

SHYLON®

2026

SHYLON®

2026

www.shylon.com

SHYLON
芯龙光电

光和影 让世界更美好



Shanghai Shylon Optoelectronics
Technology CO., LTD.
Shylon Industrial Park
No.1186-1, Pengqing Rd
Huaqiao
Kunshan
Jiangsu
China

June 14, 2022

Dear Sir or Madam,

On behalf of the Director General of the World Intellectual Property Organization (WIPO), I have the pleasure to invite you to participate at the *Ceremony of Global Awards* during the Sixty-Third Series of Meetings of the Member States of WIPO, to be held on July 19, 2022.

The Ceremony will take place in the WIPO Conference Hall.

As one the five winners of the Global Awards Program for SMEs you are also kindly invited to participate at the *Clinic on IP for commercialization for SMEs* that will take place on July 18 and 19, 2022.

My colleagues will revert in due time on the event setting, including the travel and accommodation practical arrangements.

Should you need further information, please contact my colleague Ms. Lucija Ljubic (email: lucija.ljubic@wipo.int).

I very much look forward to your participation at the ceremony of awards and the clinic for the winners.

Yours sincerely,

Marcelo Di Pietro
Director
WIPO Awards


34, chemin des Colombettes
CH-1211 Geneva 20, Switzerland
T +41 22 338 91 11 F +41 22 733 54 39
www.wipo.int



世界知识产权组织总干事 邓鸿森先生
Daren Tang, WIPO Director General



世界知识产权组织副总干事 王彬颖女士
Wang Binying, WIPO Deputy Director General

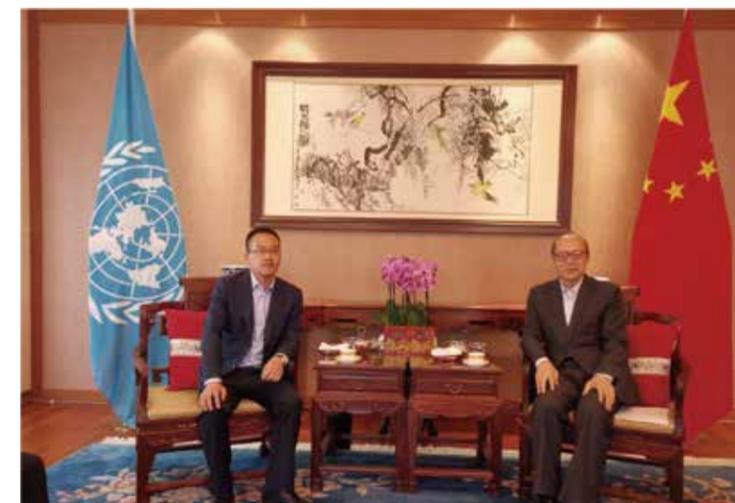

中华人民共和国驻联合国日内瓦
办事处和瑞士其他国际组织特命全权大使、常驻代表 陈旭大使



SHYLON

SHYLON 芯龙光电

1186-1, Yunqing Road





中共二大纪念馆

Memorial Hall of the second National Congress of the Communist Party of China

New visual sensation

SHYLN

To shape a joyful lifestyle.
创造愉悦的生活方式

New visual sensation

SHYON



上海 世博文化公园

Shanghai World Expo Cultural Park

Hello BETTER LIGHT
BETTER WORLD \

solutions to bring meaningful moments to people in public spaces

To shape a joyful lifestyle.
创造愉悦的生活方式

Hello BETTER LIGHT
BETTER WORLD


上海豫园 Shanghai Yu Garden



New visual sensation

SHYON

solutions to bring meaningful moments to people in public spaces



EXPO 2020 إكسبو
دبي، الإمارات العربية المتحدة
DUBAI, UNITED ARAB EMIRATES

产品应用多达10个展馆

The product has been deployed in 10 exhibition pavilion.

+ 芯龙光电为本届世博会提供了2647套照明产品及系统，其中包括芯龙自主研发的SL2169 LED地埋灯及今年荣获红点奖的SL1301H大功率洗墙灯，用一流的品质，彰显科技风采，在全球舞台上打造中国名片！

SHYLON supplied 2,647 lighting products and systems for 2020 World Expo, including its independently developed SL2169 LED in-ground luminaires and the Red Dot Award-winning SL1301H high-power wall washers. With world-class quality, SHYLON showcases technological excellence, elevating China's innovation on the global stage.



To shape a joyful lifestyle.
创造愉悦的生活方式


Hello BETTER LIGHT
BETTER WORLD

2025大阪世博会 中国馆

China Pavilion



INTELLIGENT THAT CONNECTS
WHETHER FAR OR NEAR

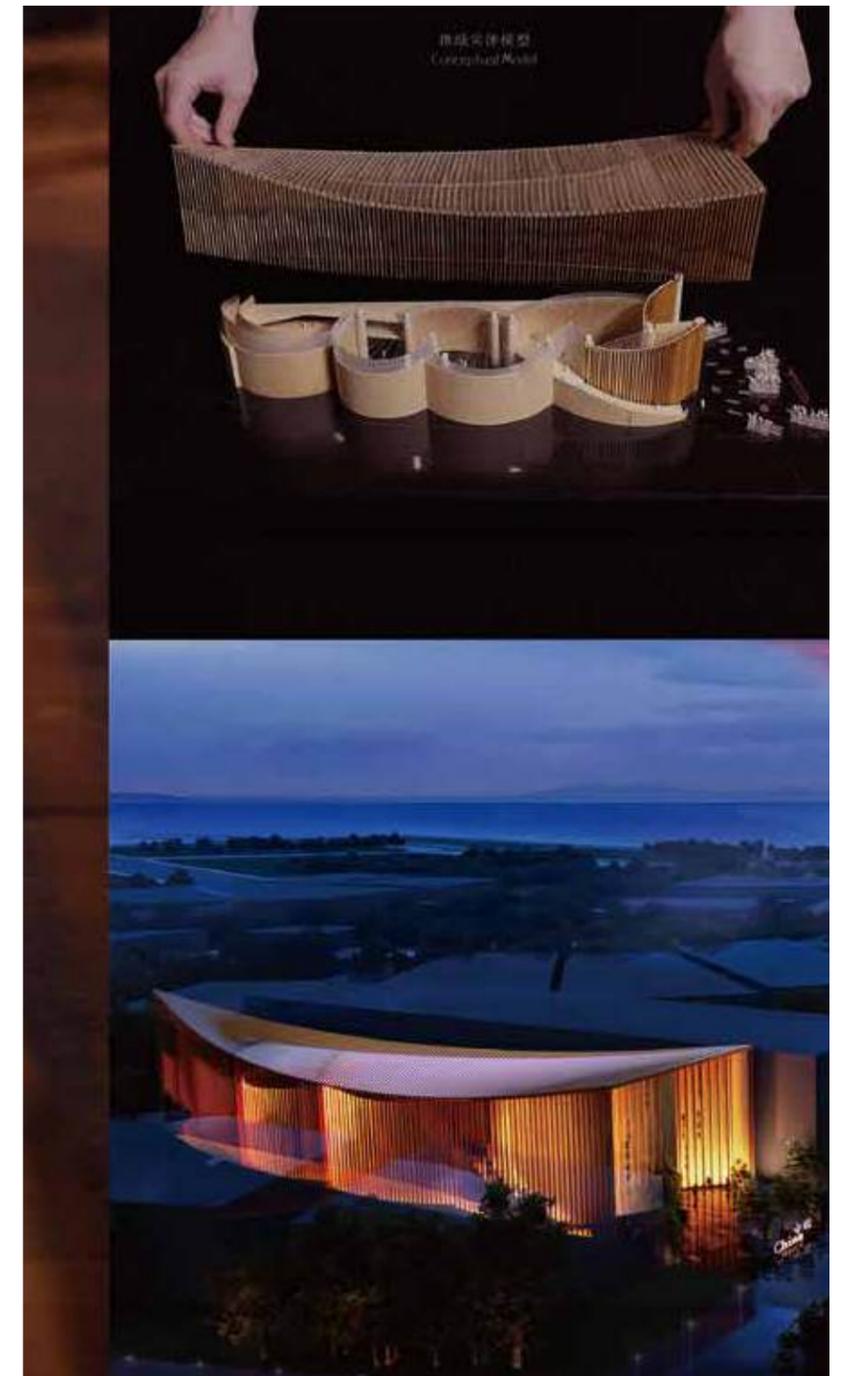

Look & Feel

New visual sensation
SHYLN

solutions to bring meaningful moments to people in public spaces

INTELLIGENT THAT CONNECTS
WHETHER FAR OR NEAR

香港中银大厦


Bank of China Tower, Hong Kong



INTELLIGENT THAT CONNECTS WHETHER FAR OR NEAR

全能的六边形战士

Look & Feel

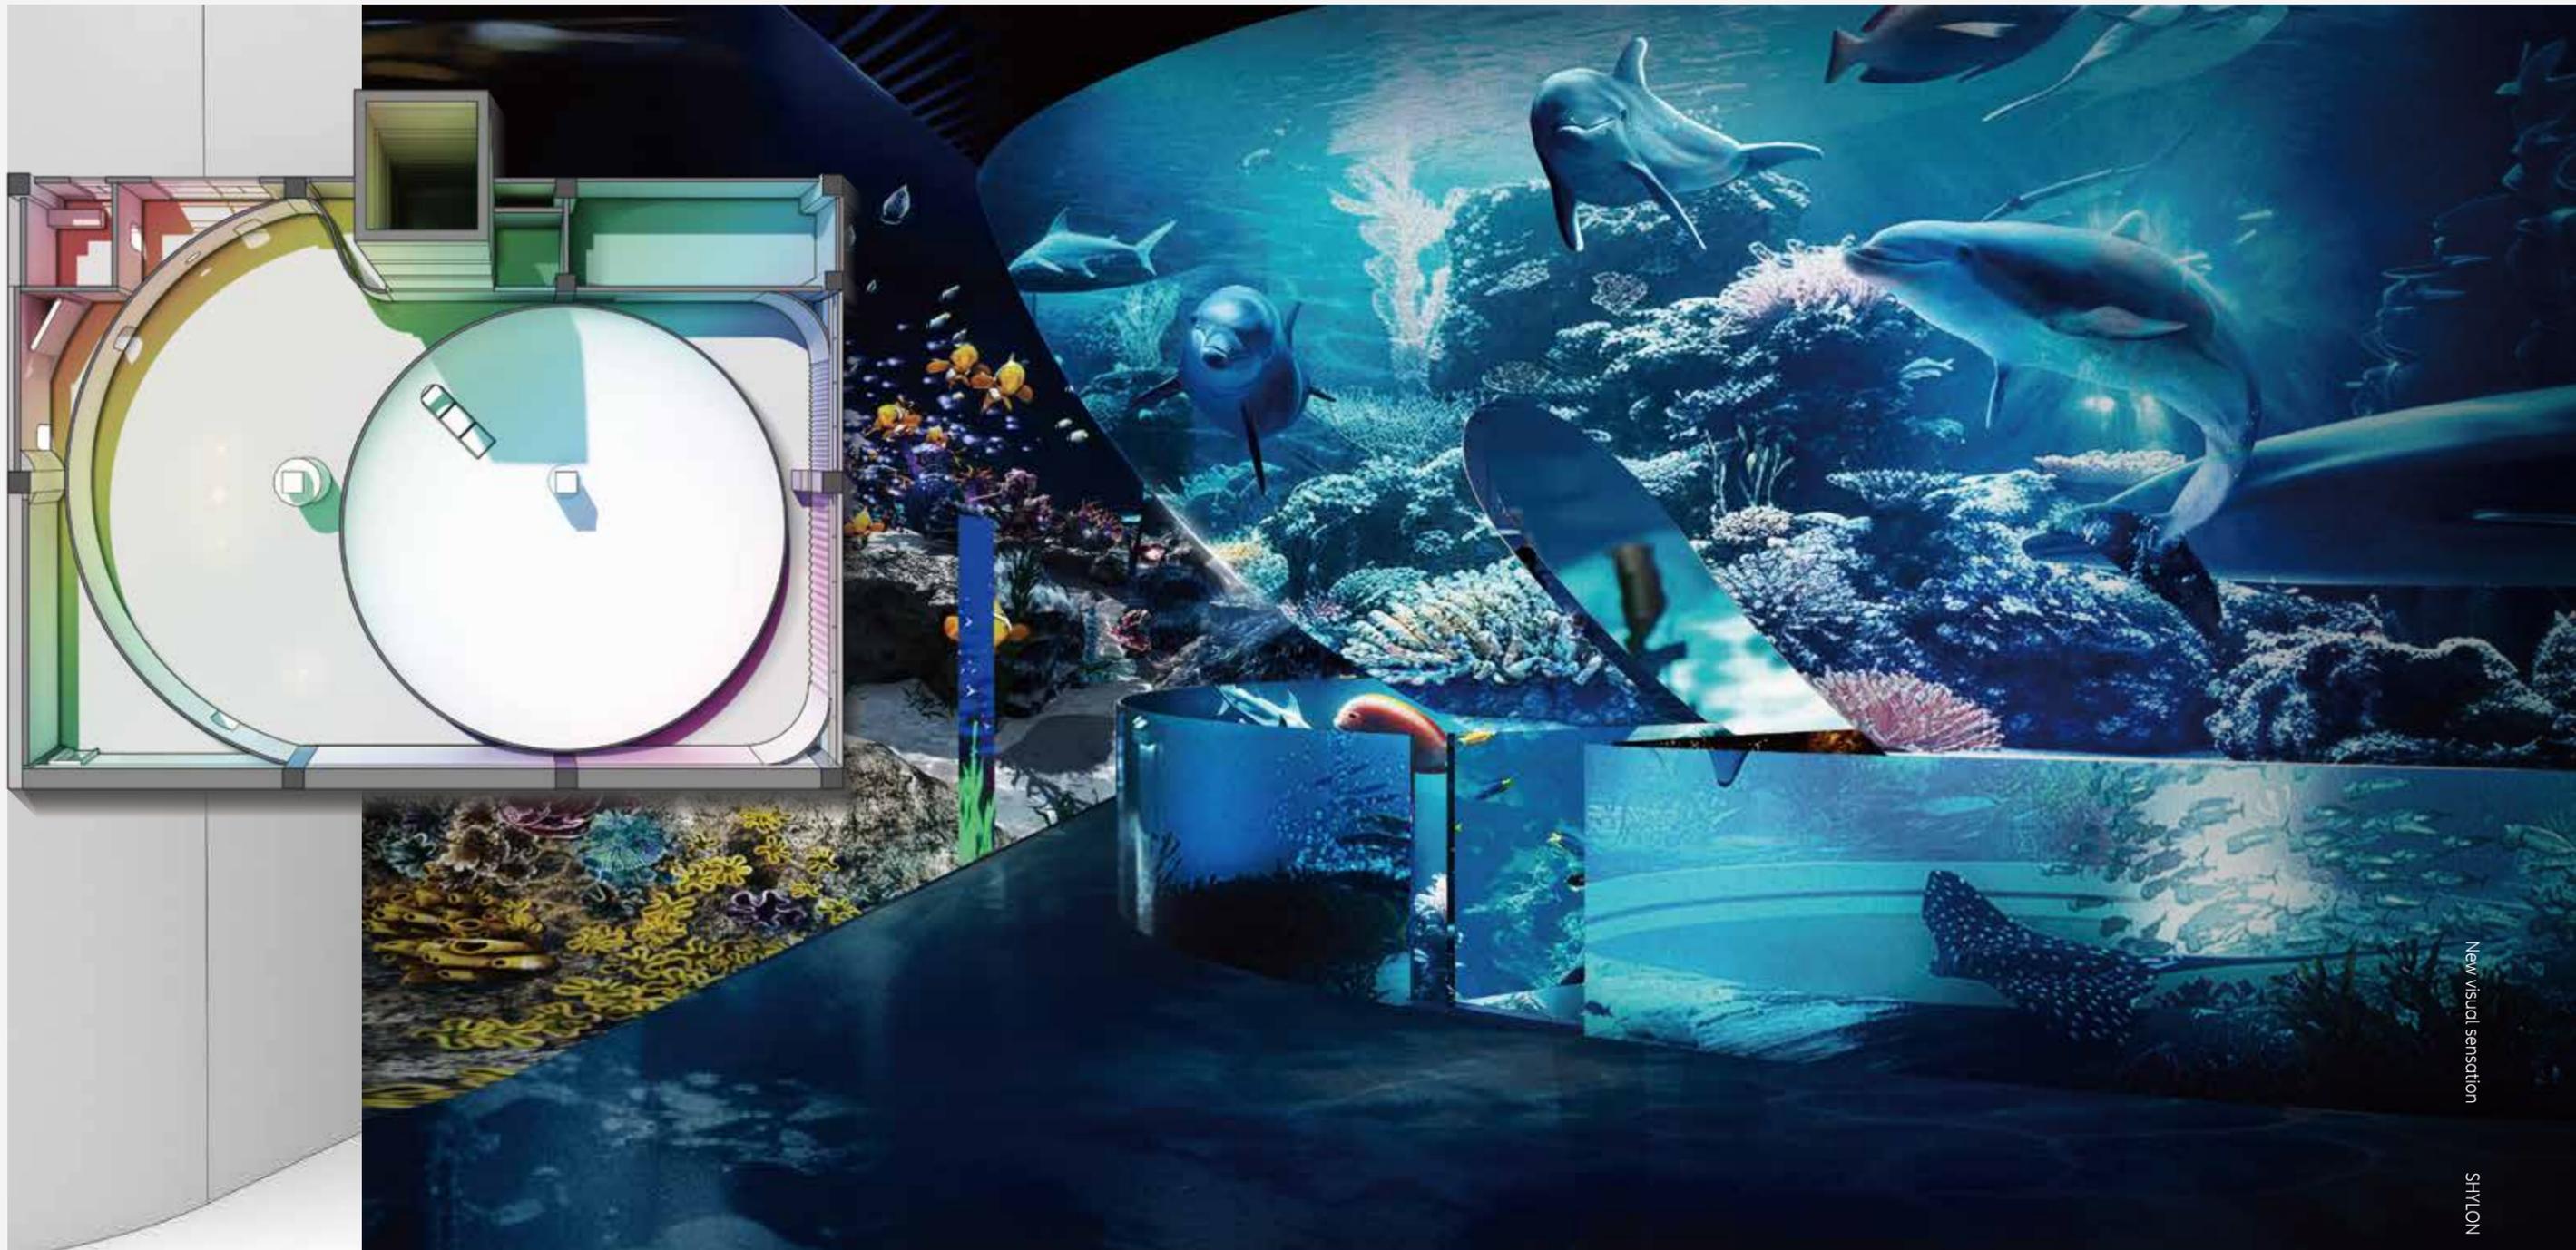


New visual sensation

SHYLN

TECHNOLOGY RESEARCH AND DEVELOPMENT
技术研发

企业资质荣誉
QUALIFICATIONS AND HONORS

+

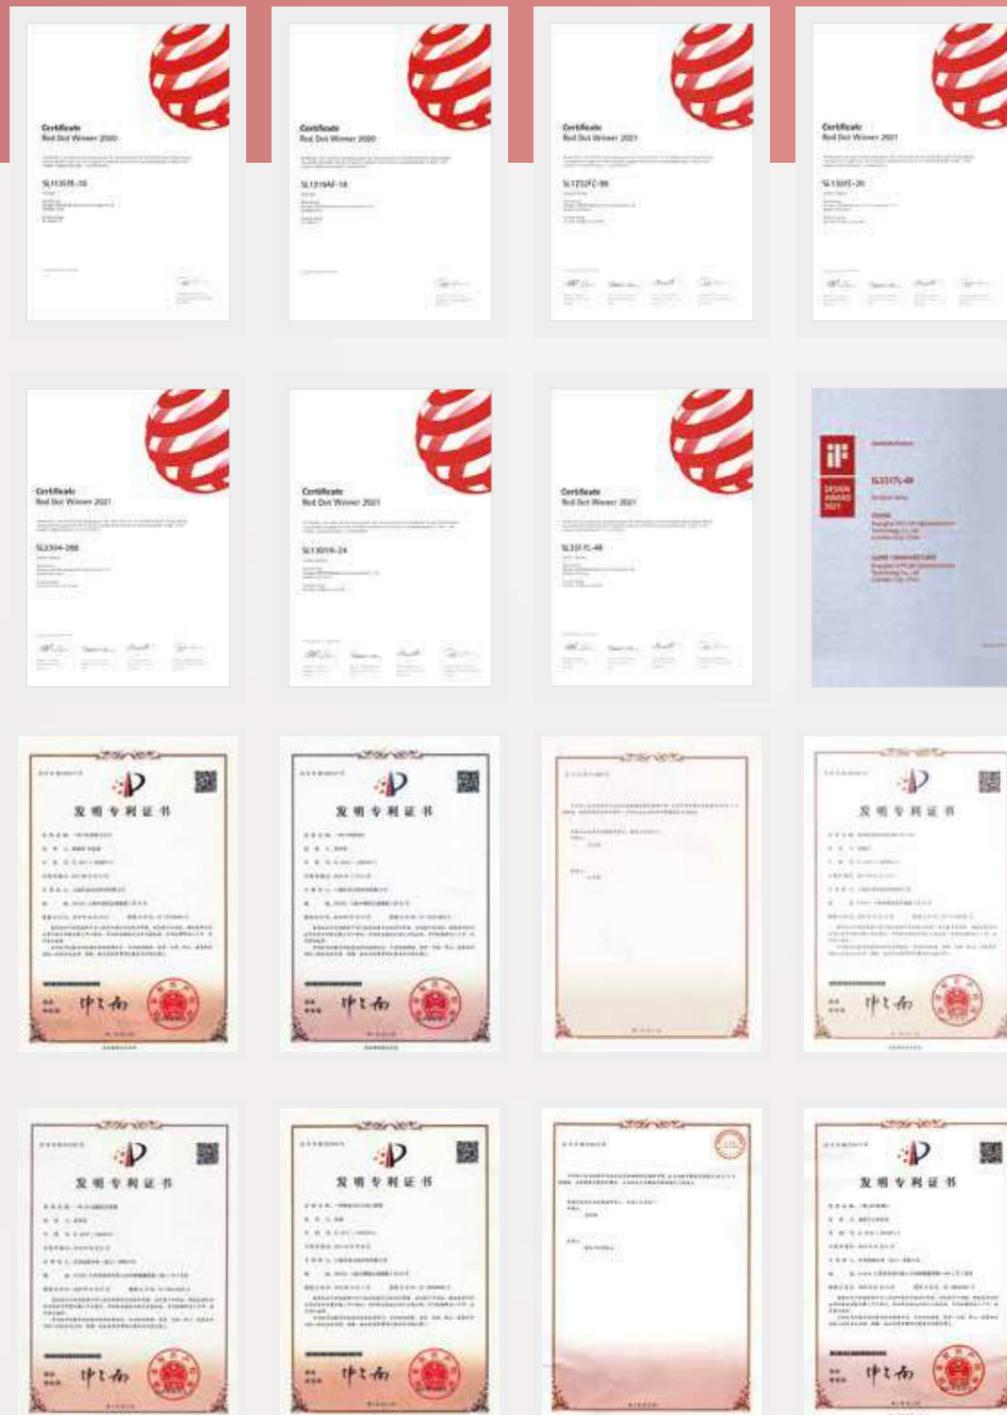

芯龙光电 通过“上海品牌”认证 SHYLON喜获“上品”标志

上海是中国近现代重要的民族工业发祥地、民族品牌发源地和集聚地，上海的品牌建设有基础、有优势。早在20世纪30年代，上海手表、正广和、冠生园等一批家喻户晓的民族品牌即崛起于浦江之滨。进入21世纪后，上海在大飞机、新能源汽车、生物医药、机器人等先进制造和战略新兴产业方面，逐渐形成独有的品质特点和品牌特色。

上海通过“上海品牌”认证打造先进标准体系，利用国内领先、国际先进的标准倒逼企业不断提升产品和服务的品质，大力弘扬创新精神、诚信精神、企业家精神和工匠精神，通过品牌经济的发展传承和发扬“海纳百川、追求卓越、开明睿智、大气谦和”的上海城市精神。



光学先驱
墨子



墨子，中国古代思想家、教育家、科学家，也是世界光学第一人。


墨子详细探讨了光和影的关系，细致观察了运动物体影像的变化规律。墨子的光学成就还包括对光的直线传播进行了科学描述、小孔成像实验、以及对平面镜、凹面镜、凸面镜成像的研究。

芯龙光电，传承墨子勇于探索、敢为人先的开创精神，深耕光学与影像领域，以领先的技术创新，致力于发展成为“国内一流、国际知名”的户外照明和影像品牌。


光和影的故事仍在继续，您、我携手一起向未来！

目录 Contents

安影系列 Anecast series P001-P066

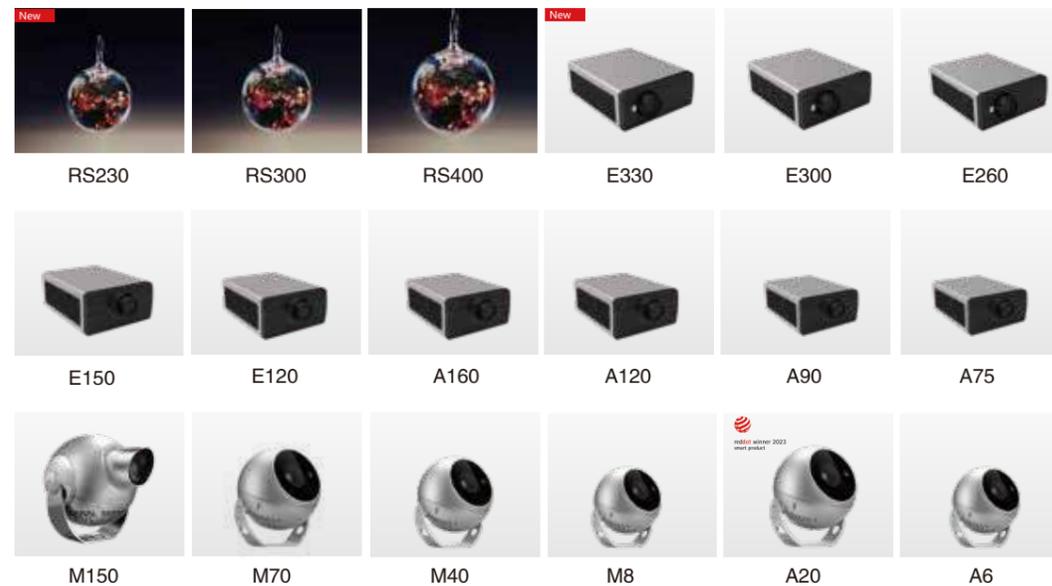

投射灯系列 Flood light series P067-P292

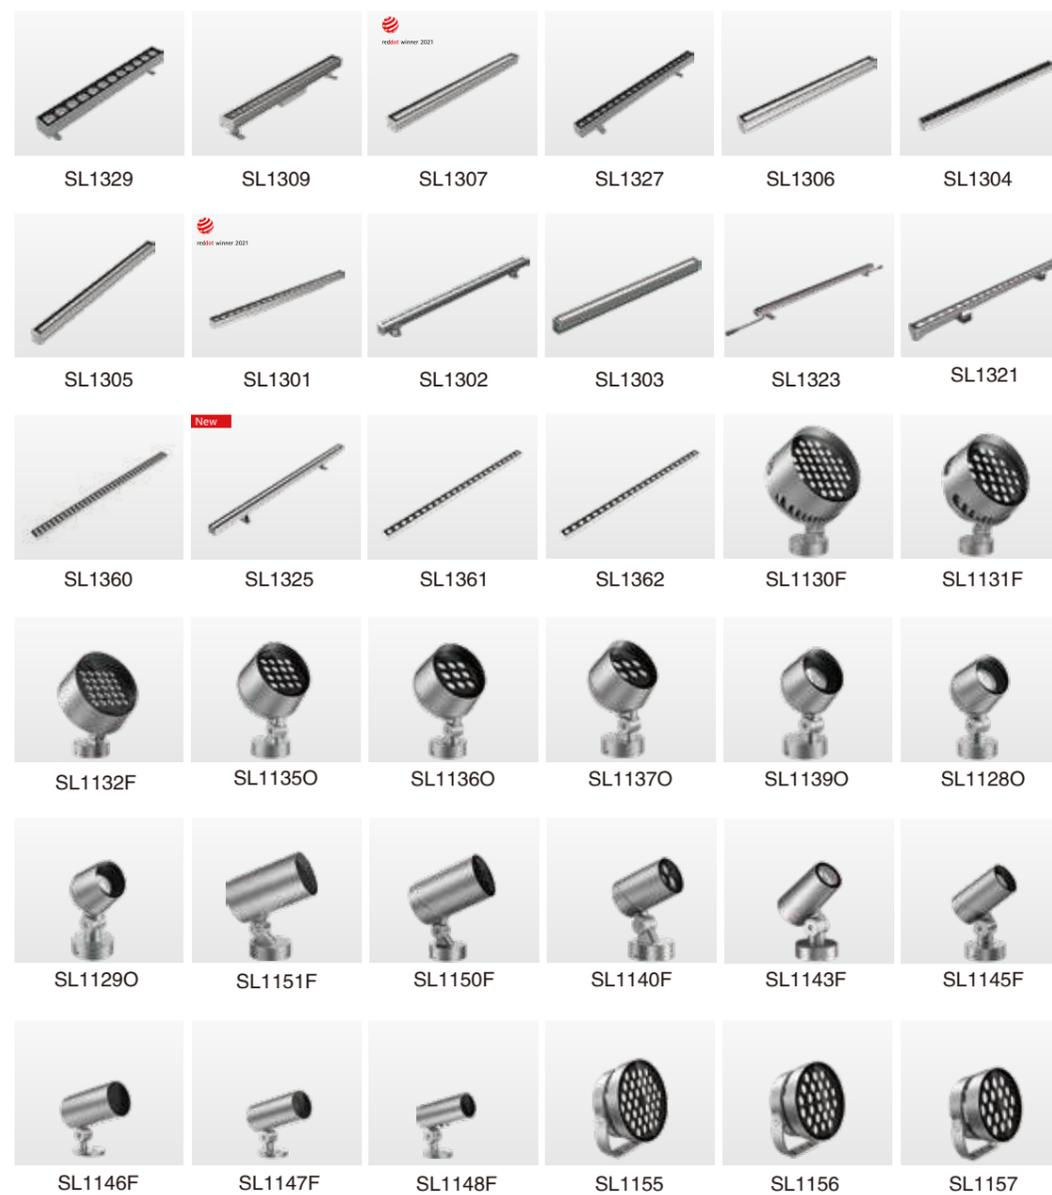




SL1158 SL1159 SL1160 SL1102U SL1103U SL1104U



SL1105U SL1125F SL1126F SL1127F SL1269U SL1272U



SL1271U SL1278U SL1281U SL1232F SL1235F SL1236F

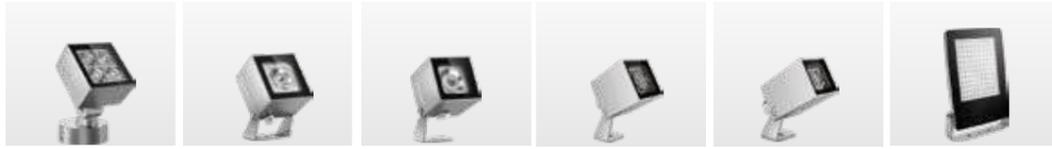

SL1239F SL1240U SL1245U SL1246U SL1247U SL1258U



SL1260U SL1262U SL1318 SL1319 SL1311 SL1310



SL1312 SL1315

照树灯系列
LED Tree Light series
P293-P306



SL1132T SL1135T SL1136T SL1137T

地埋灯系列
Inground light series
P307-P374



SL2311 SL2312 SL1307P SL2306 SL2307 SL2315



SL2308 SL2309 SL2304 SL2305 SL2270 SL2269



SL2264 SL2169C SL2166C SL2164C SL2162C SL2161C



SL2160C SL2152C SL2150C SL2130C SL2128C SL2112C



SL2110C SL2109C SL2106C SL2103C SL2102 SL2101



SL21006 SL21005 SL21003 SL2108 SL2104

轮廓灯系列
Outline light series
P375-P412




SL3315 SL3316 SL3317L SL3321 SL3322 SL3313



SL3312 SL3371 SL3351 SL3352 SL3353 SL3323



SL3110 SL3126 SL3121 SL3122 SL3123 SL3361

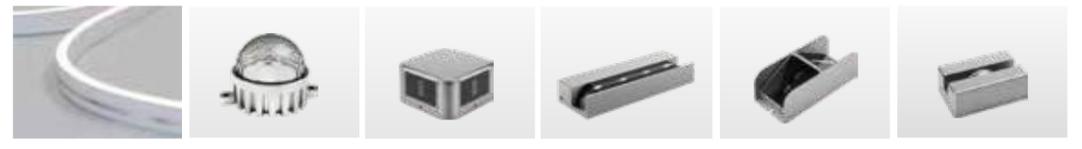

SL3362 SL3106 SL3210 SL3240 SL3230 SL3220

水下灯系列
Underwater light series
P413-P416



SL5109 SL5106 SL5119 SL5116

壁灯系列
Wall light series
P417-P428



SL6165 SL6166 SL6167 SL6132 SL6133 SL6135



SL6155 SL6156 SL6157 SL6122 SL6123 SL6125

智慧城市系列
Smart City series
P429-P478



SL7500 SL7501 SL7502 SL7503 SV7624o62901 DSL7621051901CC-64



DSL7621061001-C50 SV7624o62902 SL7101-120 SV7624o62903 DSL7219032602-M150 DSL7219032602-M80

高天棚灯系列
LED Highbay light series
P479-P490



SL0180U SL0180C SL0181U SL0181C SL0182U SL0182C

控制系统
Control system
P491-P510



SL-E2120K SL-M2220K SL-M3301 SL-Y2100 SL-D100 SL-BT100



SL-KT-X0 SL-KT-X2 SL-KT-X6 SL-M2220K AN-BOX-A2 AN-BIT-MES-103PRO



AN-BIT-MES-104PRO AN-BIT-EX-KVM AN-BIT-EX-100

产品命名规则：举例SL1135FE-16

Product naming rules: for example SL1135FE-16

SL	1	1	35	F	E	16
公司代号 Company code	灯具系列 lamps series	产品外形 Product shape	产品编号 Product code	安装方式 Installation mode	LED型号 LED mode	LED总颗数 LED Number
SHYLON简写 SHYLON shorthand	1.投射灯 Flood light	1.圆形 Round	按产品 系列编排 By product Series layout	投光灯F:法兰底座 Floodlight F: flange base	A:350mA XP-E2	1
DSL:订制 DSL: Custom made	2.地埋灯 Inground light	2.方形 square	无具体规则 No specific rules	投光灯O:一体压铸+相变液冷 Floodlight O: integrated die casting phase change liquid cooling	B:500mA/600mA XP-E2	2
SV:太阳能 sv: solar energy	3.轮廓灯 Outline light	3.线形 linear	35E01: 35为 产品编号,E01 为扩展版本名	投光灯U:U形支架 Floodlight U: U-shaped bracket	C:700mA XP-E2	3
	5.水下灯 Underwater light	5.道路 road		投光灯M:Φ48灯杆安装件 Floodlight M: Φ 48 pole mounting part	D:1050mA XP-G2
	6.壁灯 Wall light	6.景观与艺术 Landscape and art		投光灯S:地插或斜罩 Floodlight s: ground plug or inclined cover	E:1400mA XP-L、XP-G3	C: COB
	7.路灯 Road light	7.智慧路灯 Smart street lamp		投光灯L:杆装螺丝固定件 Floodlight L: pole mounted screw Fixed parts	F:350mA/700mA XM-L RGBW 4in1 OSRAR PRO 10W 3535 10W单颗	Road M: LUXEON 5050
	8.太阳能路灯 Solar street lamp			投光灯H:抱树支架 Floodlight H: tree bracket	G:1000mA/2400mA X 4 OSRAM OSTAR RGBW 4IN1	Road C: XT-E
	0.高天棚灯 Highbay lamp			投光灯P:U型的升级款相变液冷 Floodlight P: U-shaped upgraded phase change liquid cooling	H:130mA CREE CLQ6A 4IN1	Road HE: 高光效 Road HE: High efficiency
				投光灯Z:杆装抱箍 Floodlight z: pole mounted hoop	I:XHP35 700mA 12V	Flood KP: 恒功率 Flood KP: Keepower
				投光灯T:照树灯 Floodlight T: tree light	J:350mA SORAM RGBW 4IN1	路灯数字代表功率 Street lamp digital power
				投光灯G:图案灯U形支架加凸罩 Floodlight G: Pattern lamp or U-shaped bracket Convex cap	K:XHP50 1050mA 12V	
				投光灯X:法兰底座加凸罩 Floodlight X: flange base Convex cap	L:5050 RGBW 15W单颗	
				投光灯R:实景测试灯 Floodlight R: real scene measurement Pilot lamp	M:OSRAR PRO 10W	
				工矿灯U:无罩 Highbay light U: uncovered	N:RGBWCLA 7in1	
				工矿灯C:带铝罩 Highbay light U: with aluminum cover	P:RGBWCL 6in1	
				地埋灯C:圆面板 Inground light C: Circular panel	Q:40W RGBW 4in1	
				地埋灯S:方面板 Inground light S: square panel	R:LUXEON 7070	
				条灯U:平罩 Linear Light (U): Flat Cover	Z:变焦、动态电流 Z:Zoom、dynamic current	
				条灯C:弧形罩 Linear Light (C):Cambered cover		
				条灯L:水晶罩 Linear Light (L): Crystal Cover		
				条灯S:方形罩 Linear Light (S): Square Cover		

注：SL1318/SL1319/SL1310A.B.C.D.E.F.G作为型号区分

影像产品命名规则：举例E300-P-4K

Naming rules for image products: for example E300-P-4K

E	300	P	4K
公司代号 Company code	流明分档 lamps series	品类 Product shape	分辨率 Resolution
A:ANACAST简写 A:ANACAST shorthand		P:投影机 P: Projector	4K:4K高清 4K:4K High definition
M:三色纯激光户外版 M:Three-color pure laser outdoor version	300:30000lm	L:光机 L: Optical machine	
E:三色纯激光工程机版本 E:Three-color pure laser engineering machine version			
X:Micro LED数字成像投影 x:Micro LED digital imaging projection	S:球形 P:平面 C:圆柱 U:UFO S: Sphere P: Plane C: Cylinder U:UFO		
R:3D全息旋转成像 R:3D holographic rotational imaging			
S:投影产品照明版本 S:Projection product lighting version			


配件图例：

Accessories legend

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

zoomneo 色彩算法色域对比

zoomneo Color algorithm gamut contrast

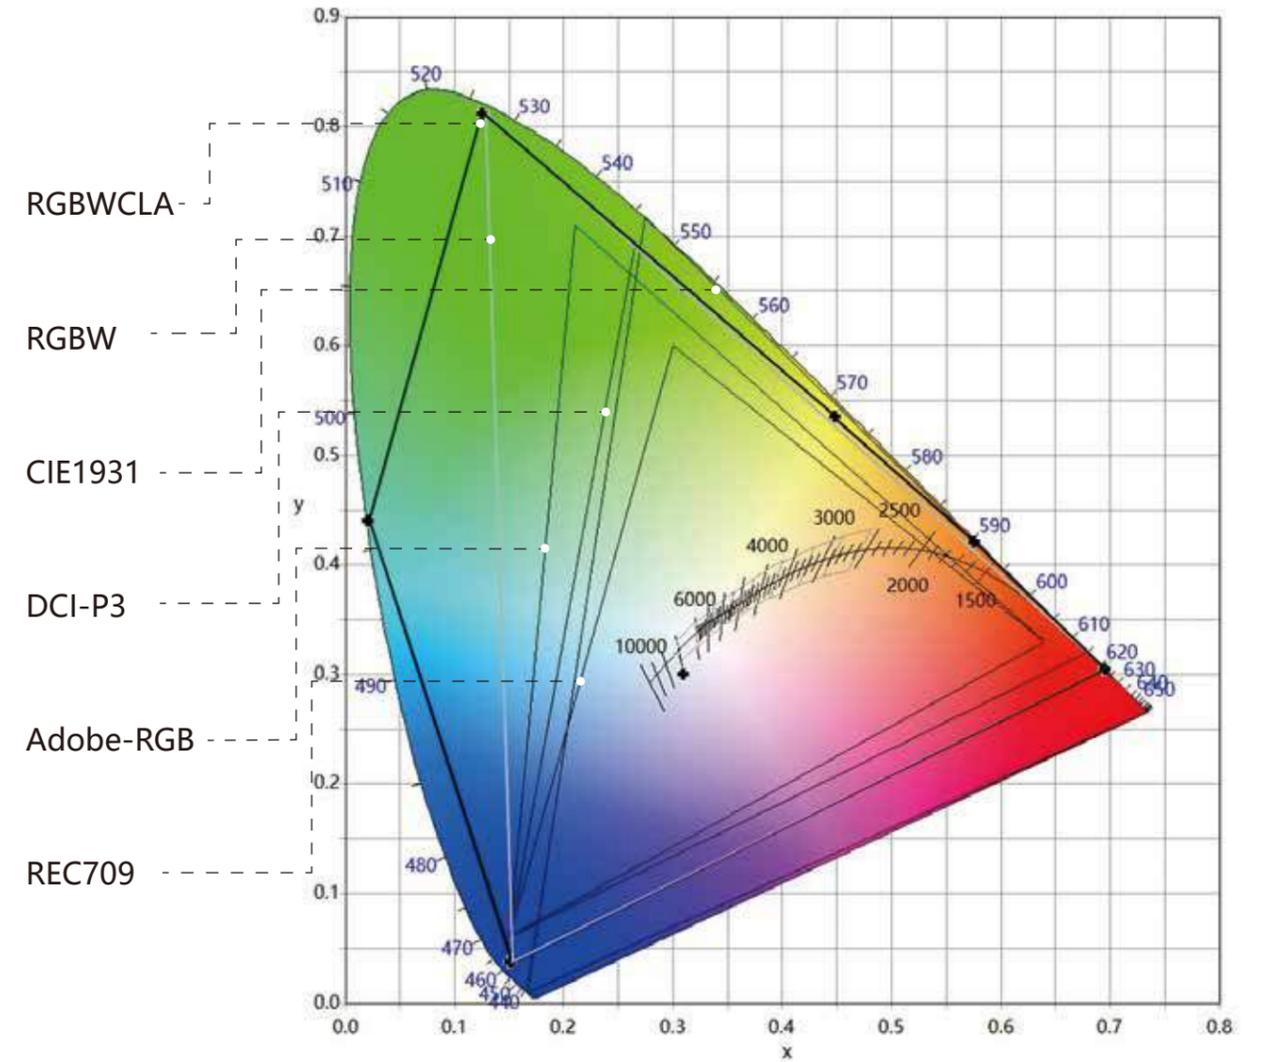

RS 230

Holovision

球形闪电3D立体全彩显示



Hello BETTER LIGHT
BETTER WORLD

立体全息 ANECOLOR 原生三色LED 星体外观 小尺寸 大显示

/ Holovision Series

安影ANECOLOR®RS230是基于ZoomNeo算法，秉承安影光影艺术理念，推出的一款全息显示的星体产品，采用ANECOLOR全色激光LED光源，巧妙运用视觉暂留现象，三维立体空间完美呈现精美画质星体外观和一体式方式设计，自发光显示画面，不惧环境光，自适应户外场景无线互联，操作简便。

Holographic Display System ANECOLOR Native Tri-color LED Technology Celestial-inspired Design Mini Body, //
Maximized Display

ANECOLOR®RS230 Holovision as a holographic celestial body product developed based on the ZoomNeo algorithm and adhering to ANECOLOR philosophy of light and shadow art, it employs ANECOLOR full-color laser LED light sources. By ingeniously utilizing the persistence of vision phenomenon, it three-dimensionally presents high-quality celestial body images in space. Featuring an integrated design with self-illuminating display that resists ambient light interference, it achieves adaptive wireless connectivity for outdoor scenarios and offers user-friendly operation.

主要特性

/ Main Features

- | | |
|--|--|
| <p>A 3D全息</p> <p>创新结构设计和精准控制算法相结合，二维空间突破3D立体呈现画面</p> | <p>3D Holographic</p> <p>The combination of innovative structure design and precise control algorithm breaks through the two-dimensional space and presents the image in three dimensions.</p> |
| <p>B 360°视角</p> <p>行星型外观设计，视觉角度无阻碍</p> | <p>360° View</p> <p>Planetary appearance design, no visual obstruction</p> |
| <p>C ANECOLOR 原生三色 LED</p> <p>光源采用多达300多颗的RGB三合一LED器件，高分辨率，色彩绚丽</p> | <p>ANECOLOR Native Tri-color LED</p> <p>The light source uses up to 300pcs RGB tri-color LED devices, high resolution, color gorgeous</p> |
| <p>D 无线连接</p> <p>WiFi无线控制和传输数据，简单快捷</p> | <p>Wireless connections</p> <p>WiFi wireless control and transmission data, simple and fast</p> |
| <p>E 节能</p> <p>系统额定功率仅为10W，低碳节能</p> | <p>Energy conservation</p> <p>The rated power of the system is only 10W, low carbon and energy saving</p> |
| <p>F 安全可靠</p> <p>低压直流无线供电，IP65防水设计，IK08防护，自适应户外工况</p> | <p>Safety and Reliability</p> <p>Low voltage DC wireless power supply, IP65 waterproof design, IK08 protection, adaptive outdoor working conditions</p> |

DAZZLING WHEELS LEAD THE PATH

球形闪电

未来生活的多元化应用场景

THE EXTERIOR CATCHES EVERY GLANCE




THE ANECAST LUMINAIRE CREATES AESTHETICAL COMBINATIONS SUITED TO NUMEROUS APPLICATIONS

技术参数 / Specification

型号	RS230	Model	RS230
光源数量	394pcs 高亮 1608 LED	Number of Light Sources	394pcs High-Brightness 1608 LED
额定功率	10W	Rated Power	10W
亮度	150lm	Brightness	150lm
额定电压	DC12V	Rated Voltage	DC12V
颜色	RGB三合一	Color	RGB 3in1
发光角度	360°	Beam Angle	360°
光源寿命	25000h	Light Source Lifespan	25000h
控制方式	WiFi	Control Method	WiFi
视频存储容量	8G Max	Video Storage Capacity	8G Max
接线方式	户外1米2芯橡胶线	Wiring Method	Outdoor 1m 2-Core Rubber Cable
安装方式	支架安装	Installation Method	Bracket Mounting
外壳材质	高透光透明PC	Housing Material	High-Speed Optical Transparent Pc
防护	IP65, K08	Protection	IP65, K08
产品尺寸	直径230*H345mm	Product Dimensions	D230xH345mm
重量	1kg	Weight	1kg
环境湿度	10%~90%	Ambient Humidity	10%-90%
环境温度	-35℃ ~ 60℃	Ambient Temperature	-35°C to 60°C

/ RS230尺寸图

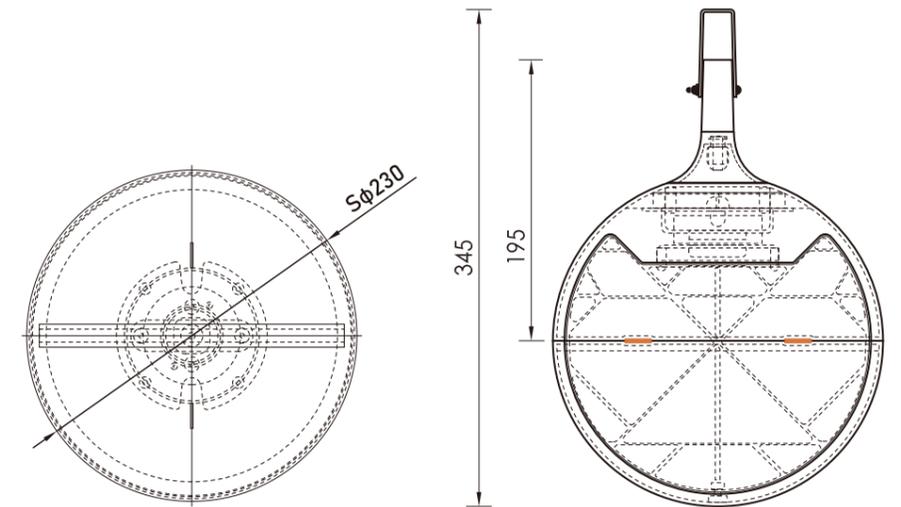

Theme park, scenic spot, pedestrian street
urban theme street, slow walking path

主题公园·景点·步行街·城市主题街道·慢行步道

SHYLON specializes in the optical display field. HoloVision possesses greater creativity and innovative awareness. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, thermal, mechanical structures, or other structural lighting fields for optical display equipment. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.

SHYLON专注于您需要的光显领域
HoloVision更具创意和创新意识
提供标志性的光显解决方案来照亮您的城市
我们的专家团队提供光显设备的光学、电学、热学
机械结构或其他结构照明领域的解决方案
将您的构思付诸实践，体现您的独特个性，提升您的艺术空间

SOLUTIONS TO BRING MEANINGFUL MOMENTS TO PEOPLE IN PUBLIC SPACES

球形闪电

未来生活的多元化应用场景

THE EXTERIOR CATCHES EVERY GLANCE




**THE ANECAST
LUMINAIRE CREATES
AESTHETICAL
COMBINATIONS
SUITED TO NUMEROUS
APPLICATIONS**

技术参数 / Specification

型号	RS300	Model	RS300
光源数量	512pcs 高亮 1608 LED	Number of Light Sources	512pcs High-Brightness 1608 LED
额定功率	20W	Rated Power	20W
亮度	800lm	Brightness	800lm
额定电压	DC24V	Rated Voltage	DC24V
颜色	RGB三合一	Color	RGB 3in1
发光角度	360°	Beam Angle	360°
光源寿命	5000h	Light Source Lifespan	25000h
控制方式	WiFi	Control Method	WiFi
视频存储容量	8G Max	Video Storage Capacity	8G Max
接线方式	户外1米2芯橡胶线	Wiring Method	Outdoor 1m 2-Core Rubber Cable
安装方式	支架安装	Installation Method	Bracket Mounting
外壳材质	高透光透明PC	Housing Material	High-Speed Optical Transparent PC
防护	IP65, K08	Protection	IP65, K08
产品尺寸	直径300*H416mm	Product Dimensions	D300xH416mm
重量	2kg	Weight	2kg
环境湿度	10%~90%	Ambient Humidity	10%-90%
环境温度	-35°C ~ 60°C	Ambient Temperature	-35°C to 60°C

/ RS300尺寸图

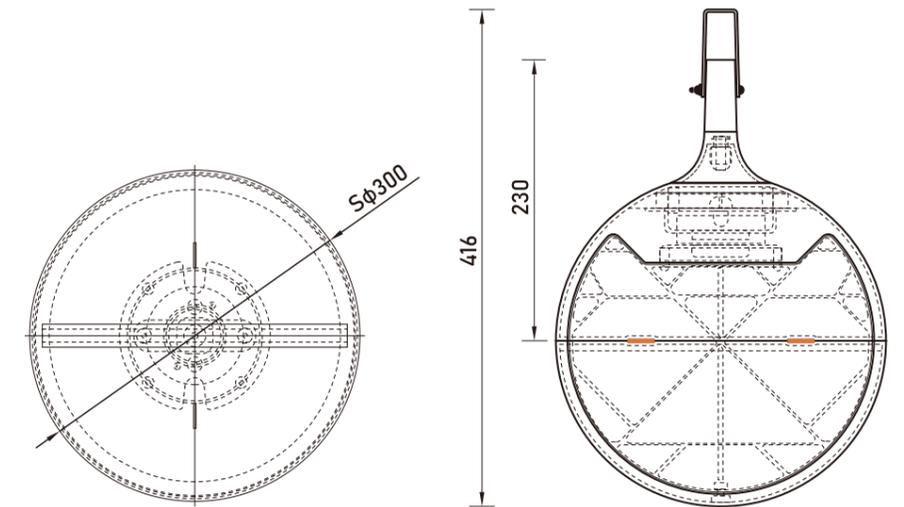

Theme park, scenic spot, pedestrian street
urban theme street, slow walking path

主题公园·景点·步行街·城市主题街道·慢行步道

SHYLON specializes in the optical display field. Holovision possesses greater creativity and innovative awareness. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, thermal, mechanical structures, or other structural lighting fields for optical display equipment. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.

SHYLON专注于您需要的光显领域

Holovision更具创意和创新意识

提供标志性的光显解决方案来照亮您的城市

我们的专家团队提供光显设备的光学、电学、热学

机械结构或其他结构照明领域的解决方案

将您的构思付诸实践，体现您的独特个性，提升您的艺术空间

SOLUTIONS TO BRING MEANINGFUL MOMENTS TO PEOPLE IN PUBLIC SPACES

球形闪电 未来生活的多元化应用场景

THE EXTERIOR CATCHES EVERY GLANCE




**THE ANECAST
LUMINAIRE CREATES
AESTHETICAL
COMBINATIONS
SUITED TO NUMEROUS
APPLICATIONS**

技术参数 / Specification

型号	RS400	Model	RS400
光源数量	554pcs 高亮 1615 LED	Number of Light Sources	554 pcs High-Brightness 1615 LED
额定功率	50W	Rated Power	50W
亮度	1500lm	Brightness	1500lm
额定电压	DC24V	Rated Voltage	DC24V
颜色	RGB三合一	Color	RGB 3in1
发光角度	360°	Beam Angle	360°
光源寿命	25000h	Light Source Lifespan	25000h
控制方式	WiFi	Control Method	WiFi
视频存储容量	8G Max	Video Storage Capacity	8G Max
接线方式	户外1米2芯橡胶线	Wiring Method	Outdoor 1m 2-Core Rubber Cable
安装方式	支架安装	Installation Method	Bracket Mounting
外壳材质	高透光透明PC	Housing Material	High-Speed Optical Transparent PC
防护	IP65, K08	Protection	IP65, K08
产品尺寸	直径400*H554mm	Product Dimensions	D400xH554mm
重量	3,2kg	Weight	3,2kg
环境湿度	10%~90%	Ambient Humidity	10%-90%
环境温度	-35℃ ~ 60℃	Ambient Temperature	-35°C to 60°C

/ RS400尺寸图

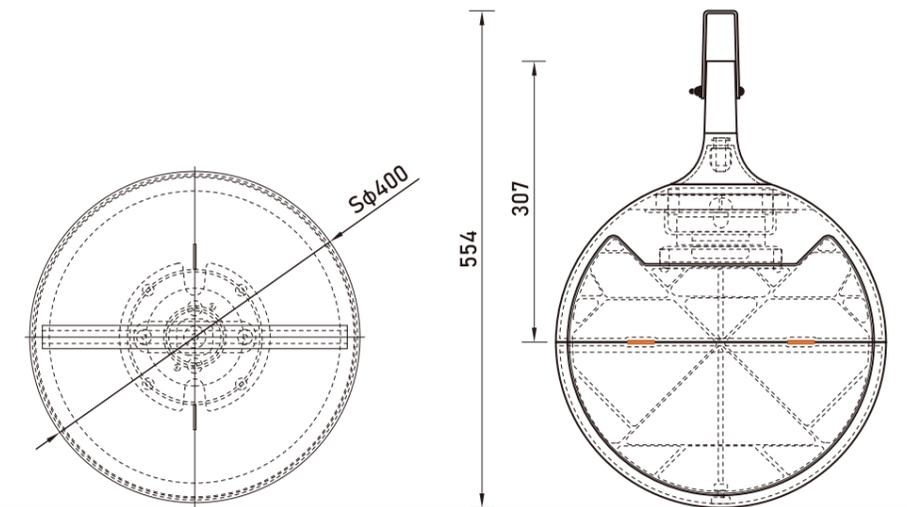

Theme park, scenic spot, pedestrian street
urban theme street, slow walking path

主题公园·景点·步行街·城市主题街道·慢行步道

SHYLON specializes in the optical display field. Holovision possesses greater creativity and innovative awareness. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, thermal, mechanical structures, or other structural lighting fields for optical display equipment. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.

SHYLON专注于您需要的光显领域
Holovision更具创意和创新意识
提供标志性的光显解决方案来照亮您的城市
我们的专家团队提供光显设备的光学、电学、热学
机械结构或其他结构照明领域的解决方案
将您的构思付诸实践，体现您的独特个性，提升您的艺术空间

SOLUTIONS TO BRING MEANINGFUL MOMENTS TO PEOPLE IN PUBLIC SPACES

全能联动 远近尽情掌控

Intelligent That Connects
Whether Far Or Near



Smartphone & Tablet Interconnection

智能手机&平板电脑互联

- + 应用3D立体全彩显示技术，能在小巧的透明球体中呈现出悬浮效果的动态影像，为用户提供沉浸式的视觉体验，无论在信息传播、广告展示，还是艺术展示时，都能带来直观清晰的内容演示。
- + 智能手机&平板电脑互联通过手机、平板、电脑等设备，即可远程投射显示内容，或对其进行实时替换，避免了繁琐的人工现场操作，确保了信息更新的及时性、灵活性。

3D stereoscopic full-color display technology can present dynamic images with floating effect in a small transparent sphere, providing users with immersive visual experience. It can bring intuitive and clear content demonstration in information transmission, advertising display or art display.

Smart phone & tablet Internet through mobile phones, tablets, computers and other devices, the display content can be remotely projected or replaced in real time, avoiding tedious manual on-site operation, ensuring the timeliness and flexibility of information update.

RS 230

Holovision

球形闪电3D立体全彩显示



技术设计双专利革新体验 实力认证

Technical Design Dual Patents Innovative Experience Certificates



球形转动多面成像显示装置 (带透明密封罩壳)
专利号: ZL 2024 3 0205496.0

一种球形转动多面成像显示装置及显示方法
专利号: ZL 2024 1 0605460.0

球形转动多面成像显示装置
专利号: ZL 2024 3 0205492.2

Spherical rotating multi-faced imaging display device (with transparent sealing housing)
Patent number: ZL 2024 3 0205496.0

A spherical rotating multi-faced imaging display device and a display method
Patent number: ZL 2024 1 0605460.0


Spherical rotating multi-faced imaging display device
Patent number: ZL 2024 3 0205492.2

一场刺激视觉神经的美学狂欢 A visual feast of aesthetics

全息显示从平面突破为立体，视角从180°蝶变为360°进入AI时代
光影显示的应用更加多元化娱乐互动元素的浸入让光显开始正式服务于生活，点亮城市光影的同时也带来更多精神层面的享受未来在LED、激光、微型智能新品的加持下，光显产品将拥有更加广阔的前景

The holographic display breaks through from the plane to the three-dimensional, and the viewing Angle changes from 180° to 360° enter the AI Era.
The applications of light and shadow display are becoming more diversified. The immersion of entertainment interactive elements has officially enabled light display to serve daily life, illuminating urban while also bringing more spiritual-level enjoyment for the future.
With the empowerment of LED, laser, and miniaturized intelligent new products, light display products will possess even broader prospects.



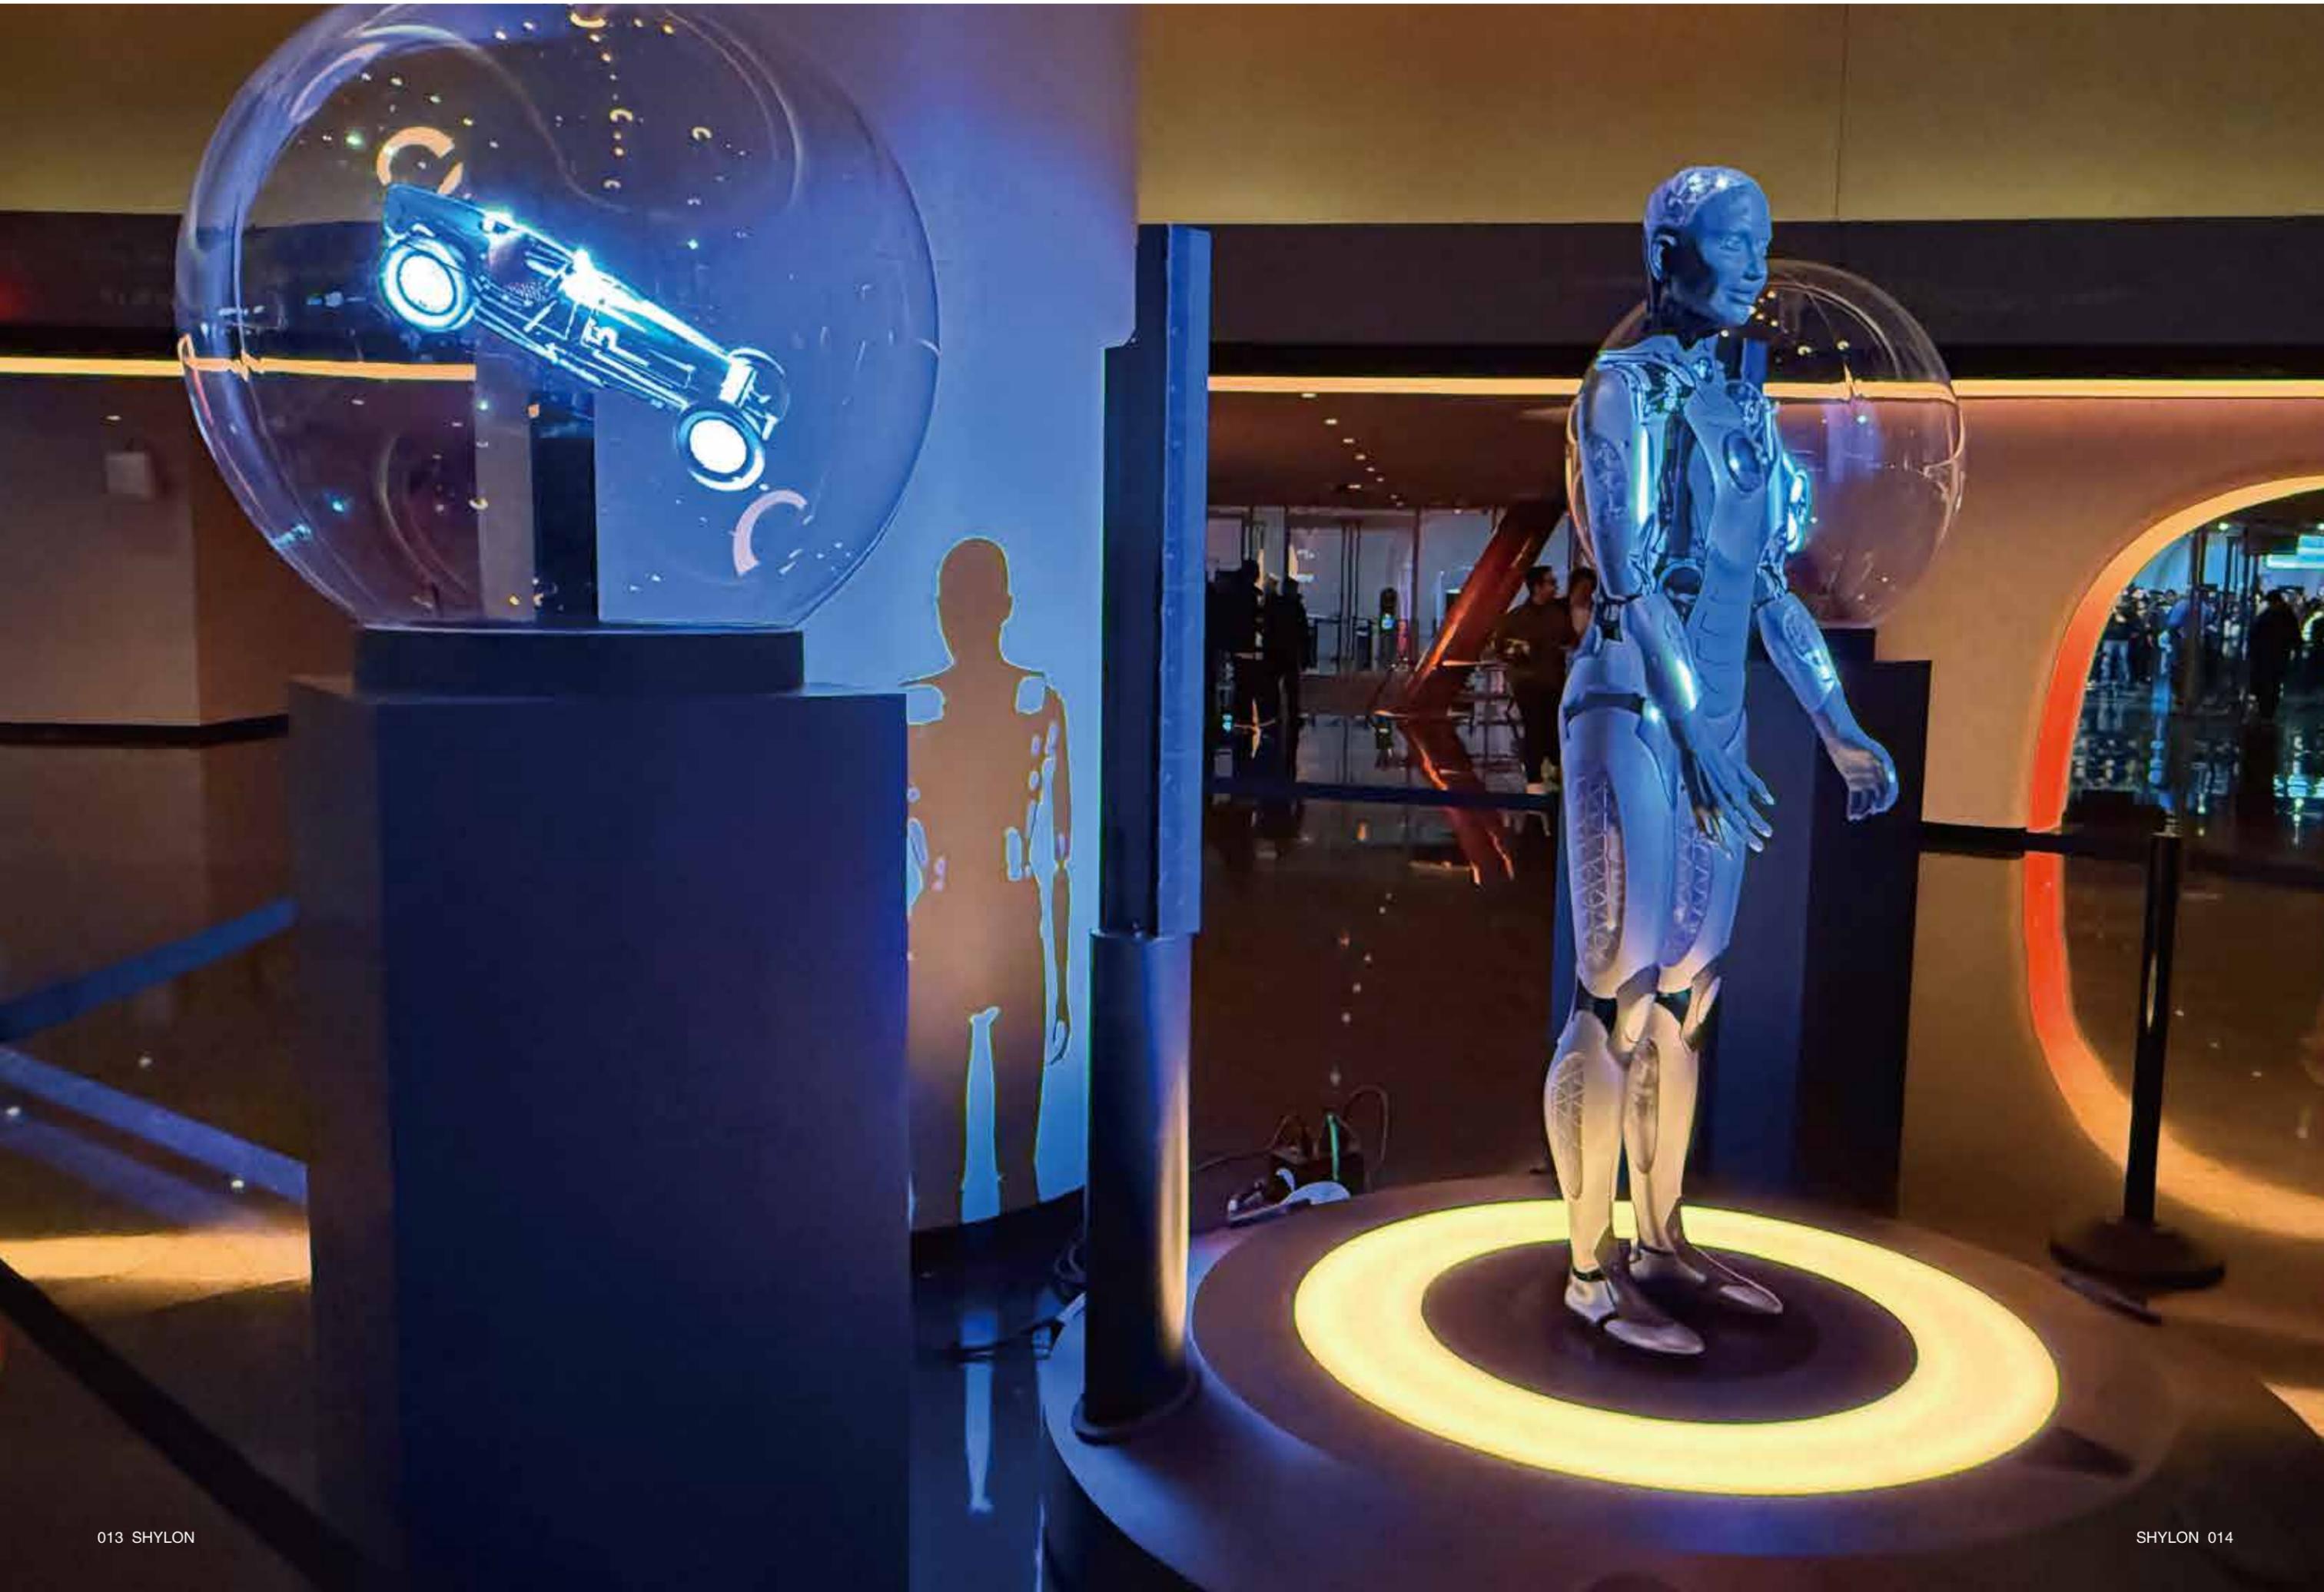



E330

2K三色激光投影

33000流明 | 2K超清分辨率 | 120%BT.2020超高清色域

ANECOLOR 全色激光, 外观灵动, 小体积, 大画面

/ E系列

安影 ANECAST® E330激光投影机采用红绿蓝三基色激光光源技术, 具有高亮度、厚重质地、静音、低温工作和全套镜头等特色。产品采用镜头、光学组件、光源系统模块化设计, 立体堆叠, 光机部分防护等级可达IPX6。适应各种户外使用环境, 是展览展示、户外宣传、文旅大型光影秀应用场所的理想选择。

ANECOLOR Full color laser, dynamic appearance, small volume, large image

//

ANECAST® E330 Laser Projector adopts RGB three-primary-color laser light source technology, featuring high brightness, robust construction, quiet operation, low-temperature operation, and a full lens suite. The product uses modular design of lenses, optical components, and light source systems with three-dimensional stacking. The optical engine achieves IPX6 protection level, adapting to various outdoor environments. It is an ideal choice for applications in exhibitions, outdoor promotions, and large-scale cultural tourism light shows.

主要特性

/ Main Features

- | | | |
|----------|-------|---|
| A | 色彩绚丽 | 固态RGB激光光源, 原生三色, 120%BT.2020超高清色域; |
| B | 显示技术 | WUXGA2K (1920*1200) 分辨率, 图像优质; |
| C | DLP平台 | 无荧光轮, 无色轮, 简练的光学引擎系统, 告别繁琐的光路设计; |
| D | 多功能 | 沉浸式视觉效果, 互动效果, 满足场景需求; |
| E | 镜头多样性 | 多种不同投影比电动镜头, 满足用户不同距离的投射需求; |
| F | 多场景可用 | 200-240VAC宽电压工作范围, 满足客户使用场景, 降低客户使用成本; |
| G | 高性能 | 高效节能, 高亮度, 低功耗, 系统可达18lm/W以上。为客户降低投入成本; |

Vivid Colors: Solid-state RGB laser light source, native three-color, 120% BT.2020 Ultra HD color gamut.

Display Technology: WUXGA2K (1920x1200) resolution, high-quality imaging.

DLP Platform: No phosphor wheel, no color wheel, simplified optical engine system, eliminating complex optical path design.

Multifunctionality: Immersive visual effects, interactive effects, meeting diverse scenario requirements.

Lens Diversity: Multiple electric lenses with different projection ratios, accommodating various projection distance needs.

Multi-scenario Applicability: 200-240VAC wide voltage operating range, adapting to customer usage scenarios, reducing customer operating costs.

High Performance: Energy-efficient, high brightness, low power consumption, system efficiency up to 18lm/W, lowering customer investment costs.

E330 2K三色激光投影机





三色激光
three-color laser



高亮度
High Brightness



30000h
30000小时
30000 hours

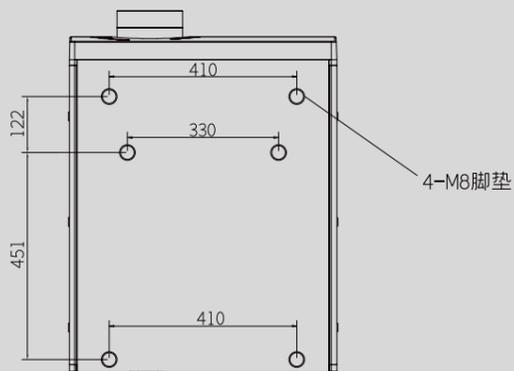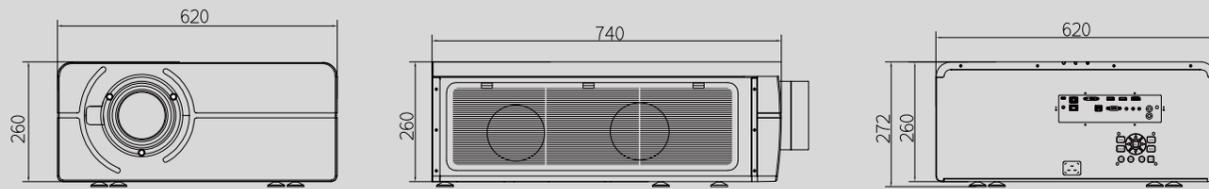

ANECOLOR
全色激光



E330

The ANECAST luminaire creates aesthetic combinations suited to numerous applications.

主题公园·景点·全息幕墙·亮化墙·投影映射

/ E系列

SHYLON专注于您需要的光影领域，ANECAST更具创意，提供标志性的光影解决方案来照亮您的城市；我们的专家团队可以提供光学、电学、机械结构或其他技术领域的解决方案将您的构思付诸实践，体现您的独特个性，提升您的艺术空间。

Theme Parks · Scenic Spot · Holographic Facades ·
Lighting Walls · Projection Mapping

SHYLON specializes in the optical display field. ANECAST possesses greater creativity. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, mechanical structures, or other technical fields. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.



DAZZLING WHEELS LEAD THE PATH

E330 ANECOLOR 全色激光投影机参数表

solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

亮度	33000lm	Brightness	33000lm
显示芯片	0.96" DMD	Display Chip	0.96" DMD
分辨率	1920 x 1200 (2,304,000 像素)	Resolution	1920 x 1200 (2,304,000 pixels)
光源	红绿蓝三色激光光源	Light Source	RGB three-color laser light source
色温	8000K-15000K	Color Temperature	8000K-15000K
亮度均匀性	> 92%	Brightness Uniformity	>92%
色彩标准	120% BT.2020 超高清色域	Color Standard	120% BT.2020 Ultra HD Color Gamut
标准寿命	30,000 小时 (光衰 50%)	Standard Lifespan	30,000 hours (50% Luminance decay)
信号输入	HDMI*1 DVI-D x 1 (只用于数字) VGA x 1 HDBaseT (RJ45 x 1) DISPLAYPORT(DP)	Signal Input	HDMIx1, DVI-Dx1 (digital only), VGAx1 HDBaseT (RJ45x1), DisplayPort (DP)
信号输出	HDMI*1	Signal Output	HDMIx1
3D 同步	3D Sync in 3D Sync out	3D Synchronization	3D Sync in, 3D Sync out
图像处理功能	垂直水平梯形校正 ±40° 几何异形矫正 RGB 色彩调整 画中画 Gamma 色彩调整	Image Processing	Vertical/Horizontal Keystone Correction +40°, Geometric Distortion Correction, RGB Adjustment, PIP, Gamma Adjustment
像素时钟	166 MHz	Pixel Clock	166 MHz
扫描速率	水平: 15 kHz to 91 kHz 垂直: 24 Hz to 75 Hz	Scanning Rate	Horizontal: 15 kHz to 91 kHz, Vertical: 24 Hz to 75 Hz
控制	RS232 串口 连接的以太网 (10/100) RJ45 可用环通输出, 适合有线遥控 (3.5mm)	Control	RS232 serial port, Ethernet (10/100) RJ45 Available loop-through output, suitable for wired remote control (3.5mm)
镜头规格	TR=0.62: 1 TR=0.81: 1 TR=1.1-1.5 TR=1.5-2.3 (标准) TR=2.3-3.6 TR=3.6-6.0 TR=6.0-9.0	Lens Specifications	TR=0.62:1 TR=0.81:1 TR=1.1-1.5 TR=1.5-2.3 (Standard) TR=2.3-3.6, TR=3.6-6.0, TR=6.0-9.0
工作电压	正常: 200-240 VAC @ 50/60 Hz	Operating Voltage	200-240 VAC @ 50/60 HZ
图像位移	电动控制	Image Shift	Motorized control
整机重量	52.5KG (不含镜头)	Total Weight	52.5 kg (without lens)
整机功耗	暖色模式 2200W / 正常模式 1850W (环境温度 25°C)	Power Consumption	Warm Mode: 2200W, Normal Mode: 1850W (ambient 25°C)
最大噪音	高亮模式: 2200W: 55dB(A) 标准模式: 1850W: 50dB(A)	Maximum Noise	High Brightness Mode (2200W): 55 dB(A), Standard Mode (1850W): 50 dB(A)
尺寸	740mmx620mmx260mm (不含镜头)	Dimensions	740mmx620mmx260mm (without lens)
工作环境	温度: 0-40°C 湿度: 0-85% RH (无冷凝)	Operating Environment	Temperature: 0-40°C, Humidity: 0-85% RH (non-condensing)
储存环境	温度: -20 to 60°C 湿度: 10-90% RH (无冷凝)	Storage Environment	Temperature: -20-60°C, Humidity: 10-90% RH (non-condensing)
检测保护功能	温度实时监控 风扇根据环境温度控制转速 节能模式	Protection Features	Real-time temperature monitoring, Fan speed controlled by ambient temperature, Energy-saving mode
镜头控制	镜头记忆功能 电动聚焦 电动变焦 电控位移	Lens Control	Lens memory function, Motorized focus Motorized zoom Motorized shift

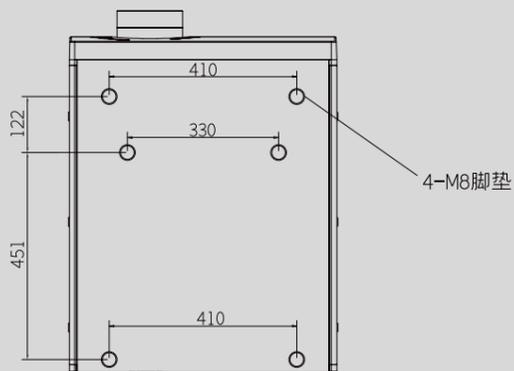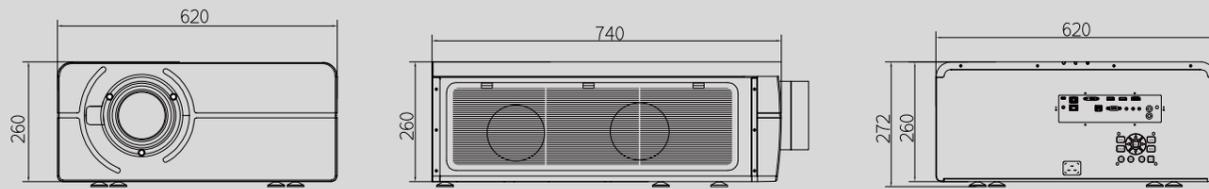

ANECOLOR
全色激光



E300

The ANECAST luminaire creates aesthetic combinations suited to numerous applications.

主题公园·景点·全息幕墙·亮化墙·投影映射

/ E系列

SHYLON专注于您需要的光影领域，ANECAST更具创意，提供标志性的光影解决方案来照亮您的城市；我们的专家团队可以提供光学、电学、机械结构或其他技术领域的解决方案将您的构思付诸实践，体现您的独特个性，提升您的艺术空间。

Theme Parks · Scenic Spot · Holographic Facades ·
Lighting Walls · Projection Mapping

SHYLON specializes in the optical display field. ANECAST possesses greater creativity. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, mechanical structures, or other technical fields. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.



DAZZLING WHEELS LEAD THE PATH

E300 ANECOLOR 全色激光投影机参数表

solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

亮度	30000lm	Brightness	30000lm
显示芯片	0.96" DMD	Display Chip	0.96" DMD
分辨率	1920 x 1200 (2,304,000 像素)	Resolution	1920 x 1200 (2,304,000 pixels)
光源	红绿蓝三色激光光源	Light Source	RGB three-color laser light source
色温	8000K-15000K	Color Temperature	8000K-15000K
亮度均匀性	> 92%	Brightness Uniformity	>92%
色彩标准	120% BT.2020 超高清色域	Color Standard	120% BT.2020 Ultra HD Color Gamut
标准寿命	30,000 小时 (光衰 50%)	Standard Lifespan	30,000 hours (50% luminance decay)
信号输入	HDMI*1 DVI-D x 1 (只用于数字) VGA x 1 HDBaseT (RJ45 x 1) DISPLAYPORT(DP)	Signal Input	HDMIx1, DVI-Dx1 (digital only), VGAx1 HDBaseT (RJ45x1), DisplayPort (DP)
信号输出	HDMI*1	Signal Output	HDMIx1
3D 同步	3D Sync in 3D Sync out	3D Synchronization	3D Sync in, 3D Sync out
图像处理功能	垂直水平梯形校正 ±40° 几何异形矫正 RGB 色彩调整 画中画 Gamma 色彩调整	Image Processing	Vertical/Horizontal Keystone Correction +40°, Geometric Distortion Correction, RGB Adjustment, PIP, Gamma Adjustment
像素时钟	166 MHz	Pixel Clock	166 MHz
扫描速率	水平: 15 kHz to 91 kHz 垂直: 24 Hz to 75 Hz	Scanning Rate	Horizontal: 15 kHz to 91 kHz, Vertical: 24 Hz to 75 Hz
控制	RS232 串口 连接的以太网 (10/100) RJ45 可用环通输出, 适合有线遥控 (3.5mm)	Control	RS232 serial port, Ethernet (10/100) RJ45 Available loop-through output, suitable for wired remote control (3.5mm)
镜头规格	TR=0.62: 1 TR=0.81: 1 TR=1.1-1.5 TR=1.5-2.3 (标准) TR=2.3-3.6 TR=3.6-6.0 TR=6.0-9.0	Lens Specifications	TR=0.62:1 TR=0.81:1 TR=1.1-1.5 TR=1.5-2.3 (Standard) TR=2.3-3.6, TR=3.6-6.0, TR=6.0-9.0
工作电压	正常: 200-240 VAC @ 50/60 Hz	Operating Voltage	200-240 VAC @ 50/60 HZ
图像位移	电动控制	Image Shift	Motorized control
整机重量	52.5KG (不含镜头)	Total Weight	52.5 kg (without lens)
整机功耗	暖色模式 2200W / 正常模式 1700W (环境温度 25°C)	Power Consumption	Warm Mode: 2200W, Normal Mode: 1700W (ambient 25°C)
最大噪音	高亮模式: 2200W: 55dB(A) 标准模式: 1700W: 50dB(A)	Maximum Noise	High Brightness Mode (2200W): 55 dB(A) Standard Mode (1700W): 50 dB(A)
尺寸	740mmx620mmx260mm (不含镜头)	Dimensions	740mmx620mmx260mm (without lens)
工作环境	温度: 0-40°C 湿度: 0-85% RH (无冷凝)	Operating Environment	Temperature: 0-40°C, Humidity: 0-85% RH (non-condensing)
储存环境	温度: -20 to 60°C 湿度: 10-90% RH (无冷凝)	Storage Environment	Temperature: -20-60°C, Humidity: 10-90% RH (non-condensing)
检测保护功能	温度实时监控 风扇根据环境温度控制转速 节能模式	Protection Features	Real-time temperature monitoring, Fan speed controlled by ambient temperature, Energy-saving mode
镜头控制	镜头记忆功能 电动聚焦 电动变焦 电控位移	Lens Control	Lens memory function, Motorized focus Motorized zoom Motorized shift

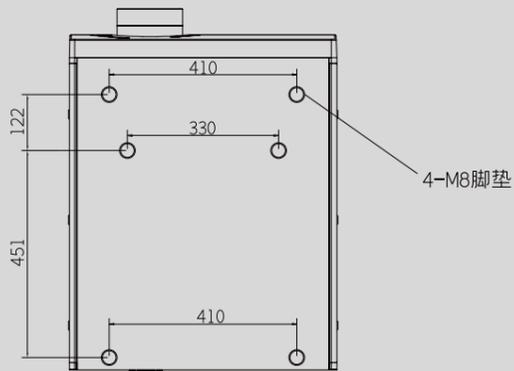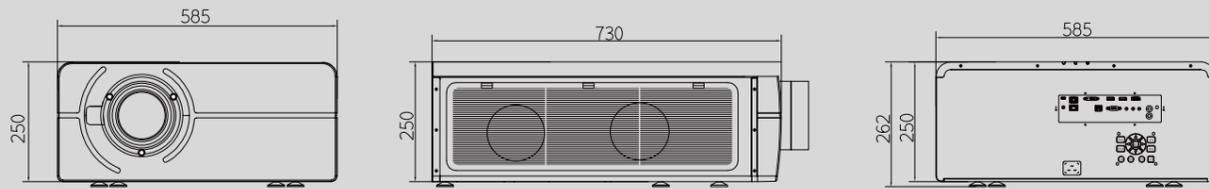

ANECOLOR
全色激光



E260

The ANECAST luminaire creates aesthetic combinations suited to numerous applications.

主题公园·景点·全息幕墙·亮化墙·投影映射

/ E系列

SHYLON专注于您需要的光影领域，ANECAST更具创意，提供标志性的光影解决方案来照亮您的城市；我们的专家团队可以提供光学、电学、机械结构或其他技术领域的解决方案将您的构思付诸实践，体现您的独特个性，提升您的艺术空间。

Theme Parks · Scenic Spot · Holographic Facades ·
Lighting Walls · Projection Mapping

SHYLON specializes in the optical display field. ANECAST possesses greater creativity. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, mechanical structures, or other technical fields. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.



DAZZLING WHEELS LEAD THE PATH

E260 ANECOLOR 全色激光投影机参数表

solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

亮度	26000 lm	Brightness	26000lm
显示芯片	0.96" DMD	Display Chip	0.96" DMD
分辨率	1920 x 1200 (2,304,000 像素)	Resolution	1920 x 1200 (2,304,000 pixels)
光源	红绿蓝三色激光光源	Light Source	RGB three-color laser light source
色温	8000K-12000K	Color Temperature	8000K-15000K
亮度均匀性	> 85%	Brightness Uniformity	>85%
色彩标准	120% BT.2020 超高清色域	Color Standard	120% BT.2020 Ultra HD Color Gamut
标准寿命	30,000 小时	Standard Lifespan	330,000 hours (50% luminance decay)
信号输入	HDMI*1 DVI-D x 1 (只用于数字) VGA x 1 HDBaseT (RJ45 x 1) DISPLAYPORT(DP)	Signal Input	HDMI*1, DVI-D*1 (digital only), VGA*1 HDBaseT (RJ45*1), DisplayPort (DP)
信号输出	HDMI*1	Signal Output	HDMI*1
3D 同步	3D Sync in 3D Sync out	3D Synchronization	3D Sync in, 3D Sync out
图像处理功能	垂直水平梯形校正 ±40 几何异形校正 RGB 色彩调整画幅 Gamma 色彩调整	Image Processing	Vertical/Horizontal Keystone Correction +40°, Geometric Distortion Correction, RGB Adjustment, PIP, Gamma Adjustment
像素时钟	166 MHz	Pixel Clock	166 MHz
扫描速率	水平: 15 kHz to 91 kHz 垂直: 24 Hz to 75 Hz	Scanning Rate	Horizontal: 15 kHz to 91 kHz, Vertical: 24 Hz to 75 Hz
控制	RS232 串口 连接的以太网 (10/100) RJ45 可用环通输出, 适合有线遥控 (3.5mm)	Control	RS232 serial port, Ethernet (10/100) RJ45 Available loop-through output suitable for wired remote control (3.5mm)
镜头规格	TR=1.2-2.3(标准镜头) 多镜头可选	Lens Specifications	TR=1.2-2.3 (Standard) Multiple lenses optional
工作电压	正常: 110-240 VAC @ 50/60 Hz	Operating Voltage	110-240 VAC @ 50/60 Hz
图像位移	电动控制	Image Shift	Motorized control
整机重量	40KG (不含镜头)	Total Weight	40 kg (without lens)
整机功耗	高亮模式: 1150W 标准模式: (950W) (环境温度 25°C)	Power Consumption	High Brightness Mode: 1150W, Standard Mode: 950W (ambient 25°C)
最大噪音	高亮模式: 1150W: 55dB(A) 标准模式: 950W: 50dB(A)	Maximum Noise	High Brightness Mode (1150W): 55 dB(A) Standard Mode (950W): 50 dB(A)
尺寸	730mmx585mmx262mm (不含镜头)	Dimensions	730mmx585mmx262mm (without lens)
工作环境	温度: 0-40°C 湿度: 0-85% RH(无冷凝)	Operating Environment	Temperature: 0 ~ 40°C, Humidity: 0 ~ 85% RH (non-condensing)
储存环境	温度: -20 to 60°C 湿度: 10-90% RH(无冷凝)	Storage Environment	Temperature: -20 ~ 60°C, Humidity: 10 ~ 90% RH (non-condensing)
检测保护功能	温度实时监控 风扇根据环境温度控制转速 节能模式	Protection Features	Real-time temperature monitoring, Fan speed controlled by ambient temperature, Energy-saving mode
镜头控制	镜头记忆功能 电动聚焦 电动变焦 电控位移	Lens Control	Lens memory function, Motorized focus Motorized zoom Motorized shift

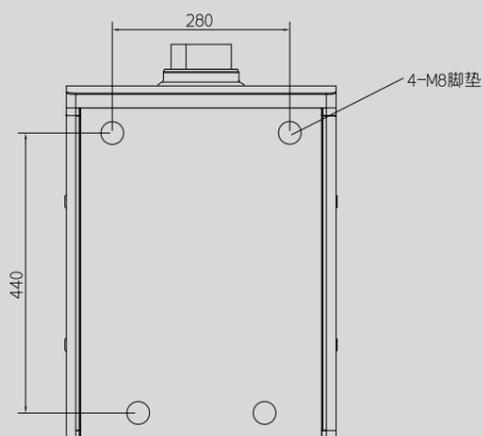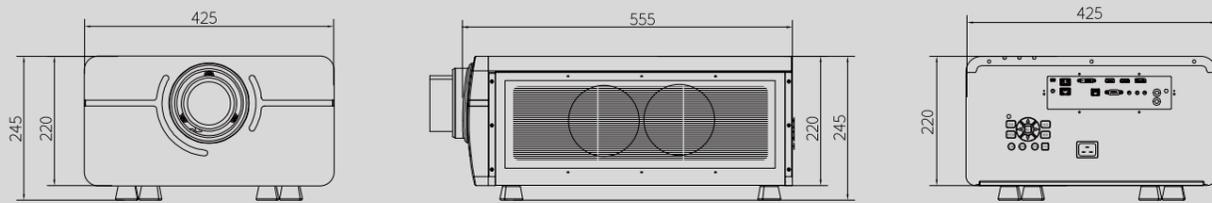

ANECOLOR 全色激光



E150

The ANECAST luminaire creates aesthetical combinations suited to numerous applications.

主题公园·景点·全息幕墙·亮化墙·投影映射

/ E系列

SHYLON专注于您需要的光影领域，ANECAST更具创意，提供标志性的光影解决方案来照亮您的城市；我们的专家团队可以提供光学、电学、机械结构或其他技术领域的解决方案将您的构思付诸实践，体现您的独特个性，提升您的艺术空间。

Theme Parks · Scenic Spot · Holographic Facades ·
Lighting Walls · Projection Mapping

SHYLON specializes in the optical display field. ANECAST possesses greater creativity. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, mechanical structures, or other technical fields. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.



DAZZLING WHEELS LEAD THE PATH

E150 4KANECOLOR 全色激光投影机参数表

solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

亮度	15000lm	Brightness	15000lm
显示芯片	0.66" DMD	Display Chip	0.66" DMD
分辨率	3840*2160(8,294,400 像素)	Resolution	3840*2160 (8,294,400 pixels)
光源	红绿蓝三色激光光源	Light Source	RGB three-color laser light source
色温	8000K-12000K	Color Temperature	8000K-15000K
亮度均匀性	> 90%	Brightness Uniformity	>90%
色彩标准	120%BT.2020 超高清色域	Color Standard	120% BT.2020 Ultra HD Color Gamut
标准寿命	30,000 小时	Standard Lifespan	330,000 hours (50% luminance decay)
信号输入	HDMI*1 DVI-D x 1 (只用于数字) VGA x 1 HDBaseT (RJ45 x 1) DISPLAYPORT(DP)	Signal Input	HDMI*1, DVI-D*1 (digital only), VGA*1 HDBaseT (RJ45*1), DisplayPort (DP)
信号输出	HDMI*1	Signal Output	HDMI*1
3D 同步	3D Sync in 3D Sync out	3D Synchronization	3D Sync in, 3D Sync out
图像处理功能	RGB 色彩调整 画中画 Gamma 色彩调整	Image Processing	RGB Color Adjustment, PIP Gamma Adjustment
像素时钟	600MHz	Pixel Clock	600 MHz
扫描速率	水平: 15 kHz to 91 kHz 垂直: 24 Hz to 75 Hz	Scanning Rate	Horizontal: 15 kHz to 91 kHz, Vertical: 24 Hz to 75 Hz
控制	RS232 串口 连接的以太网 (10/100) RJ45 可用环通输出, 适合有线遥控 (3.5mm)	Control	RS232 serial port, Ethernet (10/100) RJ45 Available loop-through output suitable for wired remote control (3.5mm)
镜头规格	TR=1.3-1.8:1 (标准镜头) 多镜头可选	Lens Specifications	TR=1.3-1.8:1 (Standard) Multiple lenses optional
工作电压	正常: 110-240 VAC @ 50/60 Hz	Operating Voltage	110-240 VAC @ 50/60 Hz
图像位移	电动控制	Image Shift	Motorized control
整机重量	20KG (不含镜头)	Total Weight	20 kg (without lens)
整机功耗	高亮模式: 580W 标准模式: 550W (环境温度 25°C)	Power Consumption	High Brightness Mode: 580W, Standard Mode: 550W (ambient 25°C)
最大噪音	高亮模式: 580W: 45dB(A) 标准模式: 550W: 40dB(A)	Maximum Noise	High Brightness Mode (580W): 45 dB(A) Standard Mode (550W): 40 dB(A)
尺寸	555mmx425mmx245mm (不含镜头)	Dimensions	555mmx425mmx245mm (without lens)
工作环境	温度: 0-40°C 湿度: 0-85% RH (无冷凝)	Operating Environment	Temperature: 0 ~ 40°C, Humidity: 0 ~ 85% RH (non-condensing)
储存环境	温度: -20 to 60°C 湿度: 10-90% RH (无冷凝)	Storage Environment	Temperature: -20 ~ 60°C, Humidity: 10 ~ 90% RH (non-condensing)
检测保护功能	温度实时监控 风扇根据环境温度控制转速 节能模式	Protection Features	Real-time temperature monitoring, Fan speed controlled by ambient temperature, Energy-saving mode
镜头控制	镜头记忆功能 电动聚焦 电动变焦 电控位移	Lens Control	Lens memory function, Motorized focus Motorized zoom Motorized shift

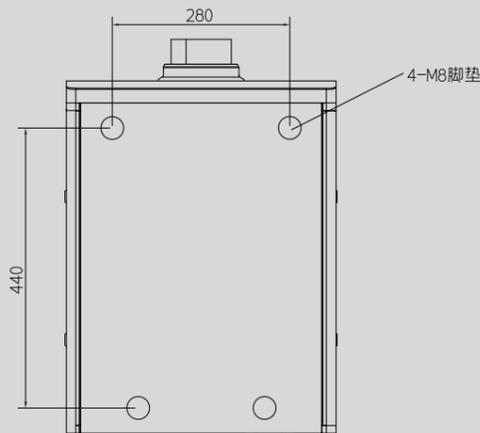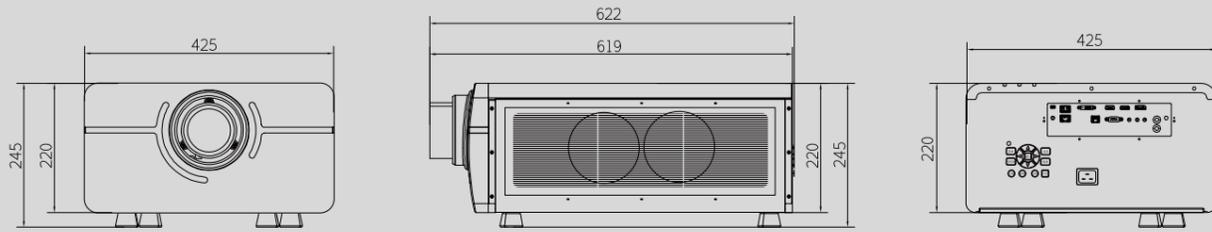

ANECOLOR
全色激光



E120

The **ANECAST** luminaire creates aesthetical combinations suited to numerous applications.

主题公园·景点·全息幕墙·亮化墙·投影映射

/ E系列

SHYLON专注于您需要的光影领域，ANECAST更具创意，提供标志性的光影解决方案来照亮您的城市；我们的专家团队可以提供光学、电学、机械结构或其他技术领域的解决方案将您的构思付诸实践，体现您的独特个性，提升您的艺术空间。

Theme Parks · Scenic Spot · Holographic Facades ·
Lighting Walls · Projection Mapping

SHYLON specializes in the optical display field. ANECAST possesses greater creativity. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, mechanical structures, or other technical fields. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.

DAZZLING WHEELS LEAD THE PATH

E120 4KANECOLOR 全色激光投影机参数表

solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

亮度	12000lm	Brightness	12000lm
显示芯片	0.66" DMD	Display Chip	0.66" DMD
分辨率	3840*2160(8,294,400 像素)	Resolution	3840*2160(8,294,400 pixels)
光源	红绿蓝三色半导体激光	Light Source	RGB three-color laser light source
色温	8000K-15000K	Color Temperature	8000K-12000K
亮度均匀性	> 90%	Brightness Uniformity	>90%
色彩标准	120%BT.2020 超高清色域	Color Standard	120% BT.2020 Ultra HD Color Gamut
标准寿命	> 30000H(光衰 50%)	Standard Lifespan	>30,000 hours (50% luminance decay)
信号输入	HDMI*1 DVI-D x 1 (只用于数字) VGA x 1 HDBaseT (RJ45 x 1) DISPLAYPORT(DP)	Signal Input	HDMIx1, DVI-Dx1 (digital only), VGAx1, HDBaseT (RJ45x1), DisplayPort (DP)
信号输出	HDMI*1	Signal Output	HDMIx1
3D同步	3D Sync in 3D Sync out	3D Synchronization	3D Sync in, 3D sync out
图像处理	RGB 色彩调整 画中画	Image Processing	RGB Color Adjustment, PIP, Gamma Adjustment
功能	Gamma 色彩调整	Pixel Clock	600 MHz
像素时钟	600MHz	Scanning Rate	Horizontal: 15 kHz to 91 kHz, Vertical: 24 Hz to 75 H2
扫描速率	水平: 15 kHz to 91 kHz 垂直: 24 Hz to 75 Hz	Control	RS232 serial port, Ethernet (10/100) RJ45 Available loop-through output, suitable for wired remote control (3.5mm)
控制	RS232 串口 连接的以太网 (10/100) RJ45 可用环通输出, 适合有线遥控 (3.5mm)	Lens Specifications	TR=0.3:1 TR=0.75:1 TR=0.8-1.0:1 TR=1-1.3:1 TR=1.7-2.4(标准) TR=2.1-3.5:1 TR=3.6-5.5 TR=5.5-8.2
镜头规格	TR=0.3:1 TR=0.75:1 TR=0.8-1.0:1 TR=1-1.3:1 TR=1.7-2.4(标准) TR=2.1-3.5:1 TR=3.6-5.5 TR=5.5-8.2	Operating Voltage	110-240 VAC @ 50/60 Hz
工作电压	正常: 110-240 VAC @ 50/60 Hz	Image shift	Motorized control
图像位移	电动控制	Power Consumption	High Brightness Mode: 580w, standard Mode: 550W (ambient 25°C)
整机功耗	高亮模式 580W 标准模式 (500W) (环境温度 25°C)	Operating Environment	Temperature:0-40°C Humidity:0-85% RH (non-condensing)
工作环境	温度: 0 - 40° C 湿度: 0 - 85% RH(无冷凝)	Storage Environment	Temperature:-20-60°C Humidity:10-90% RH (non-condensing)
储存环境	温度: -20 to 60° C 湿度: 10 - 90% RH(无冷凝)	Protection Features	Real-time temperature monitoring Fan speed controlled by ambient temperature Energy-saving mode
检测保护功能	温度实时监控 风扇根据环境温度控制转速 节能模式	Lens Control	Lens memory function Motorized focus Motorized zoom Motorized shift
镜头控制	镜头记忆功能 电动聚焦 电动变焦 电控位移		

A系列 激光影像

2K ANECOLOR 高清激光



2K超清分辨率 | 90%REC709标准色域



ANEDAST

A系列 激光影像

Hello BETTER LIGHT
BETTER WORLD

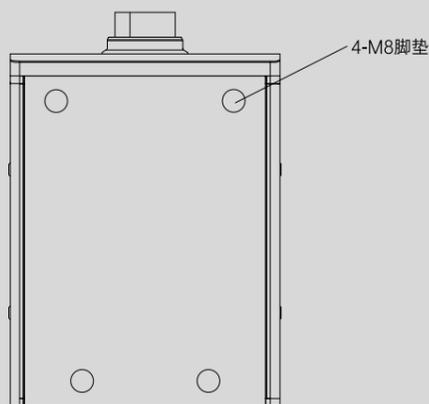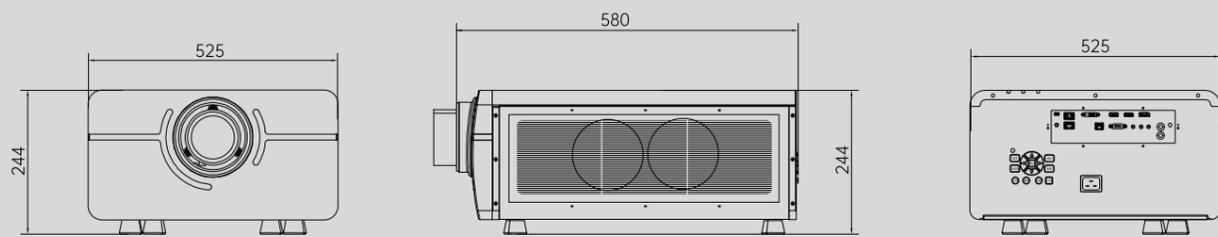

A160

The ANECAS^T luminaire creates aesthetical combinations suited to numerous applications.

主题公园·景点·全息幕墙·亮化墙·投影映射

/ A系列

SHYLON专注于您需要的光影领域，ANECAS^T更具创意，提供标志性的光影解决方案来照亮您的城市；我们的专家团队可以提供光学、电学、机械结构或其他技术领域的解决方案将您的构思付诸实践，体现您的独特个性，提升您的艺术空间。

Theme Parks · Scenic Spot · Holographic Facades · Lighting Walls · Projection Mapping

SHYLON specializes in the optical display field. ANECAS^T possesses greater creativity. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, mechanical structures, or other technical fields. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.

DAZZLING WHEELS LEAD THE PATH

A160 ANECOLOR 高清激光投影机参数表



solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

亮度	16000lm
显示芯片	0.67" DMD
分辨率	1920*1200
光源	固态蓝色半导体激光
色温	8000K-15000K
亮度均匀性	>90%
色彩标准	REC709 色彩空间
标准寿命	>20000H(光衰 50%)
信号输入	HDMI*2 DVI-D x 1 (只用于数字) VGA x 1 HDBaseT (RJ45 x 1) DISPLAYPORT(DP)
信号输出	RS232*1
3D 同步	3D Sync in 3D Sync out
图像处理功能	RGB 色彩调整 画中画 Gamma 色彩调整
扫描速率	水平: 15 to 100kHz 垂直: 50 to 120Hz
控制	RS232 串口 连接的以太网 (10/100) RJ45 可用环通输出, 适合有线遥控 (3.5mm)
镜头规格	TR=0.3:1 TR=0.6:1 TR=0.75-0.95:1 TR=0.95-1.22:1 TR=1.5-2.4(标准) TR=1.52-2.9:1 TR=2.9-5.5 TR=5.5-9.3
工作电压	正常: 200-240 VAC @ 50/60 Hz
图像位移	电动控制
整机功耗	标准模式 1300W
工作环境	温度: 0 ~ 40° C 湿度: 0 ~ 85% RH(无冷凝)
储存环境	温度: -20 to 60° C 湿度: 10 ~ 90% RH(无冷凝)
检测保护功能	温度实时监控 风扇根据环境温度控制转速 节能模式
镜头控制	镜头记忆功能 电动聚焦 电动变焦 电控位移

Brightness	16000lm
Display Chip	0.67" DMD
Resolution	1920*1200
Light Source	Solid-state blue semiconductor laser
Color Temperature	8000K-15000K
Brightness Uniformity	>90%
Color Standard	REC709 Color space
Standard Lifespan	>20,000H(50%luminance decay)
Signal Input	HDMIx2, DVI-Dx1 (digital only), VGAx1, HDBaseT (RJ45x1), DisplayPort (DP)
Signal Output	RS232x1
3D Synchronization	3D Sync in, 3D Sync out
Image Processing	RGB Color Adjustment, PIP, Gamma Adjustment
Scanning Rate	Horizontal: 15 kHz to 100 kHz, Vertical: 50 Hz to 120 Hz
Control	RS232 serial port, Ethernet (10/100) RJ45, Available loop-through output, suitable for wired remote control (3.5mm)
Lens Specifications	TR=0.3:1 TR=0.6:1 TR=0.75-0.95:1 TR=0.95-1.22:1 TR=1.5-2.4 (Standard) TR=1.52-2.9:1 TR=2.9-5.5 TR=5.5-9.3
Operating Voltage	200-240 VAC @ 50/60 Hz
Image Shift	Motorized control
Power Consumption	Standard Mode: 1300W
Operating Environment	Temperature: 0 ~ 40°C, Humidity: 0 ~ 85% RH (non-condensing)
Storage Environment	Temperature: -20 ~ 60°C Humidity: 10 ~ 90% RH (non-condensing)
Protection Features	Real-time temperature monitoring Fan speed controlled by ambient temperature Energy-saving mode
Lens Control	Lens memory function Motorized focus Motorized zoom Motorized shift

New visual sensation
A系列

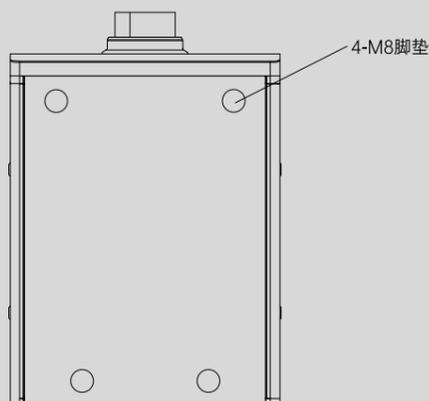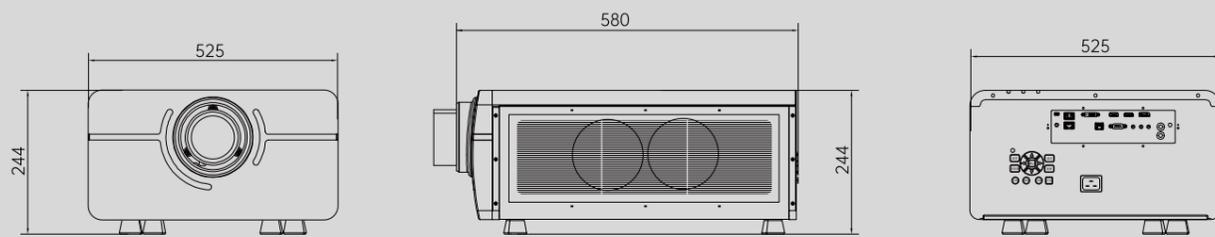

A120

The ANECAST luminaire creates aesthetical combinations suited to numerous applications.

主题公园·景点·全息幕墙·亮化墙·投影映射

/ A系列

SHYLON专注于您需要的光影领域，ANECAST更具创意，提供标志性的光影解决方案来照亮您的城市；我们的专家团队可以提供光学、电学、机械结构或其他技术领域的解决方案将您的构思付诸实践，体现您的独特个性，提升您的艺术空间。

Theme Parks · Scenic Spot · Holographic Facades · Lighting Walls · Projection Mapping

SHYLON specializes in the optical display field. ANECAST possesses greater creativity. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, mechanical structures, or other technical fields. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.



DAZZLING WHEELS LEAD THE PATH

A120 ANECOLOR 高清激光投影机参数表

solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

亮度	12000lm	Brightness	12000lm
显示芯片	0.67" DMD	Display Chip	0.67" DMD
分辨率	1920*1200	Resolution	1920*1200
光源	固态蓝色半导体激光	Light Source	Solid-state blue semiconductor laser
色温	8000K-15000K	Color Temperature	8000K-15000K
亮度均匀性	> 90%	Brightness Uniformity	>90%
色彩标准	REC709 色彩空间	Color Standard	REC709 Color space
标准寿命	> 20000H(光衰 50%)	Standard Lifespan	>20,000H(50%Luminance decay)
信号输入	HDMI*2 DVI-D x 1 (只用于数字) VGA x 1 HDBaseT (RJ45 x 1) DISPLAYPORT(DP)	Signal Input	HDMI*2, DVI-Dx1 (digital only), VGAx1, HDBaseT (RJ45x1), DisplayPort (DP)
信号输出	RS232*1	Signal Output	RS232x1
3D 同步	3D Sync in 3D Sync out	3D Synchronization	3D Sync in, 3D Sync out
图像处理功能	RGB 色彩调整 画中画 Gamma 色彩调整	Image Processing	RGB Color Adjustment, PP, Gamma Adjustment
扫描速率	水平: 15 to 100kHz 垂直: 50 to 120Hz	Scanning Rate	Horizontal 15 kHz to 100 kHz, Vertical 50 Hz to 120 Hz
控制	RS232 串口 连接的以太网 (10/100) RJ45 可用环通输出, 适合有线遥控 (3.5mm)	Control	RS232 serial port, Ethernet (10/100) RJ45, Available loop-through output, suitable for wired remote control (3.5mm)
镜头规格	TR=0.3:1 TR=0.6:1 TR=0.75-0.95:1 TR=0.95-1.22:1 TR=1.5-2.4(标准) TR=1.52-2.9:1 TR=2.9-5.5 TR=5.5-9.3	Lens Specifications	TR=0.3:1 TR=0.6:1 TR=0.75-0.95:1 TR=0.95-1.22:1 TR=1.5-2.4 (Standard) TR=1.52-2.9:1 TR=2.9-5.5 TR=5.5-9.3
工作电压	正常: 200-240 VAC @ 50/60 Hz	Operating Voltage	200-240 VAC @ 50/60 Hz
图像位移	电动控制	Image Shift	Motorized control
整机功耗	标准模式 1200W	Power Consumption	Standard Mode: 1200W
工作环境	温度: 0 - 40° C 湿度: 0 - 85% RH(无冷凝)	Operating Environment	Temperature: 0 ~ 40°C, Humidity: 0 ~ 85% RH (non-condensing)
储存环境	温度: -20 to 60° C 湿度: 10 - 90% RH(无冷凝)	Storage Environment	Temperature: -20 ~ 60°C, Humidity: 10 ~ 90% RH (non-condensing)
检测保护功能	温度实时监控 风扇根据环境温度控制转速 节能模式	Protection Features	Real-time temperature monitoring Fan speed controlled by ambient temperature Energy-saving mode
镜头控制	镜头记忆功能 电动聚焦 电动变焦 电控位移	Lens Control	Lens memory function Motorized focus Motorized zoom Motorized shift

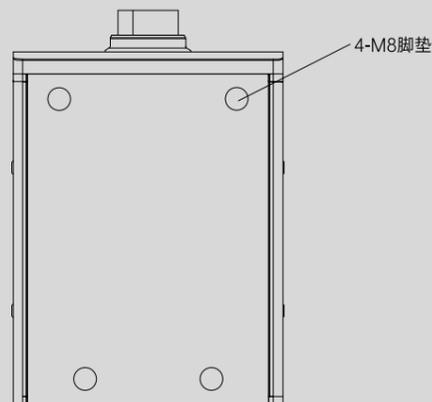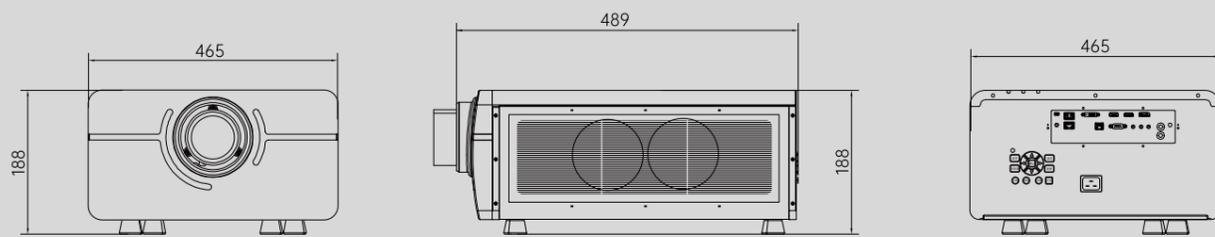

A90

The ANECAST luminaire creates aesthetical combinations suited to numerous applications.

主题公园·景点·全息幕墙·亮化墙·投影映射

/ A系列

SHYLON专注于您需要的光影领域，ANECAST更具创意，提供标志性的光影解决方案来照亮您的城市；我们的专家团队可以提供光学、电学、机械结构或其他技术领域的解决方案将您的构思付诸实践，体现您的独特个性，提升您的艺术空间。

Theme Parks · Scenic Spot · Holographic Facades · Lighting Walls · Projection Mapping

SHYLON specializes in the optical display field. ANECAST possesses greater creativity. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, mechanical structures, or other technical fields. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.

DAZZLING WHEELS LEAD THE PATH

A90 ANECOLOR 高清激光投影机参数表



solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

亮度	9000lm
显示芯片	0.67" DMD
分辨率	1920*1200
光源	固态蓝色半导体激光
色温	8000K-15000K
亮度均匀性	> 90%
色彩标准	REC709 色彩空间
标准寿命	> 20000H(光衰 50%)
信号输入	HDMI*2 DVI-D x 1 (只用于数字) VGA x 1 HDBaseT (RJ45 x 1) DISPLAYPORT(DP)
信号输出	RS232*1
3D 同步	3D Sync in 3D Sync out
图像处理功能	RGB 色彩调整 画中画 Gamma 色彩调整
扫描速率	水平: 15 to 100kHz 垂直: 50 to 120Hz
控制	RS232 串口 连接的以太网 (10/100) RJ45 可用环通输出, 适合有线遥控 (3.5mm)
镜头规格	TR=0.3:1 TR=0.6:1 TR=0.75-0.95:1 TR=0.95-1.22:1 TR=1.5-2.4(标准) TR=1.52-2.9:1 TR=2.9-5.5 TR=5.5-9.3
工作电压	正常: 200-240 VAC @ 50/60 Hz
图像位移	电动控制
整机功耗	标准模式 900W
工作环境	温度: 0 - 40° C 湿度: 0 - 85% RH(无冷凝)
储存环境	温度: -20 to 60° C 湿度: 10 - 90% RH(无冷凝)
检测保护功能	温度实时监控 风扇根据环境温度控制转速 节能模式
镜头控制	镜头记忆功能 电动聚焦 电动变焦 电控位移

Brightness	9000lm
Display Chip	0.67" DMD
Resolution	1920*1200
Light Source	Solid-state blue semiconductor laser
Color Temperature	8000K-15000K
Brightness Uniformity	>90%
Color Standard	REC709 Color space
Standard Lifespan	>20,000H(50%Luminance decay)
Signal Input	HDMI*2, DVI-Dx1 (digital only), VGAx1, HDBaseT (RJ45x1), DisplayPort (DP)
Signal Output	RS232x1
3D Synchronization	3D Sync in, 3D Sync out
Image Processing	RGB Color Adjustment, PP, Gamma Adjustment
Scanning Rate	Horizontal 15 kHz to 100 kHz, Vertical 50 Hz to 120 Hz
Control	RS232 serial port, Ethernet (10/100) RJ45, Available loop-through output, suitable for wired remote control (3.5mm)
Lens Specifications	TR=0.3:1 TR=0.6:1 TR=0.75-0.95:1 TR=0.95-1.22:1 TR=1.5-2.4 (Standard) TR=1.52-2.9:1 TR=2.9-5.5 TR=5.5-9.3
Operating Voltage	200-240 VAC @ 50/60 Hz
Image Shift	Motorized control
Power Consumption	Standard Mode: 900W
Operating Environment	Temperature: 0 ~ 40°C, Humidity: 0 ~ 85% RH (non-condensing)
Storage Environment	Temperature: -20 ~ 60°C, Humidity: 10 ~ 90% RH (non-condensing)
Protection Features	Real-time temperature monitoring Fan speed controlled by ambient temperature Energy-saving mode
Lens Control	Lens memory function Motorized focus Motorized zoom Motorized shift

New visual sensation
A系列

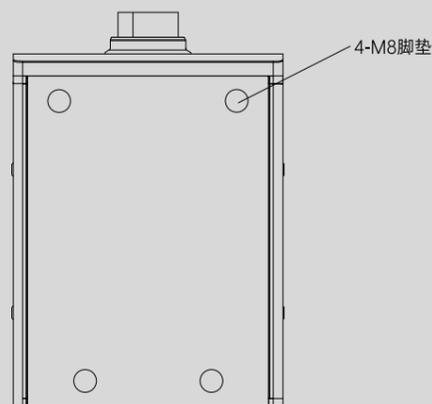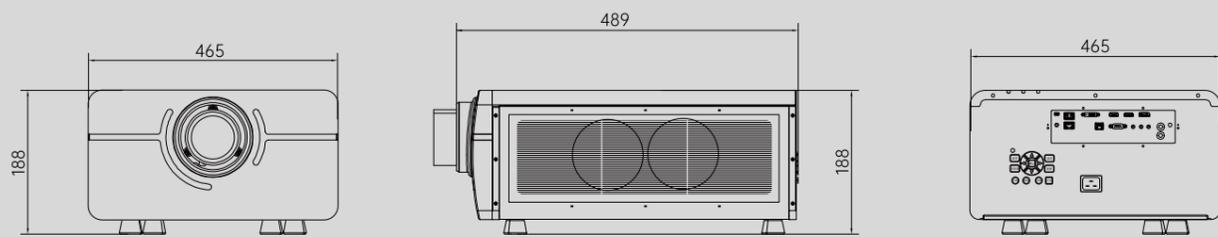

A75

The ANECAST luminaire creates aesthetical combinations suited to numerous applications.

主题公园·景点·全息幕墙·亮化墙·投影映射

/ A系列

SHYLON专注于您需要的光影领域，ANECAST更具创意，提供标志性的光影解决方案来照亮您的城市；我们的专家团队可以提供光学、电学、机械结构或其他技术领域的解决方案将您的构思付诸实践，体现您的独特个性，提升您的艺术空间。

Theme Parks · Scenic Spot · Holographic Facades · Lighting Walls · Projection Mapping

SHYLON specializes in the optical display field. ANECAST possesses greater creativity. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, mechanical structures, or other technical fields. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.

DAZZLING WHEELS LEAD THE PATH

A75 ANECOLOR 高清激光投影机参数表

solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

亮度	7500lm	Brightness	7500lm
显示芯片	0.67" DMD	Display Chip	0.67" DMD
分辨率	1920*1200	Resolution	1920*1200
光源	固态蓝色半导体激光	Light Source	Solid-state blue semiconductor laser
色温	8000K-15000K	Color Temperature	8000K-15000K
亮度均匀性	> 90%	Brightness Uniformity	>90%
色彩标准	REC709 色彩空间	Color Standard	REC709 Color space
标准寿命	> 20000H(光衰 50%)	Standard Lifespan	>20,000H(50% Luminance decay)
信号输入	HDMI*2 DVI-D x 1 (只用于数字) VGA x 1 HDBaseT (RJ45 x 1) DISPLAYPORT(DP)	Signal Input	HDMI*2, DVI-Dx1 (digital only), VGAx1, HDBaseT (RJ45x1), DisplayPort (DP)
信号输出	RS232*1	Signal Output	RS232x1
3D 同步	3D Sync in 3D Sync out	3D Synchronization	3D Sync in, 3D Sync out
图像处理功能	RGB 色彩调整 画中画 Gamma 色彩调整	Image Processing	RGB Color Adjustment, PP, Gamma Adjustment
扫描速率	水平: 15 to 100kHz 垂直: 50 to 120Hz	Scanning Rate	Horizontal 15 kHz to 100 kHz, Vertical 50 Hz to 120 Hz
控制	RS232 串口 连接的以太网 (10/100) RJ45 可用环通输出, 适合有线遥控 (3.5mm)	Control	RS232 serial port, Ethernet (10/100) RJ45, Available loop-through output, suitable for wired remote control (3.5mm)
镜头规格	TR=0.3:1 TR=0.6:1 TR=0.75-0.95:1 TR=0.95-1.22:1 TR=1.5-2.4(标准) TR=1.52-2.9:1 TR=2.9-5.5 TR=5.5-9.3	Lens Specifications	TR=0.3:1 TR=0.6:1 TR=0.75-0.95:1 TR=0.95-1.22:1 TR=1.5-2.4 (Standard) TR=1.52-2.9:1 TR=2.9-5.5 TR=5.5-9.3
工作电压	正常: 200-240 VAC @ 50/60 Hz	Operating Voltage	200-240 VAC @ 50/60 Hz
图像位移	电动控制	Image Shift	Motorized control
整机功耗	标准模式 650W	Power Consumption	Standard Mode: 650W
工作环境	温度: 0 - 40° C 湿度: 0 - 85% RH(无冷凝)	Operating Environment	Temperature: 0 ~ 40°C, Humidity: 0 ~ 85% RH (non-condensing)
储存环境	温度: -20 to 60° C 湿度: 10 - 90% RH(无冷凝)	Storage Environment	Temperature: -20 ~ 60°C, Humidity: 10 ~ 90% RH (non-condensing)
检测保护功能	温度实时监控 风扇根据环境温度控制转速 节能模式	Protection Features	Real-time temperature monitoring Fan speed controlled by ambient temperature Energy-saving mode
镜头控制	镜头记忆功能 电动聚焦 电动变焦 电控位移	Lens Control	Lens memory function Motorized focus Motorized zoom Motorized shift

智能感知 即刻对焦

M150原生三色影像

球形投影机



ANECOLOR 原生三色LED外观灵动，小体积，大画面

/ M系列

安影ANECASTMM150基于DLP平台，采用ANECOLOR原生三色LED光源，完美呈现精美画质。天圆地方理念外观和一体式防水设计，自适应户外环境，根据场景不同提供多重不同的投射比。安卓操作界面，更好的支持现场操作。

ANECOLOR native three-color LED with dynamic appearance, small volume, large image //

ANECASTM M150, based on the DLP platform, adopts ANECOLOR native three-color LED light sources to perfectly present exquisite image quality. Featuring a heaven-round-earth-square concept appearance and integrated waterproof design, it self-adapts to outdoor environments and provides multiple throw ratios for different scenarios. The Android operating interface offers enhanced support for on-site operations.

主要特性

/ Main Features

A	一体式设计	灵动的球形外观，紧凑式设计，自散热模式，无需额外防护散热设备
B	全向功能	多重安装方式，360度操作，安装便利灵活，满足不同客户需求
C	DLP平台	漫反射技术，不伤害人眼，高达200万以上的像素点的精准光路控制
D	ANECOLOR原生三色	小身量大画面，完美还原画质内容
E	多种投射比	拥有从0.495:1—3.5:1的多种投射比，满足客户的不同需求
F	节能	采用AC110V to AC240V 宽压单相电源供电，降低用户使用成本

Integrated Design: Dynamic spherical appearance, compact design, self-cooling mode, no additional heat dissipation equipment required. **Omnidirectional Functionality:** Multiple installation methods, 360 degree operation, convenient and flexible installation, meeting diverse customer needs.

DLP Platform: Diffuse reflection technology, eye-friendly, precise optical path control with over 2 million pixels.

ANECOLOR Native Three-Color: Compact body with large projection, perfectly reproduces image content.

Multiple Throw Ratios: Ranging from 0.495:1 to 3.5:1, catering to diverse customer requirements.


Energy Efficiency: Utilizes wide-voltage single-phase power supply (AC110V to AC240V), reduces user operating costs.



M150

THE ANECASTM LUMINAIRE
CREATES AESTHETICAL
COMBINATIONS
SUITED TO NUMEROUS
APPLICATIONS

/ M150尺寸图

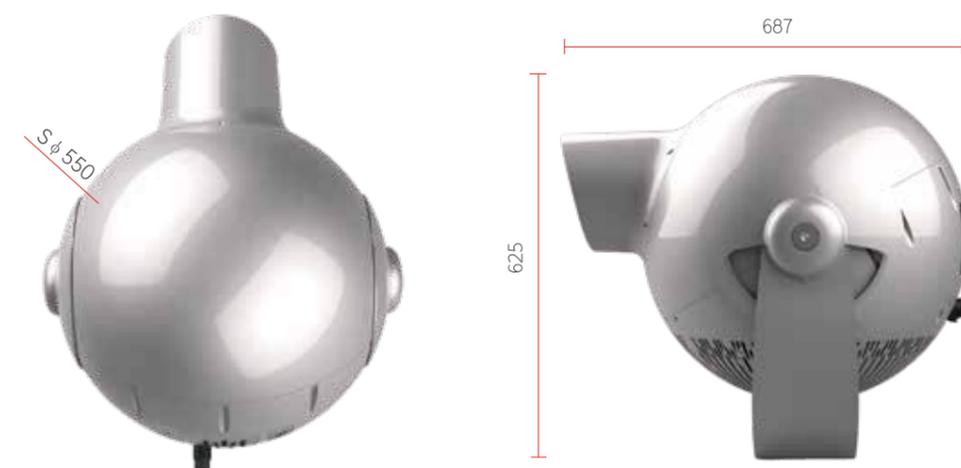

主题公园·景点·全息幕墙·亮化墙·投影映射

/ M系列

SHYLON专注于您需要的光影领域，ANECASTM更具创意，提供标志性的光影解决方案来照亮您的城市；我们的专家团队可以提供光学、电学、机械结构或其他技术领域的解决方案将您的构思付诸实践，体现您的独特个性，提升您的艺术空间。

Theme Parks · Scenic Spot · Holographic Facades ·
Lighting Walls · Projection Mapping

SHYLON specializes in the optical display field. ANECASTM possesses greater creativity. Providing iconic optical display solutions to illuminate your city. Our expert team offers solutions in optical, electrical, mechanical structures, or other technical fields. Turning your concepts into reality, reflecting your unique personality, and enhancing your artistic space.

M150 ANECOLOR 全色激光投影机参数表

solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

亮度	15000 流明	Brightness	15000lm
显示芯片	0.66" DMD	Display Chip	0.66" DMD
分辨率	3840*2160(8,294,400 像素)	Resolution	3840 x 2160(8,294,400 pixels)
光源	红绿蓝三色激光光源	Light Source	RGB three-color laser light source
色温	8000K-12000K	Color Temperature	8000K-12000K
亮度均匀性	> 90%	Brightness Uniformity	>90%
色彩标准	BT.2020 色彩空间 110%	Color Standard	110% BT.2020 Ultra HD Color Gamut
标准寿命	30,000 小时(光衰 50%)	Standard Lifespan	30,000 hours (50% luminance decay)
信号输入	HDMI*1 或 DISPLAYPORT(DP) 或 HDBaseT (RJ45 x 1)(可选)	Signal Input	HDMIx1, DVI-Dx1 (digital only), VGAx1 HDBaseT (RJ45x1), DisplayPort (DP)
信号输出	HDMI*1	Signal Output	HDMIx1
3D 同步	"3D Sync in 3D Sync out"	3D Synchronization	3D Sync in, 3D Sync out
图像处理功能	RGB 色彩调整 画中画 Gamma 色彩调整	Image Processing	RGBAdjustment, PIP, Gamma Adjustment
像素时钟	600MHz	Pixel Clock	600 MHz
扫描速率	水平: 15 kHz to 91 kHz 垂直: 24 Hz to 75 Hz	Scanning Rate	Horizontal: 15 kHz to 91 kHz, Vertical: 24 Hz to 75 Hz
控制	RS232 串口 连接的以太网 (10/100) RJ45 可用环通输出, 适合有线遥控 (3.5mm)	Control	RS232 serial port, Ethernet (10/100) RJ45 Available loop-through output, suitable for wired remote control (3.5mm)
镜头规格	"TR=1.3-1.8:1(标准镜头)多镜头可选"	Lens Specifications	TR=1.3-1.8 (Standard) TR=2.3-3.6, TR=3.6-6.0, TR=6.0-9.0
工作电压	正常: 110-240 VAC @ 50/60 Hz	Operating Voltage	110-240 VAC @ 50/60 HZ
图像位移	电动控制	Image Shift	Motorized control
整机重量	30kg (不含镜头)	Total Weight	30kg (withoutlens)
整机功耗	高亮模式: 560W 标准模式: 510W	Power Consumption	Warm Mode: 560W, Normal Mode: 510W
最大噪音	高亮模式: 560W: 45dB(A) 标准模式: 510W: 40dB(A)	Maximum Noise	High Brightness Mode (560W): 45 dB(A), Standard Mode (510W): 40 dB(A)
尺寸	550mmx625mmx687mm (不含镜头)	Dimensions	550mmx625mmx687mm (withoutlens)
工作环境	温度: 0-40°C 湿度: 0-85% RH(无冷凝)	Operating Environment	Temperature:0-40°C, Humidity:0-85% RH (non-condensing)
储存环境	温度: -20 到 60°C 湿度: 10-90% RH(无冷凝)	Storage Environment	Temperature:-20-60°C, Humidity: 10-90% RH (non-condensing)
检测保护功能	温度实时监控 风扇根据环境温度控制转速 节能模式	Protection Features	Real-time temperature monitoring, Fan speed controlled by ambient temperature, Energy-saving mode
镜头控制	镜头记忆功能 电动聚焦 电动变焦 电控位移	Lens Control	Lens memory function, Motorized focus Motorized zoom Motorized shift

产品应用

Product application

The ANECAST

luminaire creates aesthetical combinations suited to numerous applications.

安装示意:


立杆悬挂安装, 上电即可投射画面;

投射比1.2: 1, 建议安装高度5.3米;

呈现W*H 4.2米*2.4米约10平方米画幅。

Installation instructions:

The pole is suspended and installed, and the image can be projected as soon as it is powered on; the projection ratio is 1.2:1, and the recommended installation height is 5.3 meters; the image size is W*H 4.2 meters *2.4 meters, about 10 square meters.

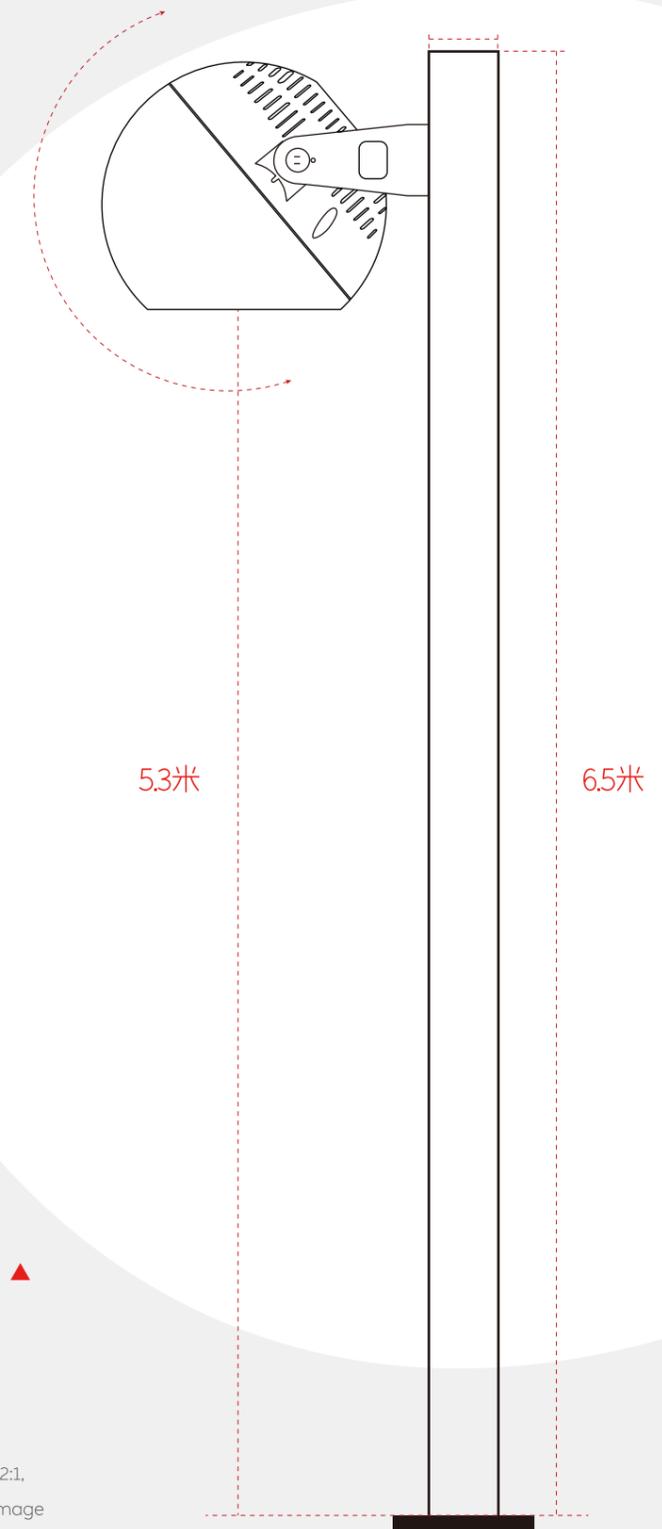

安装 示意场景

Installation scenario

投射效果示意图，直接安装上电即可使用，无需其他设备，便可呈现精美画质

Projection effect diagram

It can be used directly after installation and power on, and can present exquisite image quality without other equipment



Product application configuration

产品应用配置

<p>单机模式 Single machine mode</p>	 <p>投影机</p>				
<p>多机融合模式 Multi-machine fusion mode</p>	 <p>投影机</p>	 <p>视频处理器 / Video processor</p>	 <p>视频服务器 / Video server</p>		
<p>多机互动模式 Multi-player interaction mode</p>	 <p>投影机</p>	 <p>交换机 / Exchange board</p>	 <p>雷达感应器 / Radar sensors</p>	 <p>视频处理器 / Video processor</p>	 <p>视频服务器 / Video server</p>

投影未来生活的多元化应用场景

Multiple application scenarios of DECORATIVE projectors



户外移动影院
全天候移动式影院，180寸大画面，画幅尺寸可自行调整




户外墙面
远距离高杆投影外墙立面，15米投射画面10平方米（16:9），画面可拼接



户外地面/步道
户外地面、步道投影，立杆安装，任意画幅调整，多画面拼接



互动投影（增加外设）
增加外设（雷达或红外），实现沉浸式互动投影功能

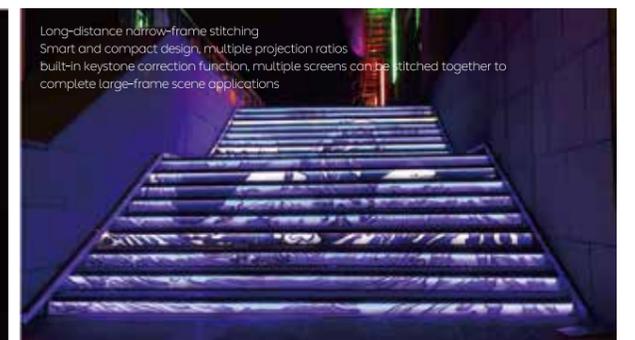


长距离窄画幅拼接
灵巧小体积设计，多重投射比，自带梯形校正功能，可多台拼接画面，完成大画幅场景应用



快速及自适应颜色管理技术


- + 创新性的设计开发多台高流明工程投影机适应不同的安装环境和投影面，实现在异形投影面（圆柱面、波浪面、斜面）投影图像正常显示，保证多台投影机输出图像快速融合，实现完整巨幅画面。
- + 投影机输出亮度和颜色根据使用环境和场地背景进行自动感知和调节，确保投影显示图像不失真，不偏色。
- + 优化了传统投影亮度不可调存在的融合后白平衡难以调节、图像偏色、发热功耗大等问题，实现投影画面亮度一致性和色彩均匀性大幅提升。

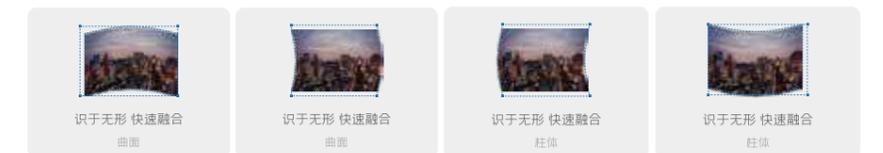

内置融合技术

通过图像几何算法处理实现球状、圆柱状等其他异型曲面矫正，利用暗场、漏光补偿，消阴等处理实现图像融合功能。内置融合可以将投影画面的色彩、灰度、亮度调节成一致，满足客户不外接设备实现多机拼接或融合画面要求。

全能六边形战士

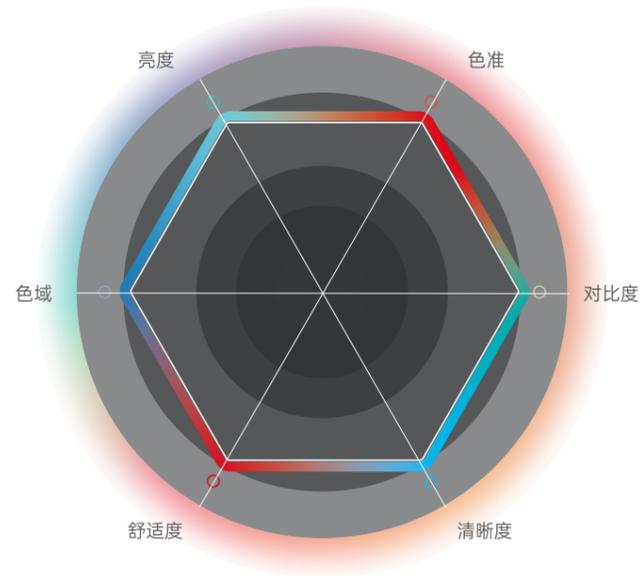

精良的散热系统 40度以下稳定运行

对机器进行有效的温度管理，将关键部件包裹在冷风扇中间，通过双面降温方式，以使核心部件能够高效并稳定工作。故热量模块变得更小时能降低噪声。

尽情发挥你的创意

可以应用在任何表面的多重投影，我们先进的融合功能可以提供亮度调节功能，平衡重合投影区域的亮度。它帮助产生一个没有可见边缘的自然、无缝隙的大尺寸画面，尤其适用于大屏幕应用，例如博物馆、控制室、室外投影。

可以7*24小时连续工作

打造恒久稳定的系统结构，确保投影机7*24小时不间断工作为用户提供连续不间断的展示，非常适用于监控安保系统。采用独特的噪声控制手法，优化整机中的风流以及配备抗振措施以保证内部动态元件的静音工作水准。

4K超高清体验

采用像素偏移的方式实现3840x2160的超高分辨率和顺滑的像素过渡，同时具备HDR图像处理技术，使画面显示更加逼真。通过HDR可帮助用户更好看清画面明暗细节，能够表现更为细致的图像内容。

高度和色彩度的高稳定性





深研客户需求，从体验、安全、智慧角度出发，增加了红色激光作为补色光源，在色域覆盖范围、均衡性和视觉舒适度上都有显著提升。解决单色光源激光显示形成的“红色不够透亮”和色彩空间不均衡问题。



安影激光产品系列

基于红、绿、蓝三基色新型激光光源

基于红、绿、蓝三基色新型激光光源空间光耦合技术，半导体激光器阵列集成技术，组成显示图像所需的三原色和DLP芯片的有效结合，在整机寿命实现30000小时的基础上整机输出亮度高达30000流明。

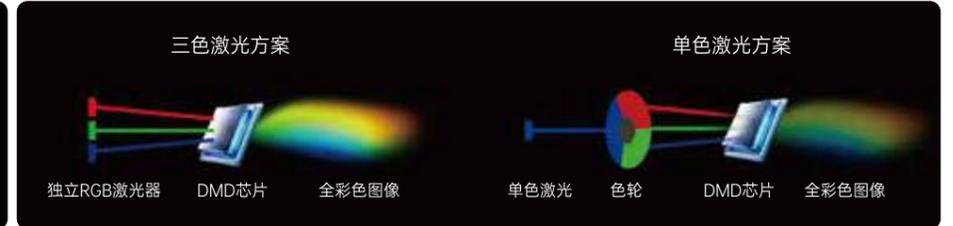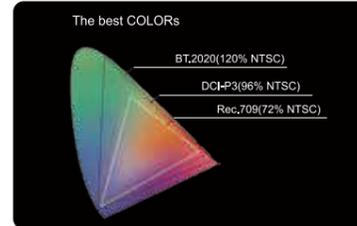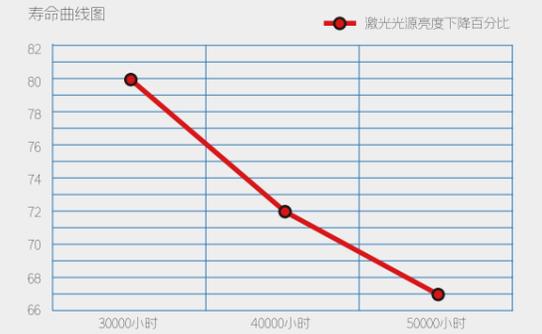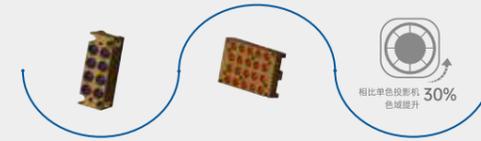

三激光RGB三色颜色处理设计技术提升色域到130%，精准完美超越了Rec.709色彩标准，相比单色投影机色域提升30%；红色图像的饱和度和色彩准确度得到了较大范围的提升。

红色表现效果图





极致色彩 精准还原

Anecast激光影像产品采用先进的6P激光光源技术，极大的提升产品的亮度，降低了产品系统功耗。同时解决了传统激光技术色彩还原度低，色准度差，色域范围小等不足之处，实现BT2020:120%的投影显示色域，真实还原原始影像，画面色彩更加真实，自然。

高色域
120%
BT.2020*

还原原始影像，画面色彩更加真实

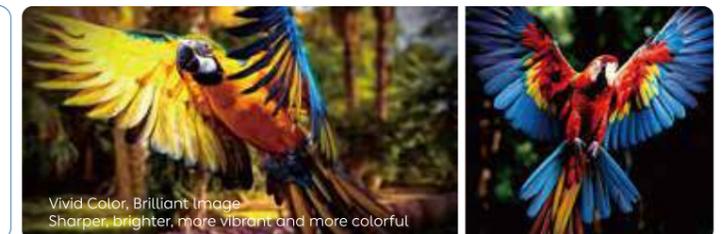

向往已久的光影 新生活

让美好从此触手可得 让日常变得
非比寻常



Embark on Your Long-Awaited Luminous Lifestyle
Where Radiance Meets Your Grasp,
Transforming the Mundane into the Magnificent

Hello **BETTER LIGHT
BETTER WORLD**

DECORATIVE

M 系列

solutions tobring meaningfulmoments to peoplein public spaces

技术参数 / Specification


型号	M70	Model	M70
芯片尺寸	0.47" 对角线	Chip size	0.47" diagonal
光学引擎	DMD,DLP@投影系统	Optical Engine	DMD, DLP projection system
像素	8294400 (3840x2160)	Pixels	8,294,400 pixels (3840x2160)
光源类型	RGB 激光光源	Light Source Type	RGB laser light source
分辨率	3840x2160	Resolution	3840x2160
亮度	7000lm	Brightness	7000lm
对比度	1300:1	Contrast Ratio	1300:1
色温	5000K-9000K	Color Temperature	5000K-9000K
可选镜头	1.2/3.5/0.495	Optional Lenses	1.2/3.5/0.495
重量	15kg	Weight	15 kg
额定功耗	400W	Rated Power	400 W
安装方式	直接安装, 无需恒温恒湿箱	Installation Method	Direct installation, no need for constant temperature/humidity chamber
工作电压	100-240VAC@50/60Hz	Operating Voltage	100-240 VAC @ 50/60 Hz
整机尺寸	400*400*500mm	Dimensions	400x400x500 mm
端口	HDMI/RJ45/USB	Ports	HDMI/RJ45/USB
工作寿命	20,000小时	Operating Lifetime	20,000 hours
防护等级	IP65	Protection Level	IP65
工作温度	-20~40°C	Operating Temperature	-20~40°C
工作湿度	0~85%RH	Operating Humidity	0~85% RH
产品可选底座	U型座/法兰座/套杆座	Optional Mounts	U-shaped bracket/Flange bracket/Rod sleeve bracket
产品可选应用配置	单机配置、多机联配置 多机互动配置	Application Configurations	Single-unit configuration/Multi-unit linked configuration/Multi-unit interactive configuration
产品拓展功能	基础投影/自动对焦 自动梯形校准/内置互动装置 手机APK	Extended Functions	Basic projection/Auto focus/ Auto keystone correction/Built-in interactive device/ Mobile APK

solutions tobring meaningfulmoments to peoplein public spaces




文艺复兴

M70一体支架

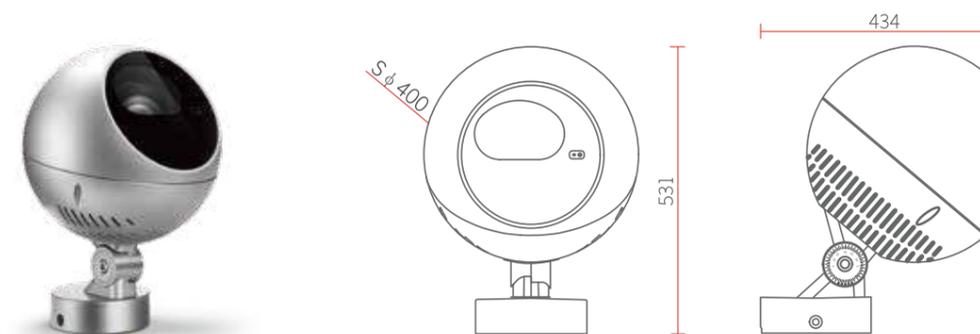

M70 U支架

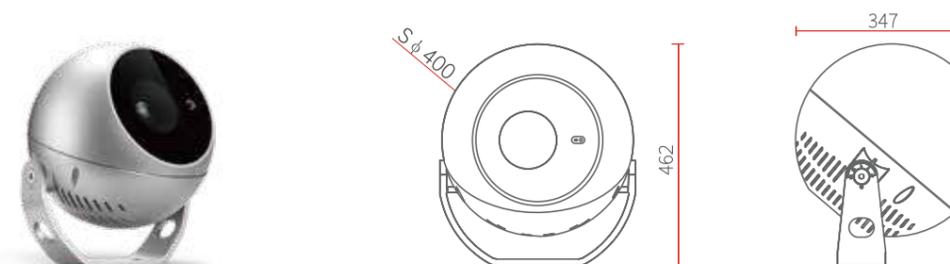

solutions tobring meaningfulmoments to peoplein public spaces

DECORATIVE

M 系列

solutions to bring meaningful moments to people in public spaces

技术参数 / Specification


型号	M40	Model	M40
芯片尺寸	0.47" 对角线	Chip size	0.47" diagonal
光学引擎	DMD/DLP@投影系统	Optical Engine	DMD, DLP projection system
像素	8294400 (3840x2160)	Pixels	8,294,400 pixels (3840x2160)
光源类型	RGB 激光光源	Light Source Type	RGB laser light source
分辨率	3840x2160	Resolution	3840x2160
亮度	4000lm	Brightness	4000lm
对比度	1300:1	Contrast Ratio	1300:1
色温	5000K-9000K	Color Temperature	5000K-9000K
可选镜头	1.2/3.5/0.495	Optional Lenses	1.2/3.5/0.495
重量	13kg	Weight	13 kg
额定功耗	300W	Rated Power	300 W
安装方式	直接安装, 无需恒温恒湿箱	Installation Method	Direct installation, no need for constant temperature/humidity chamber
工作电压	100-240VAC@50/60Hz	Operating Voltage	100-240 VAC @ 50/60 Hz
整机尺寸	300*300*350mm	Dimensions	300x300x350 mm
端口	HDMI/RJ45/USB	Ports	HDMI/RJ45/USB
工作寿命	20,000小时	Operating Lifetime	20,000 hours
防护等级	IP65	Protection Level	IP65
工作温度	-20~40°C	Operating Temperature	-20~40°C
工作湿度	0~85%RH	Operating Humidity	0-85% RH
产品可选底座	U型座/法兰座/套杆座	Optional Mounts	U-shaped bracket/Flange bracket/Rod sleeve bracket
产品可选应用配置	单机配置、多机联配置 多机互动配置	Application Configurations	Single-unit configuration/Multi-unit linked configuration/Multi-unit interactive configuration
产品拓展功能	基础投影/自动对焦 自动梯形校准/内置互动装置 手机APK	Extended Functions	Basic projection/Auto focus/ Auto keystone correction/Built-in interactive device/ Mobile APK

solutions to bring meaningful moments to people in public spaces




文艺复兴

M40一体支架

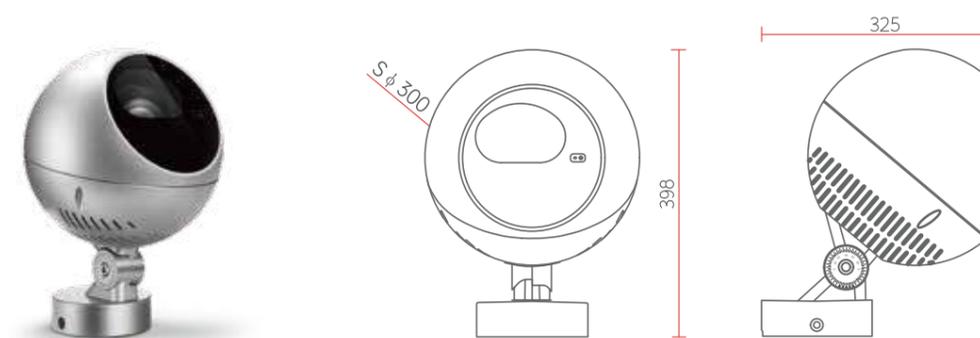

M40 U支架

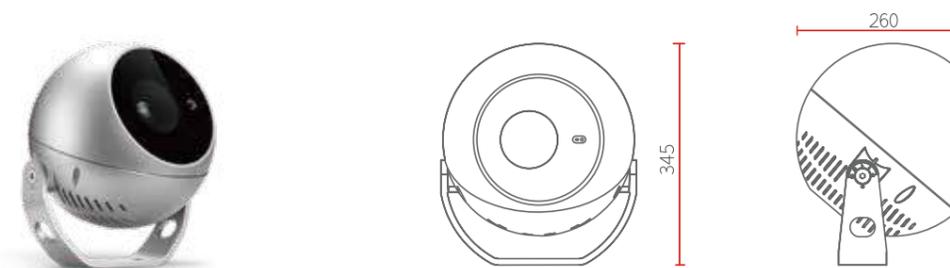

solutions to bring meaningful moments to people in public spaces

DECORATIVE

M 系列

solutions tobring meaningfulmoments to peoplein public spaces

技术参数 / Specification

型号	M8	Model	M8
芯片尺寸	0.23" 对角线	Chip size	0.23" diagonal
光学引擎	DMD,DLP@投影系统	Optical Engine	DMD, DLP projection system
像素	2073600 (1920x1080)	Pixels	2,073,600 pixels (1920x1080)
光源类型	RGB 激光光源	Light Source Type	RGB laser light source
分辨率	1920x1080	Resolution	1920x1080
亮度	800lm	Brightness	800lm
对比度	1300:1	Contrast Ratio	1300:1
色温	5000K-9000K	Color Temperature	5000K-9000K
可选镜头	1.2/3.5	Optional Lenses	1.2/3.5
重量	4kg	Weight	4 kg
额定功耗	120W	Rated Power	120 W
安装方式	直接安装, 无需恒温恒湿箱	Installation Method	Direct installation, no need for constant temperature/humidity chamber
工作电压	100-240VAC@50/60Hz	Operating Voltage	100-240 VAC @ 50/60 Hz
整机尺寸	168*168*223mm	Dimensions	168x168x223 mm
端口	HDMI/RJ45/USB	Ports	HDMI/RJ45/USB
工作寿命	20,000小时	Operating Lifetime	20,000 hours
防护等级	IP65	Protection Level	IP65
工作温度	-20~40°C	Operating Temperature	-20~40°C
工作湿度	0~85%RH	Operating Humidity	0-85% RH
产品可选底座	U型座/法兰座/套杆座	Optional Mounts	U-shaped bracket/Flange bracket/Rod sleeve bracket
产品可选应用配置	单机配置、多机联配置	Application Configurations	Single-unit configuration/Multi-unit linked configuration/Multi-unit interactive configuration
	多机互动配置		
产品拓展功能	基础投影/自动对焦	Extended Functions	Basic projection/Auto focus/
	自动梯形校准/内置互动装置		Auto keystone correction/Built-in interactive device/
	手机APK		Mobile APK

solutions tobring meaningfulmoments to peoplein public spaces




M8


文艺复兴

The ANECAST luminaire creates aesthetical combinations suited to numerous applications

M8一体支架

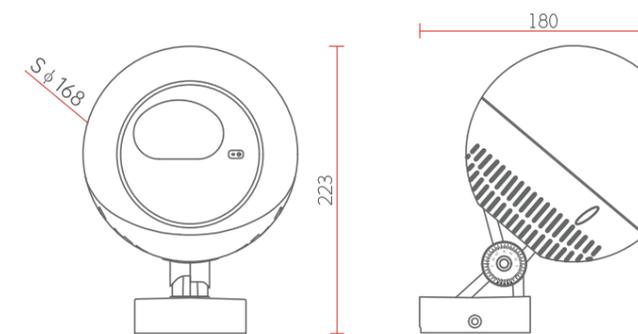

M8 U支架

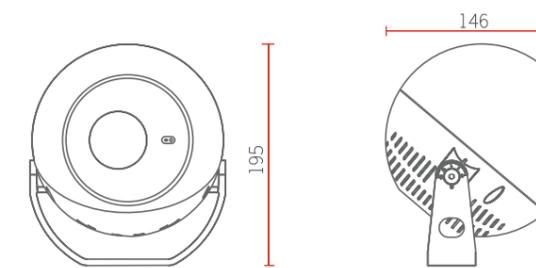

solutions tobring meaningfulmoments to peoplein public spaces

ANEDAST
STUDIO

A20原生三色影像

智能感知 即刻对焦

球形投影机



Hello BETTER LIGHT
BETTER WORLD

ANEDAST STUDIO



Certificate Red Dot Winner 2023

The Red Dot is the distinction for high design quality. Only products that demonstrate outstanding design are awarded the coveted seal of quality by the international jury. In 2023, in the category "Smart Products", it is presented to:

Outdoor Laser Projector A20

Smart Product

Manufacturer
Shanghai SHYLON Optoelectronic Technology Co., Ltd
Kunshan, China

In-house design
Yinghui Lu

Essen/Germany, 19 June 2023

Nils Toft
Member of the jury
Denmark

Guto Indio da Costa
Member of the jury
Brasil

Aleks Tatic
Member of the jury
Germany

Professor Dr. Peter Zec
Founder & CEO of Red Dot
Germany

ANECOLOR 原生三色LED外观灵动，小体积，大画面

/ 球形系列

安影 ANECAST® A20 基于DLP平台，采用 ANECOLOR 原生三色LED光源，完美呈现精美画质。天圆地方理念外观和一体式防水设计，自适应户外环境，根据场景不同提供多重不同的投射比。安卓操作界面，更好的支持现场操作。

ANECOLOR native three-color LED with dynamic appearance, small volume, large image //

ANECAST® A20, based on the DLP platform, adopts ANECOLOR native three-color LED light sources to perfectly present exquisite image quality. Featuring a heaven-round-earth-square concept appearance and integrated waterproof design, it self-adapts to outdoor environments and provides multiple throw ratios for different scenarios. The Android operating interface offers enhanced support for on-site operations.

主要特性

/ Main Features

A	一体式设计	灵动的球形外观，紧凑式设计，自散热模式，无需额外防护散热设备
B	全向功能	多重安装方式，360度操作，安装便利灵活，满足不同客户需求
C	DLP平台	漫反射技术，不伤害人眼，高达200万以上的像素点的精准光路控制
D	ANECOLOR 原生三色	小身量大画面，完美还原画质内容
E	多种投射比	拥有从0.495-3.5: 1的多种投射比，满足客户的不同需求
F	节能	采用AC100V to AC240V 宽压单相电源供电，降低用户使用成本

Integrated Design: Dynamic spherical appearance, compact design, self-cooling mode, no additional heat dissipation equipment required. **Omnidirectional Functionality:** Multiple installation methods, 360 degree operation, convenient and flexible installation, meeting diverse customer needs.

DLP Platform: Diffuse reflection technology, eye-friendly, precise optical path control with over 2 million pixels.

ANECOLOR Native Three-Color: Compact body with large projection, perfectly reproduces image content.

Multiple Throw Ratios: Ranging from 0.495:1 to 3.5:1, catering to diverse customer requirements.

Energy Efficiency: Utilizes wide-voltage single-phase power supply (AC100V to AC240V), reduces user operating costs.




A20


文艺复兴

The ANECAST luminaire creates aesthetical combinations suited to numerous applications

A20一体支架

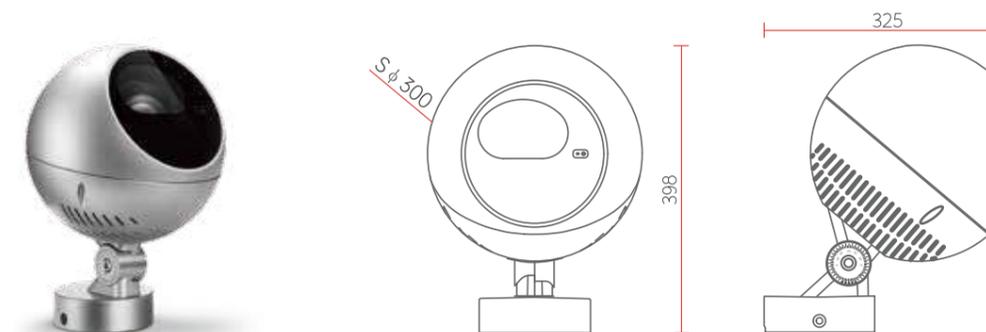

A20 U支架

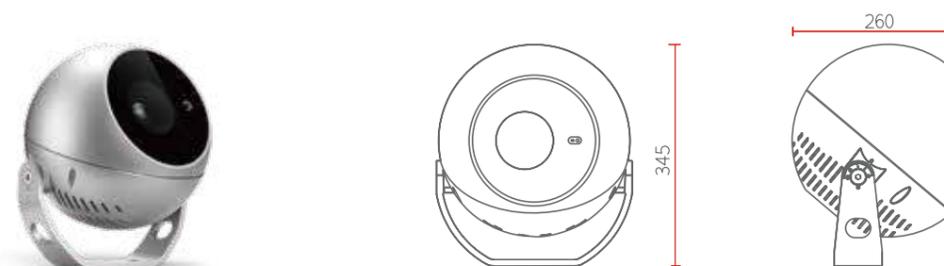

solutions to bring meaningful moments to people in public spaces

DECORATIVE

/ 球形系列

solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

型号	A20	Model	A20
芯片尺寸	0.47" 对角线	Chip size	0.47" diagonal
光学引擎	DMD/DLP@投影系统	Optical Engine	DMD, DLP projection system
像素	2073600 (1920x1080)	Pixels	2,073,600 pixels (1920x1080)
光源类型	RGB LED光源	Light source Type	RGB LED light source
物理分辨率	1920X1080	Native Resolution	1920x1080
亮度	2000lm	Brightness	2000lm
对比度	650:1	Contrast Ratio	650:1
色温	5000 - 9000 K	Color Temperature	5000-9000K
可选镜头种类	1.2/3.5/0.495/1.0-3.5	Optional Lenses	1.2/3.5/0.495/1.0-3.5
重量	12kg	Weight	12 kg
额定功耗	200W	Rated Power	200 W
安装方式	直接安装, 无需恒温恒湿箱	Installation Method Level	Direct installation, no need for constant temperature/humidity chamber
工作电压	100-240VAC@50/60Hz	Operating Voltage	100-240 VAC @ 50/60 Hz
整机尺寸	300*300*398mm	Dimensions	300x300x398 mm
端口	HDMI/RJ45/USB	Ports	HDMI/RJ45/USB
工作寿命	20,000 小时	Operating Lifetime	20,000 hours
防护等级	IP65	Protection Level	IP65
工作温度	-20~40°C	Operating Temperature	-20~40°C
工作湿度	0~85%RH	Operating Humidity	0-85% RH
产品可选底座	U型座/法兰座/套杆座	Optional Mounts	U-shaped bracket/Flange bracket/Rod sleeve bracket
产品可选应用配置	单机模式、	Application Configurations	Single-unit mode,
	多机融合模式、		Multi-unit fusion mode,
	多机互动模式		Multi-unit interactive mode

solutions to bring meaningful moments to people in public spaces

产品应用

Product application

The ANECAST


luminaire creates aesthetical combinations suited to numerous applications.

安装示意:

立杆悬挂安装, 上电即可投射画面; 投射比1.2: 1, 建议安装高度5.3米; 呈现W*H 4.2米*2.4米约10平方米画幅。

Installation instructions:

The pole is suspended and installed, and the image can be projected as soon as it is powered on; the projection ratio is 1.2:1, and the recommended installation height is 5.3 meters; the image size is W*H 4.2 meters *2.4 meters, about 10 square meters.

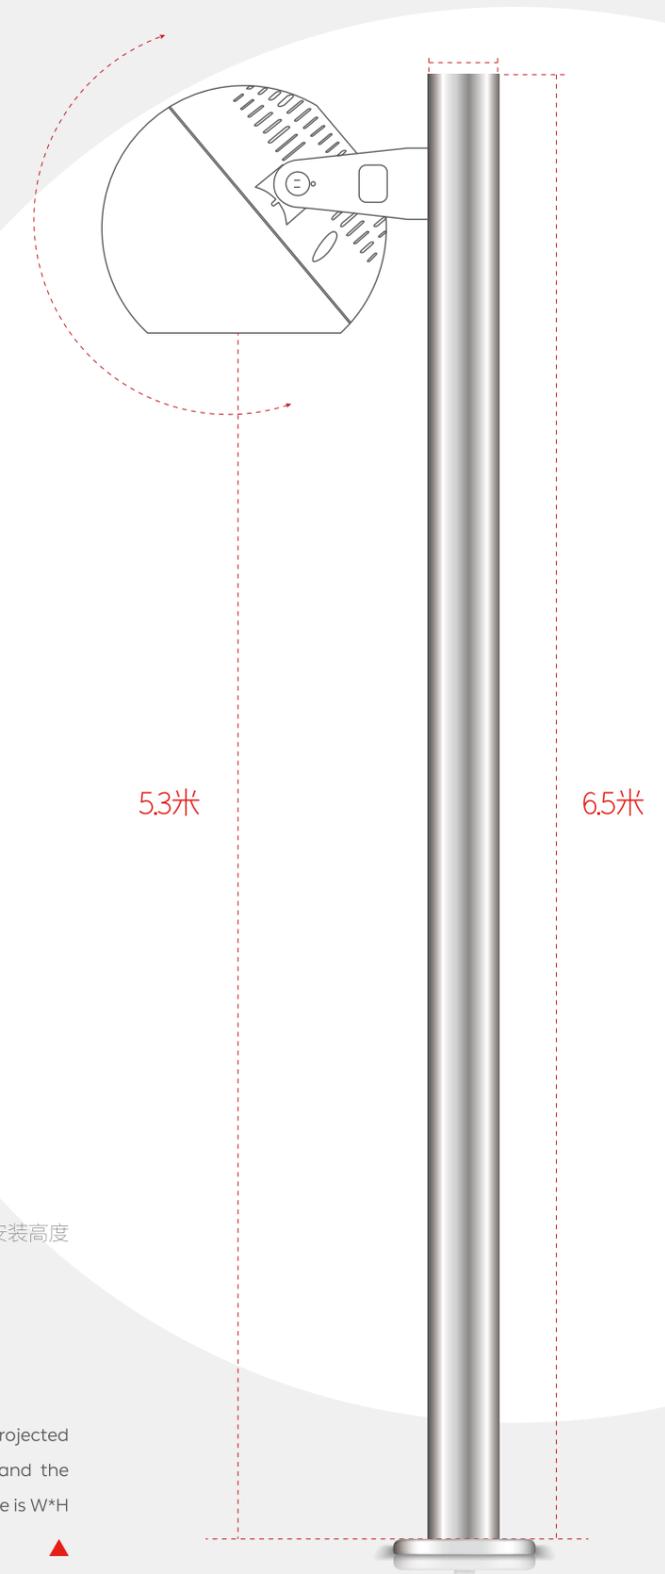

DECORATIVE

/ 球形系列

solutions to bring meaningful moments to people in public spaces

技术参数 / Specification

型号	A6	Model	A6
芯片尺寸	0.23" 对角线	Chip size	0.23" diagonal
光学引擎	DMD/DLP@投影系统	Optical Engine	DMD, DLP projection system
像素	2073600 (1920x1080)	Pixels	2,073,600 pixels (1920x1080)
光源类型	RGB LED光源	Light Source Type	RGB LED light source
分辨率	1920X1080(XPR)	Resolution	1920x1080
亮度	600lm	Brightness	600lm
对比度	300:1	Contrast Ratio	300:1
色温	5000K-9000K	Color Temperature	5000-9000K
可选镜头	1.2	Optional Lenses	1.2
重量	3.5kg	Weight	3.5 kg
额定功耗	100W	Rated Power	100 W
安装方式	直接安装, 无需恒温恒湿箱	Installation Method	Direct installation, no need for constant temperature/humidity chamber
工作电压	100-240VAC@50/60Hz	Operating Voltage	100-240 VAC @ 50/60 HZ
整机尺寸	168*168*223mm	Dimensions	168*168*223mm
端口	HDMI/RJ45/USB	Ports	HDMI/RJ45/USB
工作寿命	20,000小时	Operating Lifetime	20,000 hours
防护等级	IP65	Protection Level	IP65
工作温度	-20~40°C	Operating Temperature	-20~40°C
工作湿度	0~85%RH	Operating Humidity	0-85% RH
产品可选底座	U型座/法兰座/套杆座	Optional Mounts	U-shaped bracket/Flange bracket/Rod sleeve bracket
产品可选应用配置	单机配置、多机联配置	Application Configurations	Single-unit configuration/Multi-unit linked configuration/Multi-unit interactive configuration
	多机互动配置		
产品拓展功能	基础投影/自动对焦/	Extended Functions	Basic projection/Auto focus/
	自动梯形校正/内置融合/		Auto keystone correction/Built-in interactive device/
	红外互动装置/手机APK		Mobile APK

solutions to bring meaningful moments to people in public spaces




A6


文艺复兴

The ANECAST luminaire creates aesthetical combinations suited to numerous applications

A6一体支架

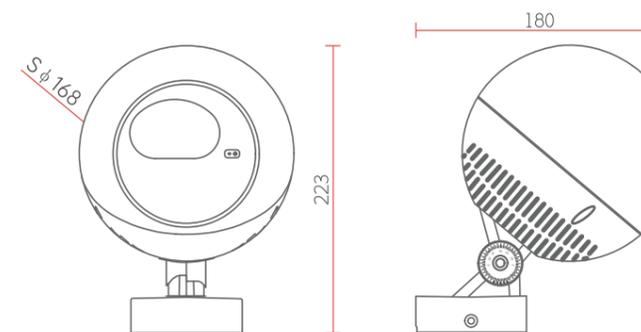

A6 U支架

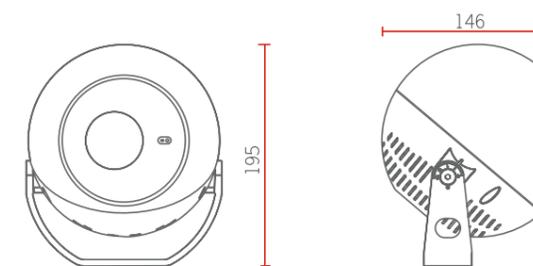

solutions to bring meaningful moments to people in public spaces

安装 示意场景

Installation scenario

投射效果示意图，直接安装上电即可使用，无需其他设备，便可呈现精美画质

Projection effect diagram
It can be used directly after installation and power on, and can present exquisite image quality without other equipment



产品应用配置

Product application configuration

ANECAS 原生三色影像

单机模式

Single machine mode



投影机

多机融合模式

Multi-machine fusion mode



投影机



视频处理器 / Video processor



视频服务器 / Video server

多机互动模式

Multi-player interaction mode



投影机



交换机 / Exchange board



雷达感应器 / Radar sensors




视频处理器 / Video processor



视频服务器 / Video server

投影未来生活的多元化应用场景

Multiple application scenarios of DECORATIVE projectors

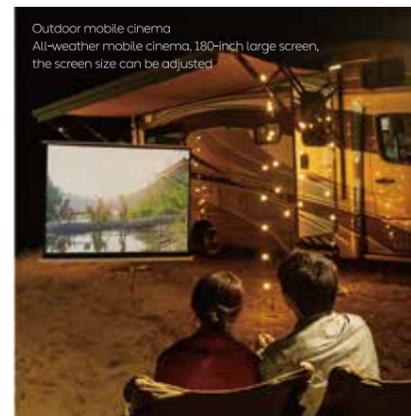

Outdoor mobile cinema
All-weather mobile cinema, 180-inch large screen, the screen size can be adjusted

户外移动影院
全天候移动式影院，180寸大画面，画幅尺寸可自行调整



Outdoor wall
Long-distance pole-mounted projection of exterior wall facade, 15 meters of projection screen 10 square meters (16:9), the screen can be spliced

户外墙面
远距离高杆装投射外墙立面，15米投射画面10平方米（16：9），画面可拼接



Outdoor ground/walkway
Outdoor ground and walkway projection, pole installation, arbitrary frame adjustment, multi-screen splicing

户外地面/步道
户外地面、步道投影，立杆安装，任意画幅调整，多画面拼接



互动投影（增加外设）
增加外设（雷达或红外），实现沉浸式互动投影功能



Long-distance narrow-frame stitching
Smart and compact design, multiple projection ratios built-in keystone correction function, multiple screens can be stitched together to complete large-frame scene applications

solutions to bring meaningful moments to people in public spaces

Flood Light Series



SL1329

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

CO₂ ↓ 50%

原生1度角

K值 > 500

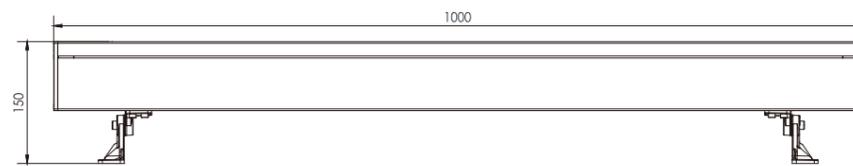

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1329M-12	SL1329M-6(0.5m)	SL1329M-3(0.3m)	SL1329F-12
Led品牌/ Led Brand	CREE	CREE	CREE	CREE RGBW 4in1/晶元 4in1
Led数量/ Led Quantity	12pcs	6pcs	3pcs	12pcs
额定功率/ Rated Power	100W	50W	20W	160W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW
发光角度/ Beam Angle	1.5° 1.5x40°			4°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1329F-6(0.5m)	SL1329F-3(0.3m)		
Led品牌/ Led Brand	CREE RGBW 4in1/晶元 RGBW 4in1	CREE RGBW 4in1/晶元 RGBW 4in1		
Led数量/ Led Quantity	6pcs	3pcs		
额定功率/ Rated Power	80W	40W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	RGBW		
发光角度/ Beam Angle	4°	4°		
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		

Flood Light Series

SL1309


蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

KEEPOWER

恒功率

Dopamine

多巴胺色彩

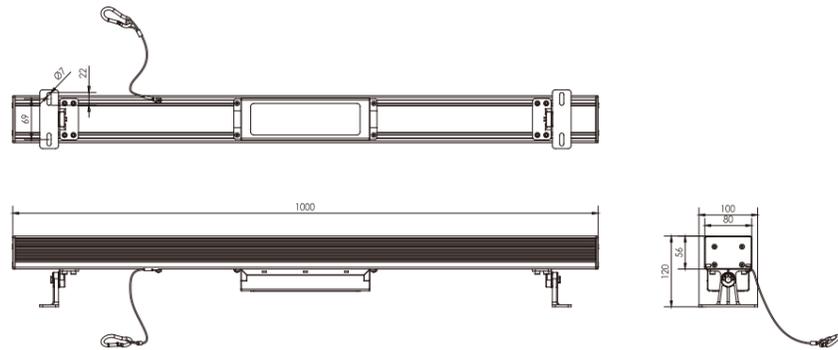

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1309M-24	SL1309E-24	SL1309E-12(0.5m)	SL1309E-8(0.3m)
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L/OSRAM P9	CREE XP-L/OSRAM P9	CREE XP-L/OSRAM P9
Led数量/ Led Quantity	24pcs	24pcs	12pcs	8pcs
额定功率/ Rated Power	200W	200W	100W	60W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	Single
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x70° 5x20°		
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	6pcs	6pcs	12pcs	20pcs
产品型号/ Product Code	SL1309N-24KP	SL1309Q-24KP	SL1309F-24	
Led品牌/ Led Brand	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	OSRAM RGBW 4in1	
Led数量/ Led Quantity	24pcs	24pcs	24pcs	
额定功率/ Rated Power	200W	200W	200W	
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBWCLA	RGBW	RGBW	
发光角度/ Beam Angle	15° 20° 30° 45° 15X60°	9° 15° 20° 30° 45° 15X60°	9° 15° 20° 30° 45° 15X60°	
控制方式/ Control Mode	DMX512	DMX512/RDM	DMX512/RDM	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	
串联数量/ In series(max)	12pcs	6pcs	6pcs	
产品型号/ Product Code	SL1309F-12(0.5m)	SL1309F-8(0.3m)		
Led品牌/ Led Brand	OSRAM RGBW 4in1	OSRAM RGBW 4in1		
Led数量/ Led Quantity	12pcs	8pcs		
额定功率/ Rated Power	100W	60W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	RGBW		
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15X60°			
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	12pcs	20pcs		

Flood Light Series

SL1309P

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

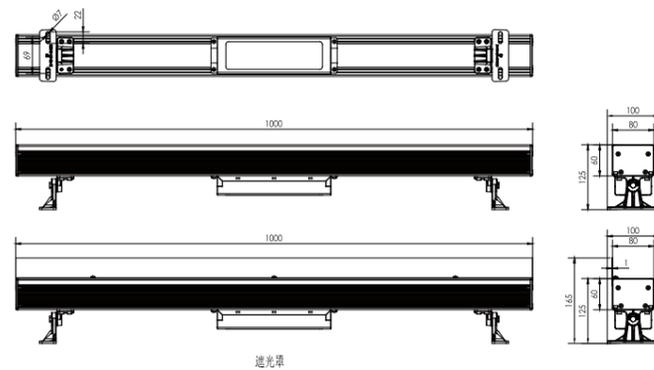

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1309PM-20	SL1309PM-10(0.5m)	SL1309PM-6(0.3m)	SL1309PF-20
Led品牌/ Led Brand	CREE	CREE	CREE	CREE
Led数量/ Led Quantity	20pcs	10pcs	6pcs	24pcs
额定功率/ Rated Power	180W	90W	60W	200W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW
发光角度/ Beam Angle	2° 2x40°			6° 6x40°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	6pcs	6pcs	12pcs	12pcs
产品型号/ Product Code	SL1309PF-10(0.5m)	SL1309PF-6(0.3m)		
Led品牌/ Led Brand	CREE	CREE		
Led数量/ Led Quantity	12pcs	6pcs		
额定功率/ Rated Power	100W	60W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	RGBW		
发光角度/ Beam Angle	6° 6x40°			
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	6pcs	6pcs		

Flood Light Series

SL1307

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



reddot winner 2021

KEEPOWER



恒功率

Dopamine

多巴胺色彩

eyePRO

光学护眼

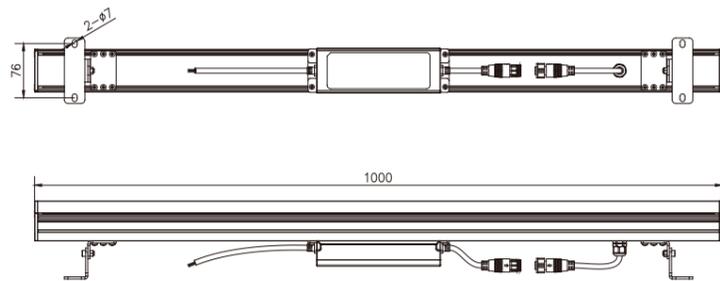

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1307M-20	SL1307E-20	SL1307E-10(0.5m)	SL1307E-6(0.3m)
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/ Led Quantity	20pcs	20pcs	10pcs	6pcs
额定功率/ Rated Power	95W	95W	48W	30W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	Single
发光角度/ Beam Angle	2.5°	6° 12° 20°	30° 60° 10x70° 5x20°	
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	6pcs	6pcs	12pcs	20pcs
产品型号/ Product Code	SL1307N-20KP	SL1307Q-20KP	SL1307F-20	SL1307F-10(0.5m)
Led品牌/ Led Brand	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	OSRAM RGBW 4in1	OSRAM RGBW 4in1
Led数量/ Led Quantity	20pcs	20pcs	20pcs	10pcs
额定功率/ Rated Power	100W	100W	100W	50W
输入电压/ Input Voltage	DC24V/AC100-305V	DC24V/AC100-305V	DC24V/AC100-305V	DC24V/AC100-305V
频率/ Frequency Range	/	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBWCLA	RGBW	RGBW	RGBW
发光角度/ Beam Angle	15° 20° 30° 15x60°		9° 15° 20° 30° 45° 15x60°	
控制方式/ Control Mode	DMX512	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	40pcs	40pcs	12pcs	25pcs
产品型号/ Product Code	SL1307F-6(0.3m)	SL1307R-20		
Led品牌/ Led Brand	OSRAM RGBW 4in1	LUXEON 7070		
Led数量/ Led Quantity	6pcs	20pcs		
额定功率/ Rated Power	30W	95W		
输入电压/ Input Voltage	DC24V/AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single		
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15X60°	30° Tilt.60°		
控制方式/ Control Mode	DMX512/RDM	CC/DALI/0-10V		
使用寿命/ Life	50000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	12pcs	6pcs		

Flood Light Series

SL1327

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

KEEPOWER


恒功率

Dopamine

多巴胺色彩

EYEPRO

光学护眼

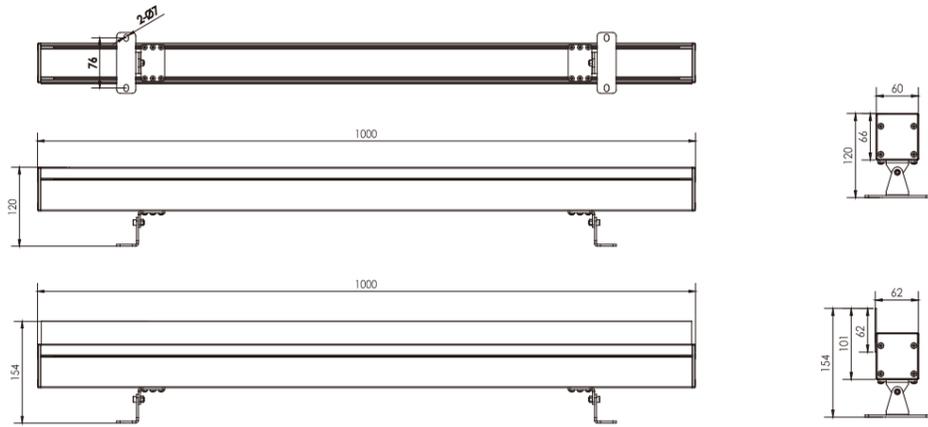

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color.;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1327M-20	SL1327E-20	SL1327E-10(0.5m)	SL1327E-6(0.3m)
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/ Led Quantity	20pcs	20pcs	10pcs	6pcs
额定功率/ Rated Power	100W	100W	50W	30W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 60° 10x70° 5x20°		
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1327N-20KP	SL1327Q-20KP	SL1327F-20	SL1327F-10(0.5m)
Led品牌/ Led Brand	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	OSRAM RGBW 4in1	OSRAM RGBW 4in1
Led数量/ Led Quantity	20pcs	20pcs	20pcs	10pcs
额定功率/ Rated Power	100W	100W	100W	50W
输入电压/ Input Voltage	DC24V/AC100-305V	DC24V/AC100-305V	DC24V/AC100-305V	DC24V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBWCLA	RGBW	RGBW	RGBW
发光角度/ Beam Angle	15° 20° 30° 10x60°	9° 15° 20° 30° 45° 15x60°		
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1327F-6(0.3m)	SL1327R-20		
Led品牌/ Led Brand	OSRAM RGBW 4in1	LUXEON 7070		
Led数量/ Led Quantity	6pcs	20pcs		
额定功率/ Rated Power	30W	100W		
输入电压/ Input Voltage	DC24V/AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single		
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15x60°	30° Tilt.60°		
控制方式/ Control Mode	DMX512/RDM	CC/DALI/0-10V		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		



Flood Light Series

SL1306

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	


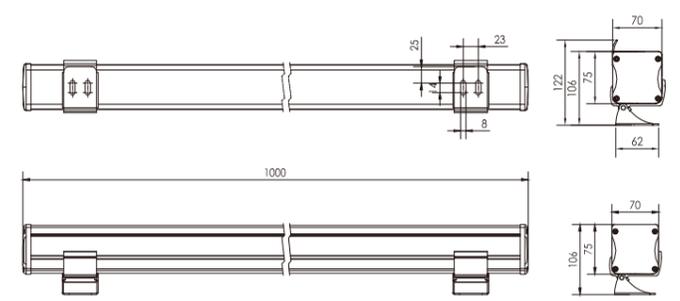


产品简介 Product Introduction






- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
 - 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
 - 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。
- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
 - 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
 - 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL1306B-54	SL1306A-54	SL1306B-27(0.5m)	SL1306A-27(0.5m)
LED品牌/LED Brand	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
LED数量/LED Quantity	54pcs	54pcs	27pcs	27pcs
额定功率/Rated Power	108W	60W	54W	30W
输入电压/Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V	DC36V/AC100-240V	DC36V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 60° 15x30° 15x60°			
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66	IP66
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	1/20(pcs)	2/20(pcs)	2/24(pcs)	4/44(pcs)

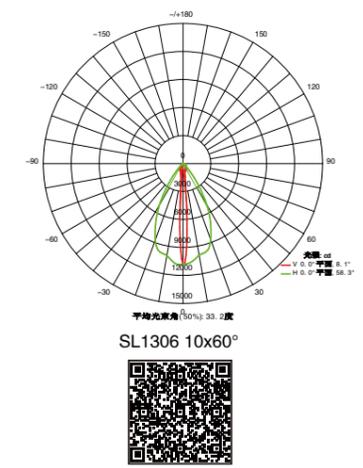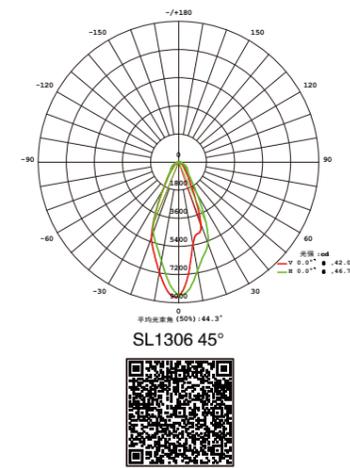

配光曲线 (半角) Distribution Curve Flux (SBC Case)

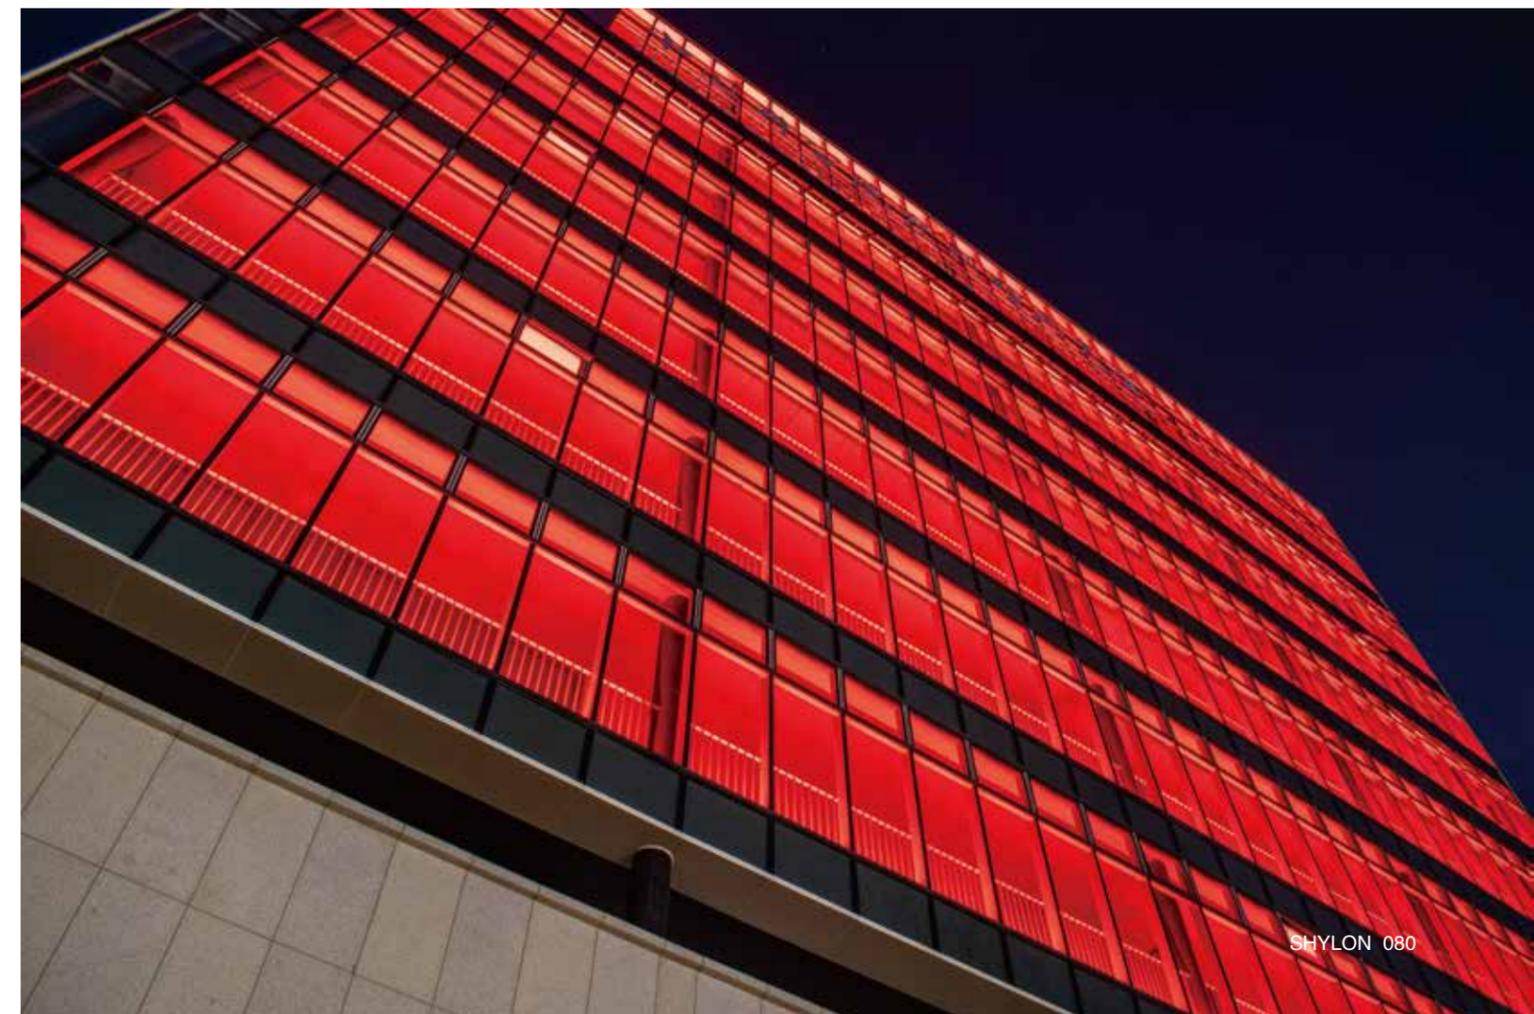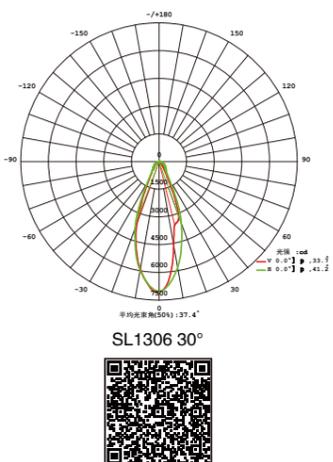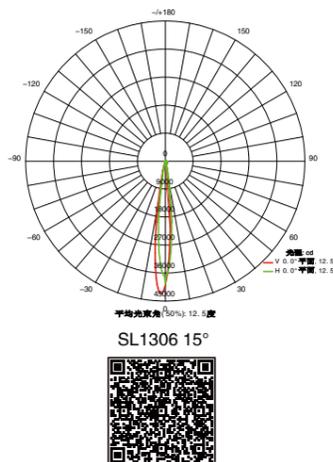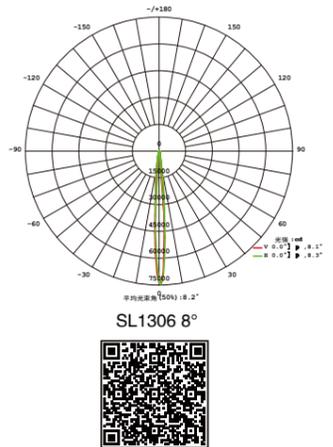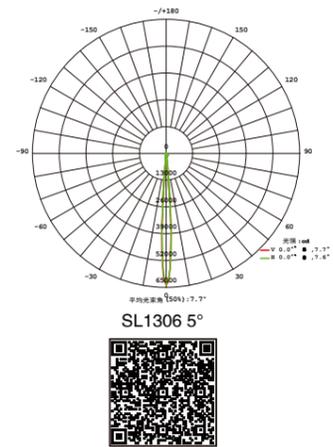


Flood Light Series

SL1304

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

EXPO
世博版

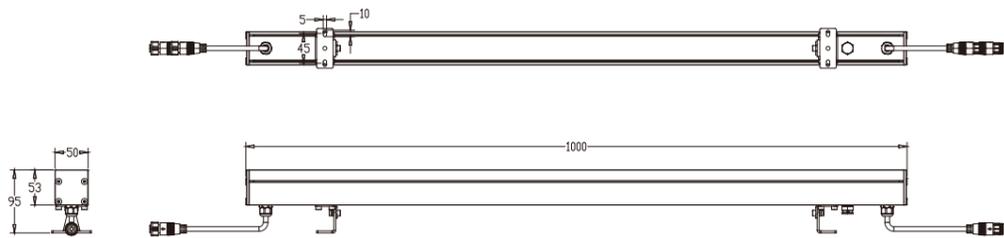

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1304P-24	SL1304H-24	SL1304H-18	SL1304A-36	SL1304A-24	SL1304A-18
Led品牌/ Led Brand	RGBWCL 6in1	CREE/OSRAM RGBW 4IN1		LUMILEDS	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	24pcs	24pcs	18pcs	36pcs	24pcs	18pcs
额定功率/ Rated Power	48W	48W	36W	36W	24W	18W
输入电压/ Input Voltage	AC110-305V	AC110-305V	AC110-305V	AC110-305V	AC110-305V	AC110-305V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	RGBWCL	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Rangle	30° 45° 60° 30x60°	20° 45° 60° 15x60° 15x25°	8° 15° 20° 30° 60° 15x30° 15x60°			
控制方式/ Control Mode	DMX512	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	5pcs	5pcs	6pcs	6/60(pcs)	10/90(pcs)	12/120(pcs)
产品型号/ Product Code	SL1304H-12(0.5)	SL1304H-9(0.5)	SL1304H-6(0.3)	SL1304A-18(0.5)	SL1304A-12(0.5)	SL1304A-9(0.5)
Led品牌/ Led Brand	CREE/OSRAM RGBW 4in1			LUMILEDS	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	12pcs	9pcs	6pcs	18pcs	12pcs	9pcs
额定功率/ Rated Power	24W	18W	12W	18W	12W	9W
输入电压/ Input Voltage	AC110-305V	AC110-305V	AC110-305V	AC110-305V	AC110-305V	AC110-305V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	RGB/Single	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Rangle	20° 45° 60° 15x60°			15° 20° 30° 60° 15x30° 15x60°		
控制方式/ Control Mode	DMX512/CC	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	10/90(pcs)	12pcs	20pcs	12pcs	20pcs	26pcs
产品型号/ Product Code	SL1304A-8(0.3)					
Led品牌/ Led Brand	LUMILEDS					
Led数量/ Led Quantity	8pcs					
额定功率/ Rated Power	8W					
输入电压/ Input Voltage	AC110-305V					
频率/ Frequency Range	/					
颜色 / Color	RGB/Single					
发光角度/ Beam Rangle	15° 20° 30° 60° 15x30° 15x60°					
控制方式/ Control Mode	DMX512/CC					
使用寿命/ Life	50000H					
防护等级/ Protection Grade	IP66					
环境温度/ Ambient Temperature	-25℃~50℃					
环境温度/ Ambient Humidity	10%~90%					
串联数量/ In series(max)	30pcs					

Flood Light Series

SL1305

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

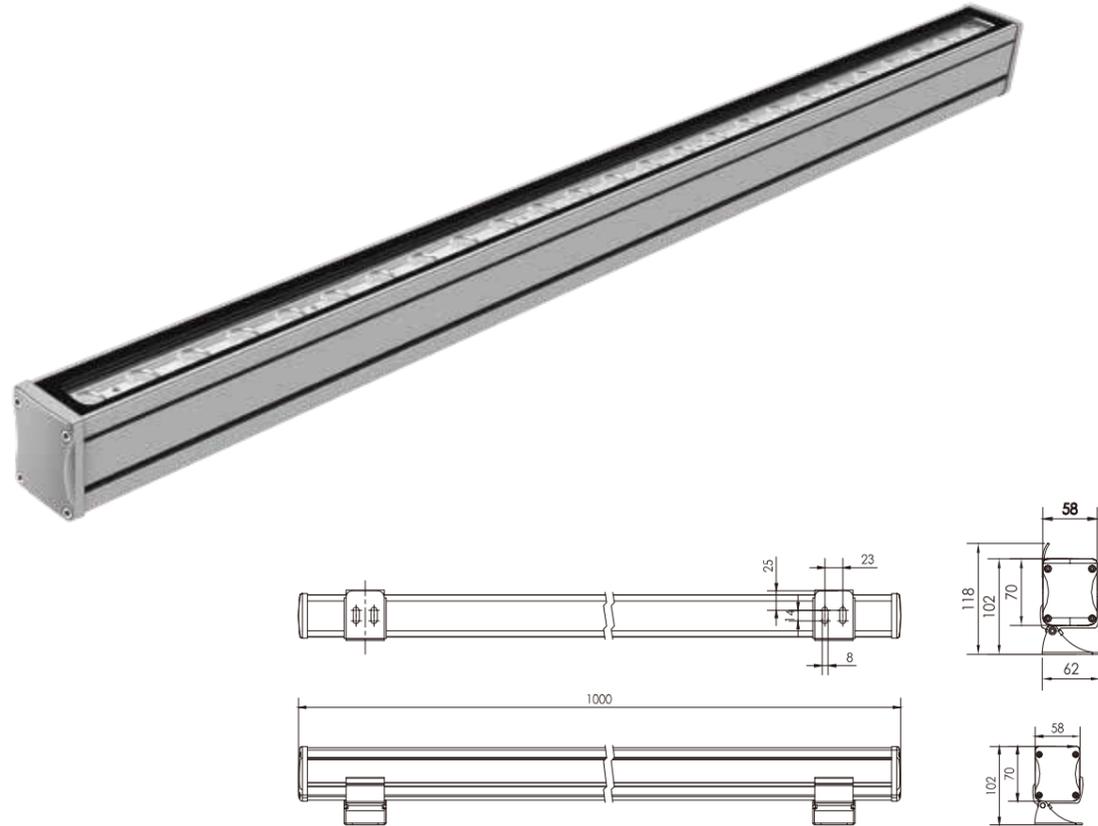





产品简介 Product Introduction



- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
 - 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐摩擦，具有优良的雨水清洁能力。
 - 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。
- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
 - 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color.;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
 - 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL1305F-18	SL1305A-36	SL1305A-24	SL1305A-18	SL1305A-12	SL1305A-9(0.5m)
Led品牌/Led Brand	CREE RGBW 4 in 1	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/Led Quantity	18pcs	36pcs	24pcs	18pcs	12pcs	9pcs
额定功率/Rated Power	72W	42W	28W	22W	14W	11W
输入电压/Input Voltage	DC36V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	/	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGBW	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 15x60°				
控制方式/Control Mode	DMX512	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3pcs	3/30(pcs)	5/46(pcs)	6/60(pcs)	10/94(pcs)	13/120(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

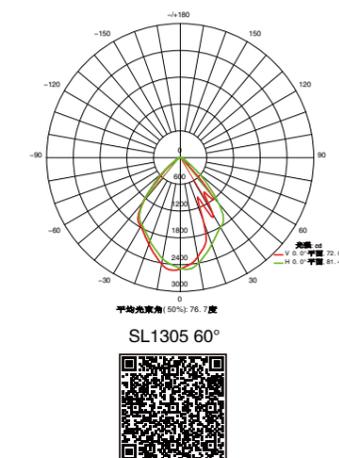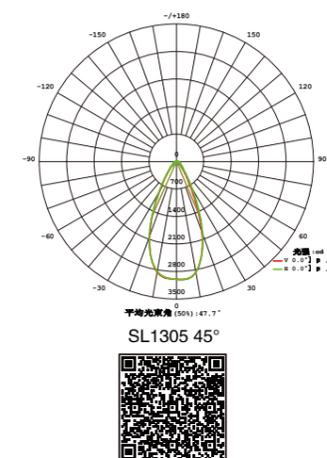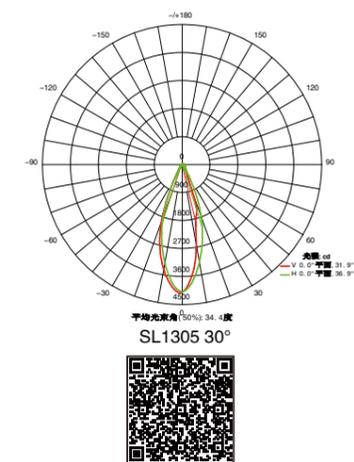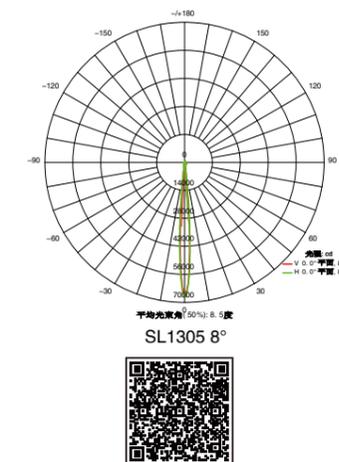

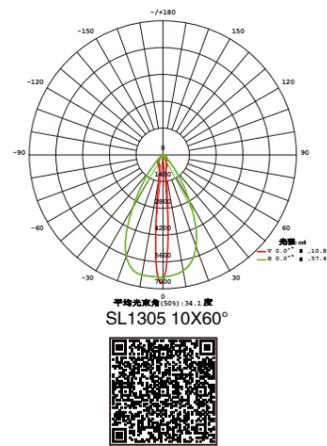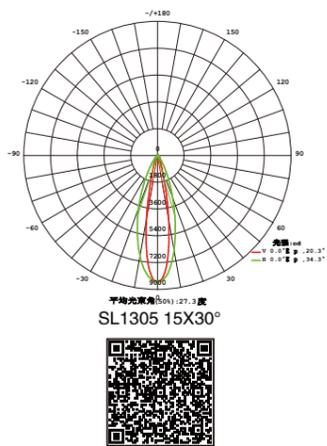

Flood Light Series




SL1301

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



reddot winner 2021

EXPO
世博版

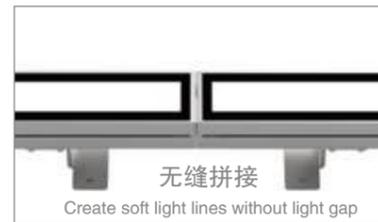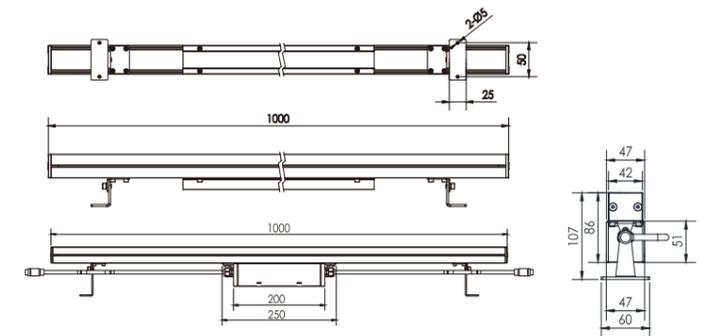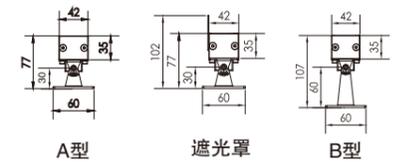


产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
 - 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
 - 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。
- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
 - 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
 - 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1301P-24	SL1301H-24	SL1301H-18	SL1301A-36	SL1301A-24	SL1301A-18
Led品牌/ Led Brand	RGBWCL 6in1	CREE/OSRAM RGBW 4IN1		LUMILEDS	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	24pcs	24pcs	18pcs	36pcs	24pcs	18pcs
额定功率/ Rated Power	48W	48W	36W	36W	24W	18W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	RGBWCL	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Range	30° 45° 60° 30x60°	20° 45° 60° 15x60° 15x25°		8° 15° 20° 30° 60° 15x30° 15x60°		
控制方式/ Control Mode	DMX512	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	5pcs	5pcs	6pcs	6pcs	10pcs	12pcs
产品型号/ Product Code	SL1301H-12(0.5)	SL1301H-9(0.5)	SL1301H-6(0.3)	SL1301A-18(0.5)	SL1301A-12(0.5)	SL1301A-9(0.5)
Led品牌/ Led Brand	CREE/OSRAM RGBW 4IN1			LUMILEDS	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	12pcs	9pcs	6pcs	18pcs	12pcs	9pcs
额定功率/ Rated Power	24W	18W	12W	18W	12W	9W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	RGB/Single	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Range	20° 45° 60° 15x60°			15° 20° 30° 60° 15x30° 15x60°		
控制方式/ Control Mode	DMX512/CC	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	10pcs	12pcs	20pcs	12pcs	20pcs	26pcs
产品型号/ Product Code	SL1301A-8(0.3)					
Led品牌/ Led Brand	LUMILEDS					
Led数量/ Led Quantity	8pcs					
额定功率/ Rated Power	8W					
输入电压/ Input Voltage	DC24V					
频率/ Frequency Range	/					
颜色 / Color	RGB/Single					
发光角度/ Beam Range	15° 20° 30° 60° 15x30° 10x60°					
控制方式/ Control Mode	DMX512/CC					
使用寿命/ Life	50000H					
防护等级/ Protection Grade	IP66					
环境温度/ Ambient Temperature	-25℃~50℃					
环境温度/ Ambient Humidity	10%~90%					
串联数量/ In series(max)	30pcs					

配光曲线 (半角) Distribution Curve Flux (SBC Case)

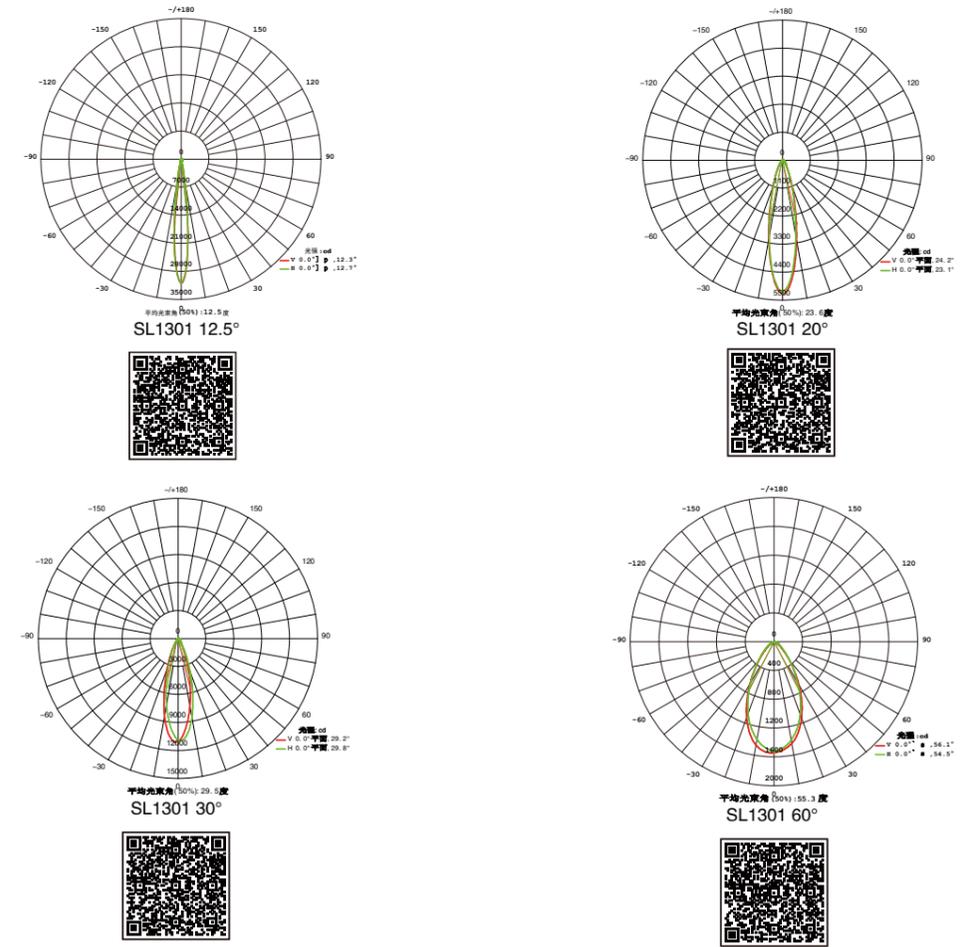


阿里巴巴云谷园区
Alibaba cloud Valley Park



Flood Light Series

SL1302

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

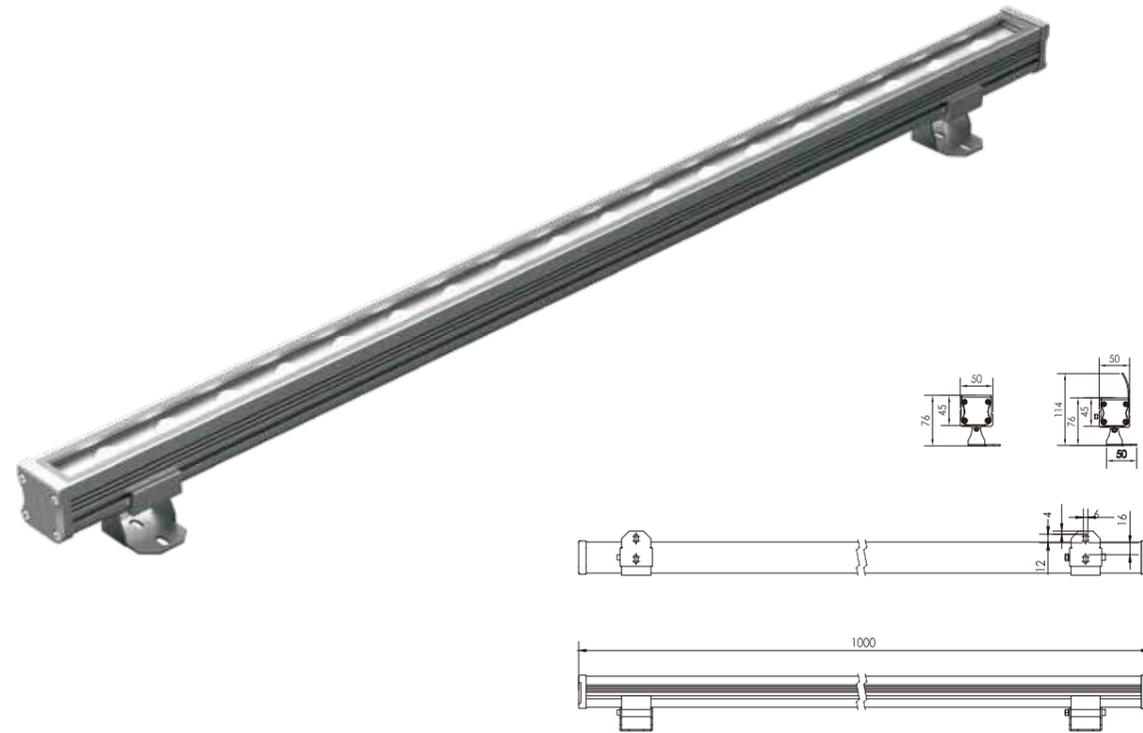


产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
 - 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
 - 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。
- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
 - 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
 - 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL1302A-36	SL1302A-24	SL1302A-18	SL1302A-12	SL1302A-9(0.5m)	SL1302A-6(0.3m)
LED品牌/LED Brand	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
LED数量/LED Quantity	36pcs	24pcs	18pcs	12pcs	9pcs	6pcs
额定功率/Rated Power	40W	26W	20W	13W	10W	7W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	RGB/Single	RGB/Single	RGB/Single	Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 60° 15x30° 15x60°					
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series	3pcs	4pcs	6pcs	10pcs	14pcs	20pcs



配光曲线 (半角) Distribution Curve Flux (SBC Case)

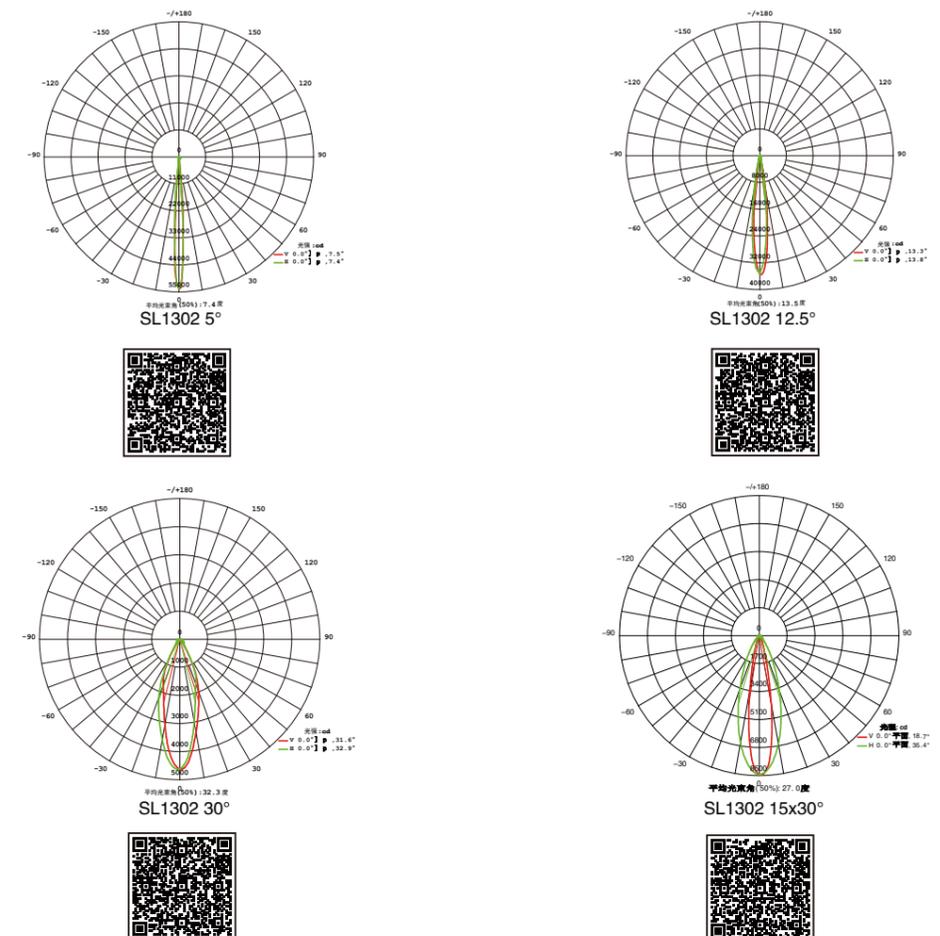

Flood Light Series

SL1303

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

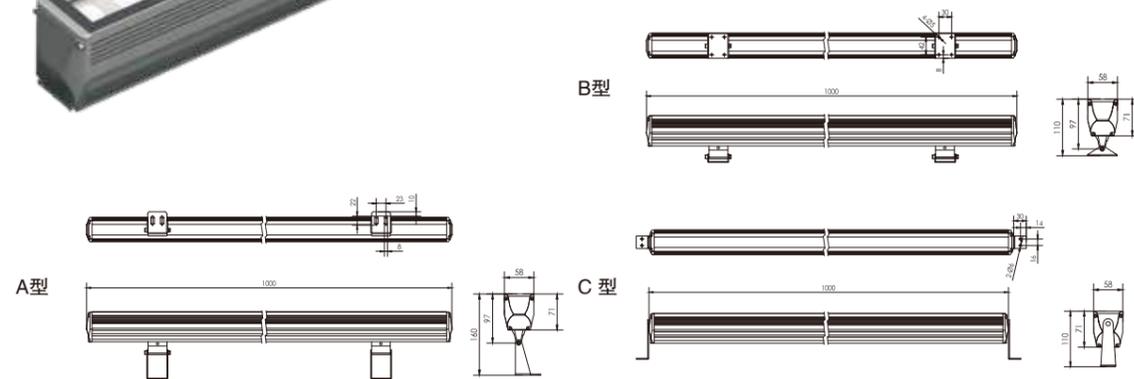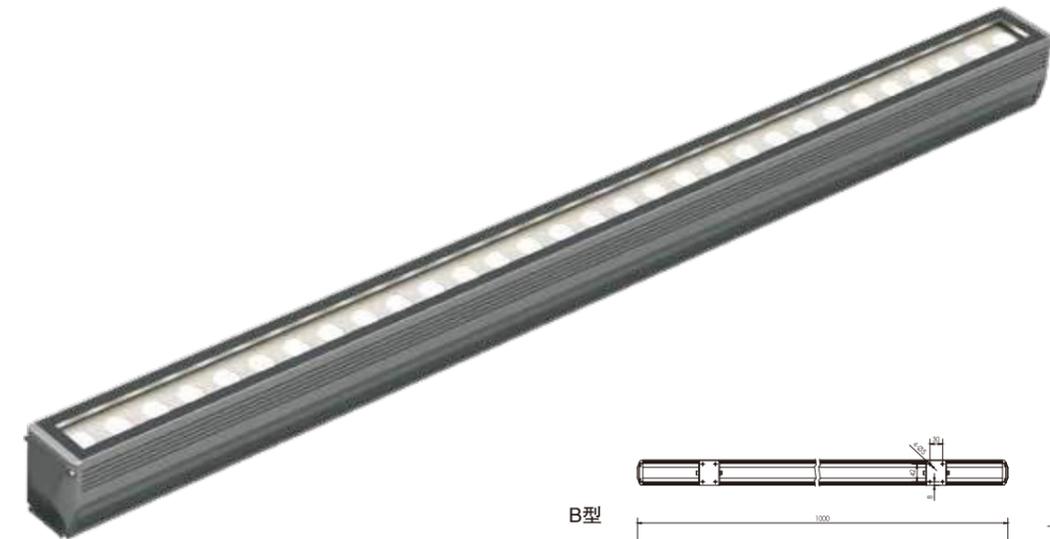

产品简介 Product Introduction




- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可选择三种支架安装方式，满足多种场合的户外工程应用。
- 三、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Three rack mounting ways available can meet the various occasions demands for outdoor projects.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1303F-18	SL1303A-36	SL1303A-30	SL1303A-27	SL1303A-18	SL1303A-9(0.5m)
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/ Led Quantity	18pcs	36pcs	30pcs	27pcs	18pcs	9pcs
额定功率/ Rated Power	72W	42W	36W	32W	22W	11W
输入电压/ Input Voltage	DC36V	DC24V/AC100-240V	DC36V/AC100-240V	DC36V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/ Frequency Range	/	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Angle	20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 15x60°				
控制方式/ Control Mode	DMX512	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3pcs	3/30(pcs)	6/36(pcs)	6/40(pcs)	6/60(pcs)	12/120(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)

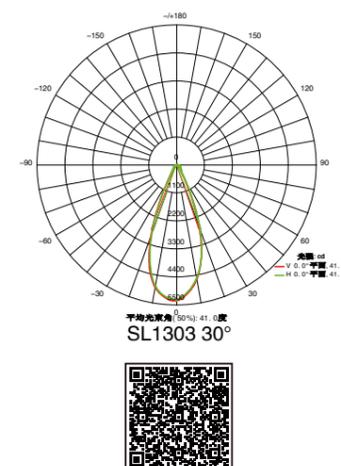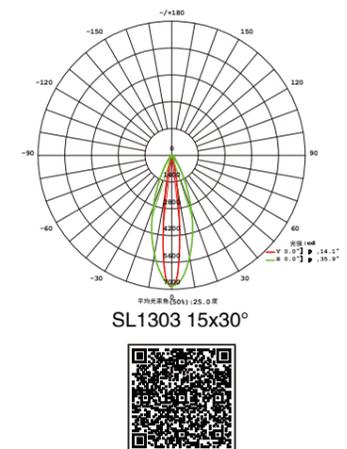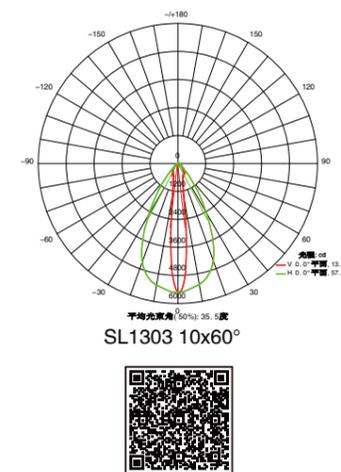

Flood Light Series

SL1323


防眩遮光罩 Anti-glare shield	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

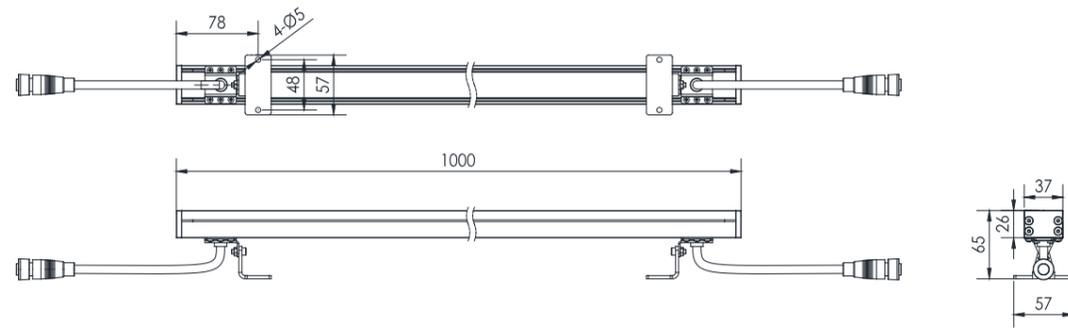


产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
 - 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
 - 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。
- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
 - 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
 - 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


配光曲线 (半角) Distribution Curve Flux (SBC Case)



平均光束角 (50%) 21.2度
SL1323 20°

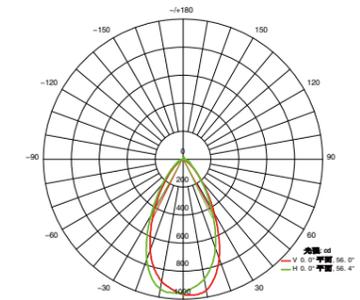

平均光束角 (50%) 56.2度
SL1323 40°



平均光束角 (50%) 37.0度
SL1323 25x45°




技术参数 Specification


产品型号/ Product Code	SL1323A-24	SL1323A-18	SL1323A-12(0.5)	SL1323A-9(0.5)	SL1323A-6(0.3)
Led品牌/ Led Brand	LUMILEDS/OSRAM	LUMILEDS/OSRAM	LUMILEDS/OSRAM	LUMILEDS/OSRAM	LUMILEDS/OSRAM
Led数量/ Led Quantity	24pcs	18pcs	12pcs	9pcs	6pcs
额定功率/ Rated Power	24W	18W	12W	9W	6W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/
颜色 / Color	Single/RGBW 4IN1	Single/RGBW 4IN1	Single/RGBW 4IN1	Single/RGBW 4IN1	Single/RGBW 4IN1
发光角度/ Beam Angle	20° 30° 45° 60° 25x45°				
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	6pcs	8pcs	12pcs	16pcs	24pcs

接线示意图 Wiring Diagram

RGB A 型

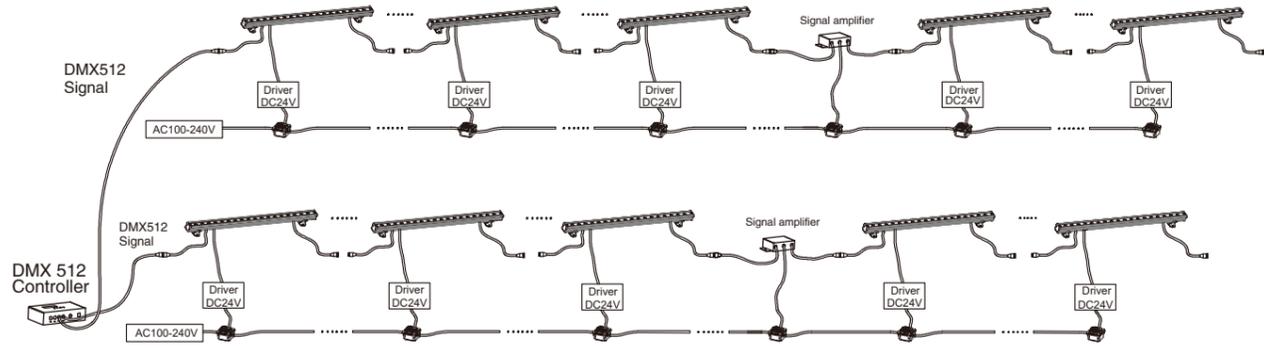

RGB B 型

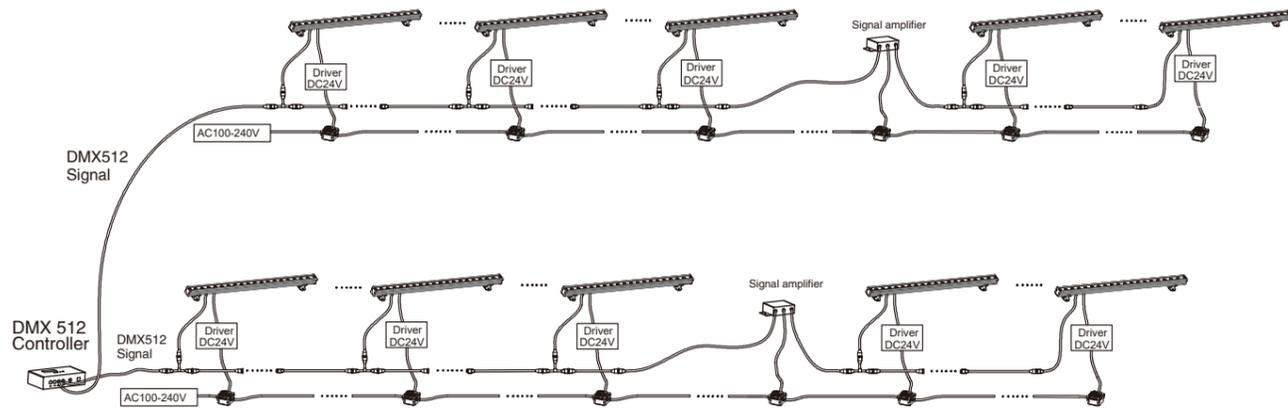


单色 (Single Color)



Flood Light Series

SL1321


防眩遮光罩 Anti-glare shield	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

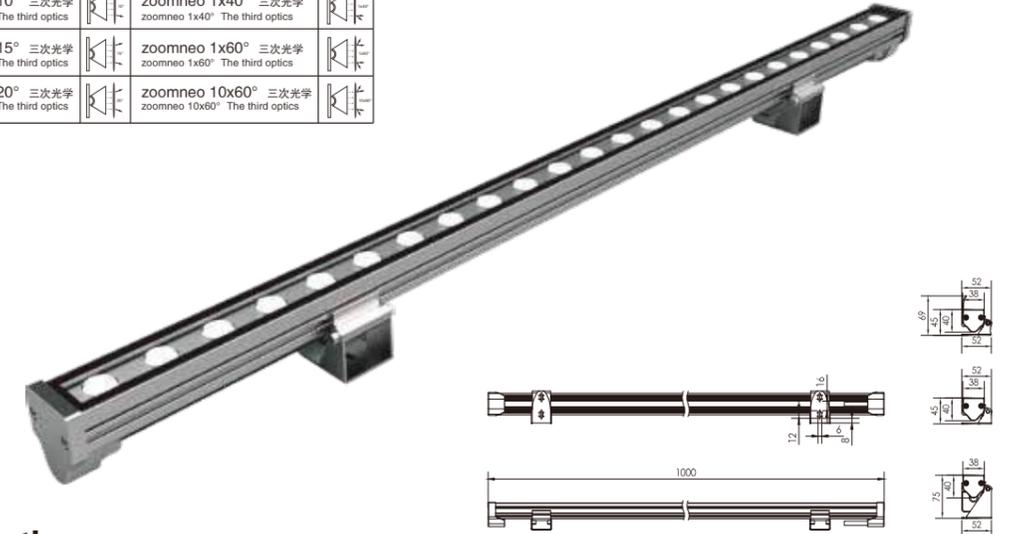


技术参数 Specification

产品型号/Product Code	SL1321A-36	SL1321A-24	SL1321A-18	SL1321A-12	SL1321A-12(0.5m)	SL1321A-9(0.5m)
LED品牌 LED Brand	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE
LED数量 LED Quantity	36pcs	24pcs	18pcs	12pcs	12pcs	9pcs
额定功率 Rated Power	36W	24W	18W	12W	12W	9W
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率 Frequency Range	/	/	/	/	/	/
颜色 Color	Single	Single	Single	Single	Single	Single
发光角度 Beam Angle	20° 30° 55° 25x45°					
控制方式 Control Mode	CC	CC	CC	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度 Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%


产品型号/ Product Code	SL1321A-6(0.3m)
LED品牌/ LED Brand	LUMILEDS/CREE
LED数量/ LED Quantity	6pcs
额定功率/ Rated Power	6W
输入电压/ Input Voltage	DC24V
频率/ Frequency Range	/
颜色/ Color	Single
发光角度/ Beam Angle	12° 30° 55° 25x45°
控制方式/ Control Mode	CC
使用寿命/ Life	50000H
防护等级/ Protection Grade	IP66
环境温度/ Ambient Temperature	-25℃ ~ 50℃
环境湿度/ Ambient Humidity	10% ~ 90%

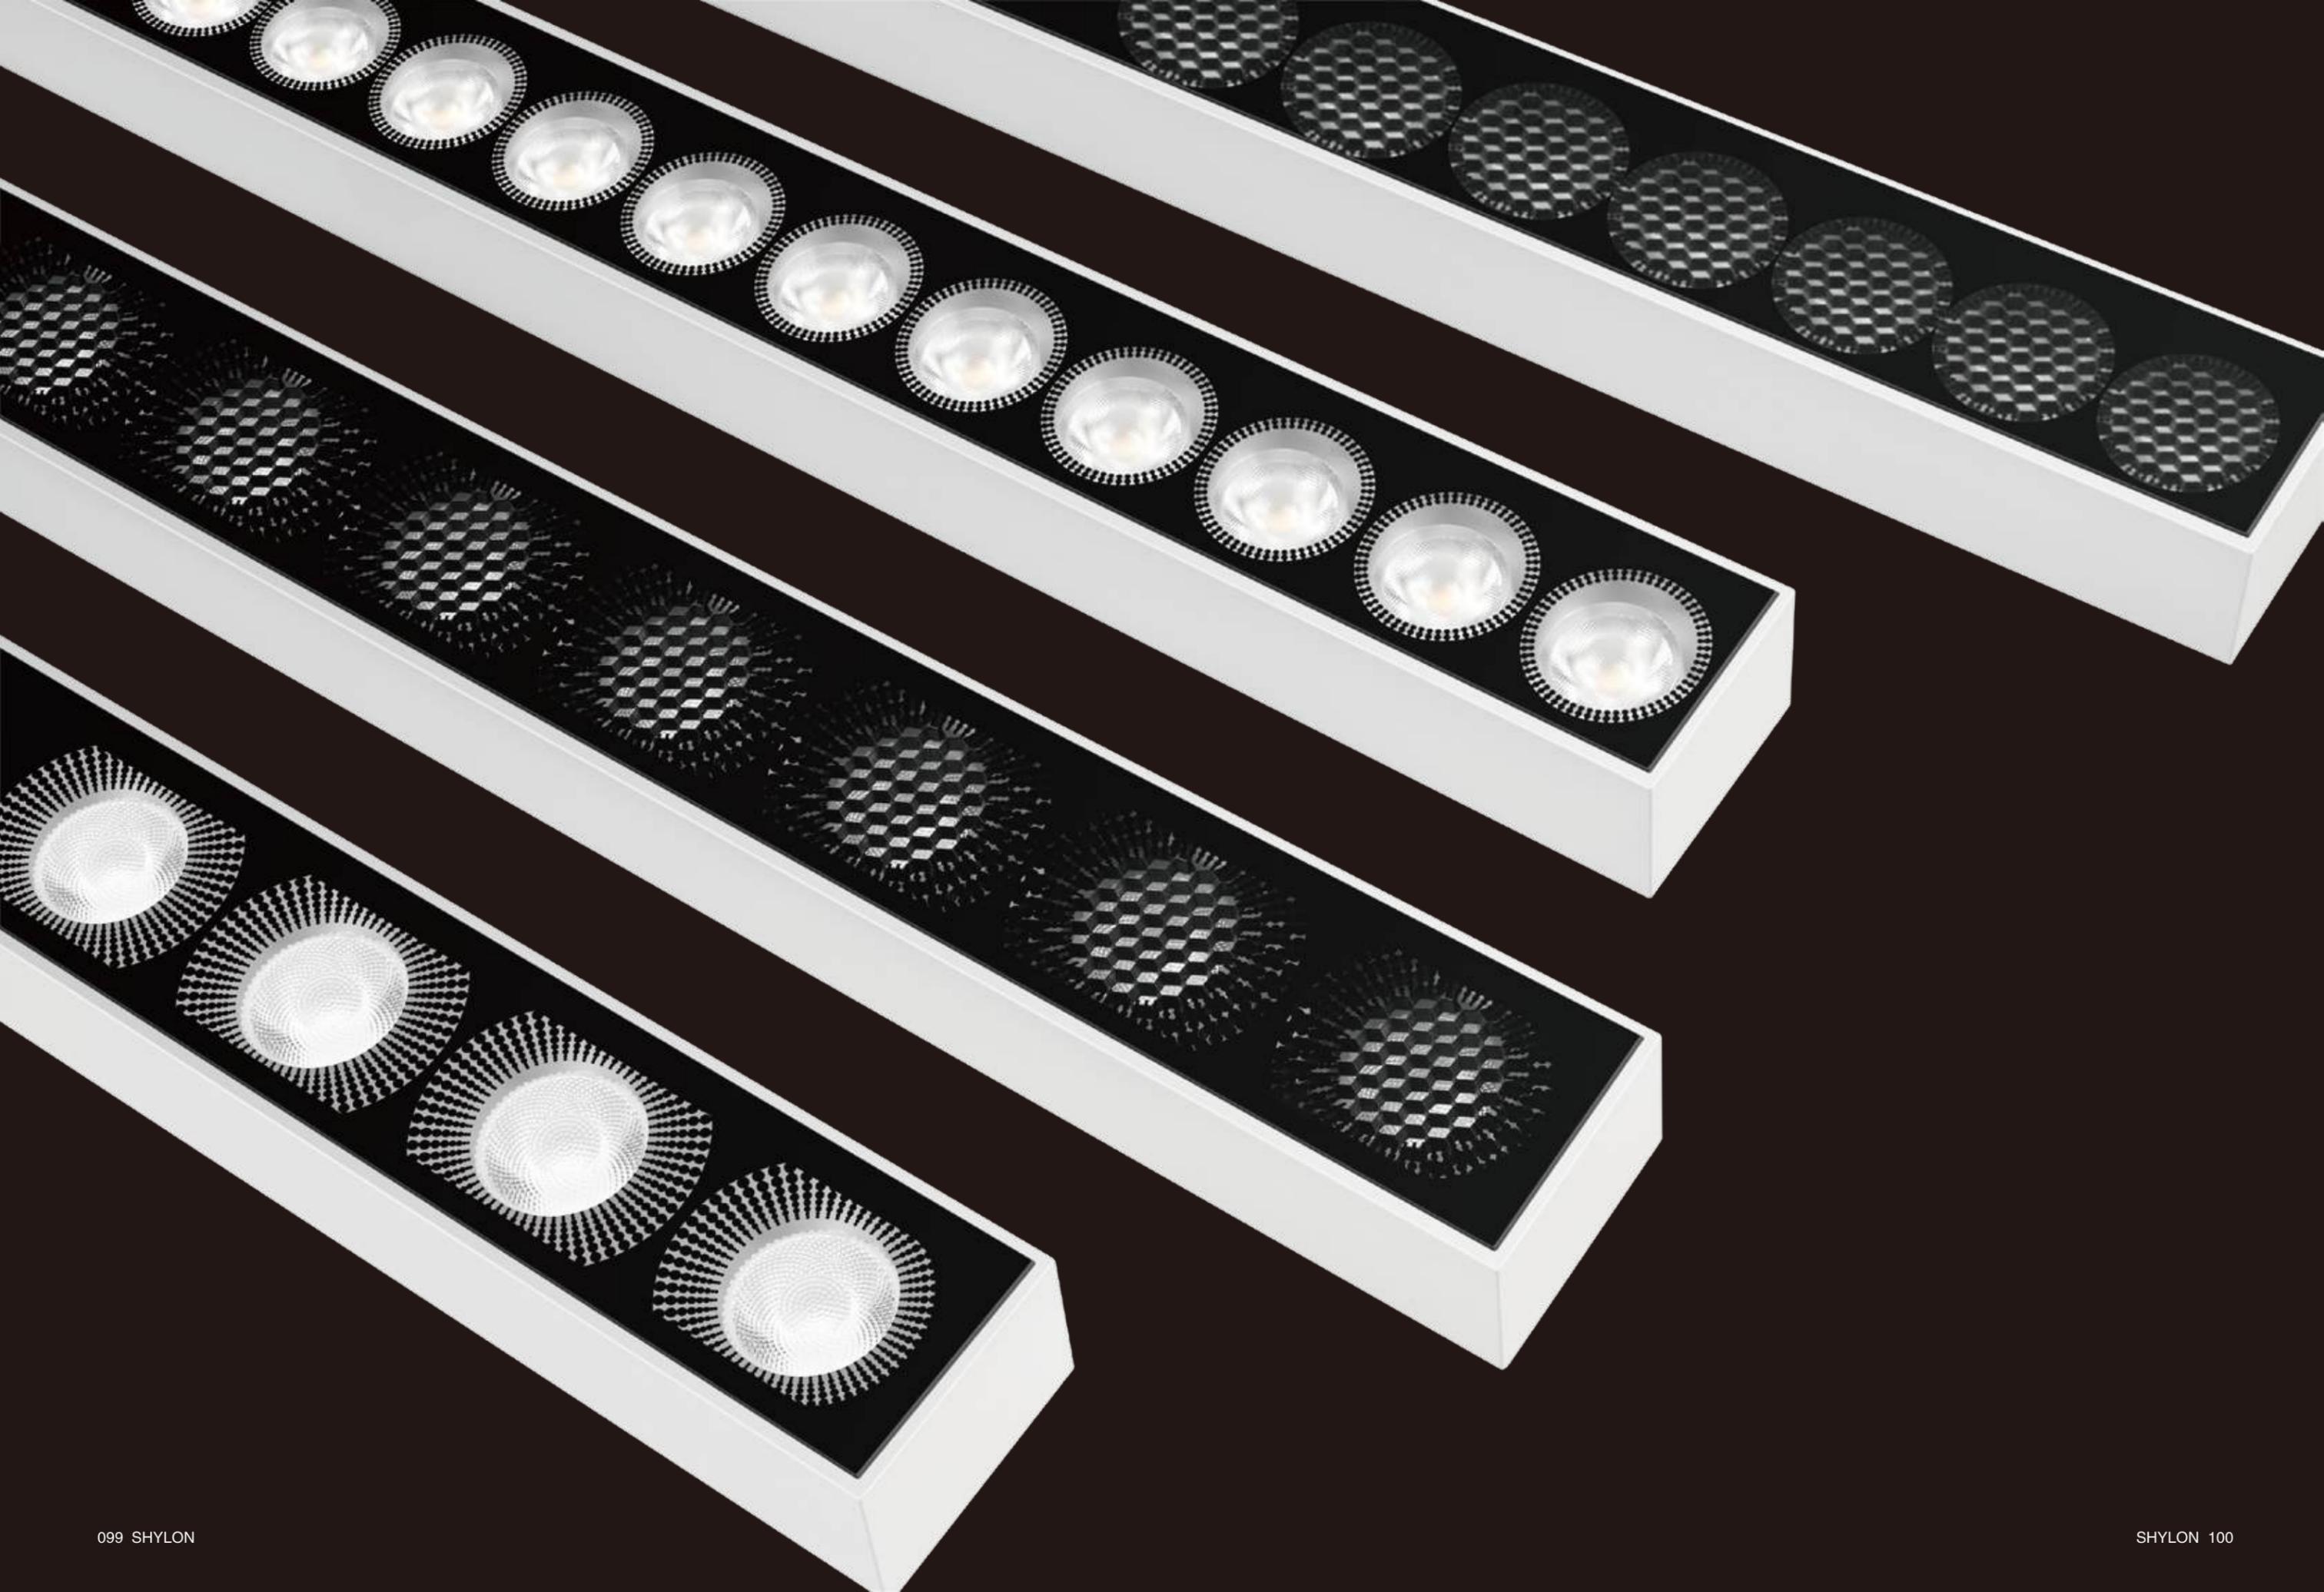

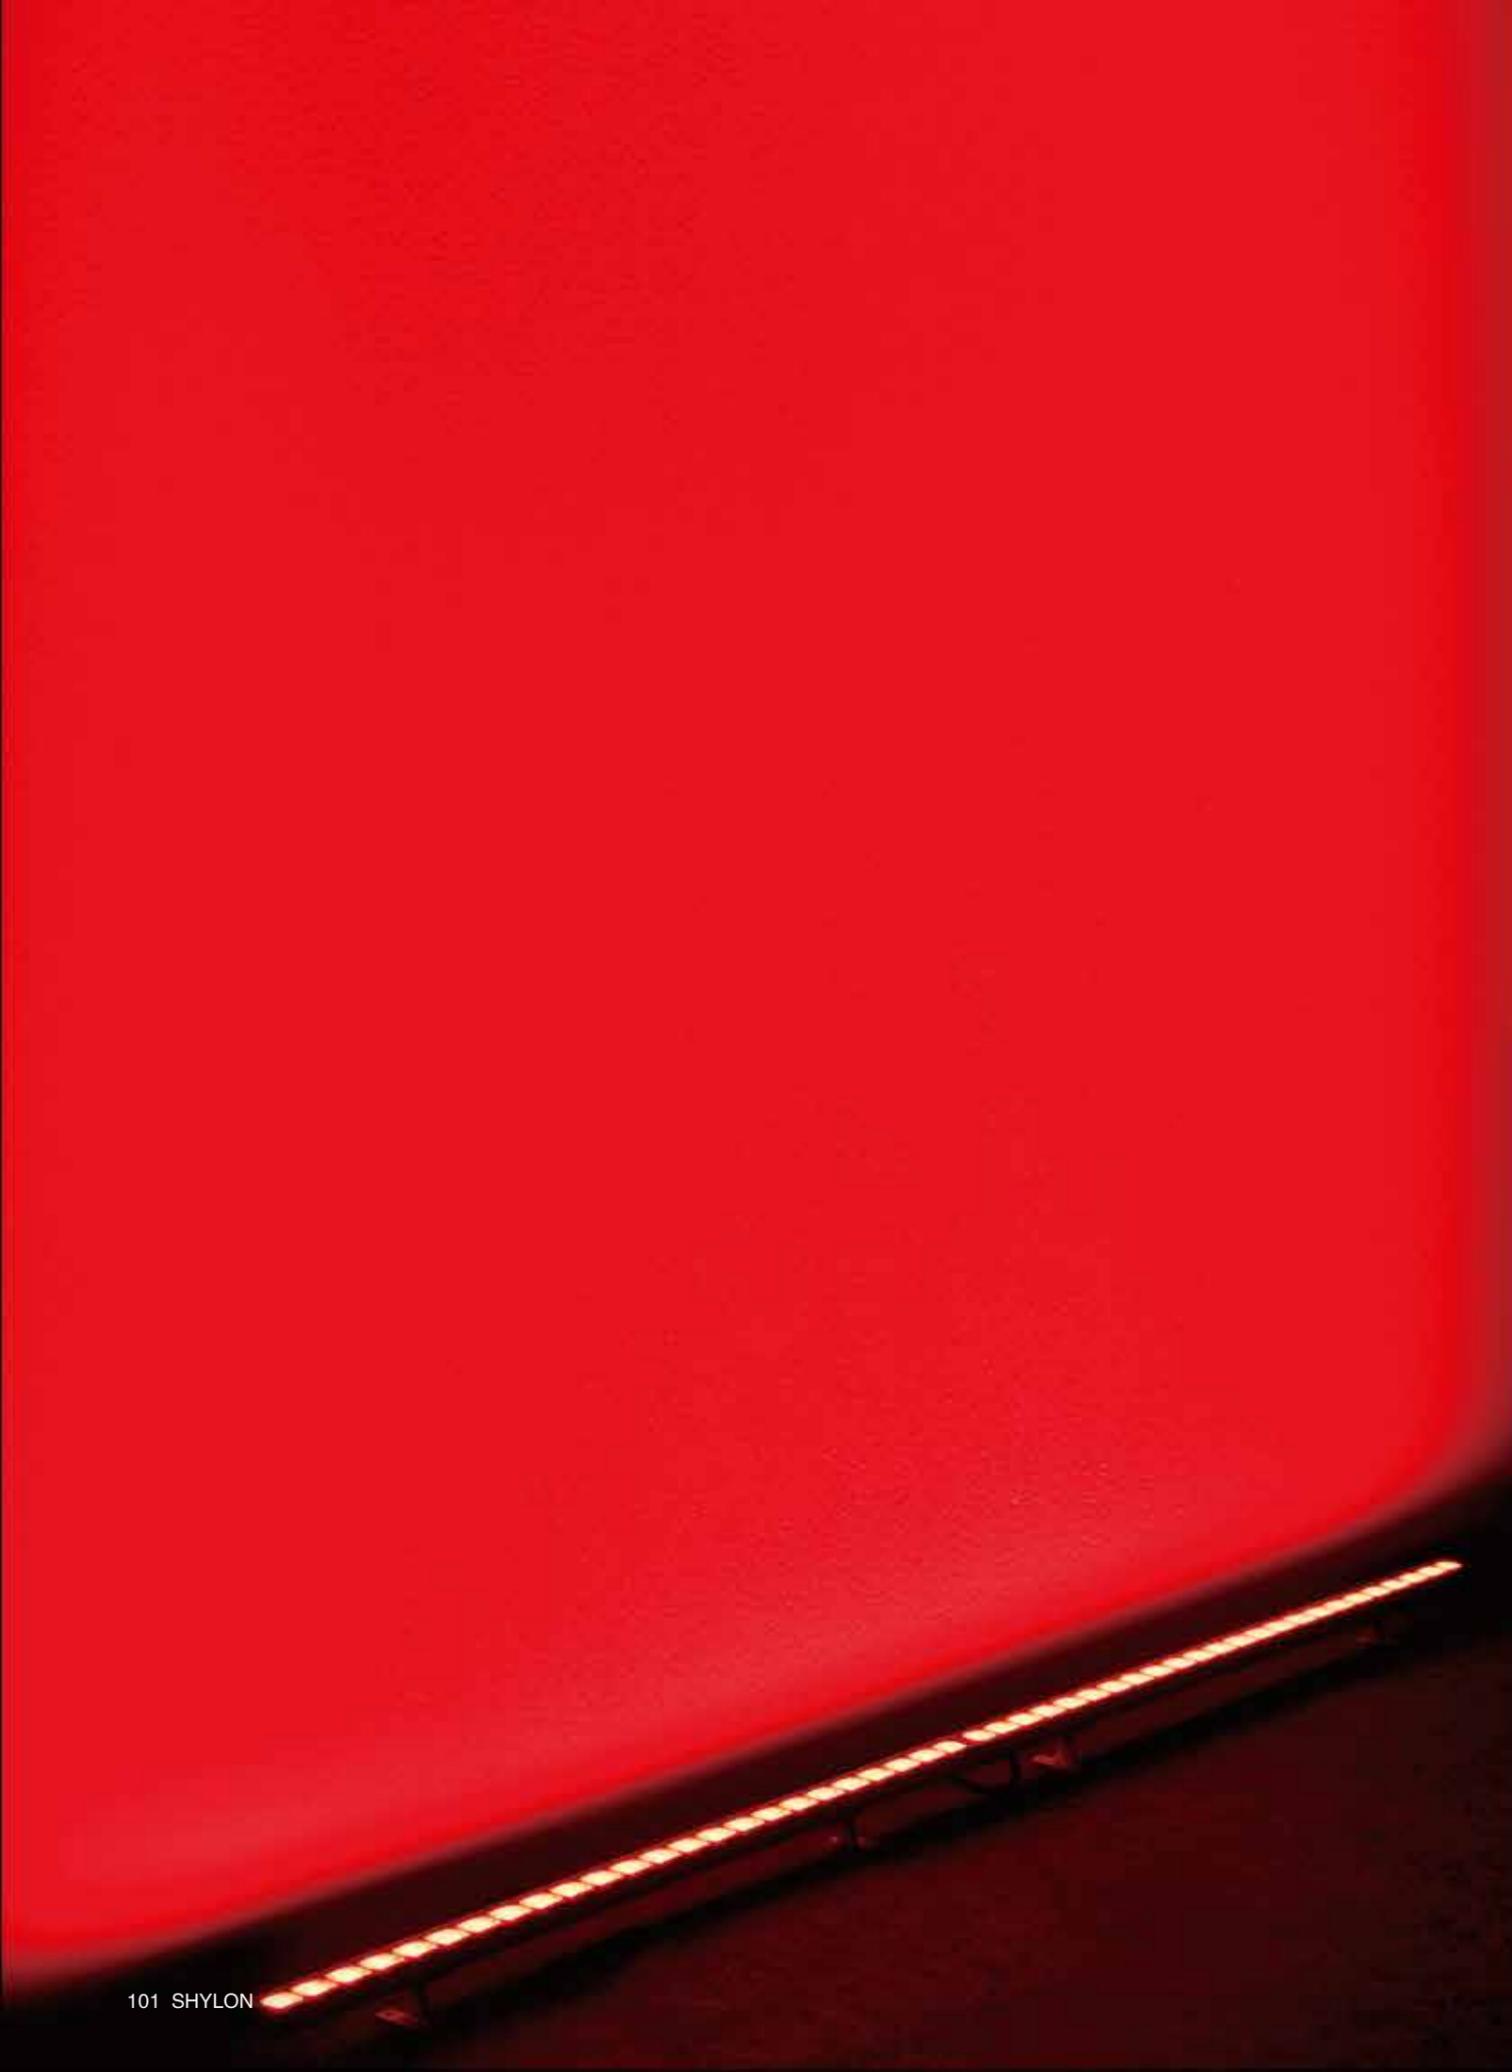

Flood Light Series

SL1360

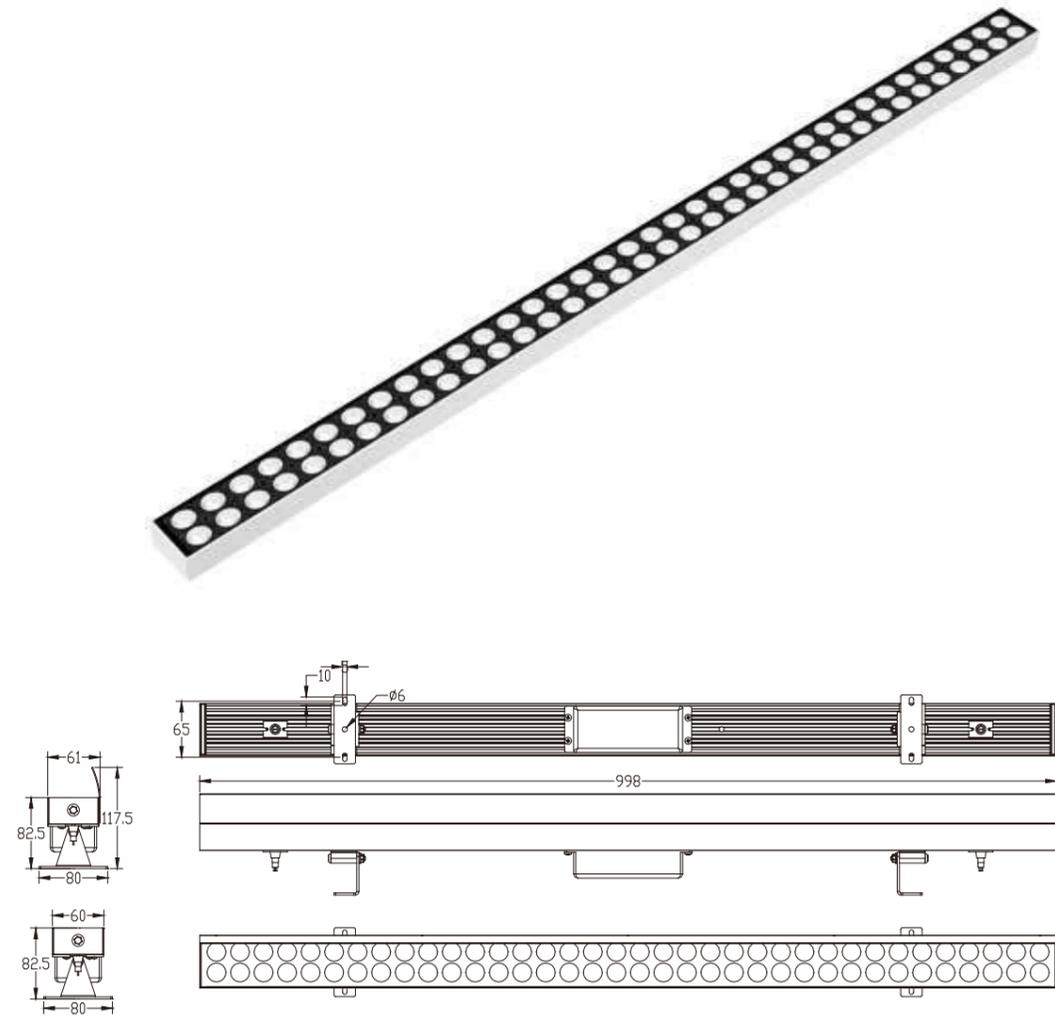

技术参数 Specification


产品型号/ Product Code	SL1360AB-72	SL1360AB-36(0.5m)	SL1360AB-24(0.3m)	SL1360BB-72	SL1360BB-36(0.5m)	SL1360BB-24(0.3m)
Led品牌/ Led Brand	LUMILEDS/OSRAM		LUMILEDS/OSRAM	OSRAM RGBW 4in1		OSRAM RGBW 4in1
Led数量/ Led Quantity	72pcs	36pcs	24pcs	72pcs	36pcs	24pcs
额定功率/ Rated Power	100W	50W	32W	100W	50W	32W
输入电压/ Input Voltage	DC24V/AC100-305V			DC24V/AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/ Beam Angle	20° 30° 45° 60° 20x40° 18x50°		15° 20° 30° 45° 60° 25x45°			
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	1/12Pcs	2/24pcs	3/40pcs	1/12pcs	2/24pcs	3/40pcs

Flood Light Series

SL1325

Foldlight



单反光学

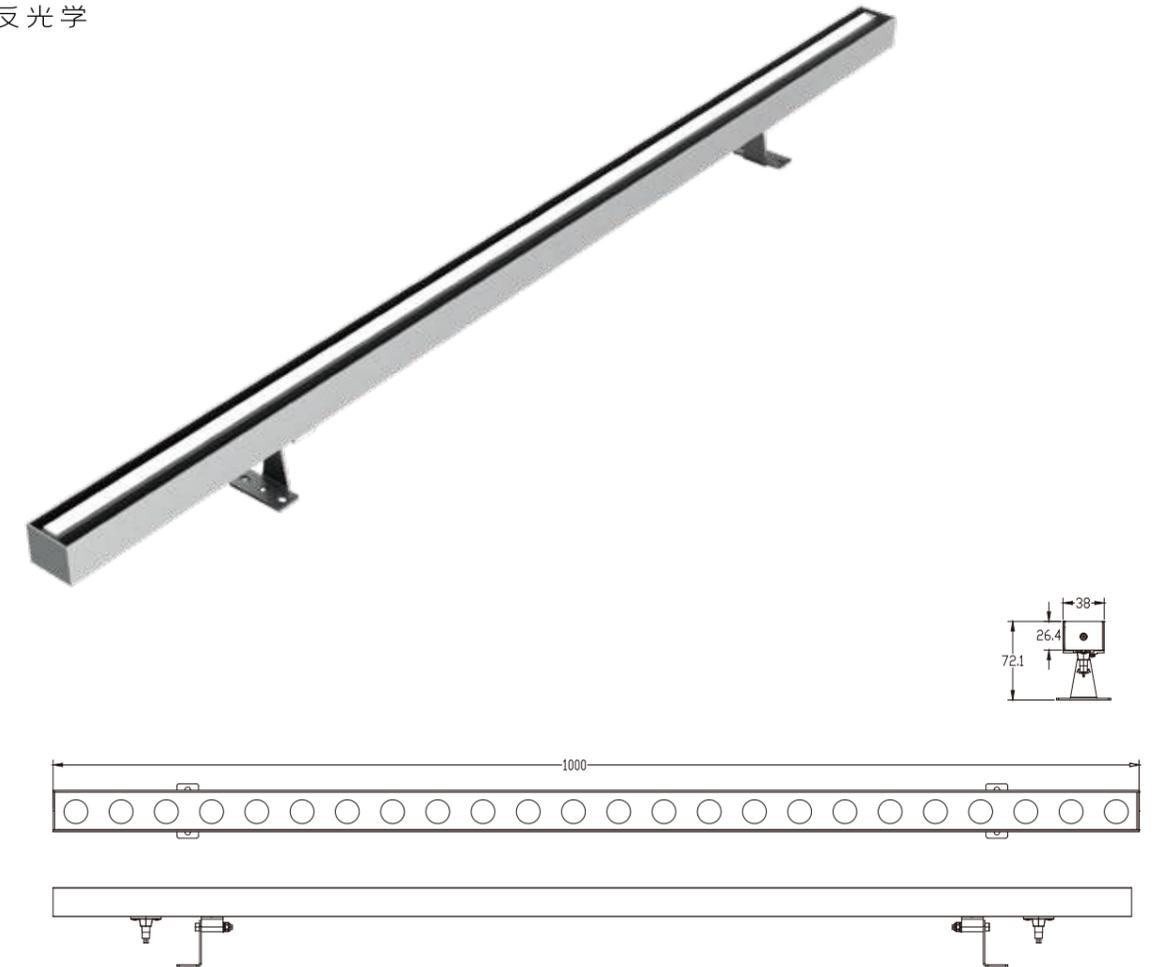

技术参数 Specification

产品型号/Product Code	SL1325H-48	SL1325A-48	SL1325H-24(0.5m)	SL1325A-24(0.5m)	SL1325H-16(0.3m)	SL1325A-16(0.3m)
LED品牌 LED Brand	OSRAM	LUMILEDS 3030	OSRAM	LUMILEDS 3030	OSRAM	LUMILEDS 3030
LED数量 LED Quantity	48pcs	48pcs	24pcs	24pcs	16pcs	16pcs
额定功率 Rated Power	48W	48W	24W	24W	16W	16W
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率 Frequency Range	/	/	/	/	/	/
颜色 Color	RGBW 4in1	Single	RGBW 4in1	Single	RGBW 4in1	Single
发光角度 Beam Angle	Wallwash 23°25° P5°					
控制方式 Control Mode	DMX512	CC	DMX512	CC	DMX512	CC
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度 Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

Flood Light Series
SL1361A

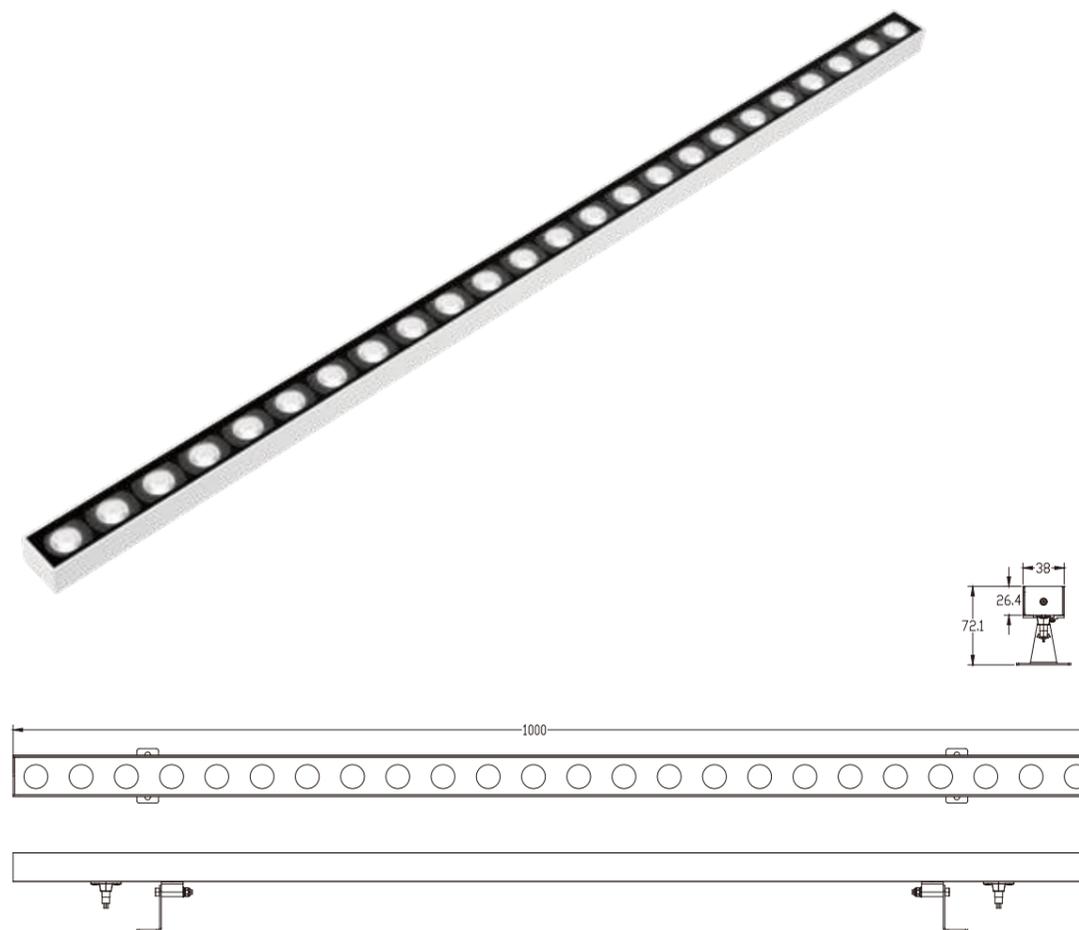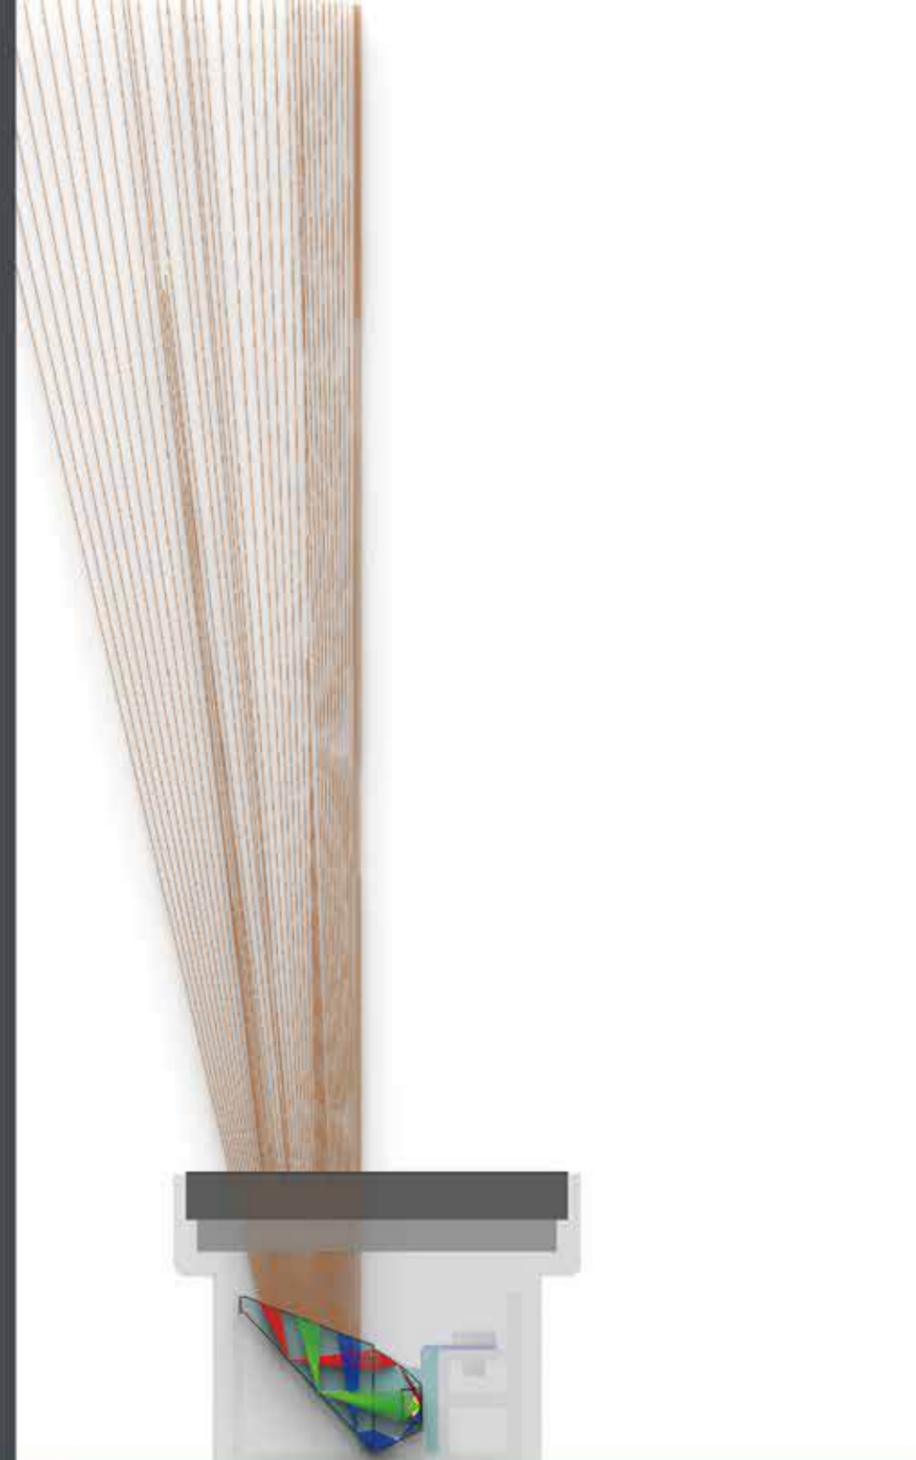


技术参数 Specification

产品型号/Product Code	SL1361AB-36	SL1361AA-36	SL1361AB-18(0.5m)	SL1361AA-18(0.5)	SL1361AB-9 (0.3m)	SL1361AA-9 (0.3m)
LED品牌 LED Brand	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030	LUMILEDS 2835
LED数量 LED Quantity	36pcs	36pcs	18pcs	18pcs	9pcs	9pcs
额定功率 Rated Power	48W	36W	24W	18W	15W	12W
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率 Frequency Range	/	/	/	/	/	/
颜色 Color	Single	Single	Single	Single	Single	Single
发光角度 Beam Angle	20° 30° 45° 60° 20x40° 18x50°					
控制方式 Control Mode	CC	CC	CC	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度 Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

Flood Light Series

SL1361B

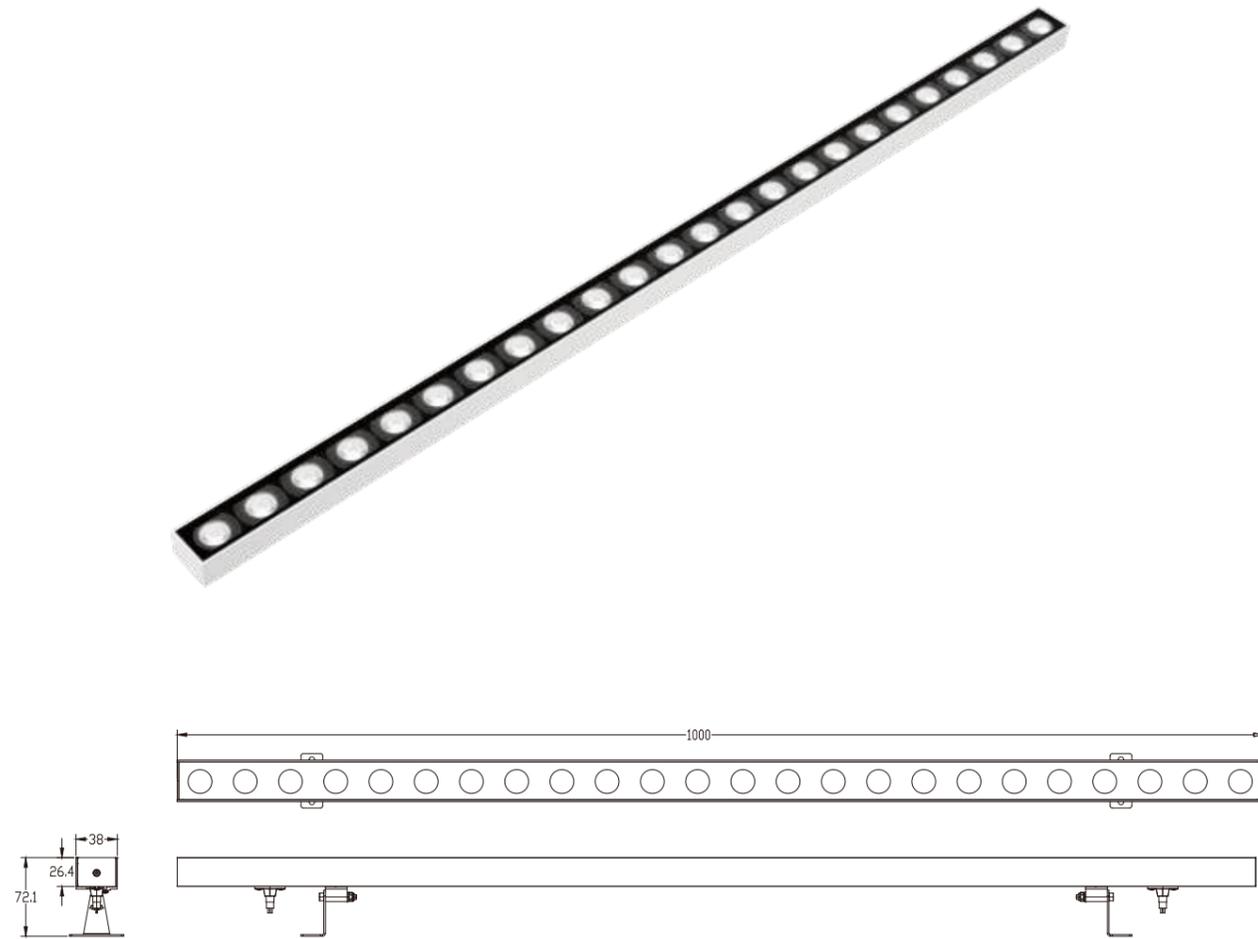


技术参数 Specification

产品型号/Product Code	SL1361BB-24	SL1361BB-18	SL1361BB-12(0.5m)	SL1361BB-9(0.5m)	SL1361BB-6(0.3m)
LED品牌 LED Brand	OSRAM	OSRAM	OSRAM	LUMILEDS 2835	LUMILEDS 3030
LED数量 LED Quantity	24pcs	18pcs	12pcs	18pcs	6pcs
额定功率 Rated Power	48W	36W	24W	18W	12W
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V
频率 Frequency Range	/	/	/	/	/
颜色 Color	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1
发光角度 Beam Angle	15° 20° 30° 45° 60° 25x45°				
控制方式 Control Mode	DMX512	DMX512	DMX512	DMX512	DMX512
使用寿命 Life	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度 Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

Flood Light Series

SL1362A


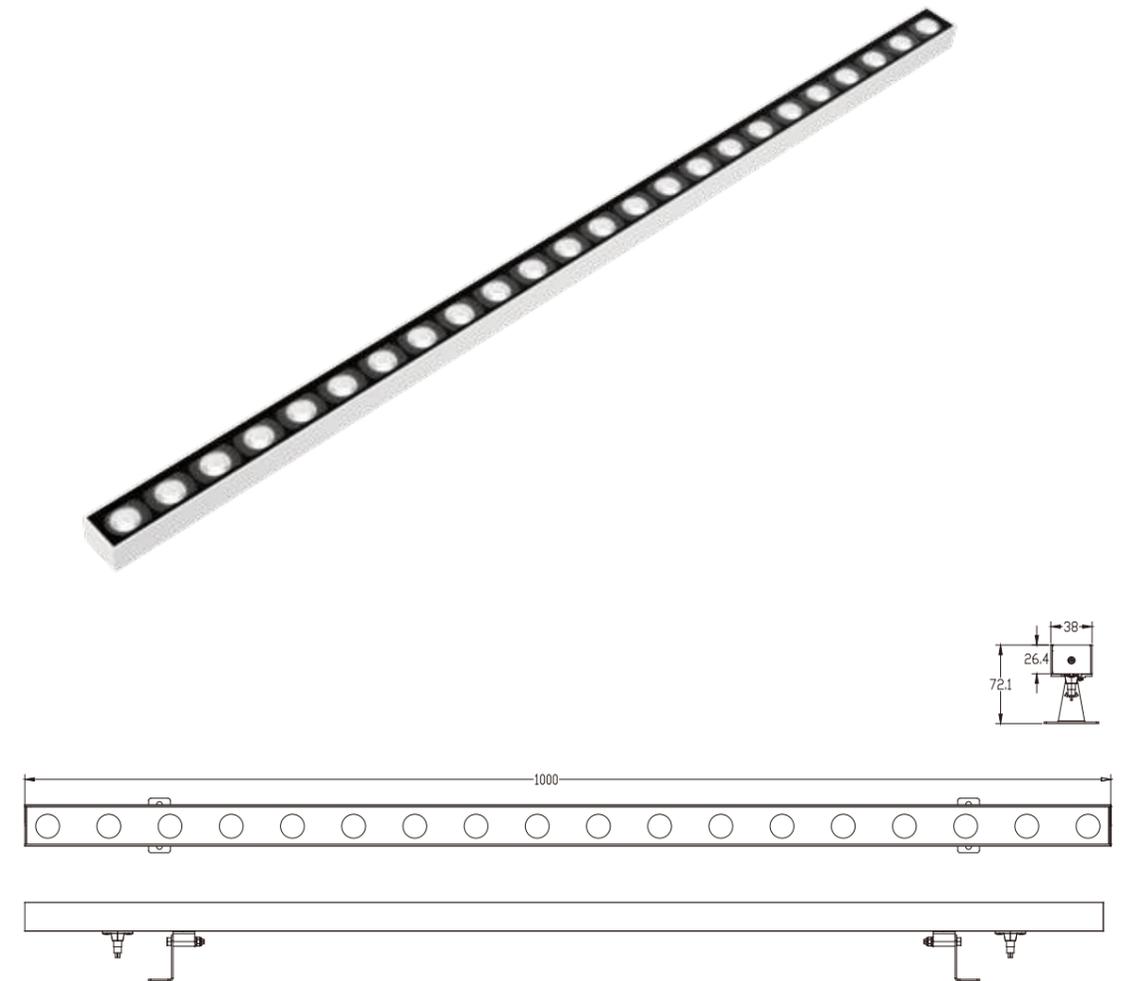


技术参数 Specification

产品型号/Product Code	SL1362AA-24	SL1362AA-18	SL1362AA-12(0.5m)	SL1362AA-9(0.5m)	SL1362AB-6(0.3m)
LED品牌 LED Brand	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030
LED数量 LED Quantity	24pcs	18pcs	12pcs	9pcs	6pcs
额定功率 Rated Power	24W	18W	12W	9W	6W
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V
频率 Frequency Range	/	/	/	/	/
颜色 Color	Single	Single	Single	Single	Single
发光角度 Beam Angle	20° 30° 40° 60° 20x40° 18x50°				
控制方式 Control Mode	CC	CC	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度 Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

Flood Light Series


SL1362B

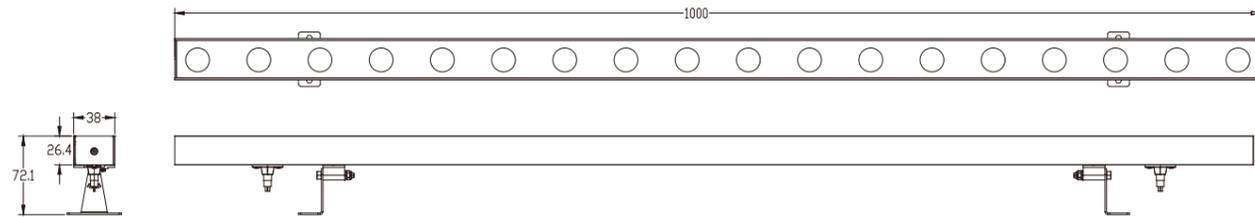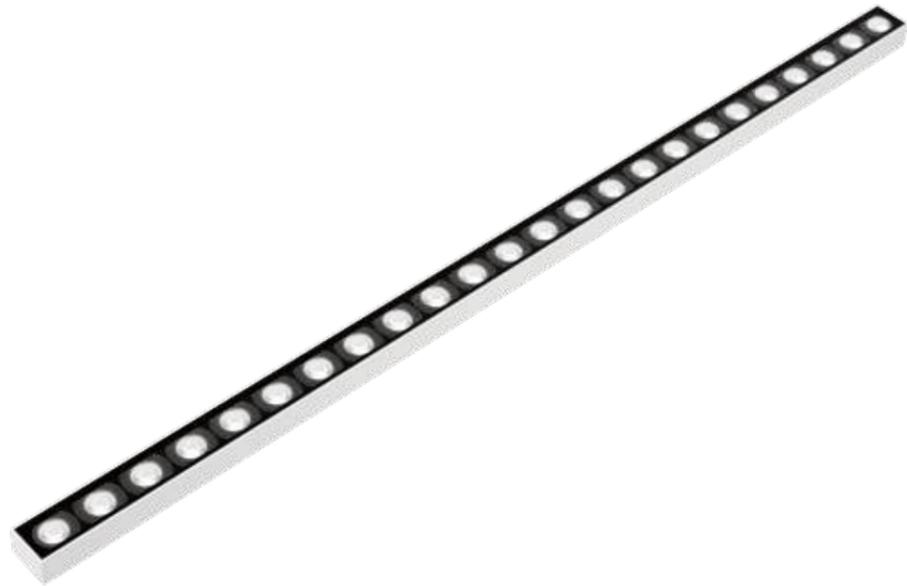


技术参数 Specification

产品型号/Product Code	SL1362BB-18	SL1362BB-12	SL1362BB-9(0.5m)	SL1362BB-6(0.5m)	SL1362BB-6(0.3m)	
LED品牌 LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	
LED数量 LED Quantity	18pcs	12pcs	9pcs	6pcs	6pcs	
额定功率 Rated Power	24W	18W	12W	9W	8W	
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	
频率 Frequency Range	/	/	/	/	/	
颜色 Color	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	
发光角度 Beam Angle	20° 30° 45° 60° 25x45°					
控制方式 Control Mode	DMX512	DMX512	DMX512	DMX512	DMX512	
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	
环境温度 Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1361AA-36 12D

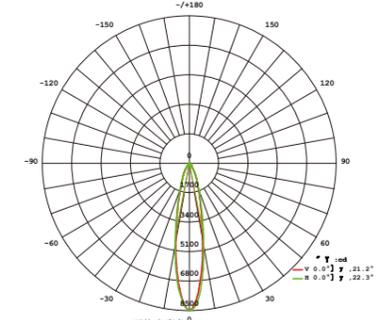

SL1362AA-24 20D



Flood Light Series

SL1130F

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

CO₂ ↓ 50%

原生1度角

K值 > 500




LED 恒功率全色域染色灯

Dopamine

多巴胺色彩

eyePRO

光学护眼









一体压铸 相变液冷

Integrated die casting & phase change liquid cooling



SL1130U



产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号 / Product Code	SL1130FM-36	SL1130FE-36	SL1130FK-36	SL1130FN-36KP
Led品牌 / Led Brand	CREE/OSRAM	CREE/OSRAM	CREE XHP50	RGBWCLA 7in1 Keepower
Led数量 / Led Quantity	36pcs	36pcs	36pcs	36pcs
额定功率 / Rated Power	320W	360W	450W	360W
输入电压 / Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率 / Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	RGBWCLA
发光角度 / Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°		10° 15° 20° 30° 15x60°
控制方式 / Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DMX512/RDM	DMX512/RDM
使用寿命 / Life	80000H	80000H	80000H	80000H
防护等级 / Protection Grade	IP66	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量 / In series(max)	3pcs	3pcs	2pcs	3pcs
产品型号 / Product Code	SL1130FQ-36KP	SL1130FF-36	SL1130FC-144	SL1130FM-19
Led品牌 / Led Brand	RGBW 4in1 Keepower	CREE RGBW 4in1	CREE	CREE/OSRAM
Led数量 / Led Quantity	36pcs	36pcs	144pcs	19pcs
额定功率 / Rated Power	450W	450W(CREE)/360W(OSRAM)		170W
输入电压 / Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率 / Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	RGBW	Single/RGBW	Single/RGBW
发光角度 / Beam Angle	6° 10° 15° 20° 30° 15x60°	6° 8° 15° 20° 30° 15x60°	8° 15° 20° 30° 15x60°	1.5°
控制方式 / Control Mode	DMX512/RDM	DMX512/RDM	CC/DMX512/RDM	CC/DMX512/RDM
使用寿命 / Life	80000H	80000H	80000H	80000H
防护等级 / Protection Grade	IP66	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量 / In series(max)	3pcs	3pcs	3pcs	5pcs

Flood Light Series

SL1131F

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

CO₂ ↓ 50%


原生1度角

K值 > 500



LED 恒功率全色域染色灯





Dopamine
多巴胺色彩
eyePRO
光学护眼



一体压铸 相变液冷
Integrated die casting & phase change liquid cooling



SL1131U

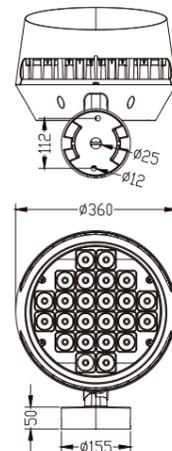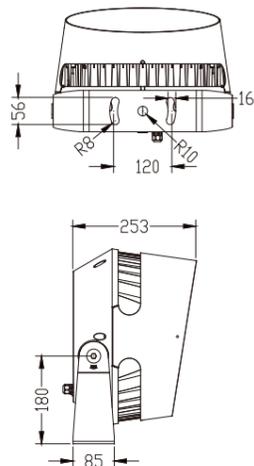

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号 / Product Code	SL1131FM-24	SL1131FE-24	SL1131FK-24	SL1131FN-24KP
Led品牌 / Led Brand	CREE/OSRAM	CREE/OSRAM	CREE XHP50	RGBWCLA 7in1 Keepower
Led数量 / Led Quantity	24pcs	24pcs	24pcs	24pcs
额定功率 / Rated Power	210W	240W	300W	240W
输入电压 / Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率 / Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	RGBWCLA
发光角度 / Beam Angle	2°	4.5° 8° 12° 20° 30° 45°	60° 10x70° 5x20°	10° 15° 20° 30° 15x60°
控制方式 / Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命 / Life	80000H	80000H	80000H	80000H
防护等级 / Protection Grade	IP66	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量 / In series(max)	8pcs	5pcs	5pcs	5pcs
产品型号 / Product Code	SL1131FQ-24	SL1131FF-24	SL1131FC-96	SL1131FM-12
Led品牌 / Led Brand	RGBW 4in1 Keepower	CREE RGBW 4in1	CREE	CREE/OSRAM
Led数量 / Led Quantity	24pcs	24pcs	96pcs	12pcs
额定功率 / Rated Power	300W	300W(CREE)/240W(OSRAM)		110W
输入电压 / Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率 / Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	RGBW	Single/RGBW	Single/RGBW
发光角度 / Beam Angle	4° 10° 15° 20° 30° 15X60°	6° 8° 15° 20° 30° 15x60°	5° 8° 12.5° 30° 15x60°	1.5°
控制方式 / Control Mode	DMX512/RDM	DMX512/RDM	CC/DMX512/RDM	CC/DMX512/RDM
使用寿命 / Life	80000H	80000H	80000H	80000H
防护等级 / Protection Grade	IP66	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量 / In series(max)	5pcs	5pcs	5pcs	10pcs


Flood Light Series

SL11320

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

LED 恒功率全色域染色灯







Dopamine
多巴胺色彩



一体压铸 相变液冷
Integrated die casting & phase change liquid cooling




SL1132P




技术参数 Specification

产品型号 / Product Code	SL11320M-25	SL11320E-25	SL11320N-24KP	SL11320Q-24KP
Led品牌 / Led Brand	CREE/OSRAM	CREE XP-L/OSRAM	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量 / Led Quantity	25pcs	25pcs	24pcs	24pcs
额定功率 / Rated Power	160W	160W	180W/200W	180W/200W
输入电压 / Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V
频率 / Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度 / Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°
控制方式 / Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命 / Life	80000H	80000H	80000H	80000H
防护等级 / Protection Grade	IP66	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25°C~50°C	-25°C~50°C	-25°C~50°C	-25°C~50°C
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号 / Product Code	SL11320F-24	SL11320C-72		
Led品牌 / Led Brand	CREE RGBW 4in1	CREE		
Led数量 / Led Quantity	24pcs	72pcs		
额定功率 / Rated Power	180W/200W	160W(single)/180W(RGBW)		
输入电压 / Input Voltage	DC36V/AC100-305V	AC100-305V		
频率 / Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single/RGB/RGBW		
发光角度 / Beam Angle	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 15x60°		
控制方式 / Control Mode	DMX512/RDM	DMX512/RDM		
使用寿命 / Life	80000H	80000H		
防护等级 / Protection Grade	IP66	IP66		
环境温度 / Ambient Temperature	-25°C~50°C	-25°C~50°C		
环境湿度 / Ambient Humidity	10%~90%	10%~90%		

配光曲线 (半角) Distribution Curve Flux (SBC Case)



SL1132 6°

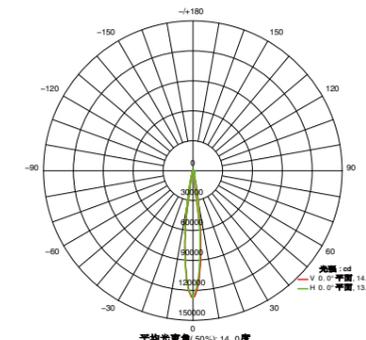

SL1132 15°



Flood Light Series

SL1132F

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

CO₂ ↓ 50%

原生1度角

K值 > 500

eyePRO

光学护眼



SL1132FM

SL1132U

SL1132FZ





产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1132FM-25	SL1132FE-25	SL1132FN-24KP	SL1132FF-24
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L	RGBWCLA 7in1 Keepower	CREE RGBW 4in1
Led数量/ Led Quantity	25pcs	25pcs	24pcs	24pcs
额定功率/ Rated Power	120W(single)/150W(RGBW)	120W	150W	150W/200W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1132FC-72	SL1132FM-7		
Led品牌/ Led Brand	CREE XP-E2	CREE/OSRAM		
Led数量/ Led Quantity	72pcs	7pcs		
额定功率/ Rated Power	120W(single)/150W(RGBW)	65W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single/RGB/RGBW	Single		
发光角度/ Beam Angle	8° 12.5° 30° 10x60°	1.5°		
控制方式/ Control Mode	DMX512/RDM	CC/DALI/0-10V		
使用寿命/ Life	80000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		

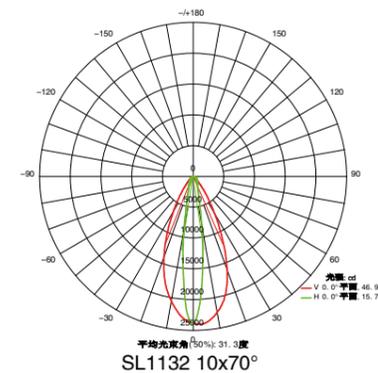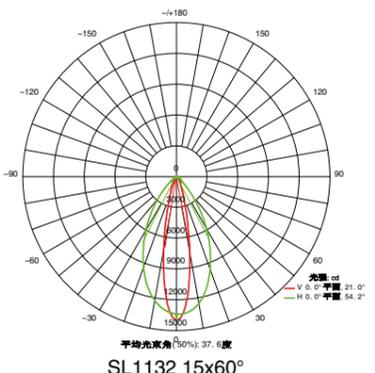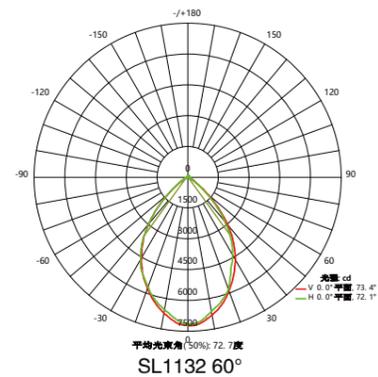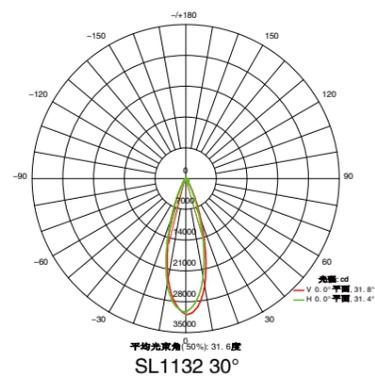

Flood Light Series

SL11350


圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

LED 恒功率全色域染色灯


Dopamine
多巴胺色彩



一体压铸 相变液冷
Integrated die casting & phase change liquid cooling

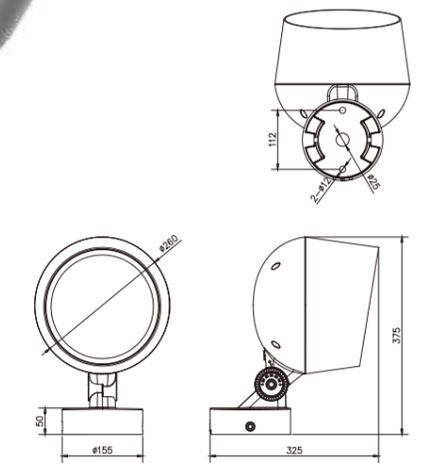

SL1135P


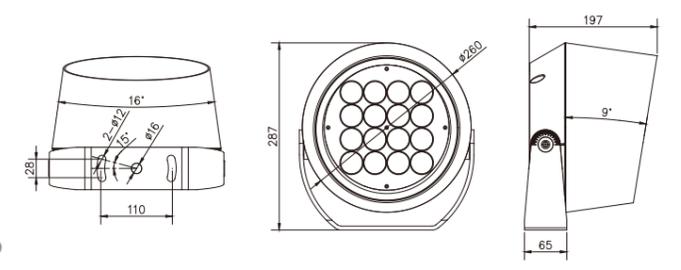




SL1135OZ



SL1135OM

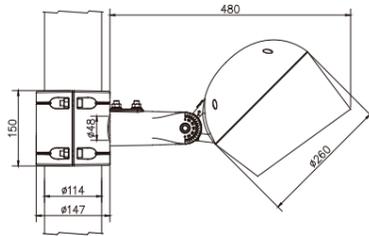

技术参数 Specification

产品型号/ Product Code	SL1135OM-16	SL1135OE-16	SL1135ON-16KP	SL1135OQ-16KP
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L/OSRAM	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	16pcs	16pcs	16pcs	16pcs
额定功率/ Rated Power	100W(single)/120W(RGBW)	100W	150W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25°C~50°C	-25°C~50°C	-25°C~50°C	-25°C~50°C
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	12pcs	10pcs	8pcs	8pcs
产品型号/ Product Code	SL1135OF-16	SL1135OC-48	SL1135O-C100	SL1135OR-16
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE XP-E2	CREE COB	LUXEON 7070
Led数量/ Led Quantity	16pcs	48pcs	1pcs	16pcs
额定功率/ Rated Power	150W	100W(single)/150W(RGBW)	100W	100W
输入电压/ Input Voltage	DC36V/AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single/RGB/RGBW	Single	Single
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15x60°	5° 8° 12.5° 30° 10x60°	15° 24° 36° 60°	30° Tilt.60°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25°C~50°C	-25°C~50°C	-25°C~50°C	-25°C~50°C
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	1/8pcs	1/8pcs	10pcs	10pcs

Flood Light Series

SL1135F

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

CO₂ ↓ 50%

原生1度角


K值 > 500

eyePRO

光学护眼



SL1135U


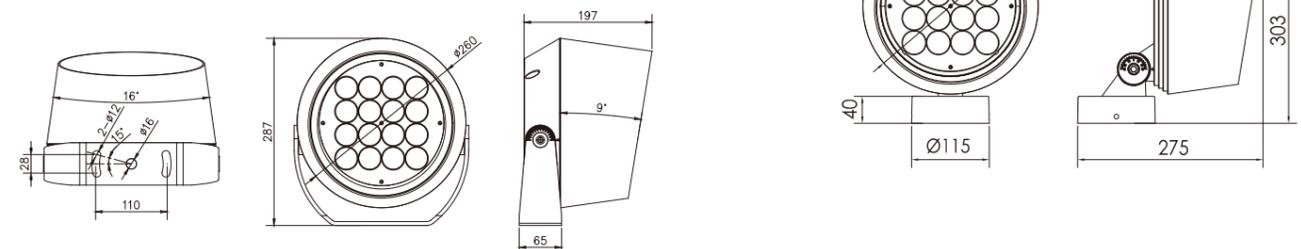




SL1135FZ





SL1135FM

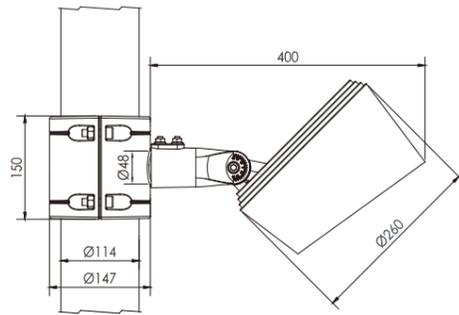

SL1135FL



SL1135FH



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4

适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm

产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design, could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1135FM-16	SL1135FE-16	SL1135FD-16	SL1135FN-16KP
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L	CREE XP-G3	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	16pcs	16pcs	16pcs	16pcs
额定功率/ Rated Power	75W(single)/100W(RGBW)	75W	60W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	RGBWCLA
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	16pcs	16pcs	20pcs	12pcs
产品型号/ Product Code	SL1135FF-16	SL1135FC-48	SL1135FM-4	SL1135FF-4
Led品牌/ Led Brand	CREE RGBW 4 in1	CREE XP-E2	CREE/OSRAM	CREE RGBW 4 in 1
Led数量/ Led Quantity	16pcs	48pcs	4pcs	4pcs
额定功率/ Rated Power	100W	100W	40W	60W
输入电压/ Input Voltage	DC36V / AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single/RGB/RGBW	Single	RGBW
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15x60°	5° 8° 12.5° 30° 10x60°	1.5°	4°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	2/12(pcs)	2/12(pcs)	30pcs	30pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

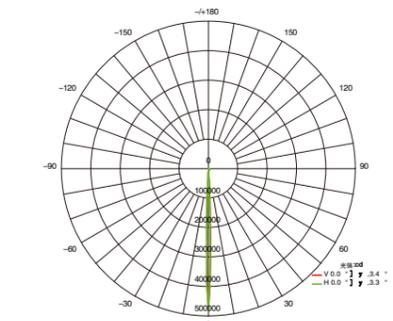


SL1135 3.5°

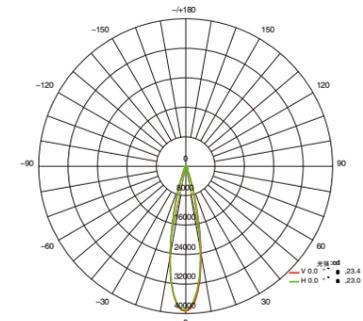


SL1135 20°

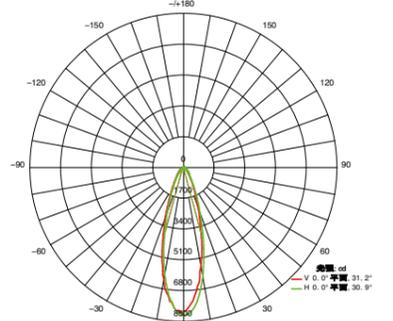


SL1135 30°

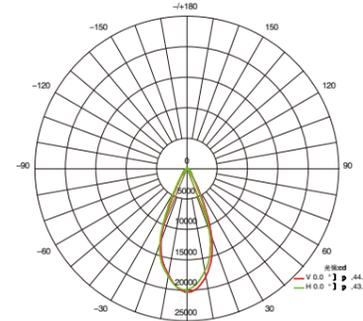

SL1135 40°

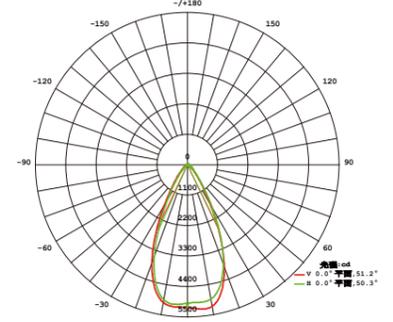


SL1135 45°

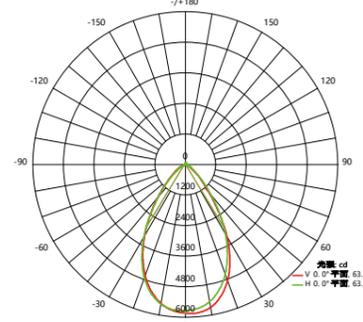


SL1135 60°



SL1135OM-26-06-04

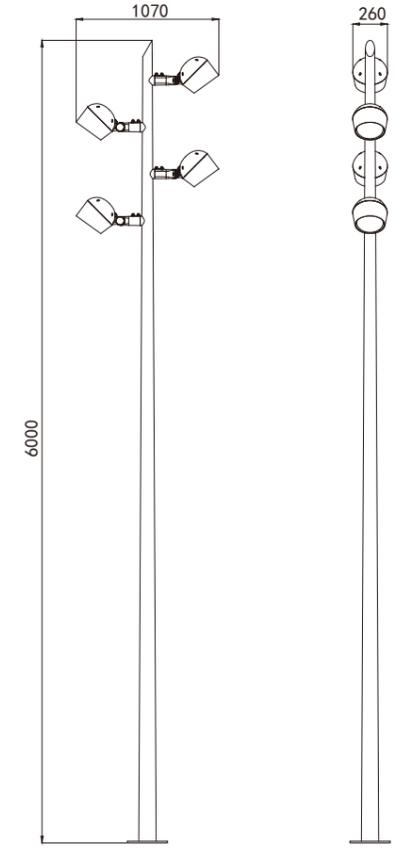

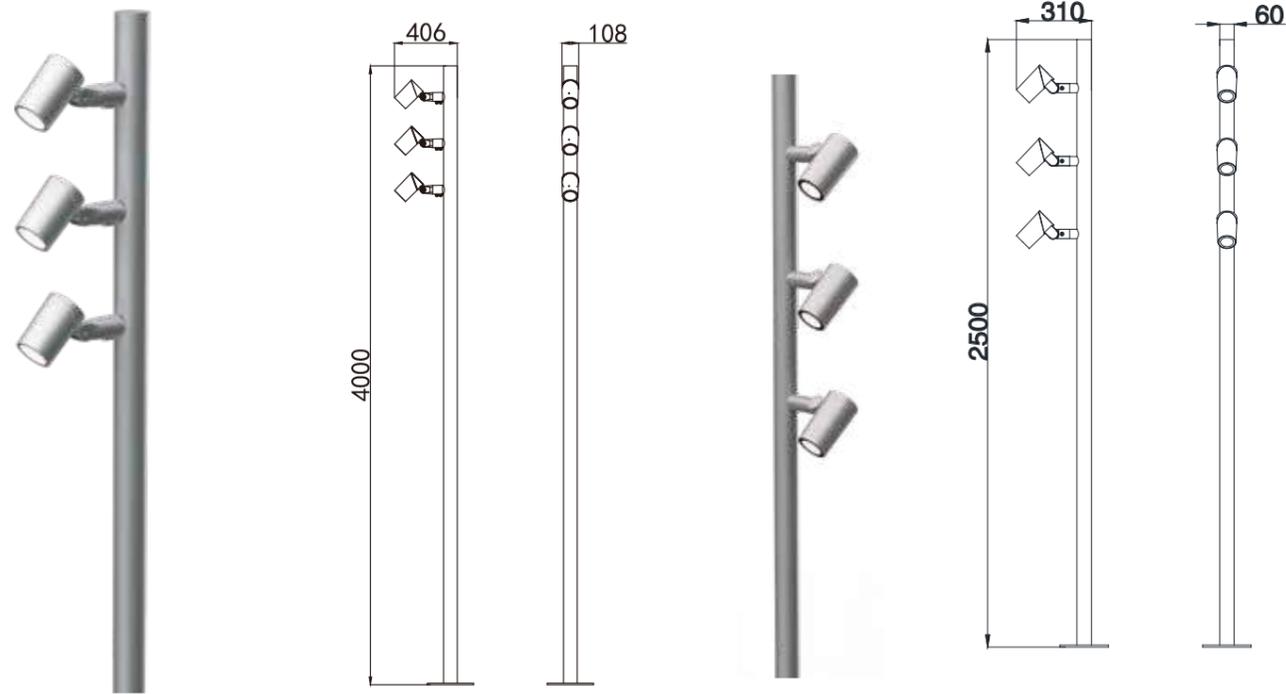

SL1140M-26-04-03

SL1145M-26-02-03

Flood Light Series

SL1136O

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

LED 恒功率全色域染色灯

Dopamine



多巴胺色彩

eyepro

光学护眼




一体压铸 相变液冷
Integrated die casting & phase change liquid cooling

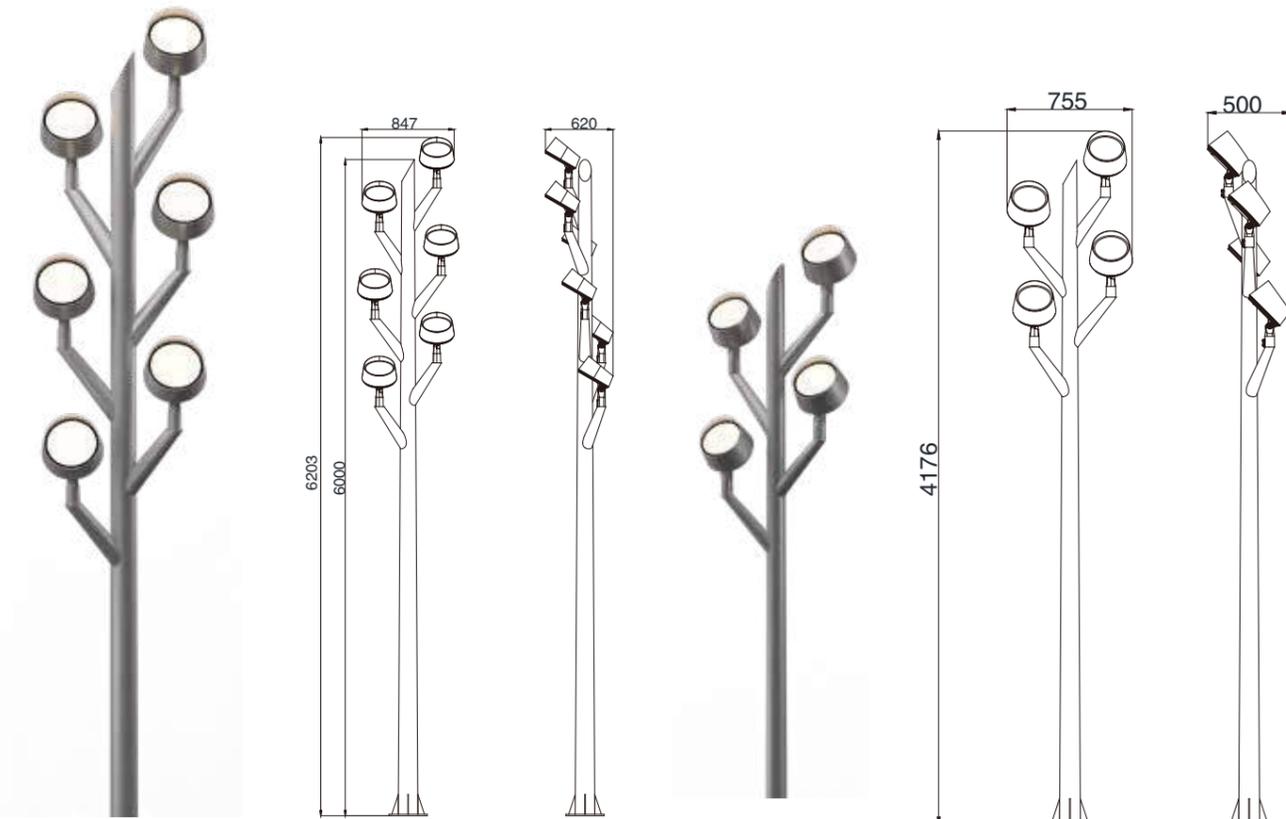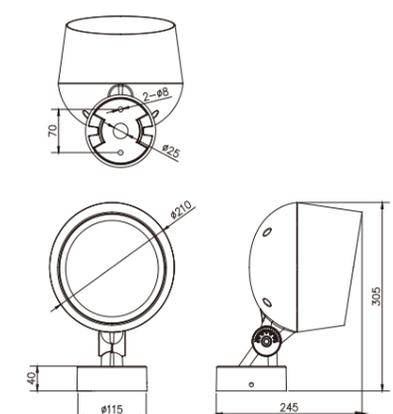

SL1132F-26-06-06


SL1135F-26-04-04

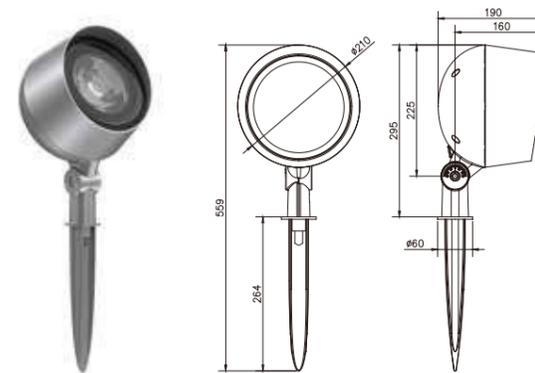

SL1136OS




SL1136P

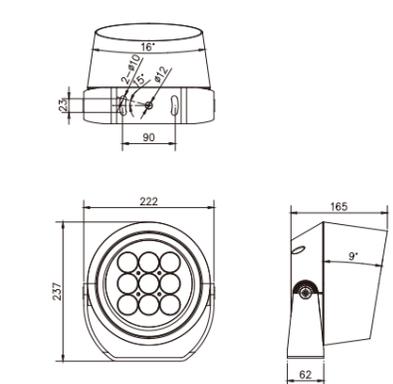





SL1136OZ

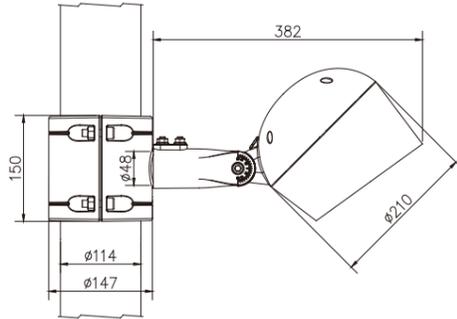

SL1136OM

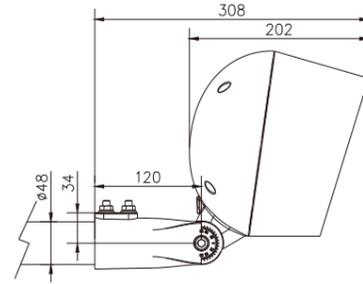


SL1136OH



适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm



SL1136OL



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、 Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、 With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、 Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、 Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、 Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1136OM-9	SL1136OE-9	SL1136ON-9KP	SL1136OQ-9KP
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L/OSRAM	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rated Power	60W(single)/80W(RGBW)	70W	100W	100W (CREE)/80W(OSRAM)
输入电压/ Input Voltage	AC100-264V	AC100-264V	AC00-305V	DC36V/AC00-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	20pcs	16pcs	16pcs	2/16pcs
产品型号/ Product Code	SL1136OF-9	SL1136OC-27	SL1136O-C70	SL1136OR-9
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE XP-G3	CREE COB	LUXEON 7070
Led数量/ Led Quantity	9pcs	27pcs	1pcs	9pcs
额定功率/ Rated Power	100W(CREE)/80W(OSRAM)	70W(single)/100W(RGBW)	70W	70W
输入电压/ Input Voltage	DC36V/AC00-305V	AC100-305V	AC100-305V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single/RGB/RGBW	Single	Single
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°	15° 24° 36° 60°	30° Tilt.60°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	2/16pcs	2/16pcs	16pcs	16pcs

Flood Light Series

SL1136F

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics


CO₂ ↓ 50%

原生1度角

K值 > 500

eyePRO


光学护眼




SL1136FS




SL1136U

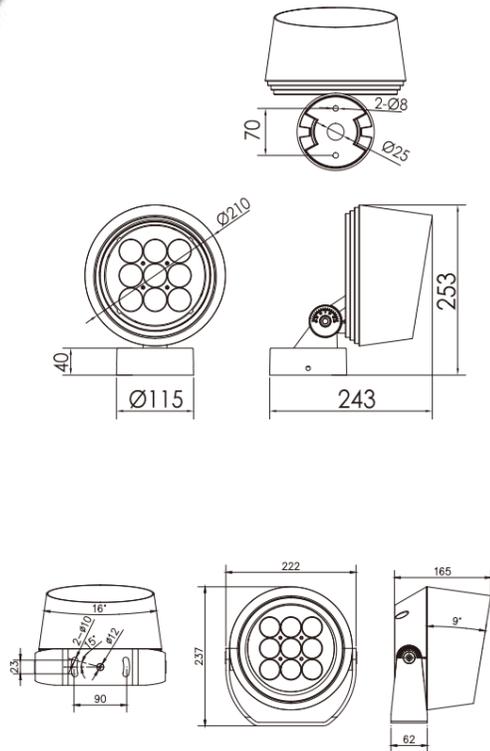


SL1136FZ

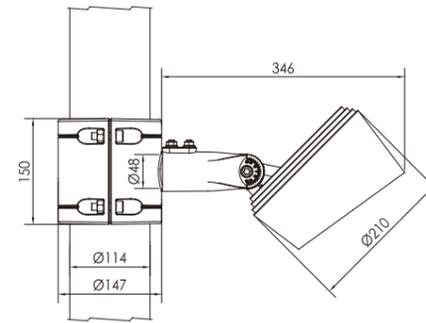


SL1136FM

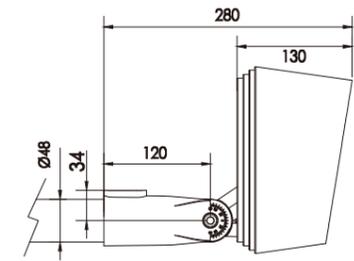

SL1136FL



SL1136FH







适配杆径(67-325)mm T ≥ 4
AVL Dia of pole(67-325)mm T ≥ 4



适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm

技术参数 Specification

产品型号/ Product Code	SL1136FM-9	SL1136FE-9	SL1136FD-9	SL1136FN-9KP
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L	CREE XP-G3	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rated Power	45W	45W	35W	60W
输入电压/ Input Voltage	AC100-264V	AC100-264V	AC100-264V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	RGBWCLA
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45°	60° 10x70° 5x20°	15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	30pcs	30pcs	37pcs	3/20pcs
产品型号/ Product Code	SL1136FF-9	SL1136FC-27	SL1136FM-3	SL1136FF-3
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE XP-E2	CREE/OSRAM	CREE RGBW 4 in 1
Led数量/ Led Quantity	9pcs	27pcs	3pcs	3pcs
额定功率/ Rated Power	60W	45W(single)/60W(RGBW)	30W	40W
输入电压/ Input Voltage	DC36V/AC100-305V	AC100-305V	AC100-264V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single/RGB/RGBW	Single	RGBW
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°	1.5°	4°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3/20pcs	3/20pcs	42pcs	40pcs

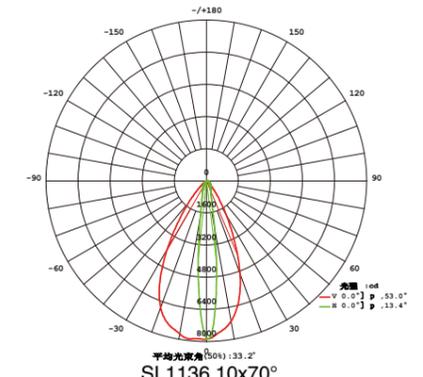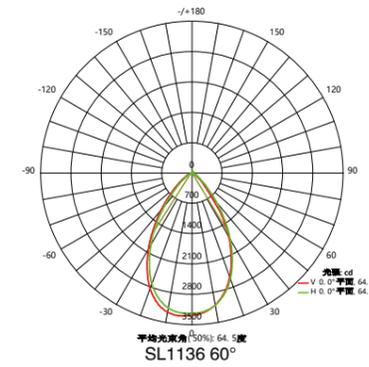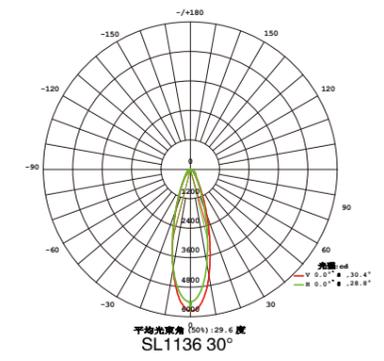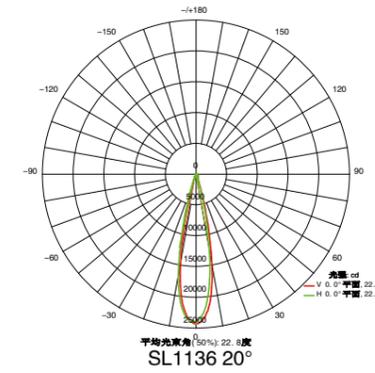

配光曲线 (半角) Distribution Curve Flux (SBC Case)

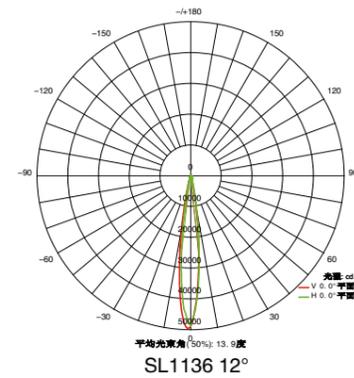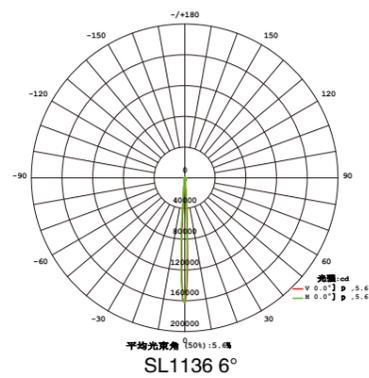

SL1130/SL1131/SL1132/SL1135 /SL1136 /SL1137/SL1139



Flood Light Series

SL11370

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics


LED 恒功率全色域染色灯

Dopamine

多巴胺色彩

eyePRO



光学护眼

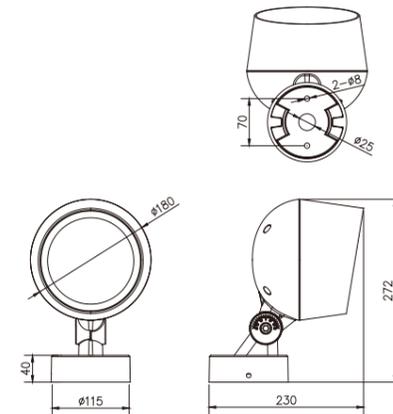

SL11370Z




SL11370M

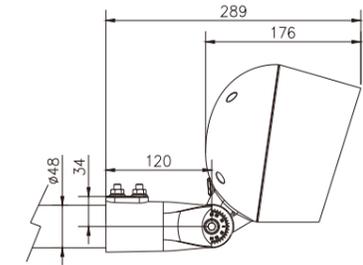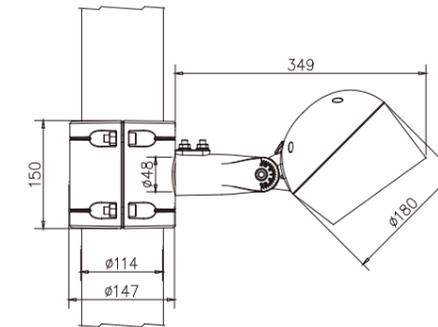


SL11370H



SL11370L

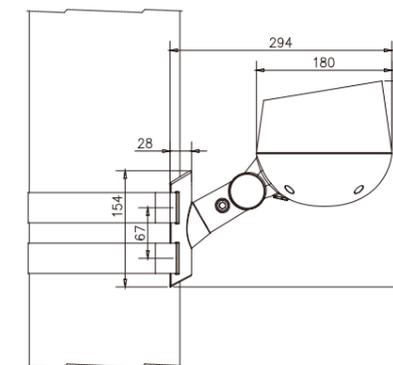

适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm

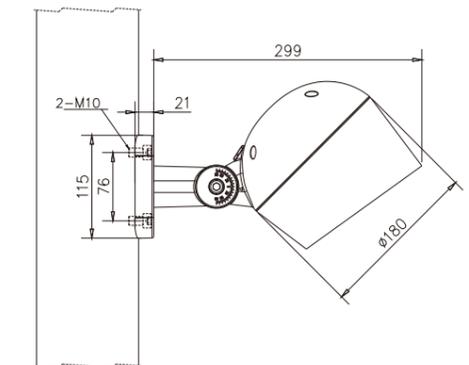


适配杆径(67-325)mm T ≥ 4
AVL Dia of pole(67-325)mm T ≥ 4


一体压铸 相变液冷
Integrated die casting phase change liquid cooling



SL11370S

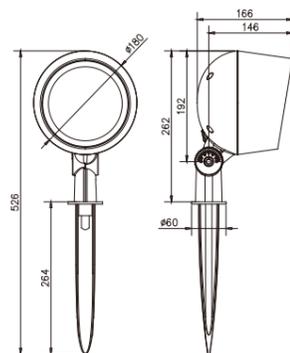

SL1137P

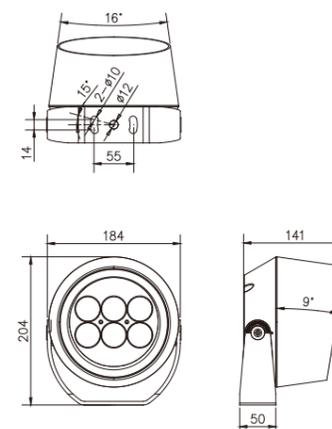

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
 - 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1137OM-6	SL1137OE-6	SL1137OF-6	SL1137OC-18
LED品牌/ LED Brand	CREE	XP-L/OSRAM	CREE RGBW 4 in 1	CREE XP-E
LED数量/ LED Quantity	6pcs	6pcs	6pcs	18pcs
额定功率/ Rated Power	50W	50W/45W	60W	50W(single)/60W(CREE RGBW)
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC24V/AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	33pcs	26pcs	3/26(pcs)	3/26(pcs)
产品型号/ Product Code	SL1137O-C50	SL1137OR-6		
LED品牌/ LED Brand	CREE XP-E	LUXEON 7070		
LED数量/ LED Quantity	18pcs	6pcs		
额定功率/ Rated Power	50W	50W		
输入电压/ Input Voltage	DC24V/AC100-264V	AC100-264V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single	Single		
发光角度/ Beam Angle	15° 24° 36° 60°	30° Tilt.60°		
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		
使用寿命/ Life	50000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	3/26pcs	3/26pcs		


Flood Light Series

SL1137F


圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

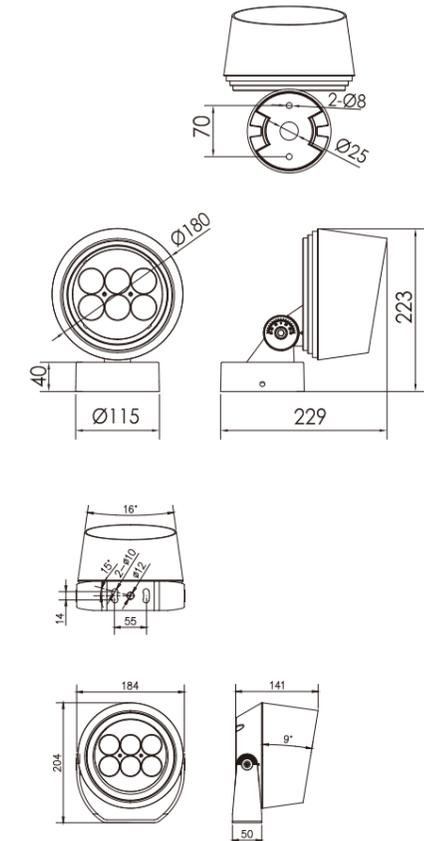


SL1137FS




SL1137U




SL1137FZ

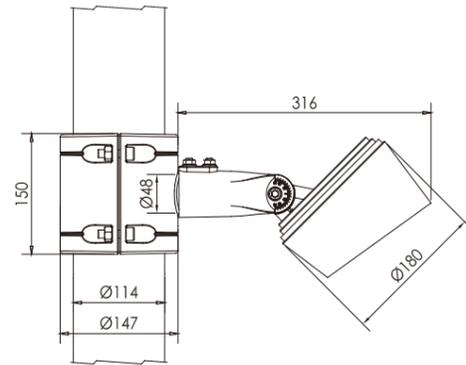

SL1137FM

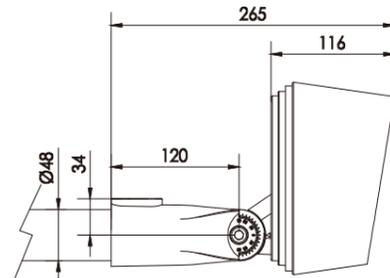


SL1137FL



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4



SL1137FH




适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm


技术参数 Specification

产品型号/ Product Code	SL1137FM-6	SL1137FE-6	SL1137FD-6	SL1137FF-6	SL1137FC-18
LED品牌/ LED Brand	CREE	CREE XP-L	CREE XP-G3	CREE RGBW 4in1	CREE XP-E
LED数量/ LED Quantity	6pcs	6pcs	6pcs	6pcs	18pcs
额定功率/ Rated Power	30W	30W	22W	30W	36W
输入电压/ Input Voltage	AC100-264V	AC100-264V	AC100-264V	DC24V/AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	42pcs	42pcs	60pcs	4/42(pcs)	4/42(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)

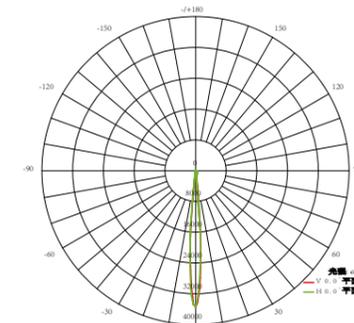


平均光束角(50%): 4.0 度
SL1137 8°

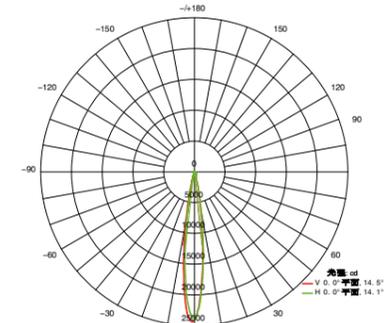

平均光束角(50%): 14.3 度
SL1137 12°

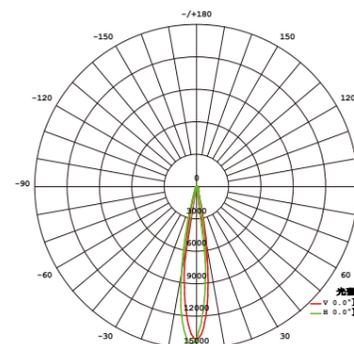

平均光束角(50%): 17.4°
SL1137 15°

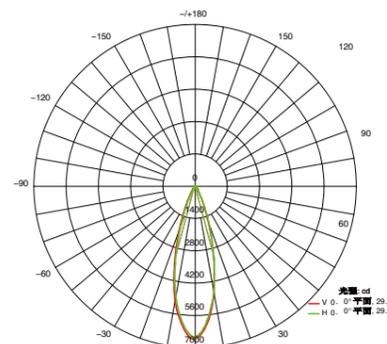

平均光束角(50%): 29.6 度
SL1137 30°



Flood Light Series

SL11390

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO



光学护眼




SL11390Z



SL11390M

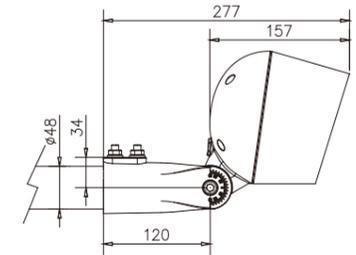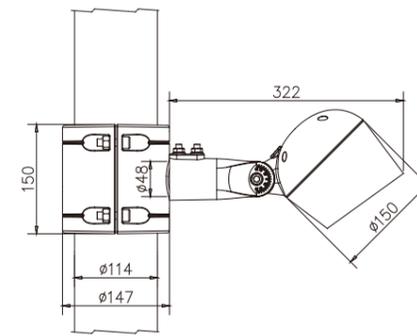

一体压铸 相变液冷
Integrated die casting&phase change liquid cooling

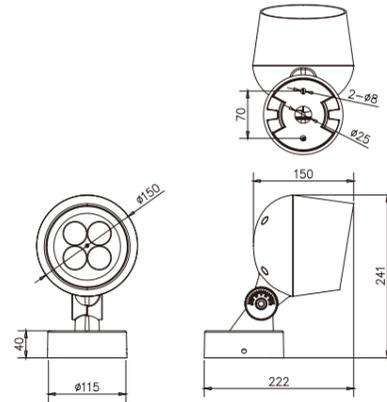


SL11390H





SL11390L




SL11390S

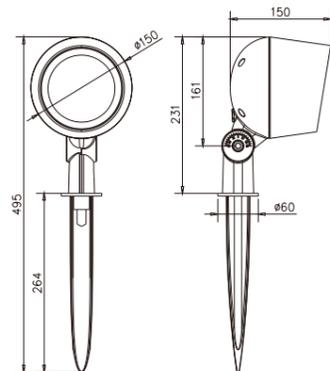

SL1139P

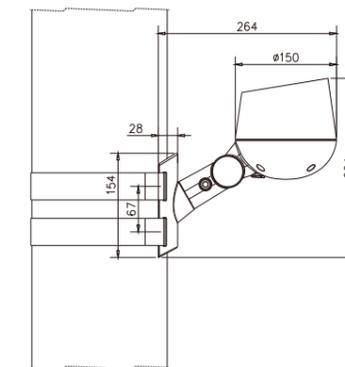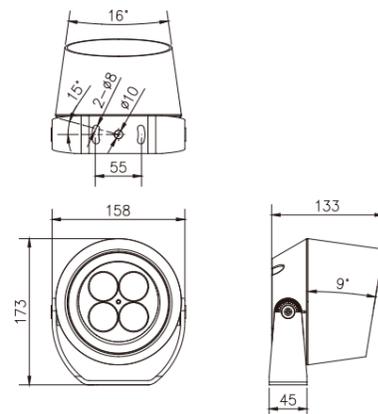

适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm

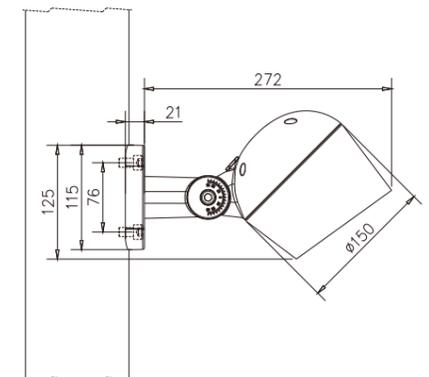

适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1139OM-4	SL1139OE-4	SL1139OF-4	SL1139OC-8
Led品牌/ Led Brand	CREE	CREE XP-L/OSRAM	CREE RGBW 4 in 1	CREE XP-G3
Led数量/ Led Quantity	4pcs	4pcs	4pcs	8pcs
额定功率/ Rated Power	30W	35W	40W	30W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC24V/AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	60pcs	42pcs	4/42pcs	4pcs
产品型号/ Product Code	SL1139O-C30	SL1139OR-4		
Led品牌/ Led Brand	CREE COB	LUXEON 7070		
Led数量/ Led Quantity	1pcs	4pcs		
额定功率/ Rated Power	30W	35W		
输入电压/ Input Voltage	AC100-264V	AC100-264V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single	Single		
发光角度/ Beam Angle	15° 24° 36° 60°	30° Tilt.60°		
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		
使用寿命/ Life	50000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	42pcs	42pcs		

Flood Light Series

SL1139F

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics


eyePRO

光学护眼







SL1139FZ

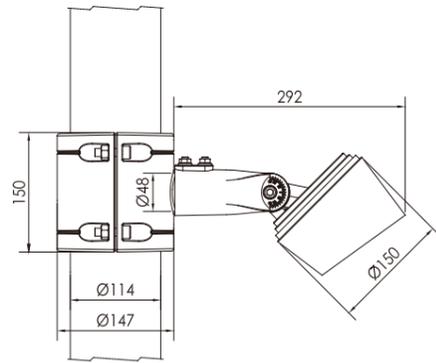

SL1139FM

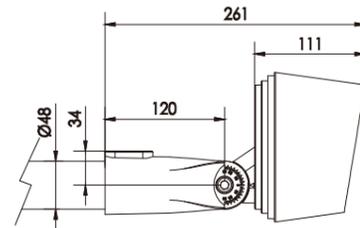


SL1139FL



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4



SL1139FH




适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm


技术参数 Specification

产品型号/ Product Code	SL1139FM-4	SL1139FE-4	SL1139FD-4	SL1139FF-4	SL1139FM-1
Led品牌/ Led Brand	CREE	CREE XP-L	CREE XP-G3	CREE RGBW 4 in1	CREE/OSRAM
Led数量/ Led Quantity	4pcs	4pcs	4pcs	4pcs	1pcs
额定功率/ Rated Power	20W	20W	15W	20W	10W
输入电压/ Input Voltage	AC100-264V	AC100-264V	AC100-264V	DC24V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	1.5°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	120pcs	60pcs	60pcs	88pcs	7pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

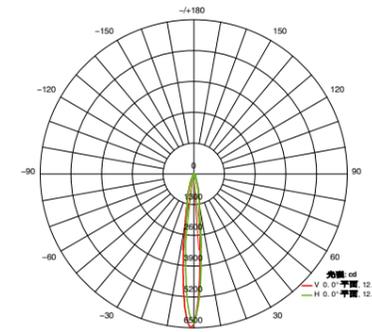


平均光束角(50%): 12.4度
SL1139 12.5°

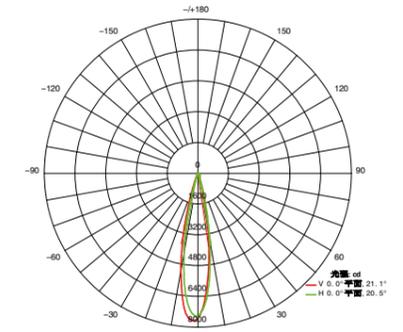

平均光束角(50%): 20.8度
SL1139 20°

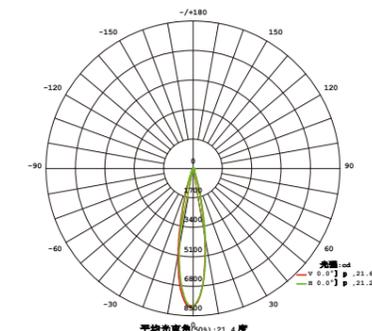

平均光束角(50%): 21.4度
SL1139 22.5°

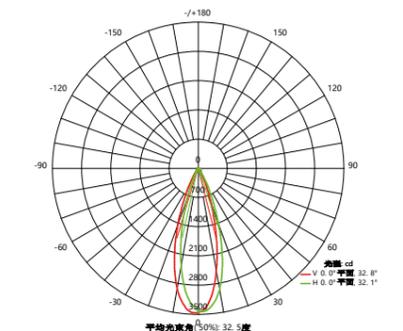

平均光束角(50%): 32.5度
SL1139 30°



Flood Light Series

SL1128O

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics







一体压铸 相变液冷


Integrated die casting phase change liquid cooling




SL1128OS

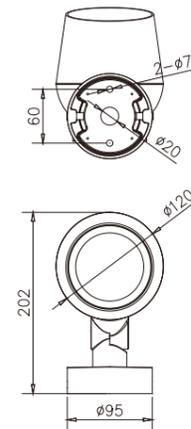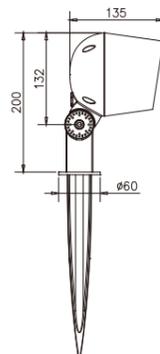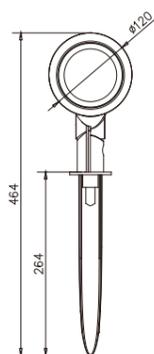

SL1128OH



SL1128OL



技术参数 Specification

产品型号 / Product Code	SL1128OM-2	SL1128OE-2	SL1128OF-2	SL1128OC-6
Led品牌 / Led Brand	CREE	CREE XP-L/OSRAM	CREE RGBW 4 in 1	CREE XP-G3
Led数量 / Led Quantity	2pcs	2pcs	2pcs	6pcs
额定功率 / Rated Power	20W	20W	30W/20W(OSRAM)	25W
输入电压 / Input Voltage	AC100-264V	AC100-264V	DC24V/AC100-264V	AC100-264V
频率 / Frequency Range	50/60Hz	50/60Hz	/	50/60Hz
颜色 / Color	Single	Single	RGBW	Single
发光角度 / Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°
控制方式 / Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命 / Life	50000H	50000H	50000H	50000H
防护等级 / Protection Grade	IP66	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量 / In series(max)	88pcs	60pcs	7pcs	60pcs
产品型号 / Product Code	SL1128O-C20	SL1128O-CS20		
Led品牌 / Led Brand	CREE COB	SunLike COB CRI>97		
Led数量 / Led Quantity	1pcs	1pcs		
额定功率 / Rated Power	20W	20W		
输入电压 / Input Voltage	AC100-264V	AC100-264V		
频率 / Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single	Single		
发光角度 / Beam Angle	15° 24° 36° 60°	15° 24° 36° 60°		
控制方式 / Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		
使用寿命 / Life	50000H	50000H		
防护等级 / Protection Grade	IP66	IP66		
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度 / Ambient Humidity	10%~90%	10%~90%		
串联数量 / In series(max)	60pcs	60pcs		

Flood Light Series


SL11290

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



一体压铸 相变液冷

Integrated die casting phase change liquid cooling

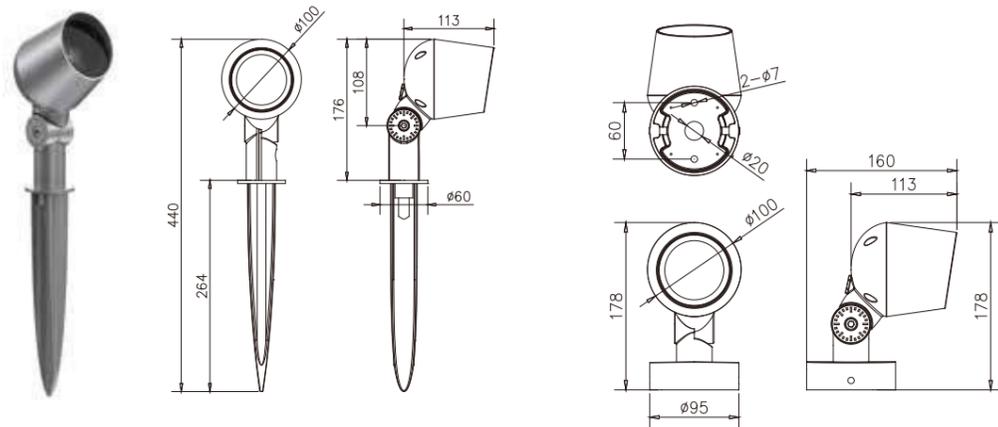



SL11290S



SL11290H



SL11290L



技术参数 Specification

产品型号 / Product Code	SL11290M-1	SL11290E-1	SL11290F-1	SL11290C-3
Led品牌 / Led Brand	CREE	CREE XP-L/OSRAM	CREE RGBW 4 in 1	CREE XP-G3
Led数量 / Led Quantity	1pcs	1pcs	1pcs	3pcs
额定功率 / Rated Power	10W	10W	15W/10W(OSRAM)	15W
输入电压 / Input Voltage	AC100-264V	AC100-264V	DC12V/DC24V	AC100-264V
频率 / Frequency Range	50/60Hz	50/60Hz	/	50/60Hz
颜色 / Color	Single	Single	RGBW	Single
发光角度 / Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°
控制方式 / Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命 / Life	50000H	50000H	50000H	50000H
防护等级 / Protection Grade	IP66	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量 / In series(max)	200pcs	120pcs	120pcs	7/14pcs
产品型号 / Product Code	SL11290-C12	SL11290-CS12		
Led品牌 / Led Brand	CREE COB	SunLike COB CRI>97		
Led数量 / Led Quantity	1pcs	1pcs		
额定功率 / Rated Power	12W	12W		
输入电压 / Input Voltage	AC100-264V	AC100-264V		
频率 / Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single	Single		
发光角度 / Beam Angle	15° 24° 36° 60°	15° 24° 36° 60°		
控制方式 / Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		
使用寿命 / Life	50000H	50000H		
防护等级 / Protection Grade	IP66	IP66		
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度 / Ambient Humidity	10%~90%	10%~90%		
串联数量 / In series(max)	120pcs	120pcs		

Flood Light Series

SL1151F

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



墨子光学大师

LED 恒功率全色域染色灯

Dopamine

多巴胺色彩



一体压铸 相变液冷

Integrated die casting & phase change liquid cooling




SL1151M



SL1151Z



SL1151U

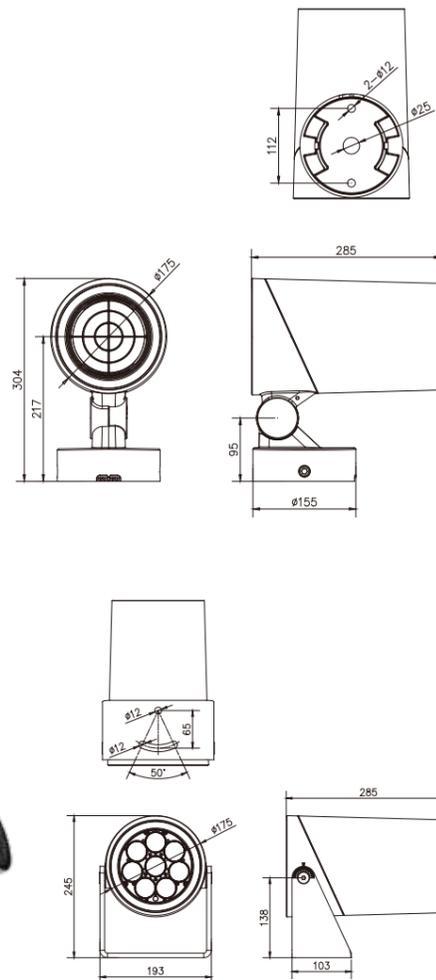


产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1151FM-8	SL1151FE-8	SL1151FK-8	SL1151FD-18
Led品牌/ Led Brand	CREE	CREE XP-L	CREE XHP50	CREE
Led数量/ Led Quantity	8pcs	8pcs	8pcs	18pcs
额定功率/ Rated Power	75W	75W	100W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	8° 12° 20° 30° 45° 60° 10x70° 5x20°	8° 12.5° 20° 30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1151FN-8KP	SL1151FQ-8KP	SL1151FF-8	SL1151F-C100
Led品牌/ Led Brand	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	CREE RGBW 4 in1	CREE COB
Led数量/ Led Quantity	8pcs	8pcs	8pcs	1pcs
额定功率/ Rated Power	120W	120W	120W/80W(OSRAM)	100W
输入电压/ Input Voltage	DC24V/AC00-305V	DC36V/AC00-305V	DC36V/AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBWCLA	RGBW	RGBW	Single
发光角度/ Beam Angle	15° 20° 30° 15x60°	9° 15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°	15° 24° 36° 60°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%

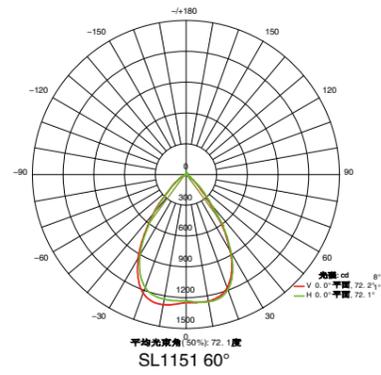

Flood Light Series

SL1150F


圓孔格柵 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窩格柵 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窩玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



一体压铸 相变液冷
Integrated die casting & phase change liquid cooling




SL1150S

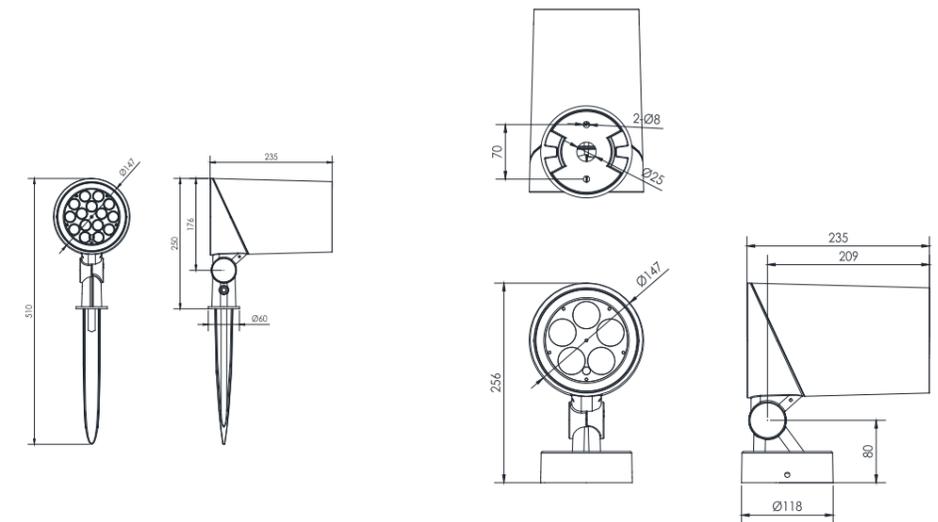





SL1150U

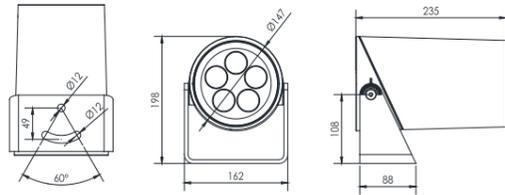


SL1150M

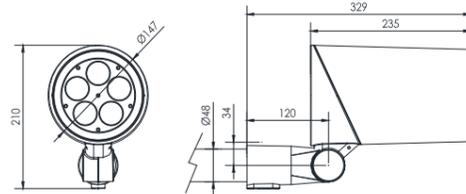

SL1150Z

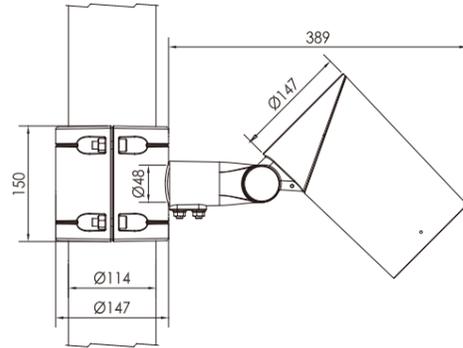


SL1150L



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4



SL1150H



适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm



产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1150FM-5	SL1150FI-5	SL1150FD-15	SL1150FF-5	SL1150F-C50
Led品牌/ Led Brand	CREE	CREE XHP35	OSRAM P9	CREE RGBW 4 in1	CREE COB
Led数量/ Led Quantity	5pcs	5pcs	15pcs	5pcs	1pcs
额定功率/ Rated Power	45W	60W/45W	60W	60W/50W(OSRAM)	50W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC24V / AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	8° 12.5° 20° 30° 10x60°	9° 15° 20° 30° 45° 15x60°	12° 24° 38°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	28pcs	28pcs	26pcs	24/26pcs	26pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

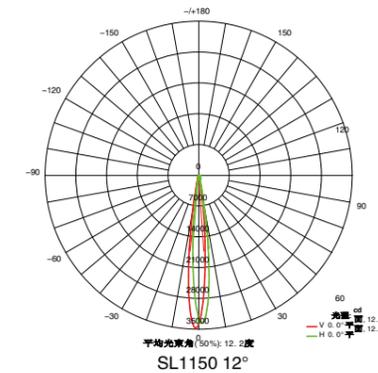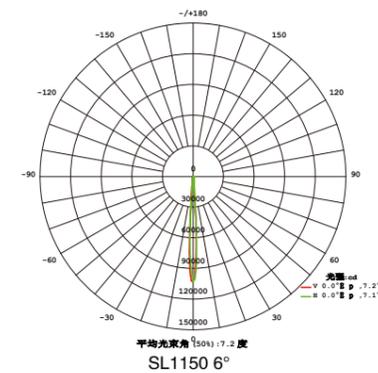


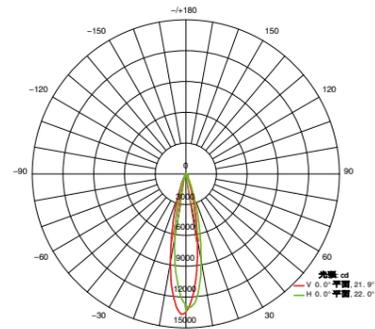


SL1150 20°

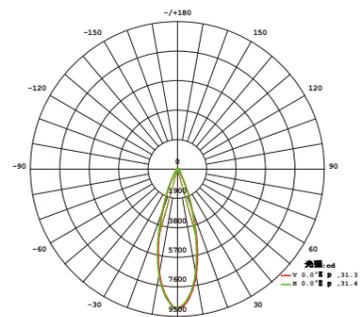

SL1150 30°

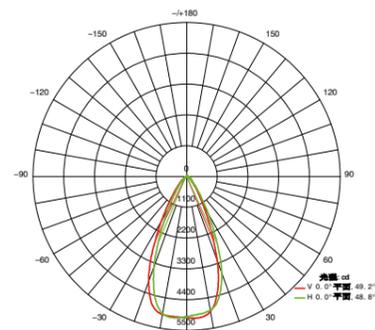

SL1150 45°

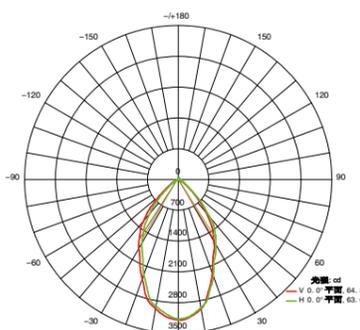

SL1150 60°



Flood Light Series

SL1140F


圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



一体压铸 相变液冷
Integrated die casting & phase change liquid cooling




SL1140S

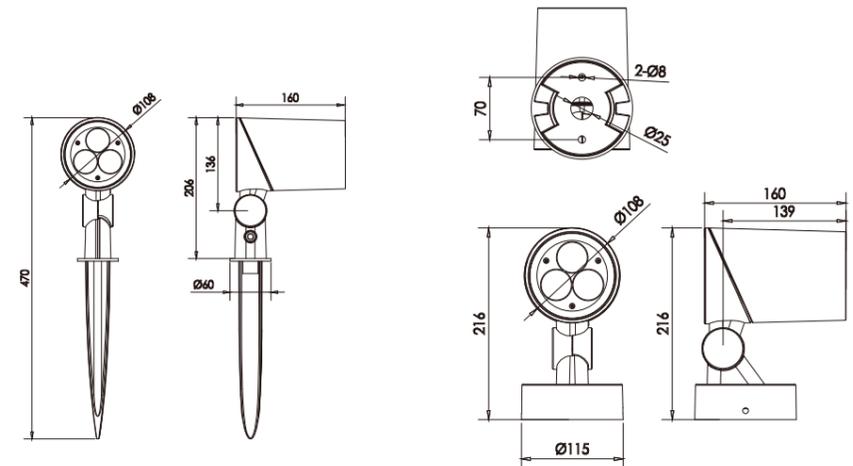





SL1140U

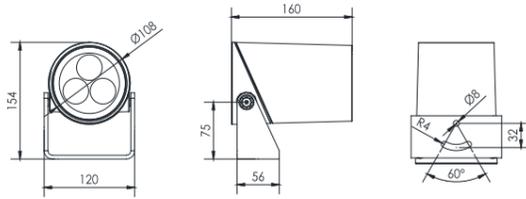


SL1140M

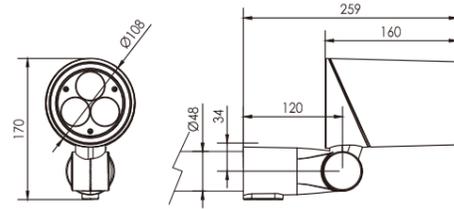

SL1140Z

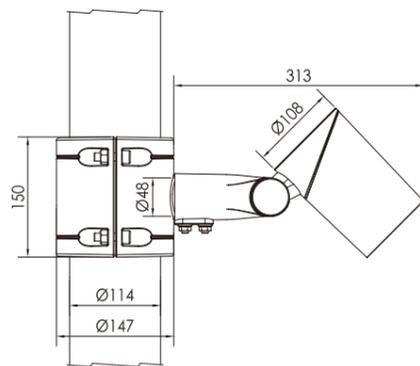


SL1140L



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4



SL1140H




适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm


技术参数 Specification

产品型号/ Product Code	SL1140FM-3	SL1140FI-3	SL1140FE-3	SL1140FF-3	SL1140F-C30	SL1140F-C20
Led品牌/ Led Brand	CREE	CREE XHP35	CREE XP-L	CREE RGBW 4in1	CREE COB	CREE COB
Led数量/ Led Quantity	3pcs	3pcs	3pcs	3pcs	1pcs	1pcs
额定功率/ Rated Power	30W	30W	30W	40W/30W(OSRAM)	30W	20W
输入电压/ Input Voltage	AC100-264V	AC100-264V	AC100-264V	DC24V	AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	/	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	Single	Single
发光角度/ Beam Rangle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	12° 24° 38° 45° 60°	
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	88pcs	88pcs	88pcs	88pcs	88pcs	88pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)



平均光束角 (50%) 8.2°
SL1140 6°

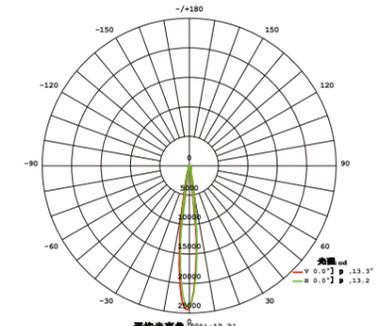

平均光束角 (50%) 13.2°
SL1140 12°







Flood Light Series

SL1143F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

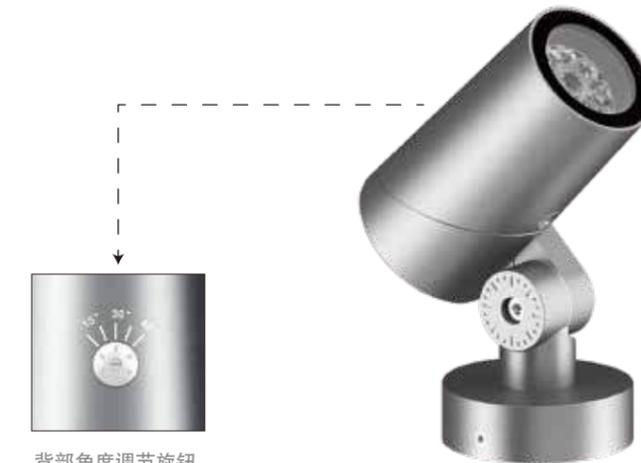


背部角度调节旋钮
Back angle adjustment knob

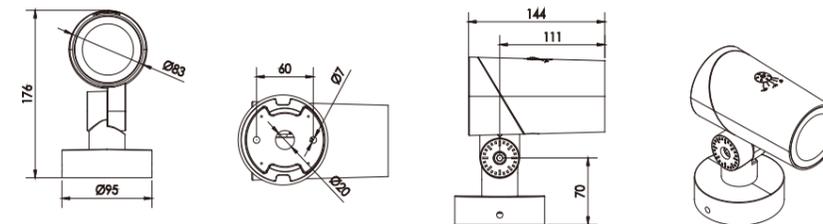


技术参数 Specification


产品型号/ Product Code	SL1143F-C16	SL1143F-C12
Led品牌/ Led Brand	CREE COB	CREE COB
Led数量/ Led Quantity	1pcs	1pcs
额定功率/ Rated Power	16W	12W
输入电压/ Input Voltage	AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Angle	20-50°	15-50°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	-25°C~50°C	-25°C~50°C
环境湿度/ Ambient Humidity	10%~90%	10%~90%

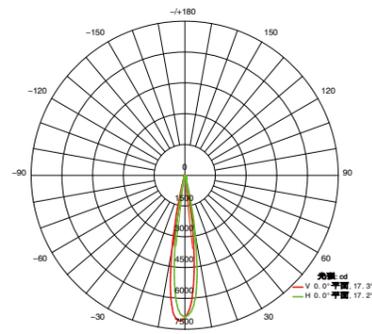

平均光束角 (50%) : 17.2°
SL1140 20°

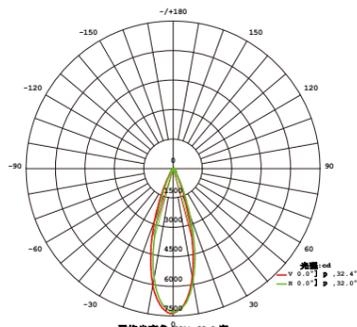

平均光束角 (50%) : 32.2°
SL1140 30°

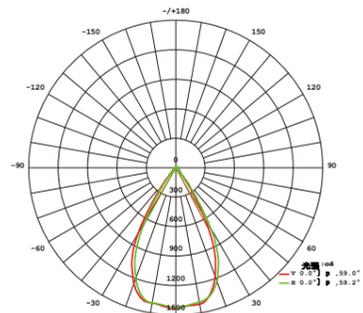


平均光束角 (50%) : 59.3°
SL1140 60°



Flood Light Series

SL1145F


蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

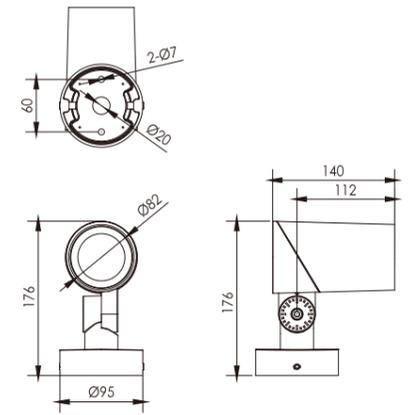


一体压铸 相变液冷
Integrated die casting phase change liquid cooling




SL1145U

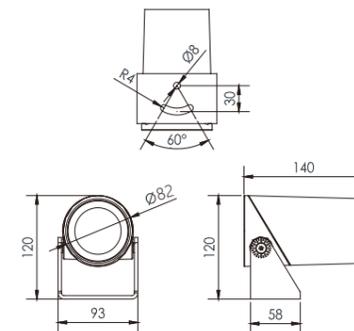


SL1145S



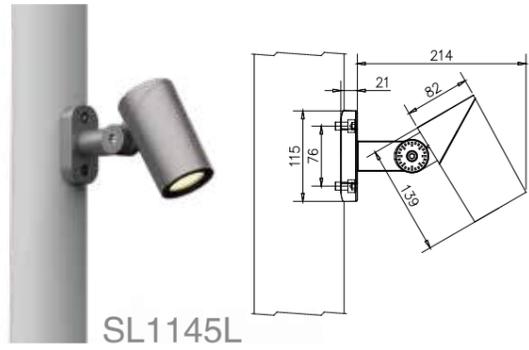


SL1145L

适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4

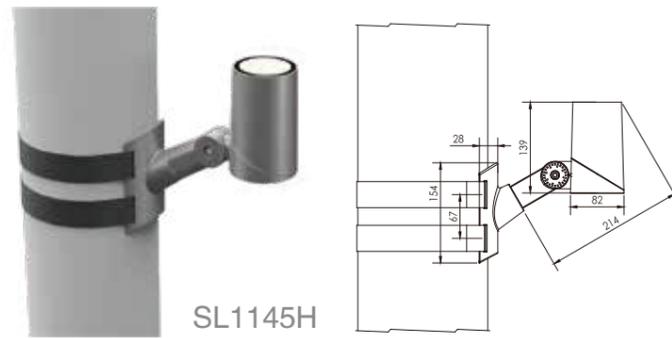


SL1145H

适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm

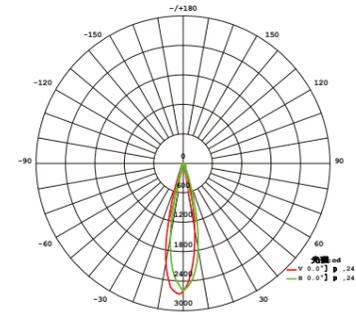

平均光束角(50%) 24.1°
SL1145 24°

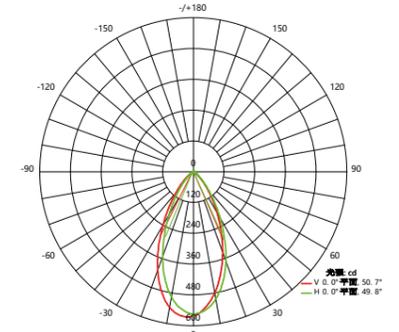


平均光束角(50%) 50.2°
SL1145 60°




技术参数 Specification

产品型号/ Product Code	SL1145FE-1	SL1145FF-1	SL1145F-C16	SL1145F-C12
Led品牌/ Led Brand	CREE XHP35	CREE RGBW 4IN1	CREE COB	CREE COB
Led数量/ Led Quantity	1pcs	1pcs	1pcs	1pcs
额定功率/ Rated Power	10W	12W/10W(OSRAM)	16W	12W
输入电压/ Input Voltage	AC100-264V	DC12V/DC24V	AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	/	50/60Hz	50/60Hz
颜色 / Color	Single	RGBW	Single	Single
发光角度/ Beam Rangle	8° 12° 20° 30° 45° 60° 10X45°	8° 25° 10x45°	15° 24° 36° 50°	12° 24° 38°
控制方式/ Control Mode	CC	DMX512	CC	CC
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25°C~50°C	-25°C~50°C	-25°C~50°C	-25°C~50°C
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	130pcs	9/18(pcs)	100(pcs)	110(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)

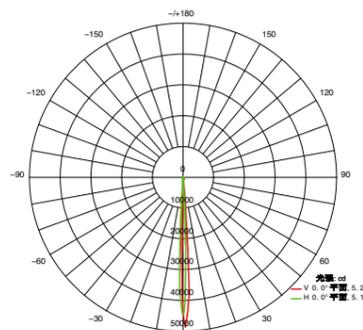

平均光束角(50%) 5.2°
SL1145 3°

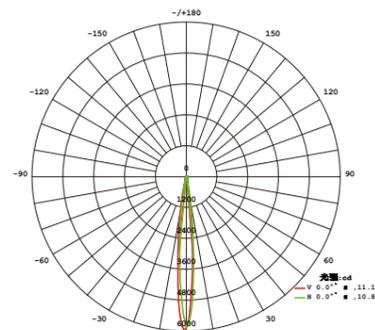


平均光束角(50%) 10.9°
SL1145 12°

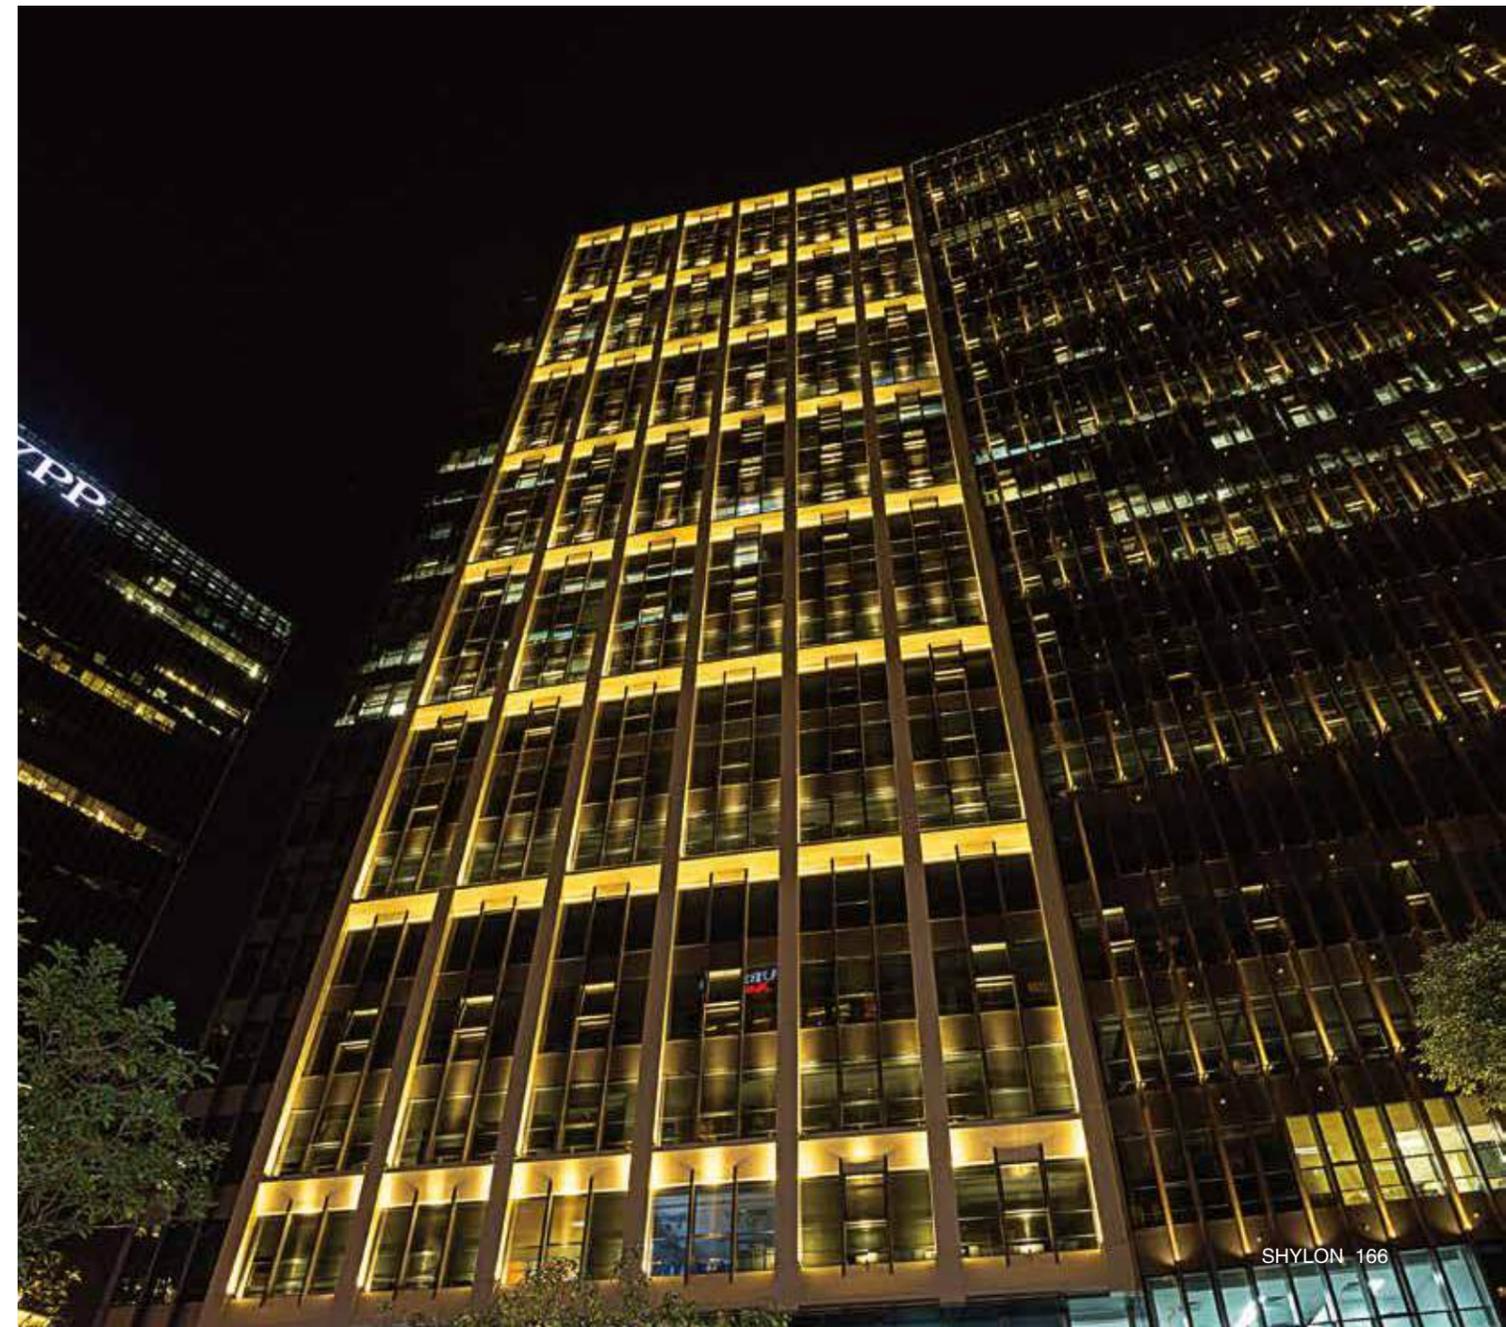

Flood Light Series


SL1146F

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



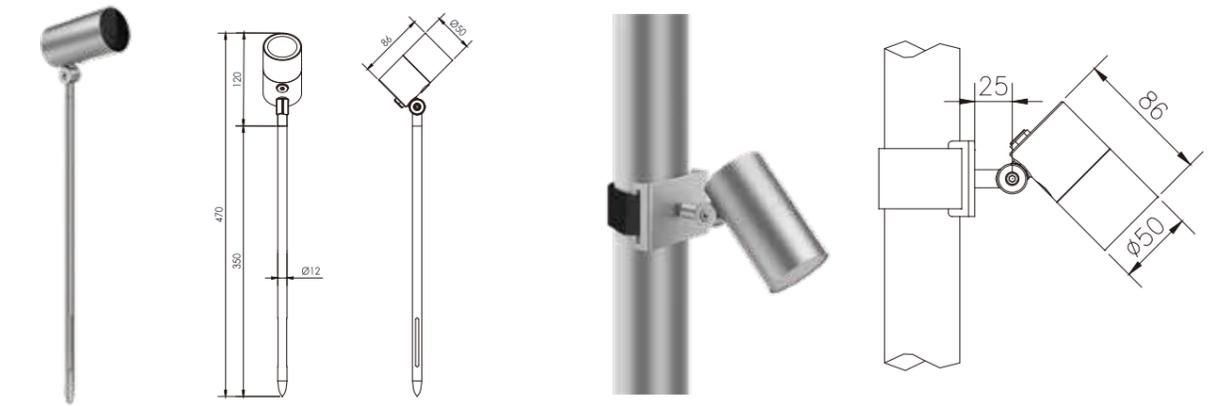


SL1146S

SL1146H
适配树杆尺寸(60-200)MM



SL1146C

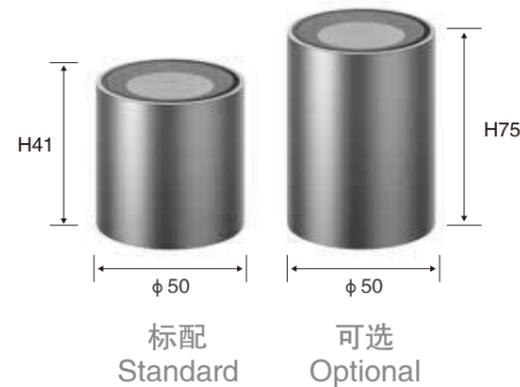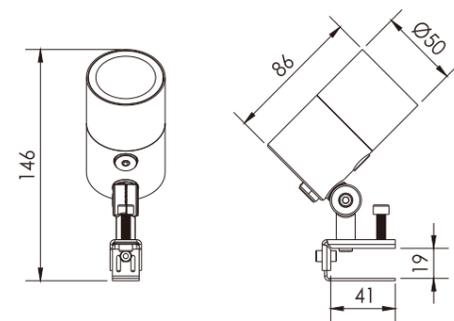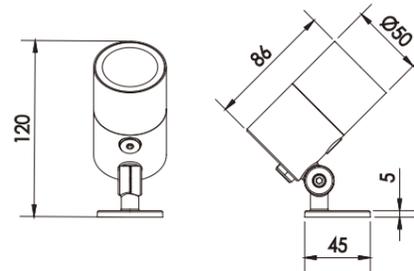

标配
Standard

可选
Optional

产品简介 Product Introduction

- 一、拥有自主知识产权的原创新设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、 Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、 With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、 Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、 Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、 Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1146FM-1	SL1146FE-1	SL1146FF-1
Led品牌/ Led Brand	CREE	CREE XP-L	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	10W	10W	10W
输入电压/ Input Voltage	AC100-264V/DC12V/DC24V	AC100-264V/DC12V/DC24V	DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC	CC	DMX512
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	120pcs/12pcs	64pcs	64pcs

Flood Light Series

SL1147F

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics









SL1147C



SL1147S

SL1147H
适配树杆尺寸(60-200)MM

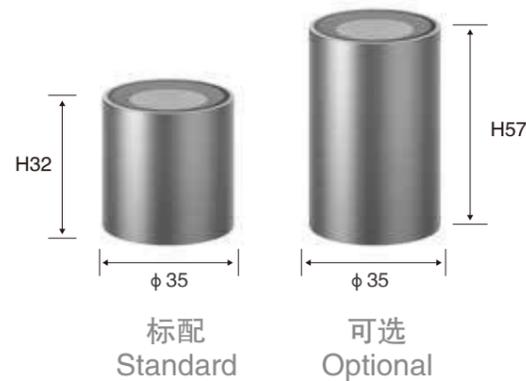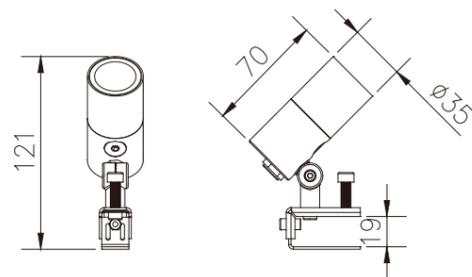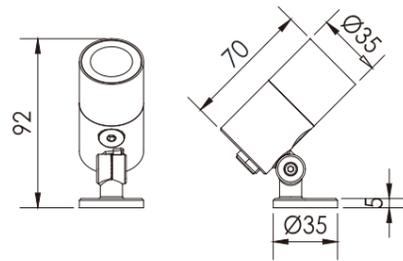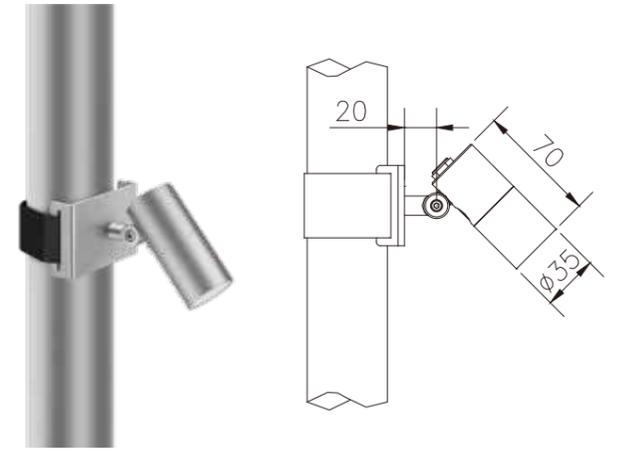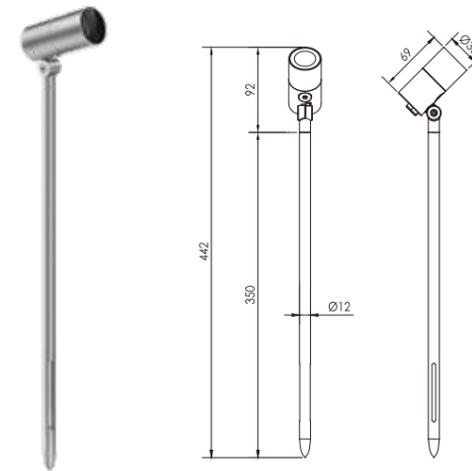

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号 / Product Code	SL1147FM-1	SL1147FE-1	SL1147FF-1
Led品牌 / Led Brand	CREE	CREE	CREE RGBW 4 in 1
Led数量 / Led Quantity	1pcs	1pcs	1pcs
额定功率 / Rated Power	6W	6W	6W
输入电压 / Input Voltage	AC100-264V防水防雷阻气线 / DC12V/DC24V		DC12V/DC24V
频率 / Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	Single	Single	RGBW
发光角度 / Beam Angle	6°	12.5° 20° 30° 60° 15x30° 10x60°	20° 45° 60° 15x60° 15x25°
控制方式 / Control Mode	CC	CC	DMX512
使用寿命 / Life	50000H	50000H	50000H
防护等级 / Protection Grade	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量 / In series(max)	120pcs/12pcs	120pcs/12pcs	64pcs


Flood Light Series

SL1148F


圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

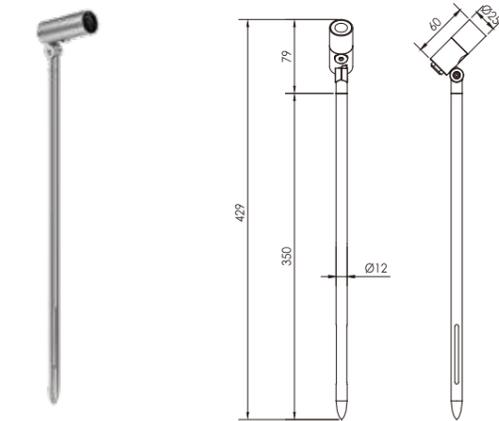




SL1148S

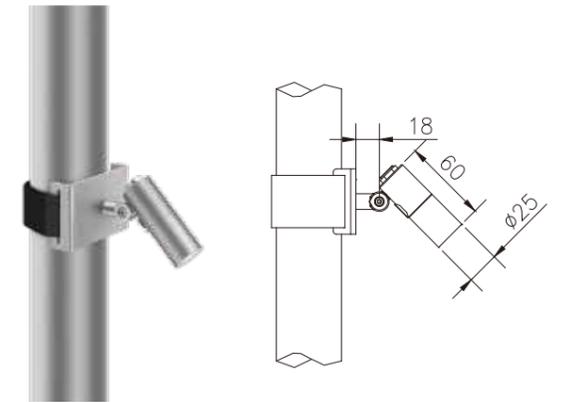

SL1148H
适配树杆尺寸(60-200)MM



SL1148C

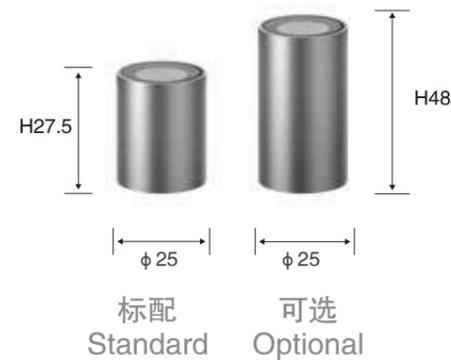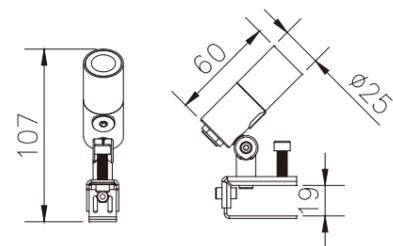

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1148FE-1
Led品牌/ Led Brand	CREE XP-E
Led数量/ Led Quantity	1pcs
额定功率/ Rated Power	3W
输入电压/ Input Voltage	DC12V/DC24V
频率/ Frequency Range	50/60Hz
颜色/ Color	Single
发光角度/ Beam Angle	20° 30° 45° 60° 25x45°
控制方式/ Control Mode	CC
使用寿命/ Life	50000H
防护等级/ Protection Grade	IP66
环境温度/ Ambient Temperature	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%
串联数量/ In series(max)	220pcs/22pcs

Flood Light Series





SL1155

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

LED 恒功率全色域染色灯

Dopamine


多巴胺色彩



遮光罩/Visor


技术参数 Specification

产品型号/ Product Code	SL1155M-36	SL1155E-36	SL1155N-36KP	SL1155Q-36KP	SL1155F-36
Led品牌/ Led Brand	CREE	LUMILEDS	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	RGBW 4in1
Led数量/ Led Quantity	36pcs	36pcs	36pcs	36pcs	36pcs
额定功率/ Rated Power	150W(single)/200W(RGBW)	150W	200W	200W	200W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber/RGBW	Single	RGBWCLA	RGBW	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	10° 15° 20° 30° 15x60°	5° 10° 15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25°C~50°C	-25°C~50°C	-25°C~50°C	-25°C~50°C	-25°C~50°C
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

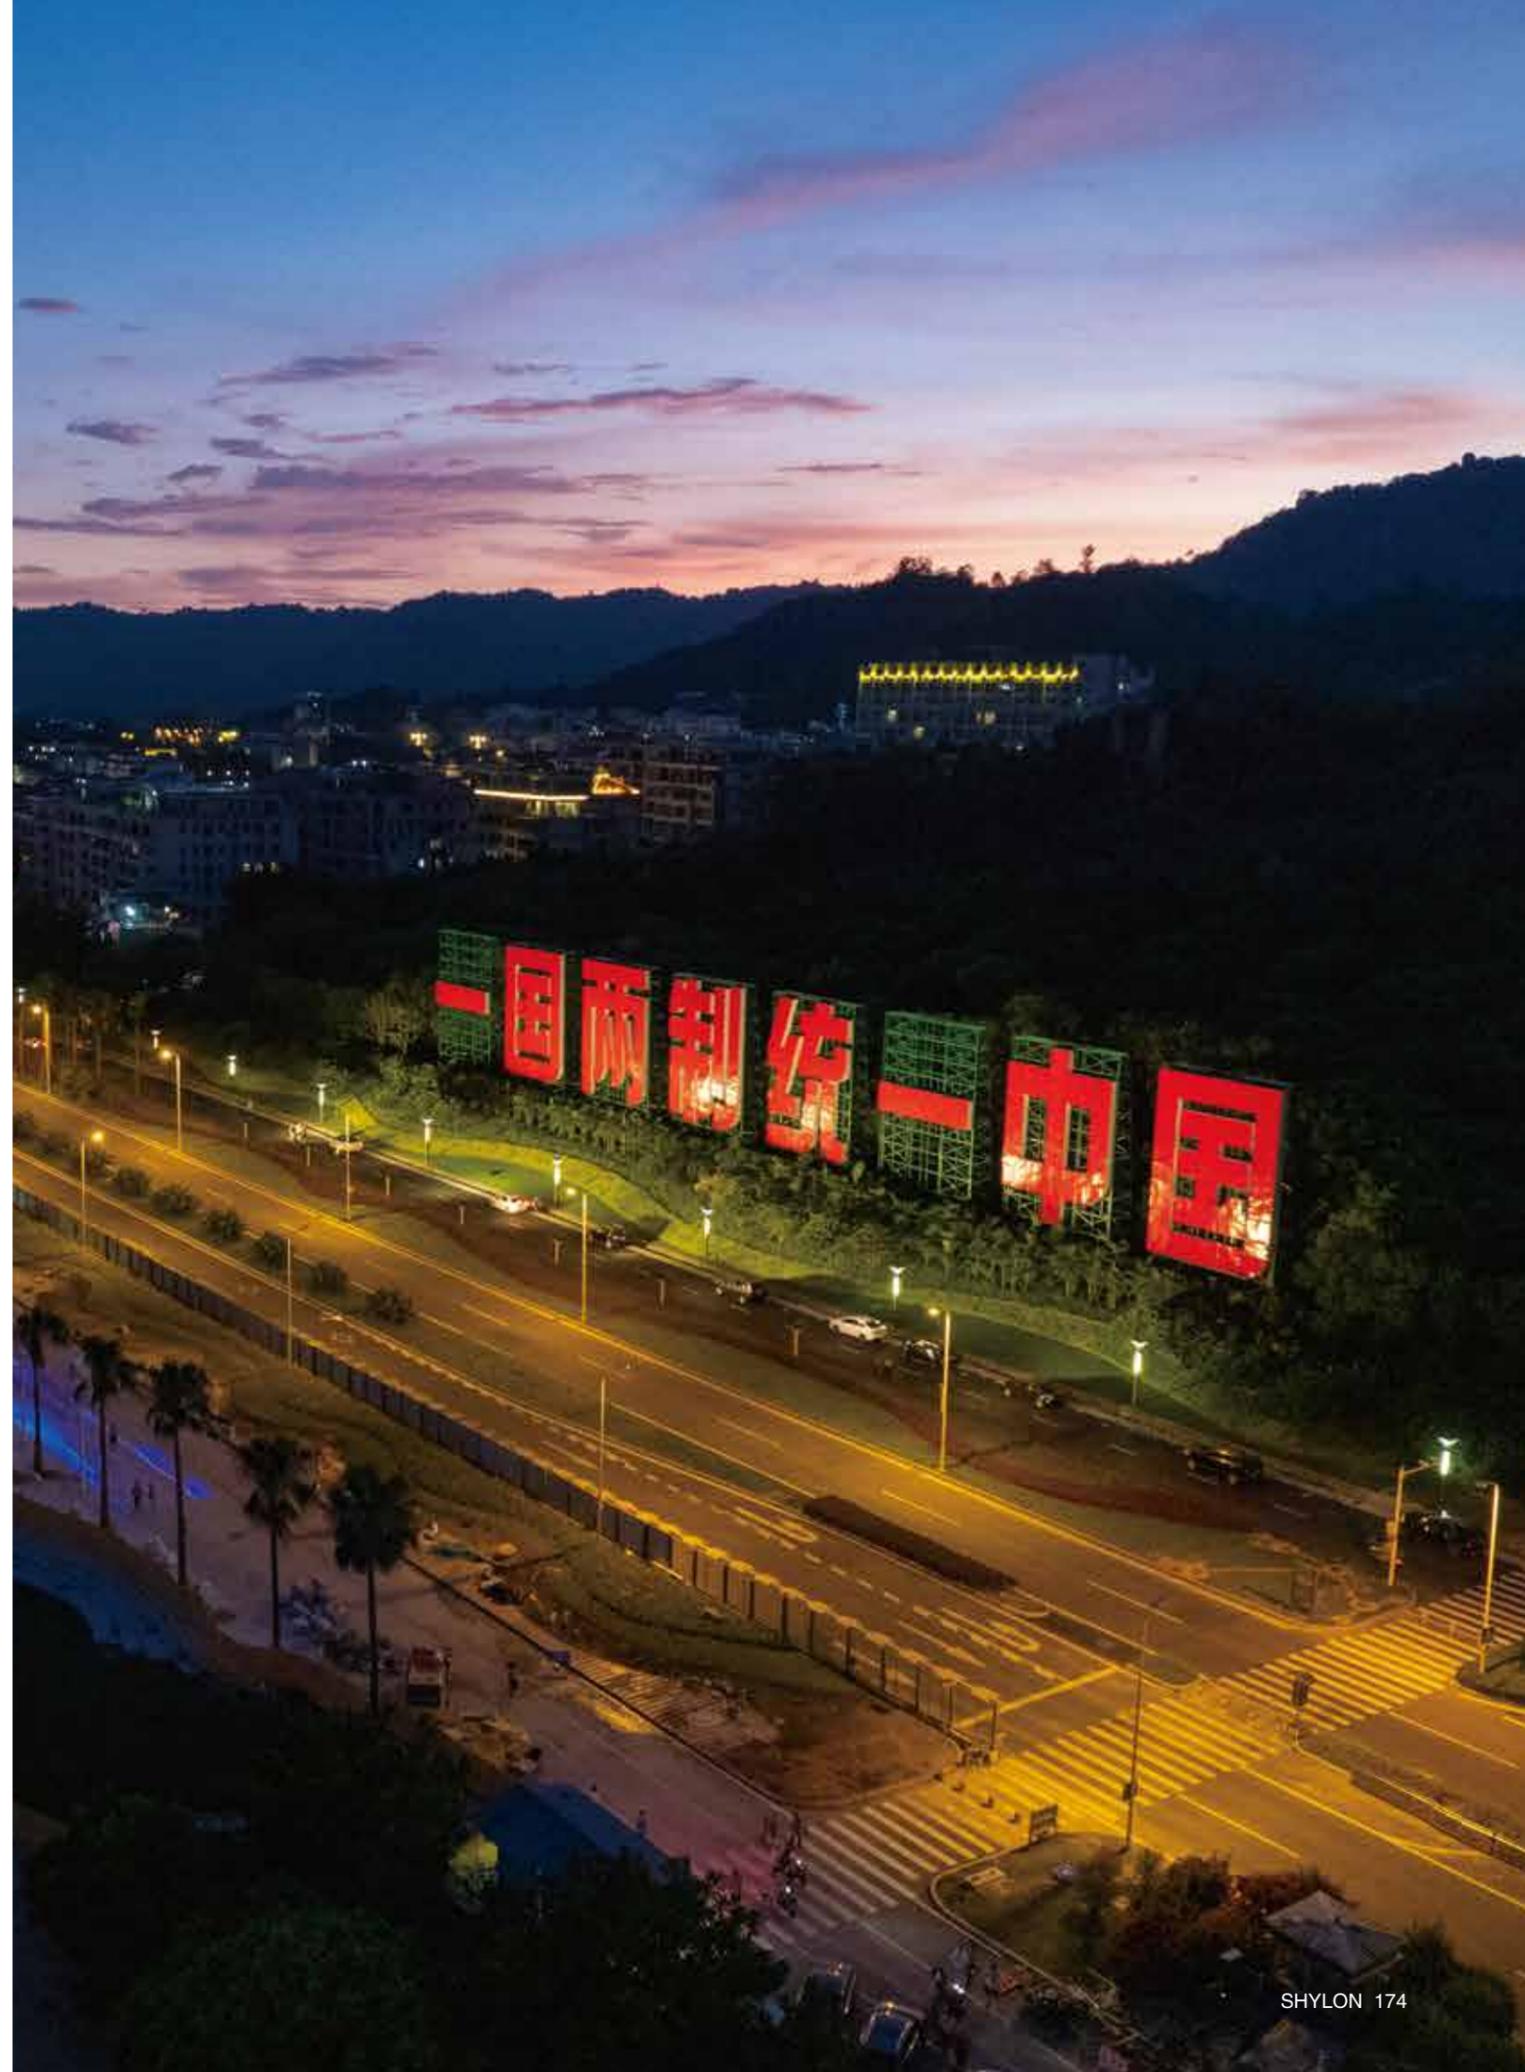





SL1155-26-06-06

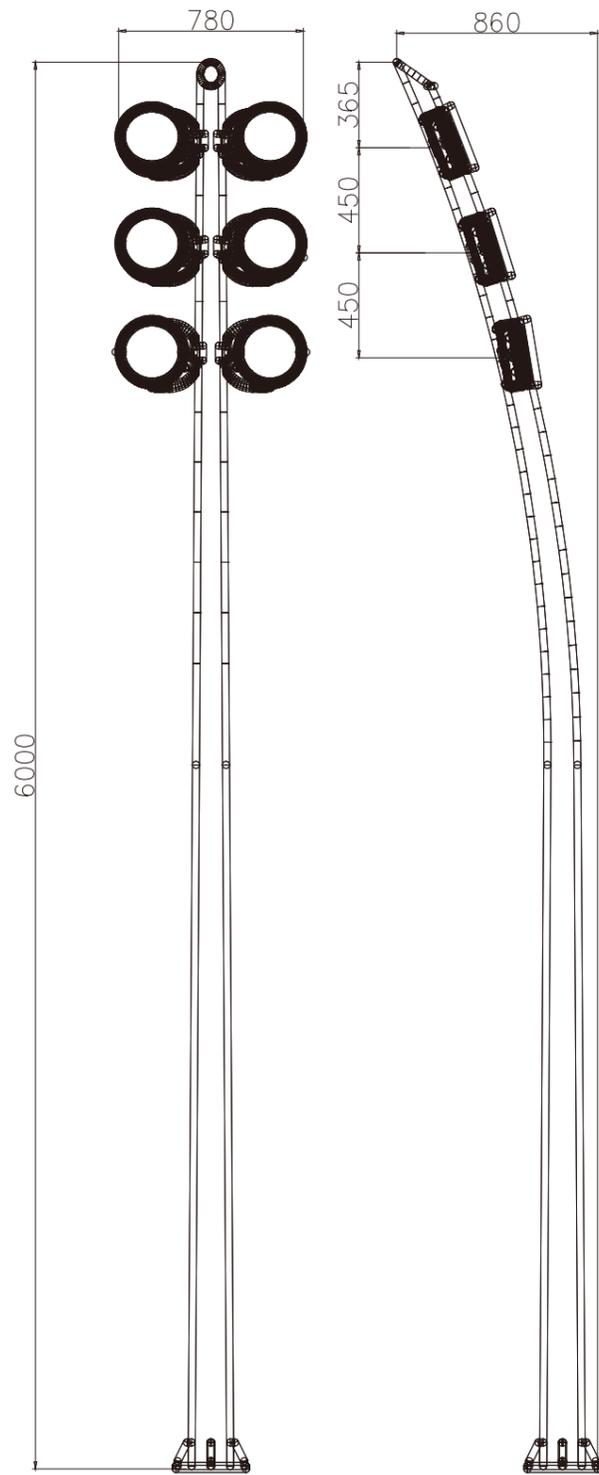

SL1155-26-04-04

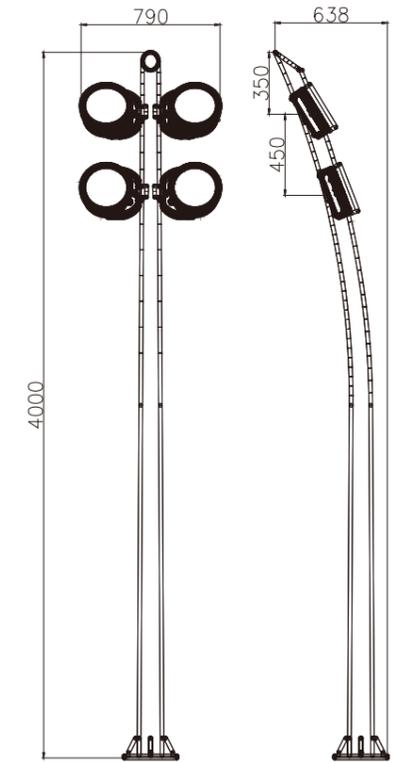

SL1155-26-05-04

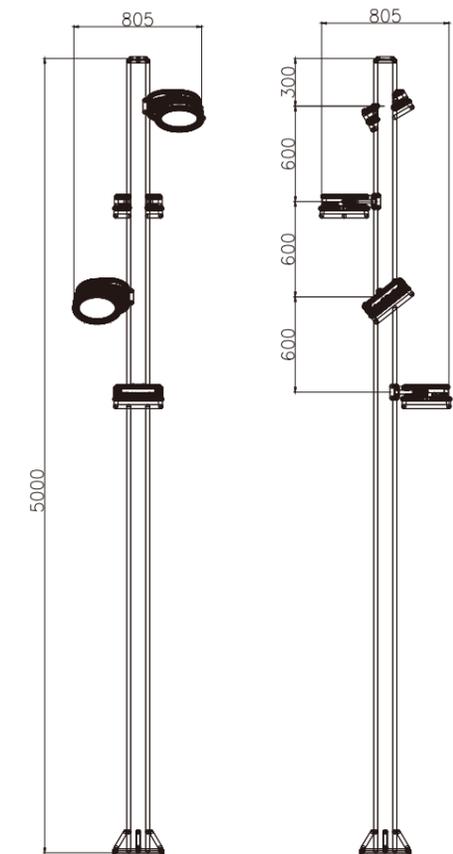

Flood Light Series


SL1156

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

LED 恒功率全色域染色灯

Dopamine

多巴胺色彩

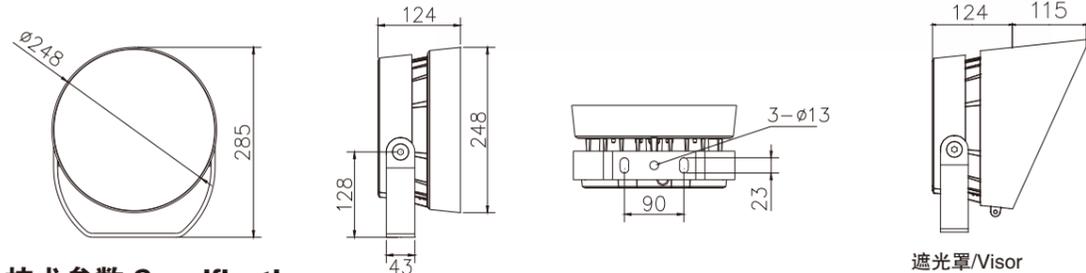

遮光罩/Visor

技术参数 Specification

产品型号/ Product Code	SL1156M-24	SL1156E-24	SL1156N-24KP	SL1156Q-24KP	SL1156F-24
Led品牌/ Led Brand	CREE	LUMILEDS	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	RGBW 4in1
Led数量/ Led Quantity	24pcs	24pcs	24pcs	24pcs	24pcs
额定功率/ Rated Power	100W(single)/150W(RGBW)	100W	150W	150W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	RGBWCLA	RGBW	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	10° 15° 20° 30° 15x60°	5° 10° 15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25°C~50°C	-25°C~50°C	-25°C~50°C	-25°C~50°C	-25°C~50°C
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

Flood Light Series


SL1157

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

LED 恒功率全色域染色灯

Dopamine

多巴胺色彩

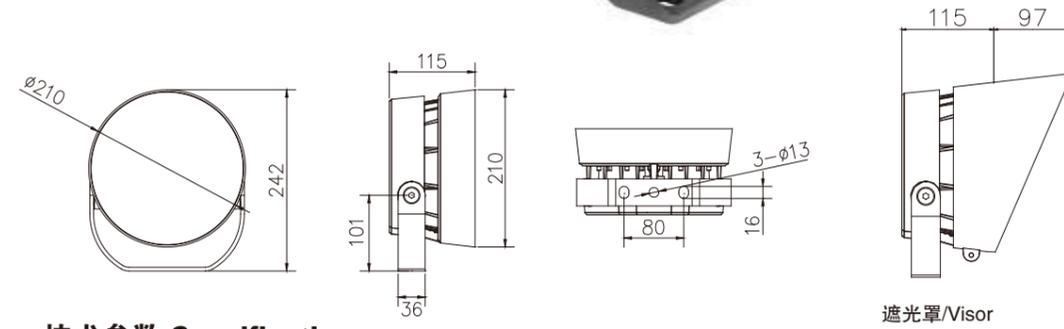

遮光罩/Visor


技术参数 Specification

产品型号/ Product Code	SL1157M-18	SL1157E-18	SL1157N-18KP	SL1157Q-18KP	SL1157F-18
Led品牌/ Led Brand	CREE	LUMILEDS	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	RGBW 4in1
Led数量/ Led Quantity	18pcs	18pcs	18pcs	18pcs	18pcs
额定功率/ Rated Power	75W(single)/100W(RGBW)	75W	100W	100W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	RGBWCLA	RGBW	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	10° 15° 20° 30° 15x60°	5° 10° 15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25°C~50°C	-25°C~50°C	-25°C~50°C	-25°C~50°C	-25°C~50°C
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

Flood Light Series

SL1158

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

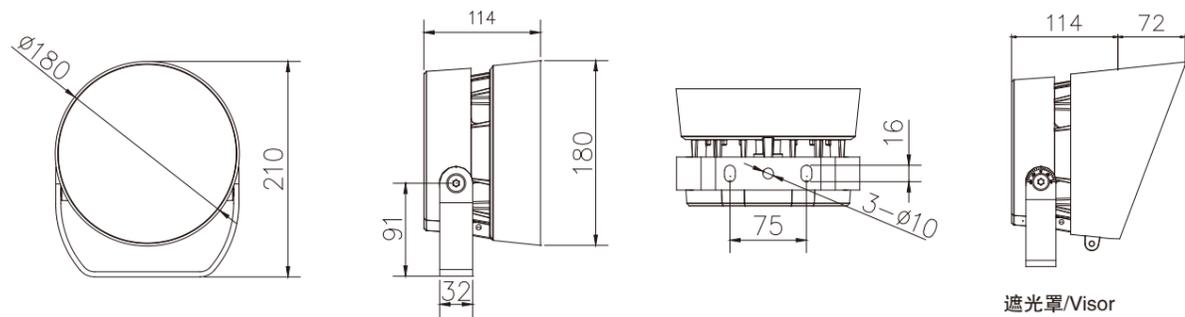

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1158M-12	SL1158E-12	SL1158F-12	SL1158M-9	SL1158E-9
Led品牌/ Led Brand	CREE	LUMILEDS	RGBW 4in1	CREE	LUMILEDS
Led数量/ Led Quantity	12pcs	12pcs	12pcs	9pcs	9pcs
额定功率/ Rated Power	50W	50W	75W	36W	36W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber	Single	RGBW	Single	Single
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	9° 15° 20° 30° 45° 15x60°	2.5°	8° 12° 20° 30° 45° 60° 15X60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1158F-9				
Led品牌/ Led Brand	RGBW 4in1				
Led数量/ Led Quantity	9pcs				
额定功率/ Rated Power	60W				
输入电压/ Input Voltage	AC100-305V				
频率/ Frequency Range	50/60Hz				
颜色 / Color	RGBW				
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15X60°				
控制方式/ Control Mode	DMX512/RDM				
使用寿命/ Life	80000H				
防护等级/ Protection Grade	IP66				
环境温度/ Ambient Temperature	-25℃~50℃				
环境湿度/ Ambient Humidity	10%~90%				

Flood Light Series

SL1159

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

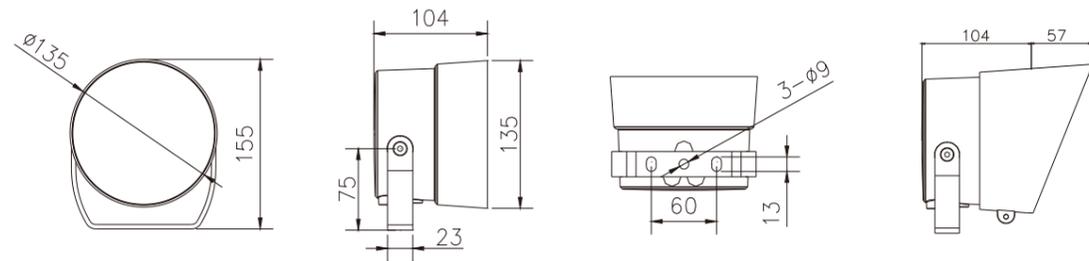


技术参数 Specification

产品型号/ Product Code	SL1159M-6	SL1159E-6	SL1159F-6
Led品牌/ Led Brand	CREE	LUMILEDS	RGBW 4in1
Led数量/ Led Quantity	6pcs	6pcs	6pcs
额定功率/ Rated Power	25W	25W	36W
输入电压/ Input Voltage	DC24/AC100-305V	AC100-305V	DC24/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber	Single	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%

Flood Light Series

SL1160

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

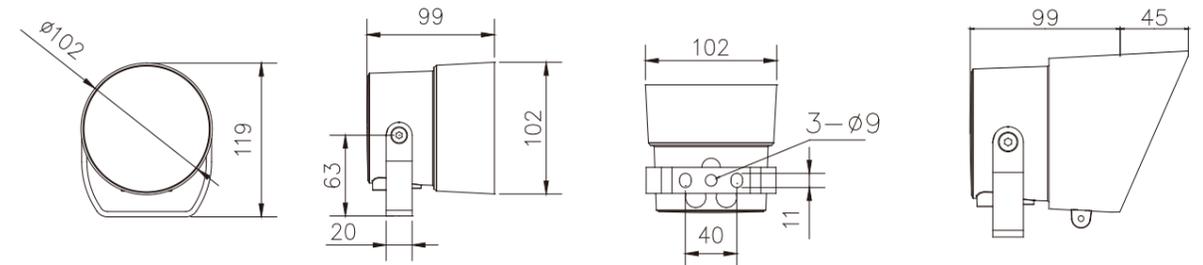


技术参数 Specification

产品型号/ Product Code	SL1160M-3	SL1160E-3	SL1160F-3
Led品牌/ Led Brand	CREE	LUMILEDS	RGBW 4in1
Led数量/ Led Quantity	3pcs	3pcs	3pcs
额定功率/ Rated Power	15W	20W	20W
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC24/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber	Single	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%



Flood Light Series

SL1102U



蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



SL1102S



SL1102G



产品简介 Product Introduction



- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1102UD-36	SL1102UC-36	SL1102UB-36	SL1102UC-24
Led品牌/ Led Brand	CREE XP-G3	CREE	CREE	CREE
Led数量/ Led Quantity	36pcs	36pcs	36pcs	24pcs
额定功率/ Rated Power	105W	86W	60W	50W
输入电压/ Input Voltage	AC100-240V	DC24V/AC100-240V		DC36V/AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°			
控制方式/ Control Mode	CC	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	12pcs	1/15(pcs)	2/22(pcs)	4/26(pcs)











配光曲线 (半角) Distribution Curve Flux (SBC Case)

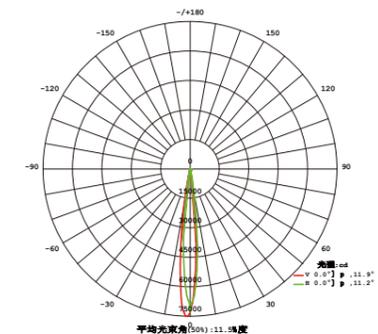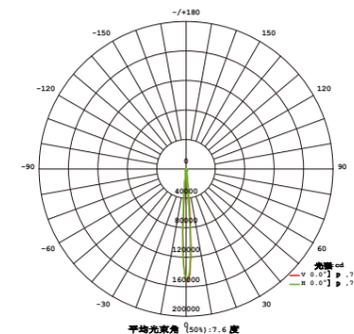

Flood Light Series

SL1102F

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

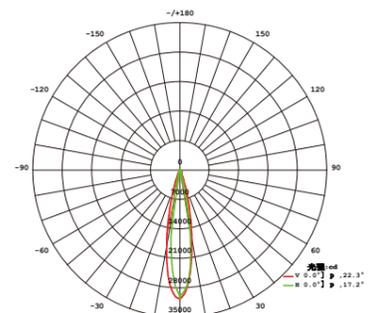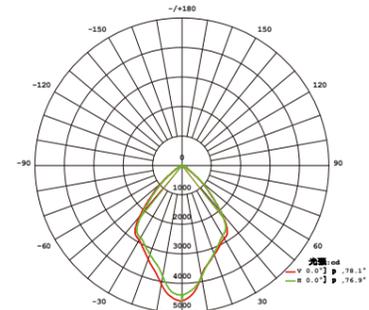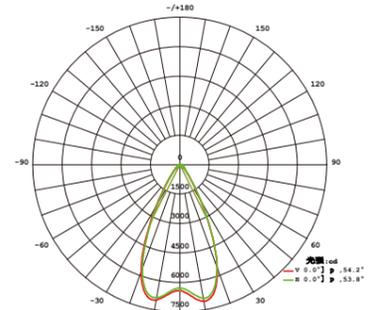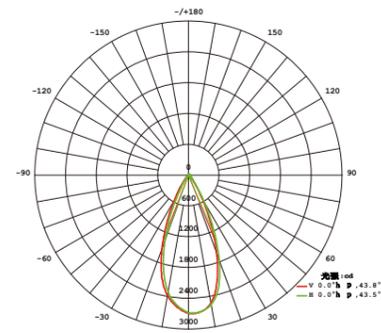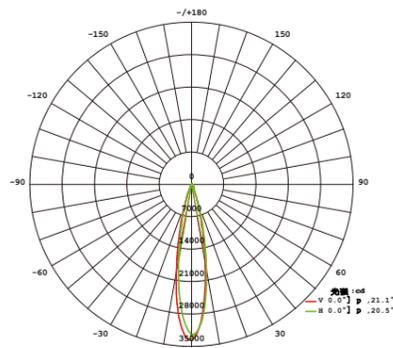

SL1102X

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.







技术参数 Specification

产品型号/ Product Code	SL1102FD-36	SL1102FC-36	SL1102FB-36	SL1102FC-24
Led品牌/ Led Brand	CREE	CREE	CREE	CREE
Led数量/ Led Quantity	36pcs	36pcs	36pcs	24pcs
额定功率/ Rated Power	105W	86W	60W	50W
输入电压/ Input Voltage	AC100-240V	AC100-240V		AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°			
控制方式/ Control Mode	CC	CC	CC	CC
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	12pcs	15pcs	22pcs	26pcs

Flood Light Series

SL1103U

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

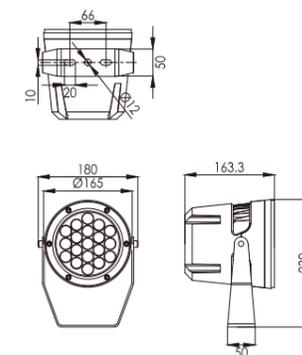

SL1103G

SL1103S



产品简介 Product Introduction



- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL1103UC-18	SL1103UB-18	SL1103UA-18
LED品牌 LED Brand	CREE XP-G3	CREE	CREE
LED数量 LED Quantity	18pcs	18pcs	18pcs
额定功率 Rated Power	45W	30W	21W
输入电压 Input Voltage	AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	RGB/Single	RGB/Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°		
控制方式 Control Mode	CC	DMX512/CC	DMX512/CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%
串联数量/ In series(max)	28pcs	4/44(pcs)	7/60(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

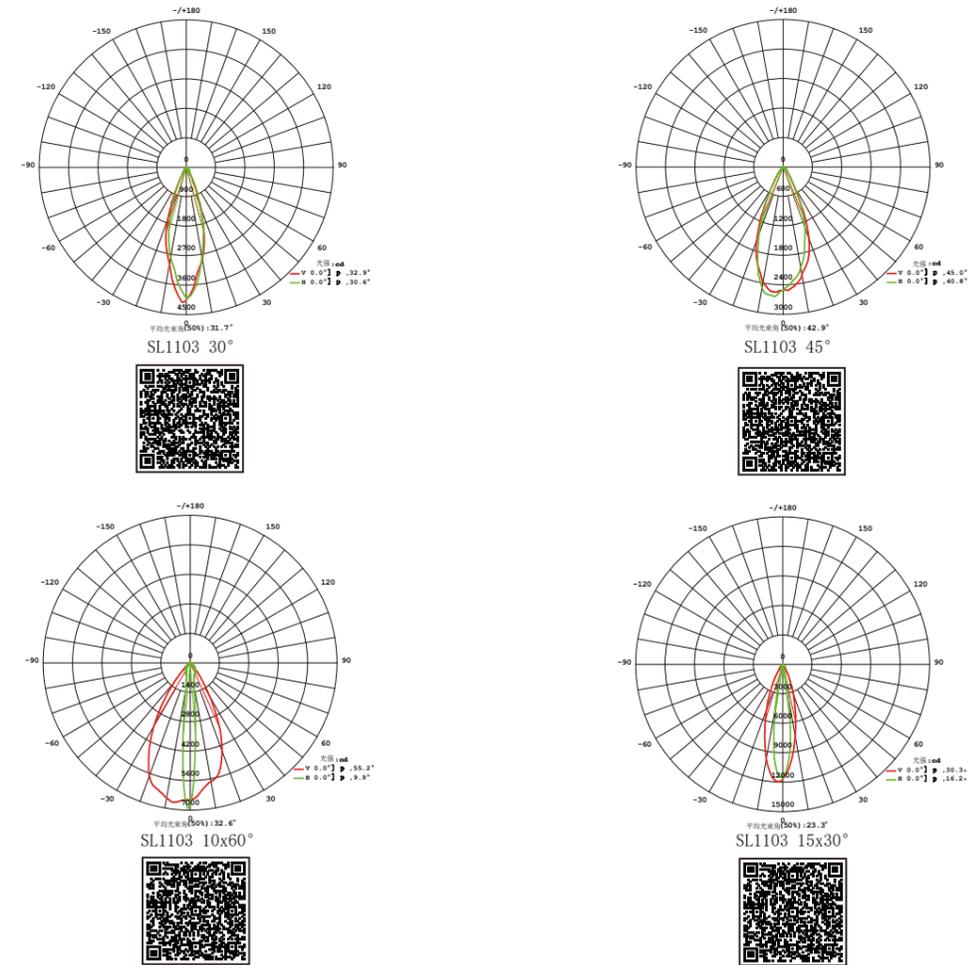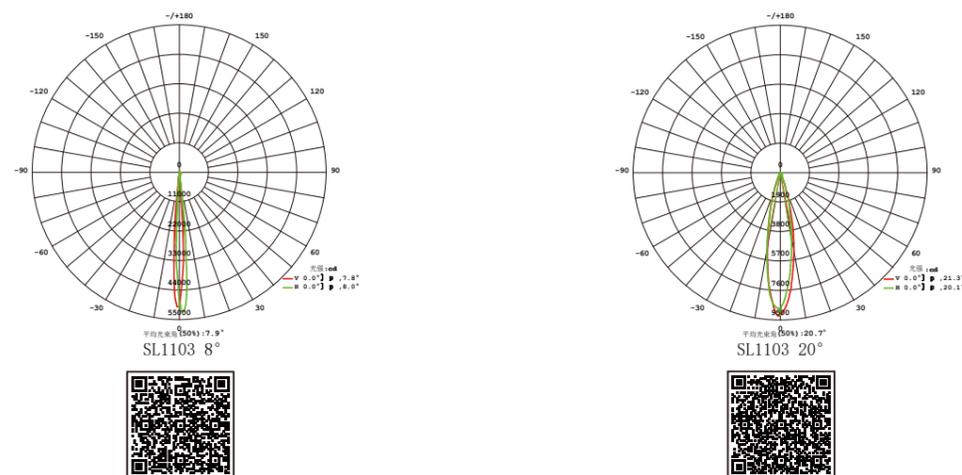


Flood Light Series

SL1103F



蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



SL1103M



SL1103X

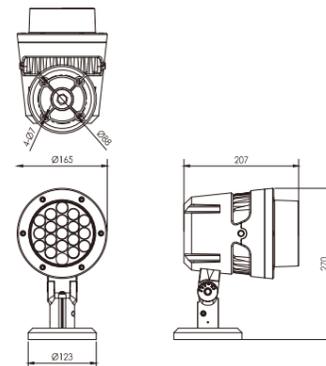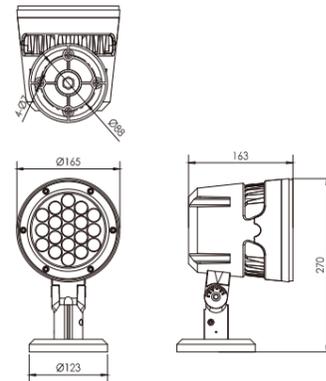

技术参数 Specification



产品型号/Product Code	SL1103FC-18	SL1103FB-18	SL1103FA-18
LED品牌 LED Brand	CREE XP-G3	CREE	CREE
LED数量 LED Quantity	18pcs	18pcs	18pcs
额定功率 Rated Power	45W	30W	21W
输入电压 Input Voltage	AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	RGB/Single	RGB/Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°		
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%
串联数量/ In series(max)	28pcs	4/44pcs	7/60pcs





Flood Light Series

SL1104U



蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



SL1104G



SL1104S



产品简介 Product Introduction



- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL1104UB-9	SL1104UA-9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	20W	11W
输入电压/Input Voltage	DC12V/AC100-240V	DC12V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP66	IP66
环境温度/Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/66(pcs)	6/120(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)

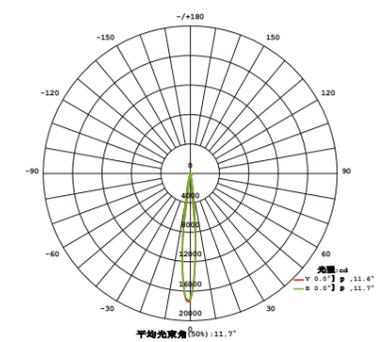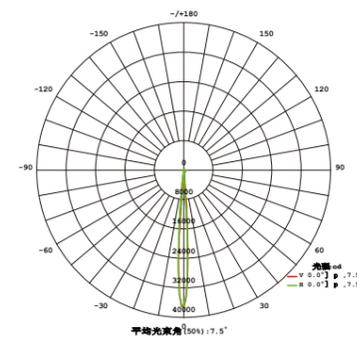


Flood Light Series

SL1104F


蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

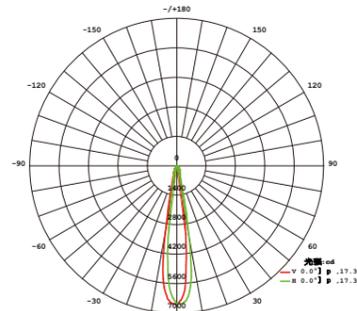


平均光束角 (50%) : 17.3°
SL1104 15°

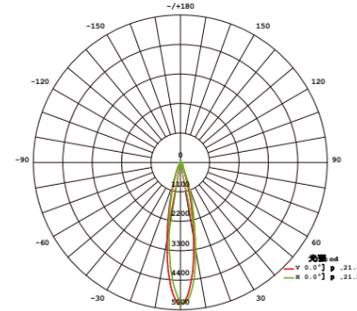


平均光束角 (50%) : 21.3°
SL1104 20°

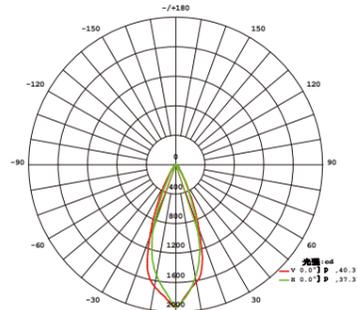


平均光束角 (50%) : 30.0°
SL1104 30°

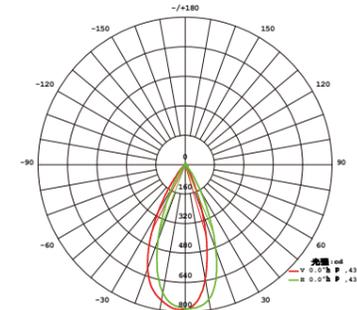

平均光束角 (50%) : 43.0°
SL1104 45°

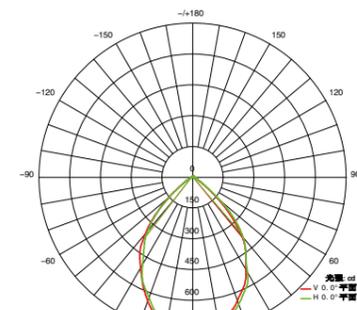


平均光束角 (50%) : 79.4°
SL1104 60°

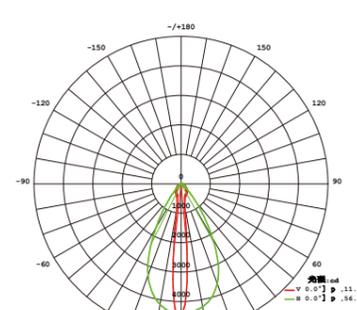


平均光束角 (50%) : 33.8°
SL1104 10x60°



SL1104M





SL1104X

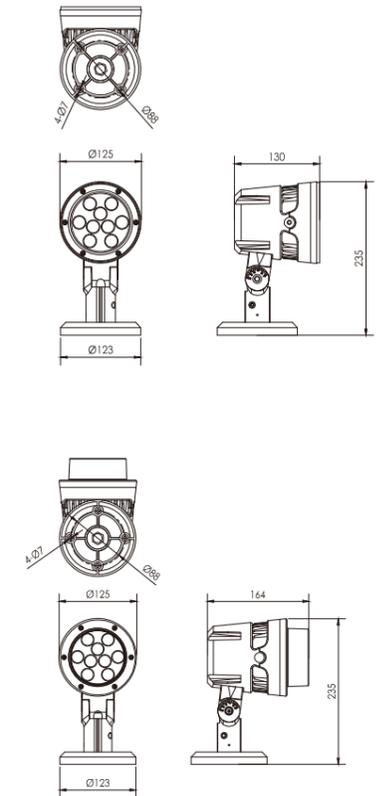

技术参数 Specification

产品型号/Product Code	SL1104FB-9	SL1104FA-9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	20W	11W
输入电压/Input Voltage	AC100-240V	AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	Single	Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式/Control Mode	CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP66	IP66
环境温度/Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	61pcs	110pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

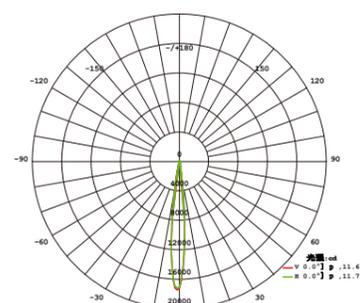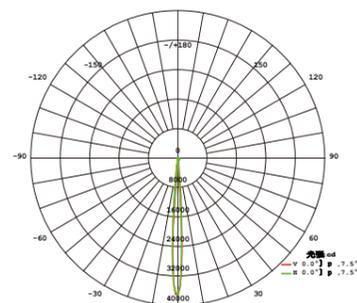



Flood Light Series

SL1105U

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



SL1105S

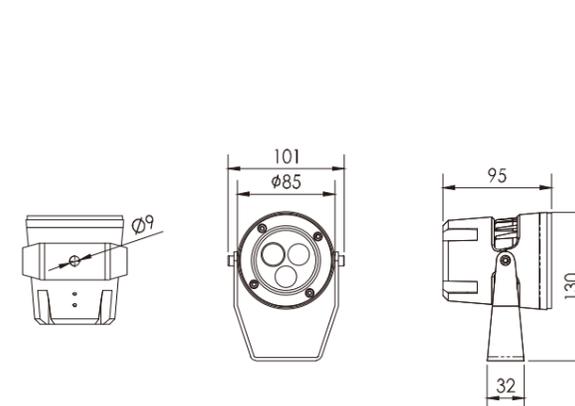

产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号Product Code	SL1105UC-3	SL1105UB-3	SL1105UA-3	SL1105U-C10
LED品牌LED Brand	CREE	CREE	CREE	CREE COB
LED数量LED Quantity	3pcs	3pcs	3pcs	1pc
额定功率Rated Power	8W	6W	3.5W	8W
输入电压Input Voltage	DC12V/AC100-240V	DC12V/AC100-240V	DC12V/AC100-240V	DC12V/AC100-240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色Color	RGB/Single	RGB/Single	RGB/Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°			25°
控制方式Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)

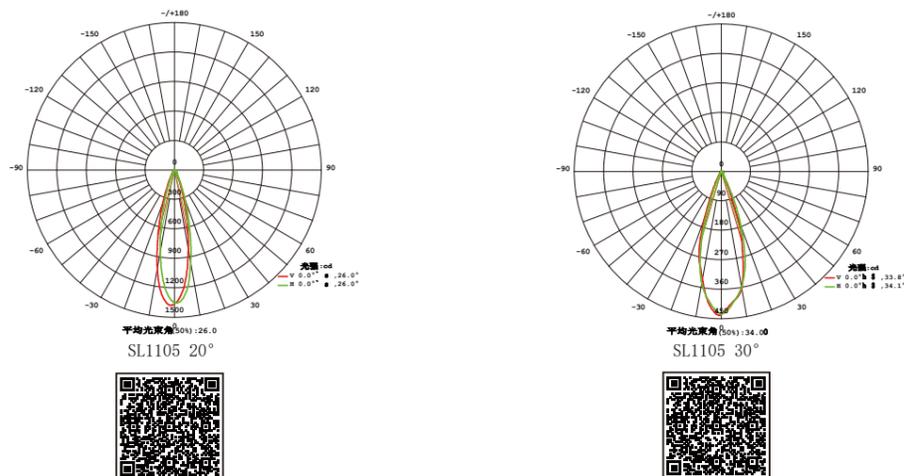

Flood Light Series

SL1105F

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号Product Code	SL1105FC-3	SL1105FB-3	SL1105FA-3	SL1105F-C10
LED品牌LED Brand	CREE	CREE	CREE	CREE COB
LED数量LED Quantity	3pcs	3pcs	3pcs	1pc
额定功率Rated Power	8W	6W	3.5W	8W
输入电压Input Voltage	AC100-240V	AC100-240V	AC100-240V	AC100-240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色Color	Single	Single	Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°			25°
控制方式Control Mode	CC	CC	CC	CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)

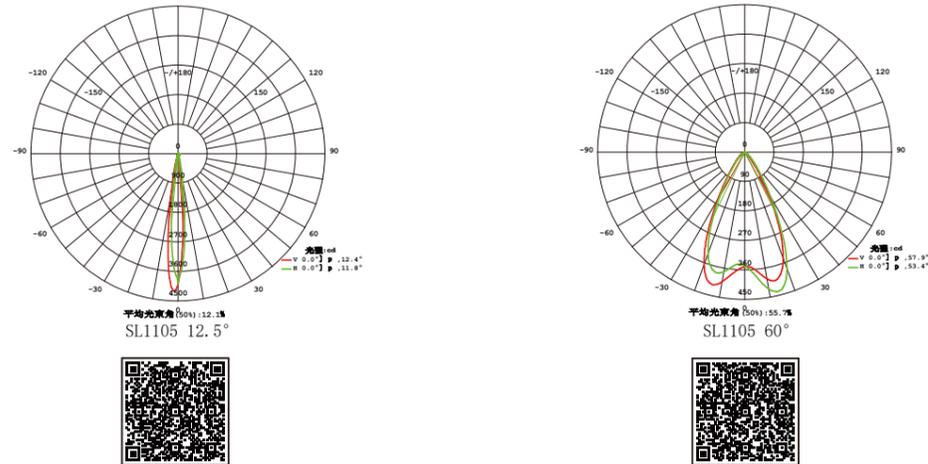


接线示意图 Wiring Diagram

RGB A 型

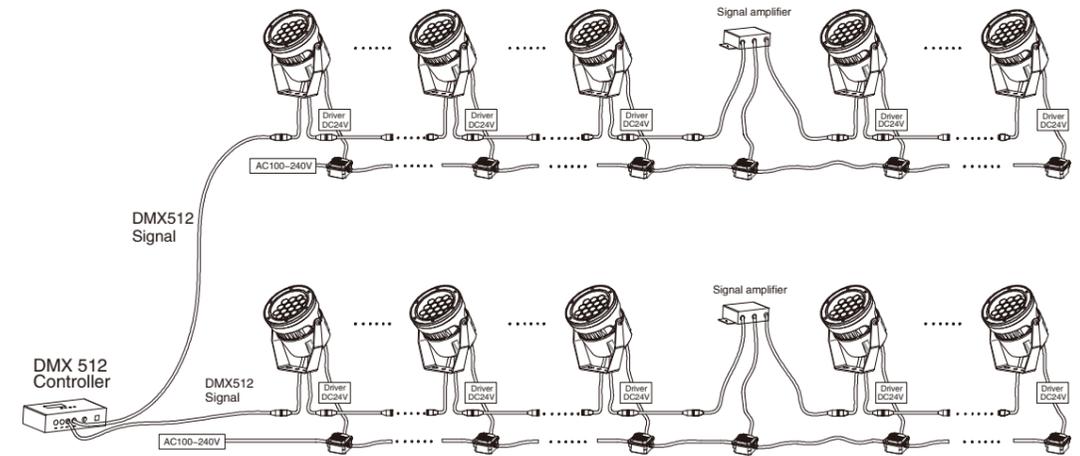

RGB B 型

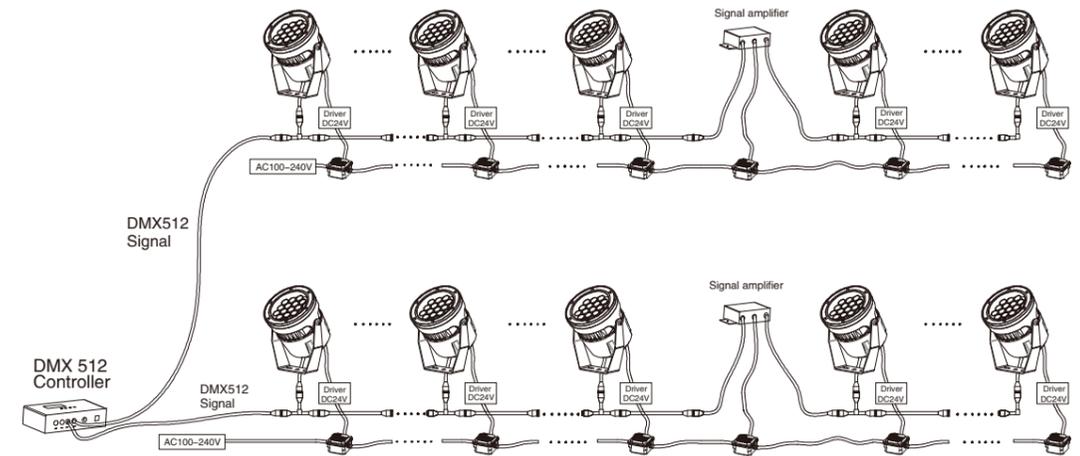



单色 (Single Color)







Flood Light Series

SL1125F

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

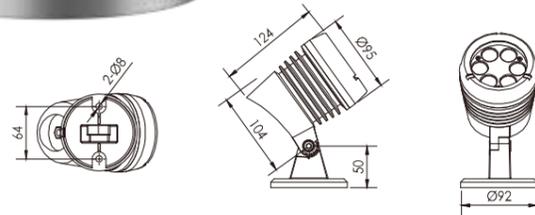

配光曲线 (全角) Distribution Curve Flux (SBC Case)

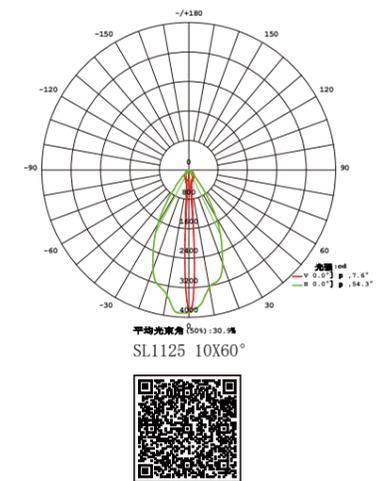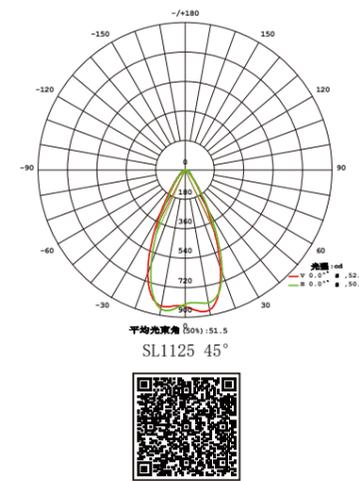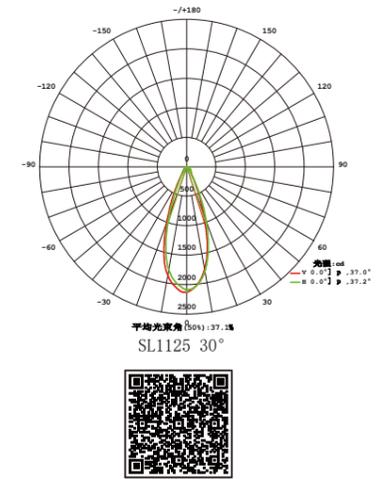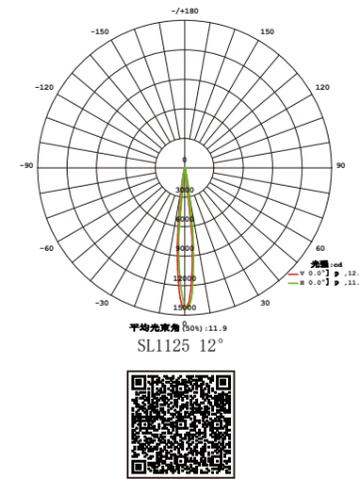

技术参数 Specification

产品型号Product Code	SL1125FC-7	SL1125FB-6	SL1125FA-6	SL1125F-C12
LED品牌LED Brand	CREE	CREE	CREE	CREE COB
LED数量LED Quantity	7pcs	6pcs	6pcs	1pc
额定功率Rated Power	16W	11W	7W	12W
输入电压Input Voltage	AC100-240V	AC100-240V	AC100-240V	AC100-240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色Color	Single	Single	Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°			15°
控制方式Control Mode	CC	CC	CC	CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%






Flood Light Series

SL1126F

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



配光曲线 (全角) Distribution Curve Flux (SBC Case)

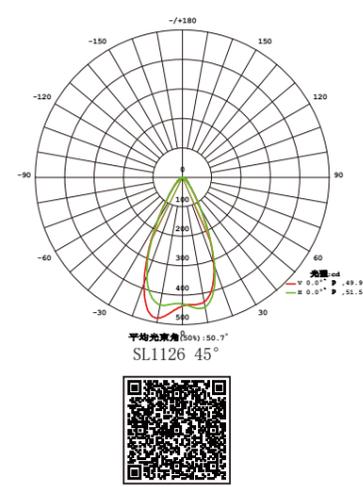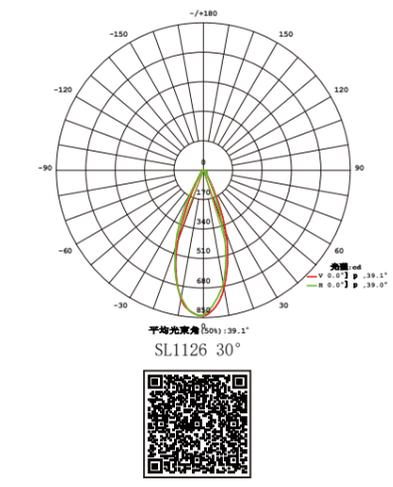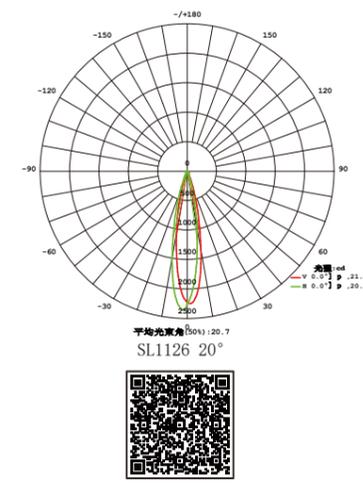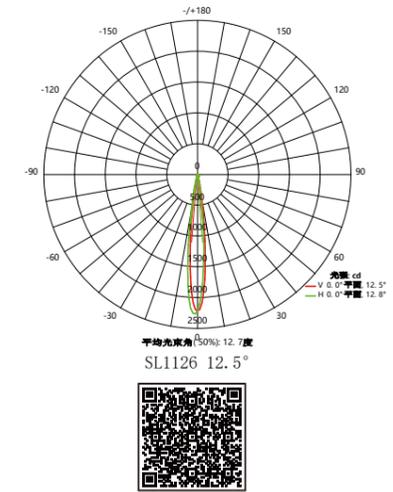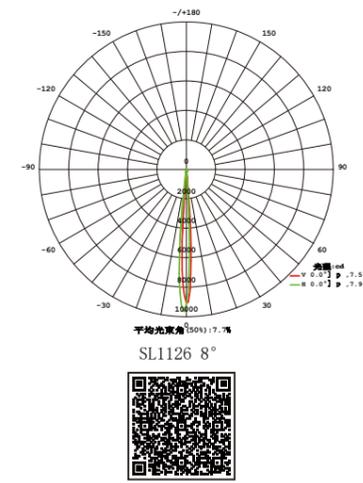




技术参数 Specification

产品型号Product Code	SL1126FB-3	SL1126FA-3	SL1126F-C6
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量LED Quantity	3pcs	3pcs	1pc
额定功率Rated Power	6W	3.5W	6W
输入电压Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色Color	Single	Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°		20°
控制方式Control Mode	CC	CC	CC
使用寿命Life	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66
环境温度Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%


Flood Light Series

SL1127F

配光曲线 (半角) Distribution Curve Flux (SBC Case)

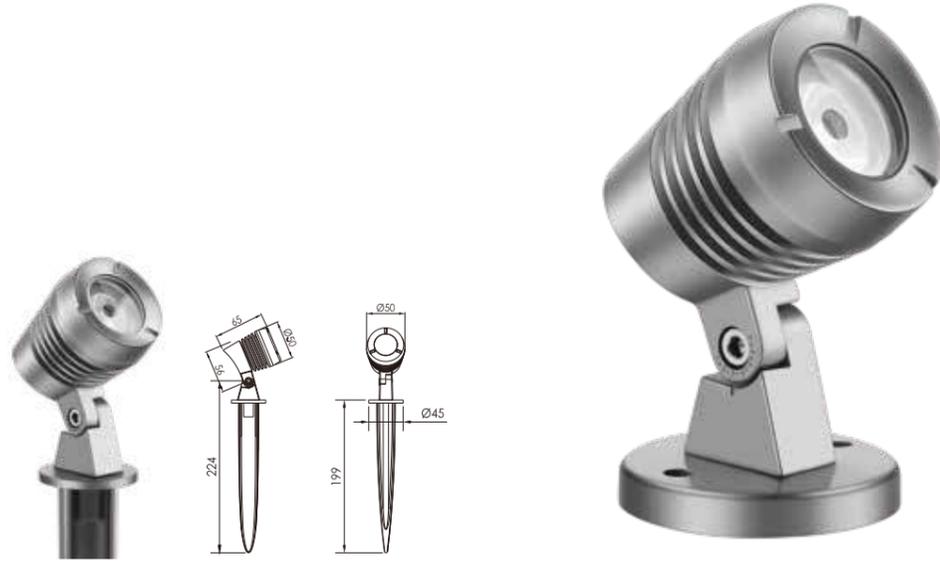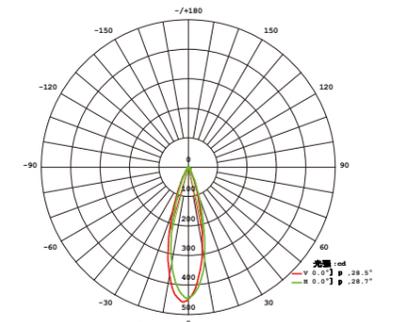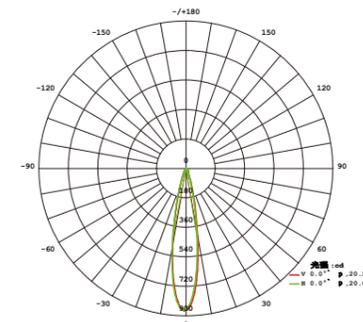

SL1127S

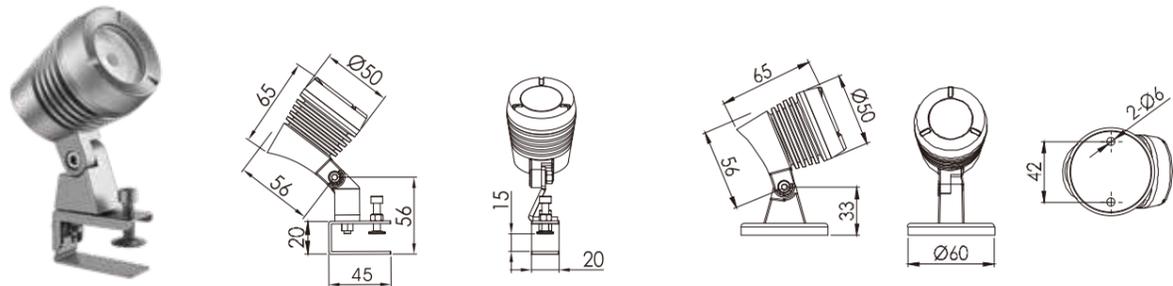

SL1127C

技术参数 Specification

产品型号Product Code	SL1127FC-1	SL1127FA-1
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	1pc	1pc
额定功率Rated Power	3W	1.5W
输入电压Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	Single	Single
发光角度Beam Angle	15° 28°	
控制方式Control Mode	CC	CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP66	IP66
环境温度Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%



Flood Light Series

SL1269U


蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics	CO ₂ ↓ 50%
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics	
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	原生1度角
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	K值 > 500
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯


Dopamine

多巴胺色彩

Superhigh[®]

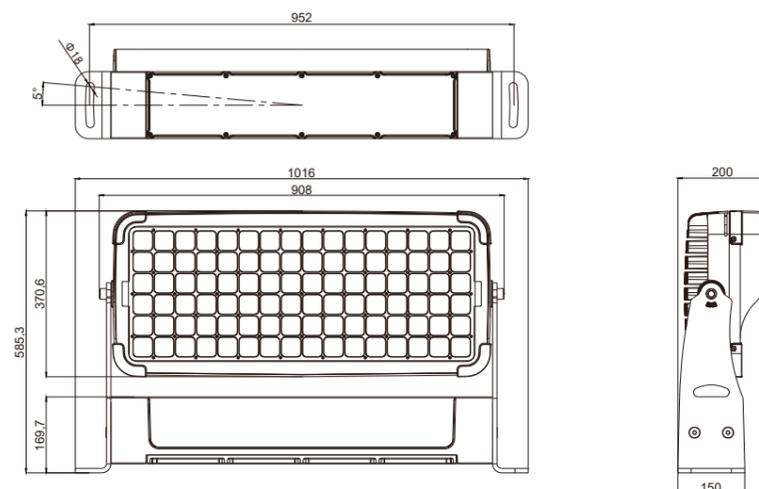

配光曲线 (半角) Distribution Curve Flux (SBC Case)

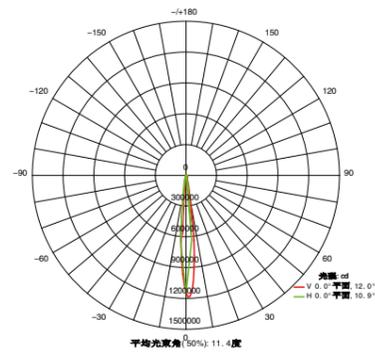

SL1269 8°



技术参数 Specification

产品型号/ Product Code	SL1269UM-96	SL1269UE-96	SL1269UN-96KP	SL1269UQ-96KP
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L/OSRAM P9	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	96pcs	96pcs	96pcs	96pcs
额定功率/ Rated Power	700W	800W	800W	800W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15X60°	6° 8° 15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1269UF-96	SL1269UE-96HE	SL1269UC-384	SL1269UM-40
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE XHP50	LUXEON 5050	CREE/OSRAM
Led数量/ Led Quantity	96pcs	96pcs	384pcs	40pcs
额定功率/ Rated Power	800W	800W	800W	350W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single	Single	Single/RGBW
发光角度/ Beam Angle	6° 8° 15° 20° 30° 15x60°	8° 12° 20° 30° 60° 10x70°	8° 15° 20° 30° 45° 20x40° 15x25°	1.5°
控制方式/ Control Mode	DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%

Flood Light Series

SL1272U

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

CO₂ ↓ 50%

原生1度角

K值 > 500

LED 恒功率全色域染色灯

Dopamine

多巴胺色彩




SL1272S


产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1272UM-180KP	SL1272UD-180	SL1272UC-180	SL1272UN-80KP
Led品牌/ Led Brand	RGBW Keepower	CREE/LUMILEDS	CREE/LUMILEDS	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	180pcs	180pcs	180pcs (48R 48G 48B 36W)	80pcs
额定功率/ Rated Power	600W	600W	420W	600W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBW/RGBA/Single	RGBWCLA
发光角度/ Beam Range	2.5°	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20°		8° 25° 10X45°
控制方式/ Control Mode	CC/DMX512/RDM	CC	DMX512/RDM/CC	DMX512/RDM/CC
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1272UQ-80KP	SL1272UF-80	SL1272UM-36	
Led品牌/ Led Brand	RGBW 4in1 Keepower	CREE RGBW 4 in 1	CREE/OSRAM	
Led数量/ Led Quantity	80pcs	80pcs	36pcs	
额定功率/ Rated Power	720W	720W	320W	
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBW	RGBW	2700K/3000K/4000K 6500K//Pc Amber/RGBW	
发光角度/ Beam Range	8° 25° 10x45°	8° 25° 10x45°	1.5°	
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	

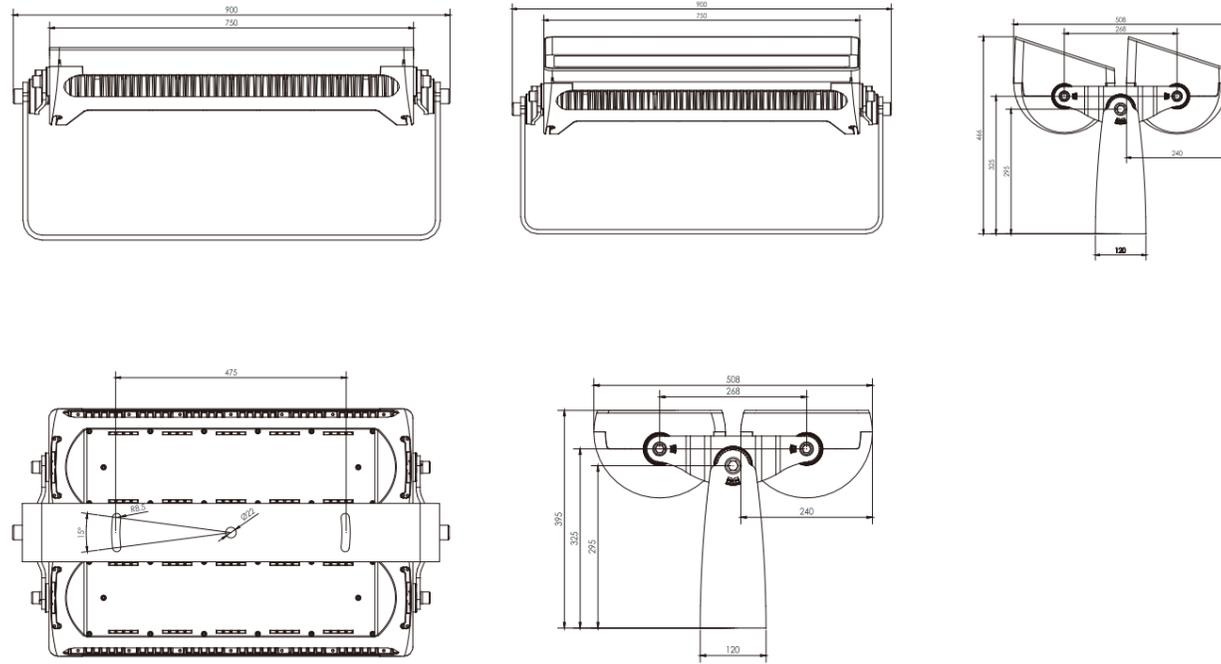

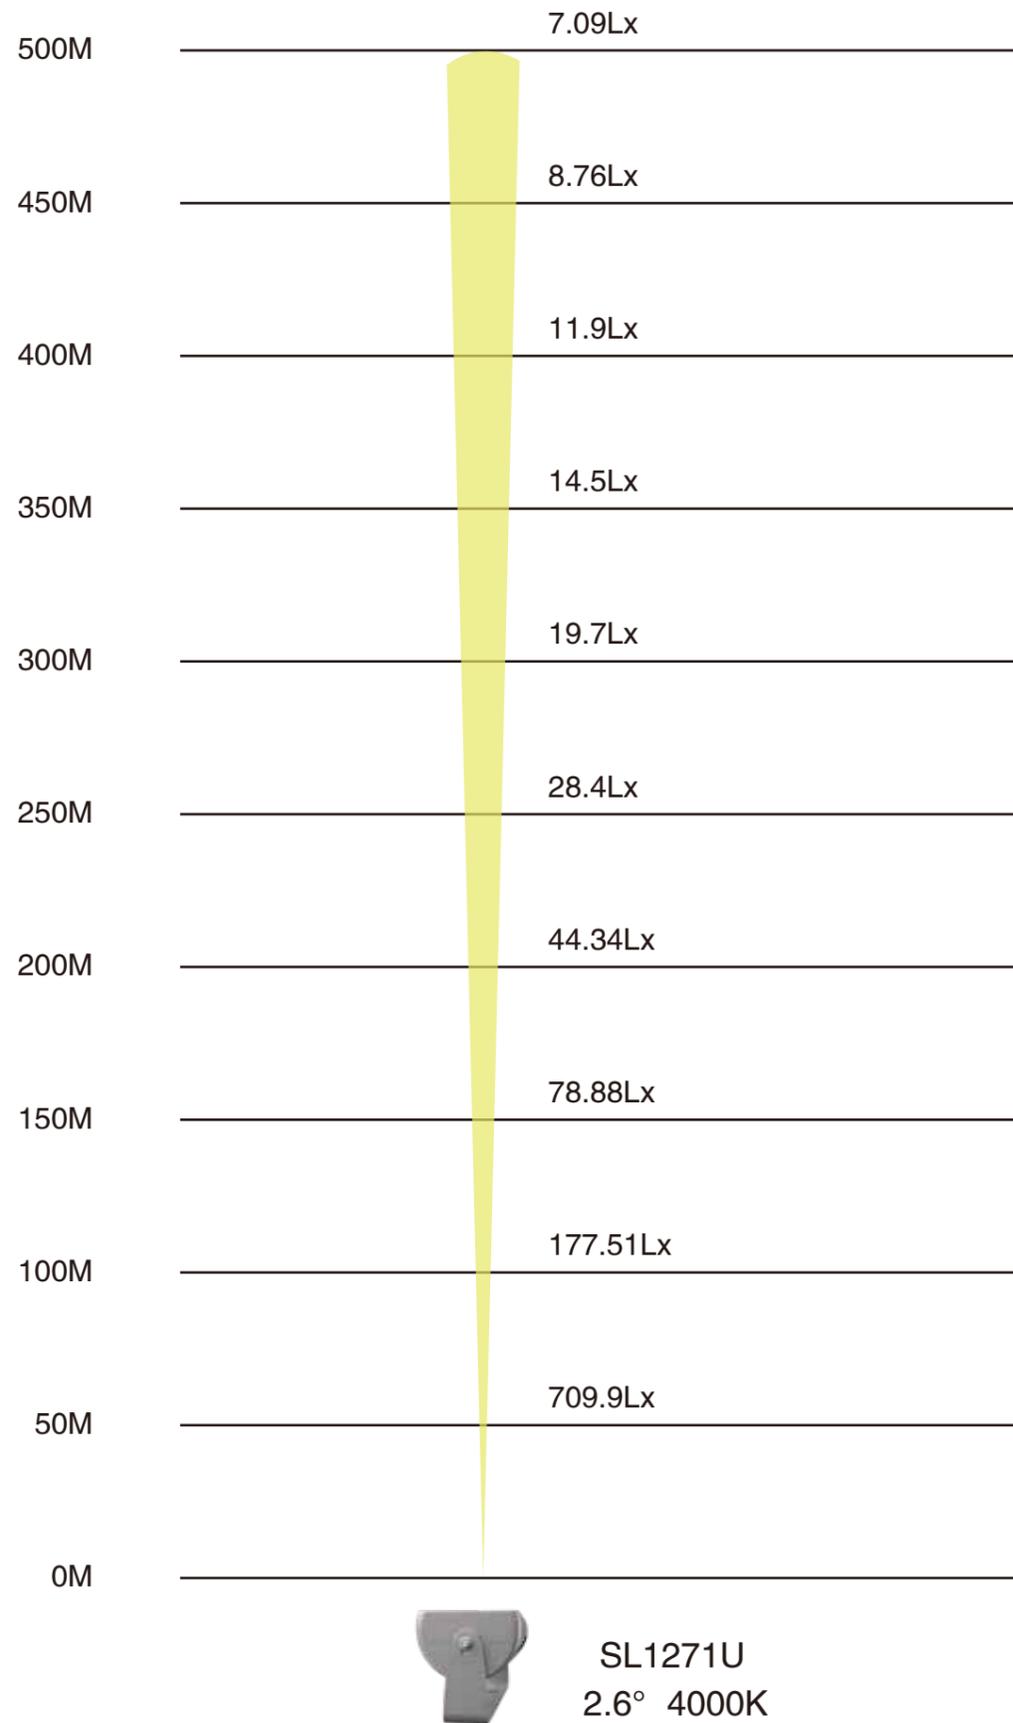

6MM超白钢化玻璃, 透光率93%, 抗冲击、自清洁能力强。
6mm toughened glass, 93% light transmittance, excellent impact force resistance and self-cleaning performance

专业防眩光灯罩, 三面立体防护, 无眩光。
Professional anti-glare shade, three dimensional protection, avoiding glare.

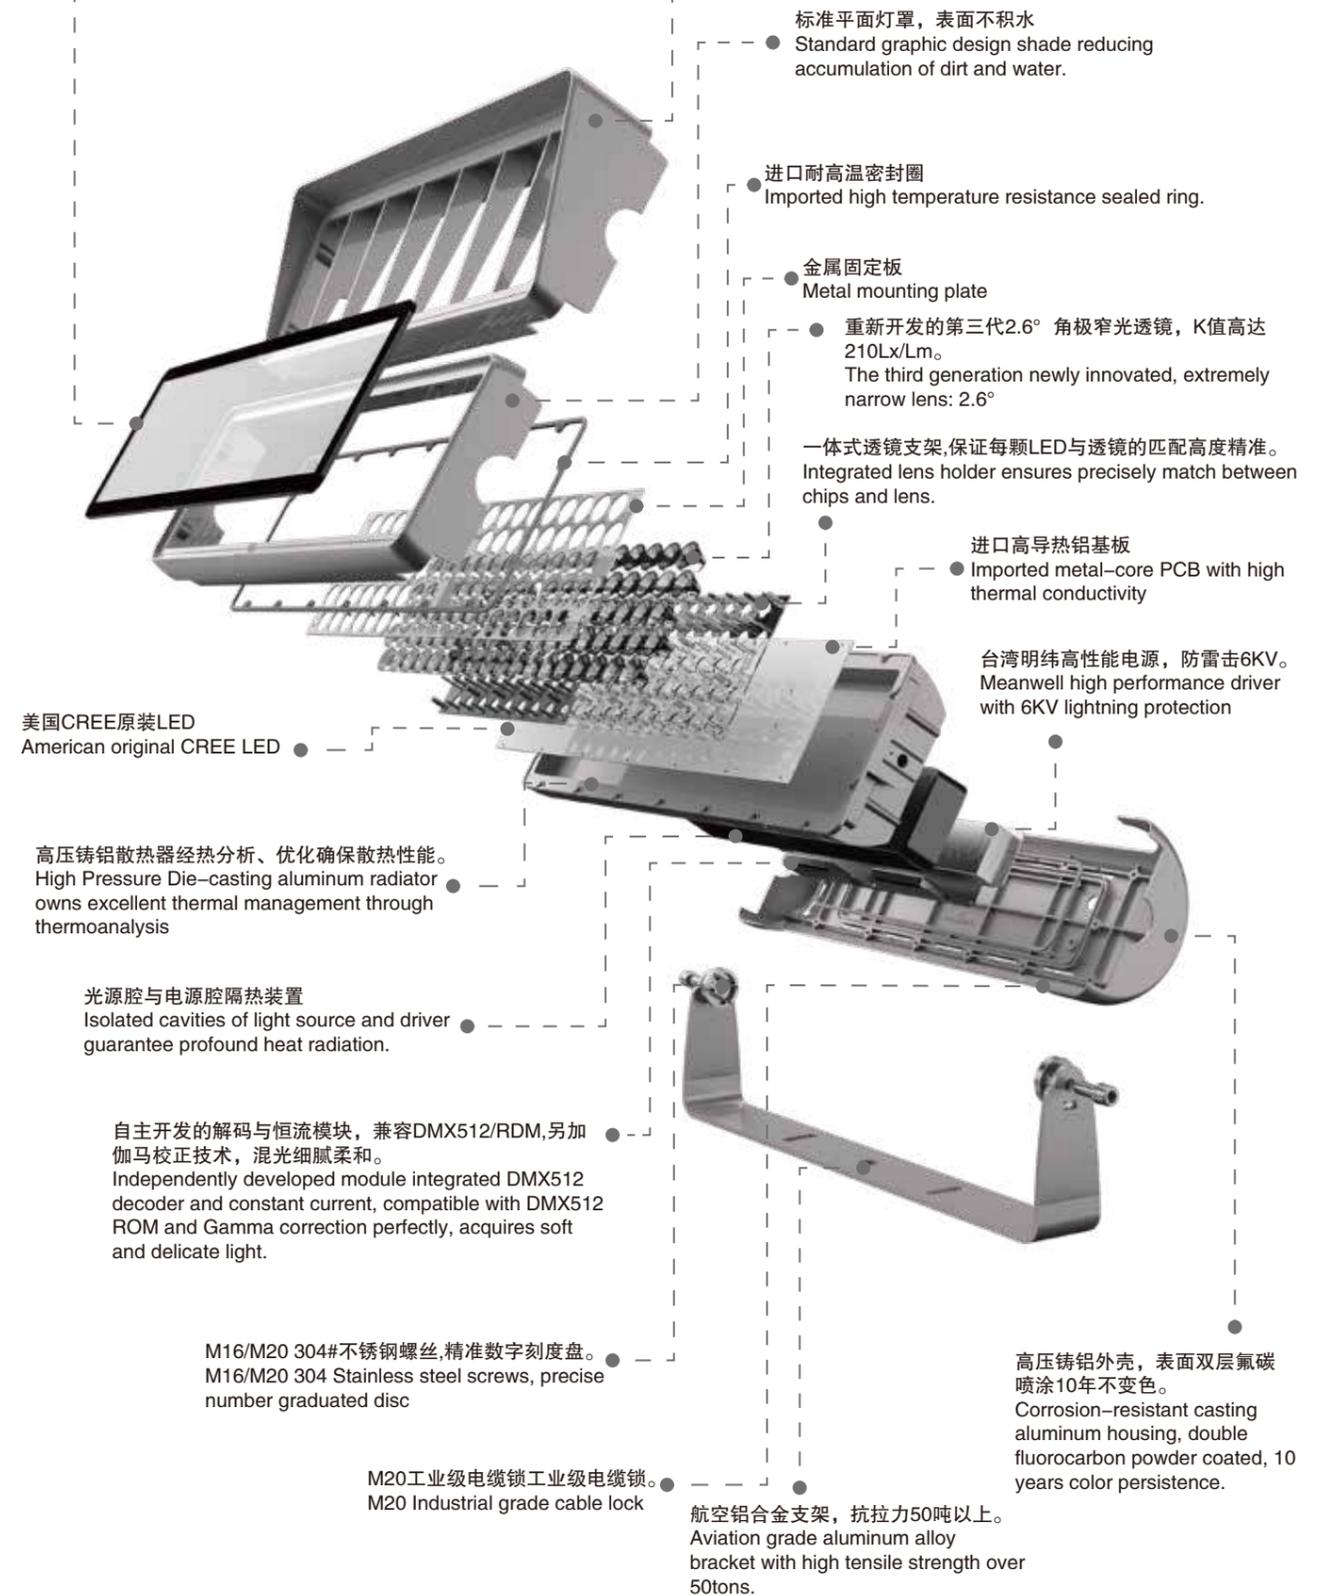

Flood Light Series

SL1271U

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

CO₂ ↓ 50%

原生1度角

K值 > 500




LED 恒功率全色域染色灯

Dopamine

多巴胺色彩



SL1271S

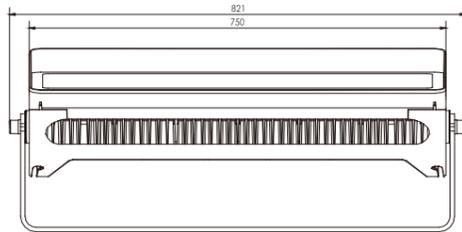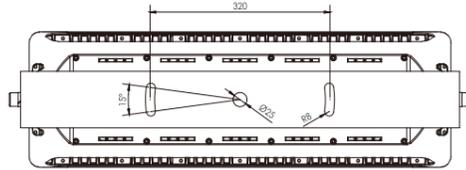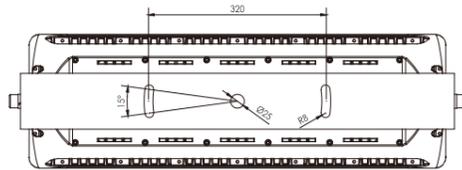







产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1271UM-90KP	SL1271UD-90	SL1271UC-90	SL1271UN-40KP
Led品牌/ Led Brand	RGBW Keepower	CREE/LUMILEDS	CREE/LUMILEDS	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	90pcs	90pcs	90pcs (24R 24G 24B 18W)	40pcs
额定功率/ Rated Power	300W	300W	210W	300W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color		Single	RGBW/RGBA/Single	RGBWCLA
发光角度/ Beam Angle	2.5°	2.6° 6° 12° 20° 30° 45° 60° 10x70°	5x20°	8° 25° 10x45°
控制方式/ Control Mode	CC/DMX512/RDM	CC	DMX512/RDM/CC	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1271UQ-40KP	SL1271UF-40	SL1271UM-18	
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE RGBW 4 in 1	CREE/OSRAM	
Led数量/ Led Quantity	40pcs	40pcs	18pcs	
额定功率/ Rated Power	360W	360W	160W	
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBW	RGBW	2700K/3000K/4000K 6500K/Pc Amber	
发光角度/ Beam Angle	8° 25° 10x45°	8° 25° 10x45°	1.5°	
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	

配光曲线 (半角) Distribution Curve Flux (SBC Case)

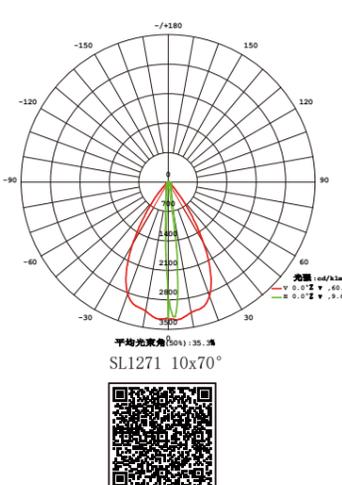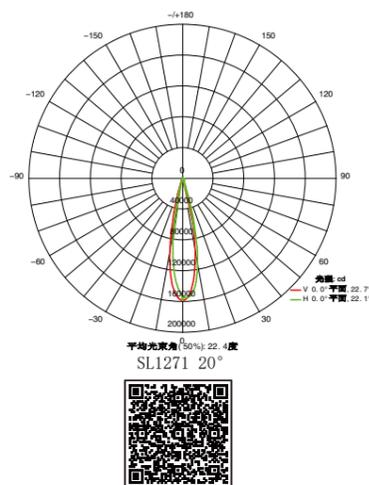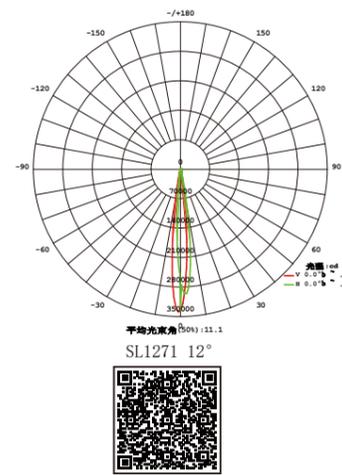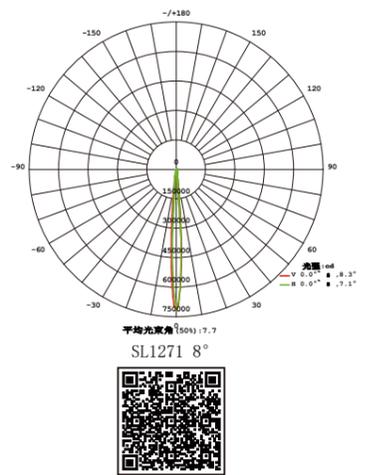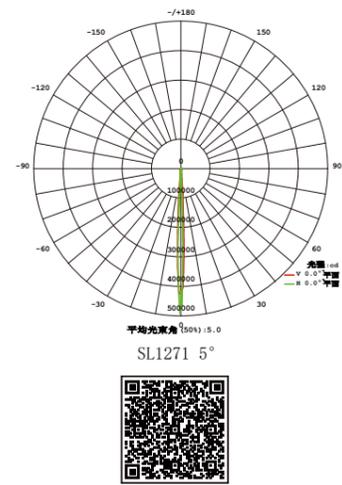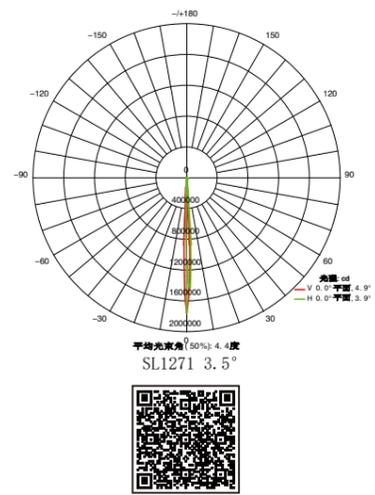

Flood Light Series

SL1278U

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

CO₂ ↓ 50%

原生1度角

K值 > 500






LED 恒功率全色域染色灯

Dopamine

多巴胺色彩



SL1278S

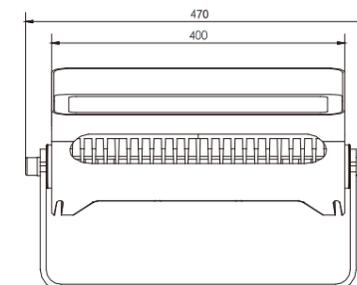

产品简介 Product Introduction




- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1278UM-36	SL1278UD-36	SL1278UC-36	SL1278UN-18KP
Led品牌/ Led Brand	CREE/OSRAM	LUMILEDS/CREE	LUMILEDS/CREE	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	36pcs	36pcs	36pcs (9R 9G 9B 9W)	18pcs
额定功率/ Rated Power	150W	150W	90W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBW/RGBA/Single	RGBWCLA
发光角度/ Beam Angle	2.5°	6° 12° 20°	30° 45° 60° 10x70° 5x20°	8° 25° 10x45°
控制方式/ Control Mode	DMX512/RDM/CC	CC	DMX512/RDM/CC	Bluetooth/DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1278UQ-18KP	SL1278UF-18	SL1278UM-8	
Led品牌/ Led Brand	RGBW 4in1 Keepower	CREE RGBW 4in1	CREE/OSRAM	
Led数量/ Led Quantity	18pcs	18pcs	8pcs	
额定功率/ Rated Power	150W	150W	75W	
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBW	RGBW	2700K/3000K/4000K 6500K/Pc Amber	
发光角度/ Beam Angle	8° 25° 10X45°	8° 25° 10X45°	1.5°	
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	


配光曲线 (半角) Distribution Curve Flux (SBC Case)

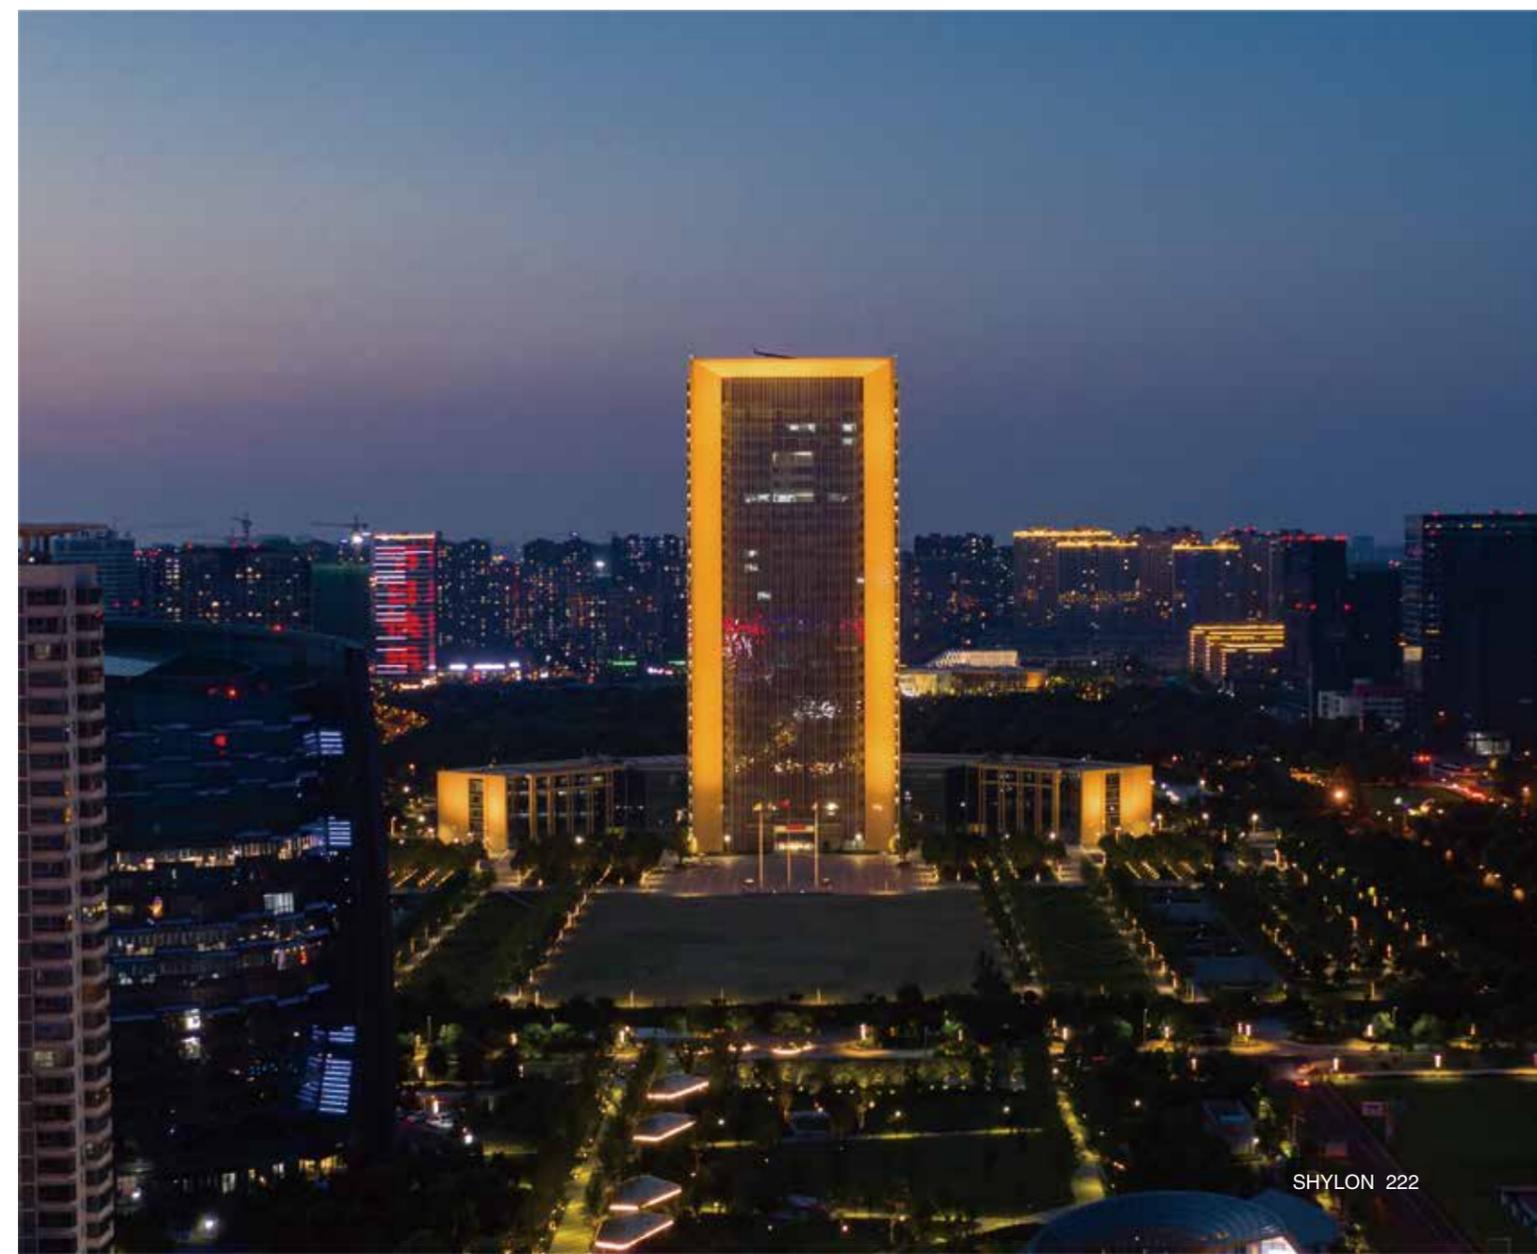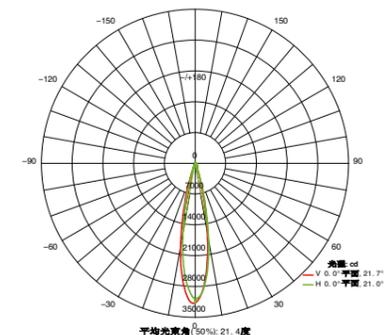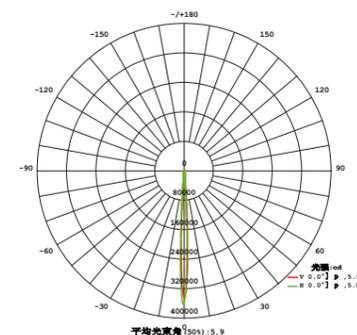


Flood Light Series

SL1281U

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

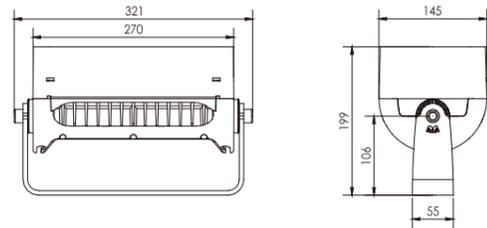

SL1281S

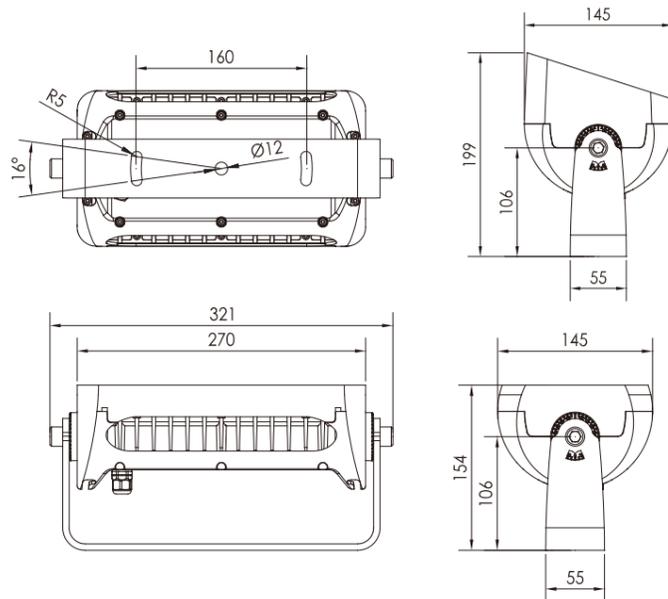

SL1281G


产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM，度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1281UM-12	SL1281UE-12	SL1281UD-12	SL1281UF-12
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L/XP-G3	LUMILEDS	CREE RGBW 4 in 1
Led数量/ Led Quantity	12pcs	12pcs	12pcs	12pcs
额定功率/ Rated Power	56W	56W	40W	72W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber/RGBW	Single	Single	RGBW
发光角度/ Beam Angle	2.5°	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC	CC	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)

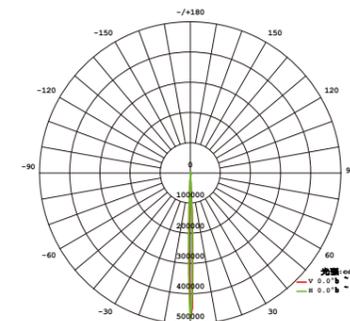


平均光束角(50%) 3.2°
SL1281 3.5°

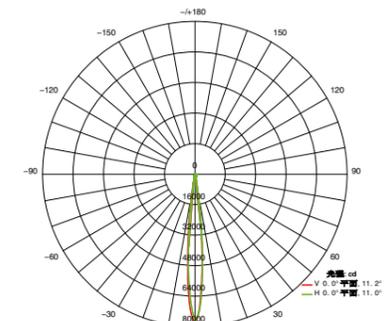


平均光束角(50%) 11.1°
SL1281 12°




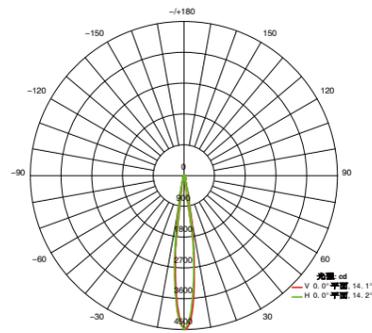

平均光束角(50%): 14.2度
SL1281 15°

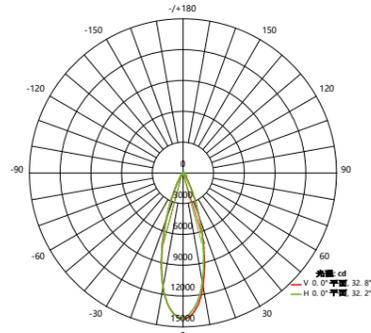

平均光束角(50%): 32.5度
SL1281 30°

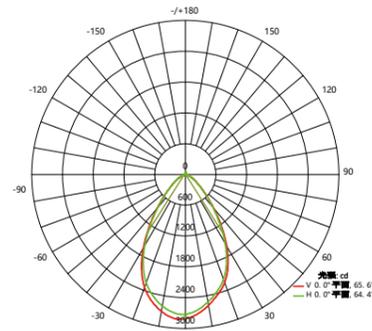

平均光束角(50%): 65.0度
SL1281 60°



Flood Light Series

SL1232F

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

CO₂ ↓ 50%

原生 1度角

K值 > 500



reddot winner 2021
innovative product

LED 恒功率全色域染色灯

Dopamine







多巴胺色彩










SL1232U



SL1232M



SL1232Z

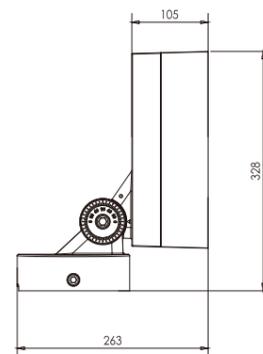
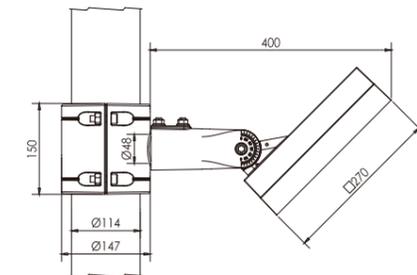


产品简介 Product Introduction



- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、 Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、 With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
 - 3、 Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、 Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、 Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1232FM-25	SL1232FE-25	SL1232FN-24KP	SL1232FQ-24KP	SL1232FF-24
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	CREE RGBW 4in1
Led数量/ Led Quantity	25pcs	25pcs	24pcs	24pcs	24pcs
额定功率/ Rated Power	120W	120W	150W	150W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 45° 15x60°	6° 8° 15° 20° 30°	15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1232FC-48	SL1232FB-48	SL1232FZ-96	SL1232F-C120	SL1232FM-9
Led品牌/ Led Brand	OSRAM	OSRAM	CREE	CREE COB	CREE/OSRAM
Led数量/ Led Quantity	48pcs	48pcs	96pcs	4pcs	9pcs
额定功率/ Rated Power	120W	120W	120W	120W	85W
输入电压/ Input Voltage	DC36V/AC100-305V	DC36V/AC100-305	DC24V/AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	RGBW	Single	Single	Single/RGBW
发光角度/ Beam Angle	8° 15° 20° 30° 45° 20x40° 15x25°		7~36° Photoelectron zoom	12° 24° 36° 70°	1.5°
控制方式/ Control Mode	CC/DALI/0-10V	DMX512/RDM	Touch screen	CC/DALI/0-10V	CC/DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

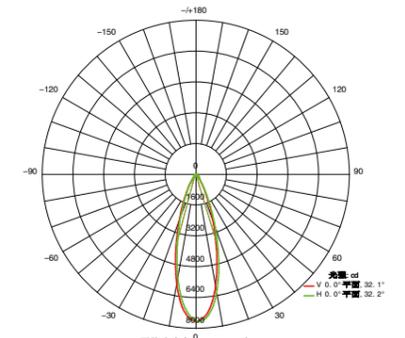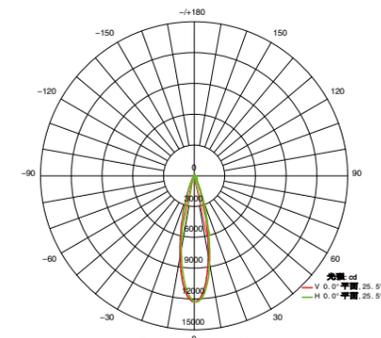


配光曲线 (半角) Distribution Curve Flux (SBC Case)

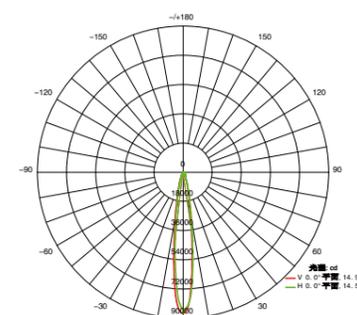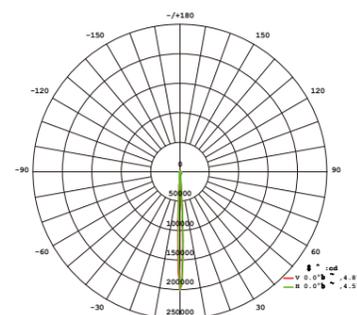


配光曲线 (半角) Distribution Curve Flux (SBC Case)

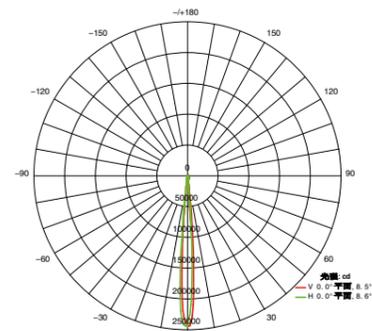


平均光束角(50%): 8.6度
SL1235 8°

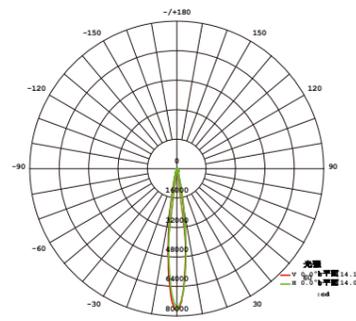


平均光束角(50%): 14.0度
SL1235 12°

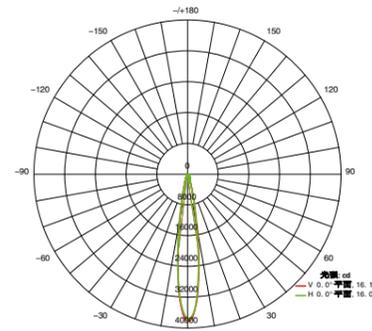

平均光束角(50%): 16.1度
SL1235 15°

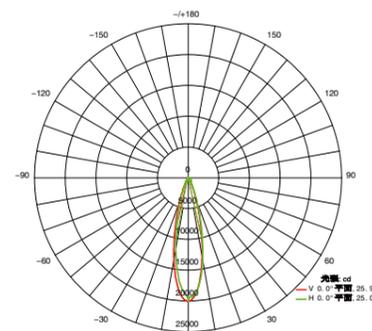

平均光束角(50%): 25.5度
SL1235 24°

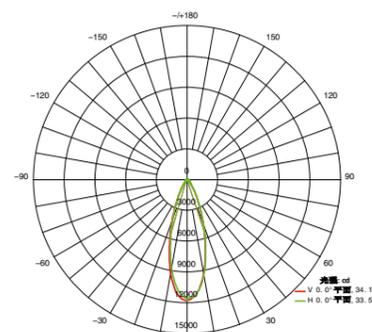

平均光束角(50%): 33.8度
SL1235 30°



技术参数 Specification

产品型号/ Product Code	SL1235FM-16	SL1235FE-16	SL1235FN-16KP	SL1235FQ-16KP	SL1235FF-16
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	CREE RGBW 4in1
Led数量/ Led Quantity	16pcs	16pcs	16pcs	16pcs	16pcs
额定功率/ Rated Power	75W	75W	100W	100W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC36V/AC100-305V	DC36V/AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15X60°	6° 8° 15° 20° 30° 15x60°	6° 8° 15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1235FC-32	SL1235FB-32	SL1235FZ-64	SL1235F-C80	SL1235FM-5
Led品牌/ Led Brand	OSRAM	OSRAM	CREE	CREE COB	CREE/OSRAM
Led数量/ Led Quantity	32pcs	32pcs	64pcs	4pcs	5pcs
额定功率/ Rated Power	75W	75W	75W	75W	50W
输入电压/ Input Voltage	DC36V/AC100-305V	DC36V/AC100-305	DC24V/AC100-305V	AC100-264V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	RGBW	Single	Single	Single
发光角度/ Beam Angle	8° 15° 20° 30° 45°	20x40° 15x25°	7~36° Photoelectron zoom	12° 24° 38° 45° 60°	1.5°
控制方式/ Control Mode	CC/DALI/0-10V	DMX512/RDM	Touch screen	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1235FF-5				
Led品牌/ Led Brand	CREE RGBW 4 in 1				
Led数量/ Led Quantity	5pcs				
额定功率/ Rated Power	70W				
输入电压/ Input Voltage	AC100-305				
频率/ Frequency Range	50/60Hz				
颜色 / Color	RGBW				
发光角度/ Beam Angle	4°				
控制方式/ Control Mode	DMX512/RDM				
使用寿命/ Life	80000H				
防护等级/ Protection Grade	IP66				
环境温度/ Ambient Temperature	-25℃~50℃				
环境湿度/ Ambient Humidity	10%~90%				

Flood Light Series

SL1236F

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



EXPO
世博版




SL1236U




SL1236M

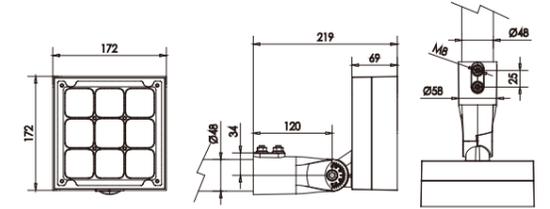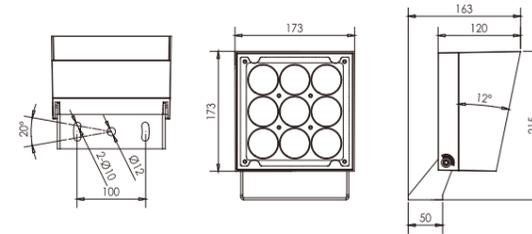


SL1236S




SL1236Z

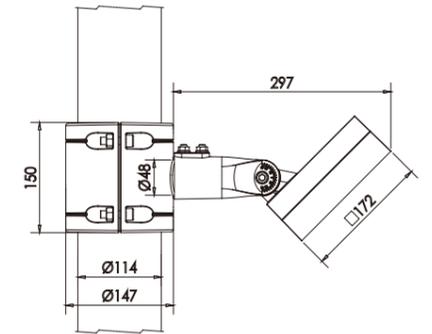

SL1236L






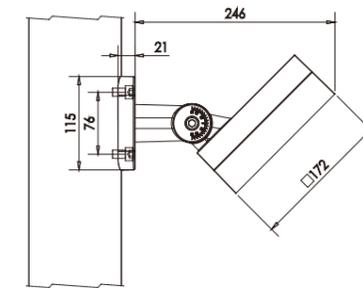


SL1236H



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4

适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm




产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态灯光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、 Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation full ensure the stability and long lifespan of LED light.
 - 2、 With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
 - 3、 Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、 Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gra control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、 Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1236FM-9	SL1236FE-9	SL1236FL-9	SL1236FF-9
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	OSRAM	CREE RGBW 4in1
Led数量/ Led Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rated Power	45W	45W	60W	60W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC36V/AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBW	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°		6° 8° 15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	28/22(pcs)	28/22(pcs)	3/22(pcs)	3/22(pcs)
产品型号/ Product Code	SL1236FC-18	SL1236FB-18	SL1236FZ-36	SL1236F-C50
Led品牌/ Led Brand	LUMILEDS/OSRAM	LUMILEDS/OSRAM	CREE	CREE COB
Led数量/ Led Quantity	18pcs	18pcs	36pcs	1pcs
额定功率/ Rated Power	45W	45W	45W	45W
输入电压/ Input Voltage	DC24V/AC100-240V	DC24V/AC100-305	DC36V/AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	RGBW	Single	Single
发光角度/ Beam Angle	8° 15° 20° 30° 45° 20x40° 15x25°		7~36° Photoelectron zoom	12° 24° 36° 70°
控制方式/ Control Mode	CC/DALI/0-10V	DMX512/RDM	Touch screen	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	2/22(pcs)	4/36(pcs)	3/33(pcs)	28pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

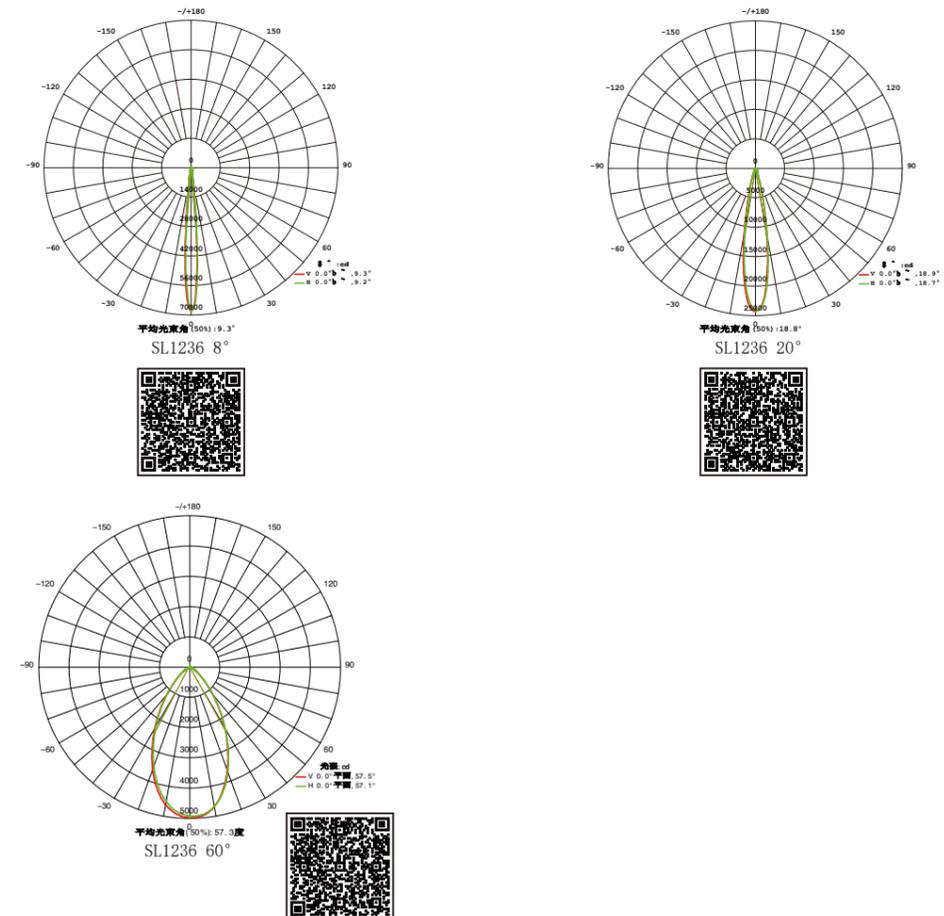

Flood Light Series

SL1239F

圓孔格柵 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窩格柵 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyepro

光学护眼





SL1239S




SL1239U




SL1239M

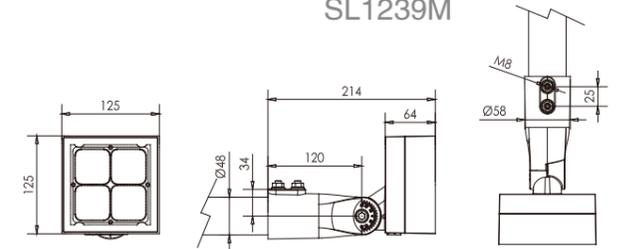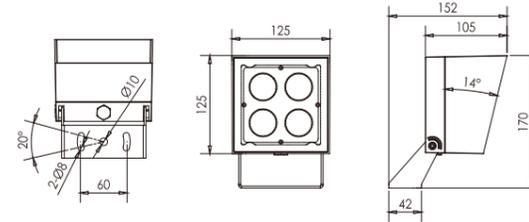

SL1239Z

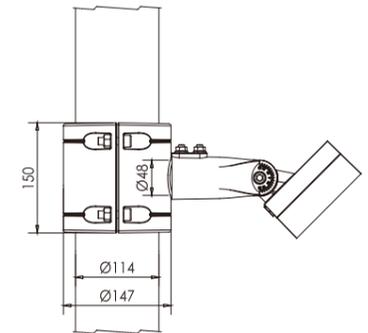


SL1239L










适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4



SL1239H

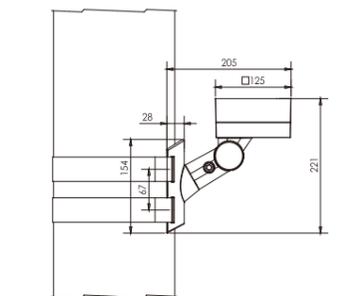

适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm



产品简介 Product Introduction







- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation full ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gra control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1239FM-4	SL1239FE-4	SL1239FL-4	SL1239FF-4
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	OSRAM	CREE RGBW 4in1
Led数量/ Led Quantity	4pcs	4pcs	4pcs	4pcs
额定功率/ Rated Power	20W	20W	30W	20W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°		6° 8° 15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	61pcs	61pcs	4pcs	4pcs
产品型号/ Product Code	SL1239FB-8	SL1239FZ-16	SL1239F-C20	
Led品牌/ Led Brand	OSRAM	CREE	CREE COB	
Led数量/ Led Quantity	8pcs	16pcs	1pcs	
额定功率/ Rated Power	20W	20W	20W	
输入电压/ Input Voltage	DC24V/AC100-240V	DC24V/AC100-305V	AC100-264V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	Single/RGBW	Single	Single	
发光角度/ Beam Angle	8° 15° 20° 30° 45° 20x40° 15x25°	7~36° Photoelectron zoom	12° 24° 38° 45° 60°	
控制方式/ Control Mode	CC/DALI/0-10V/DMX512	DMX512	CC/DALI/0-10V	
使用寿命/ Life	50000H	50000H	50000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	
串联数量/ In series(max)	66pcs	8/70pcs	66pcs	

配光曲线 (半角) Distribution Curve Flux (SBC Case)

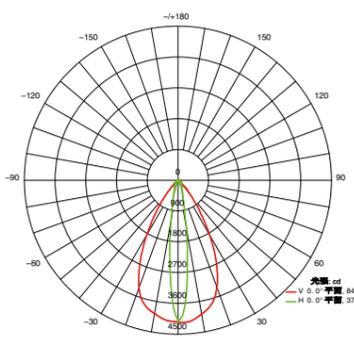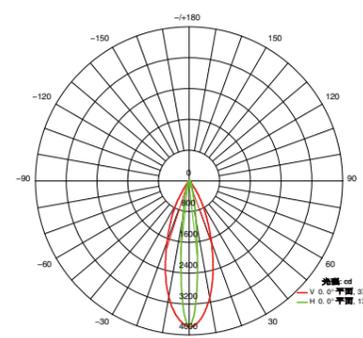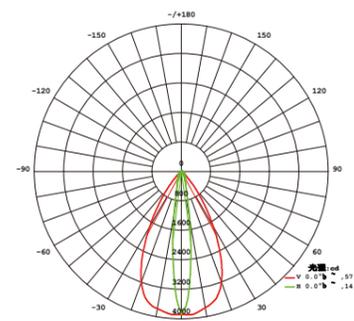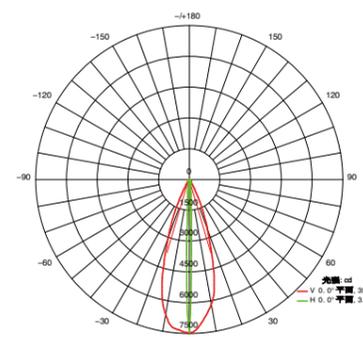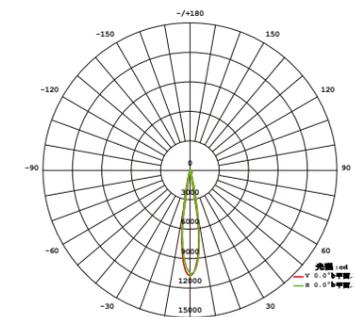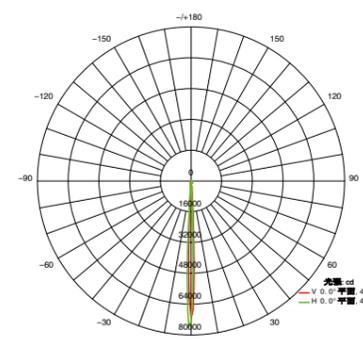



Flood Light Series

SL1240U



圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



SL1240C

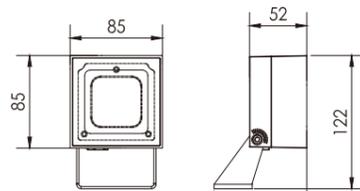



SL1240S

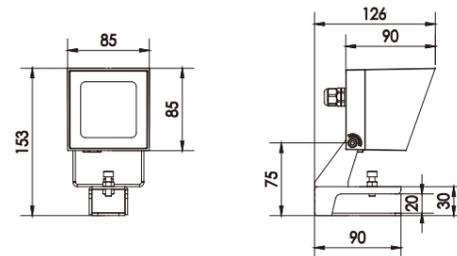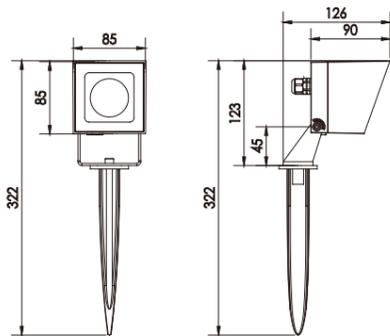


技术参数 Specification

产品型号/ Product Code	SL1240UM-1	SL1240UE-1	SL1240UF-1
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	CREE RGBW 4in1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	10W	10W	10W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	8° 15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1240UB-4	SL1240UZ-4	SL1240F-C12
Led品牌/ Led Brand	OSRAM	CREE	CREE COB
Led数量/ Led Quantity	4pcs	4pcs	1pcs
额定功率/ Rated Power	10W	10W	12W
输入电压/ Input Voltage	DC12V/AC100-240V	DC24V/AC100-305V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single
发光角度/ Beam Angle	6° 8° 15° 20° 30° 15x60°	7~36° Photoelectron zoom	12° 24° 36°
控制方式/ Control Mode	CC	DMX512	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)

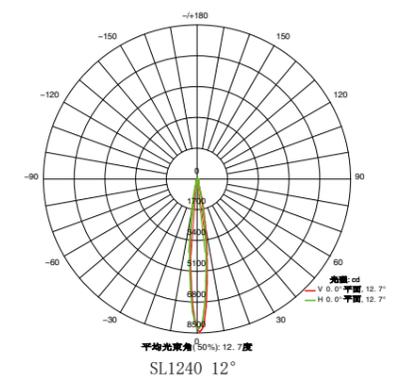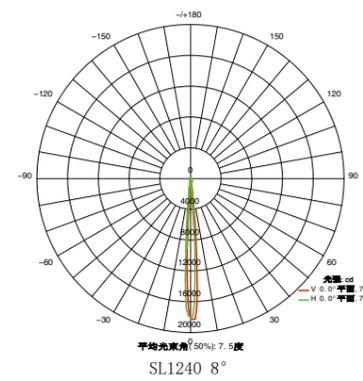

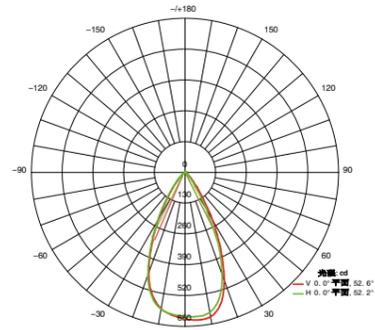

Flood Light Series

SL1245F


防眩遮光罩 Anti-glare shield	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics






SL1245C



SL1245S

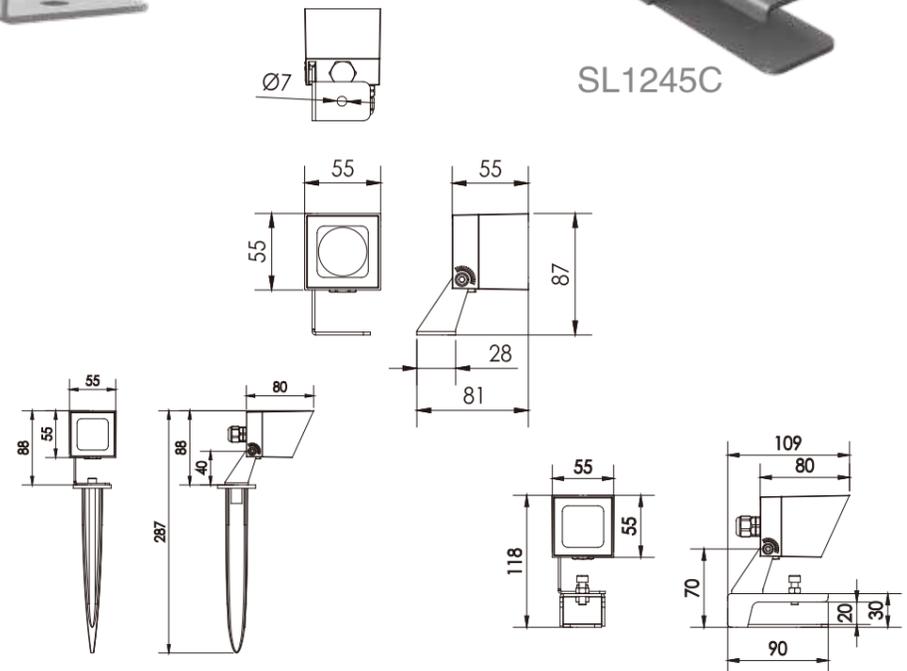

配光曲线 (半角) Distribution Curve Flux (SBC Case)

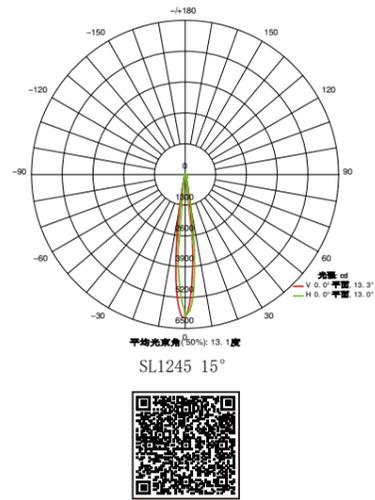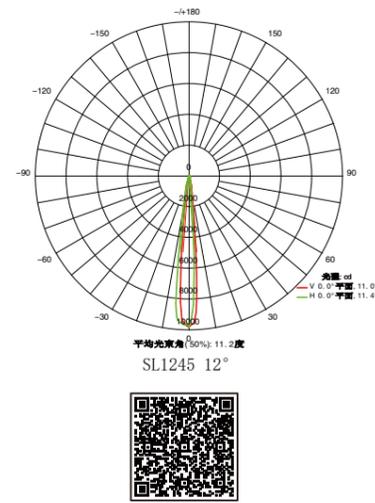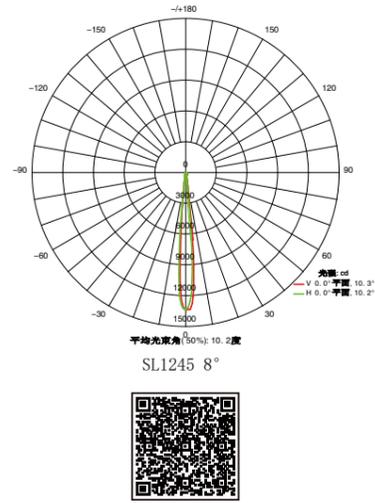

技术参数 Specification


产品型号 / Product Code	SL1245FM-1	SL1245FE-1	SL1245FF-1
Led品牌 / Led Brand	CREE	CREE XHP35	CREE RGBW 4 in 1
Led数量 / Led Quantity	1pcs	1pcs	1pcs
额定功率 / Rated Power	8W	10W	6W
输入电压 / Input Voltage	DC12V/DC24V	DC12V/DC24V	DC12V/DC24V
频率 / Frequency Range	/	/	/
颜色 / Color	Single	Single	RGBW
发光角度 / Beam Angle	2.5°	6° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°
控制方式 / Control Mode	CC	CC/DALI/0-10V	DMX512(External drive)
使用寿命 / Life	50000H	50000H	50000H
防护等级 / Protection Grade	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%





Flood Light Series

SL1246F


圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

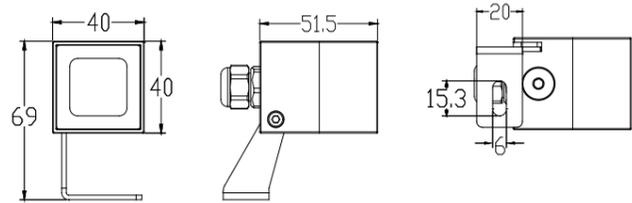

SL1246C

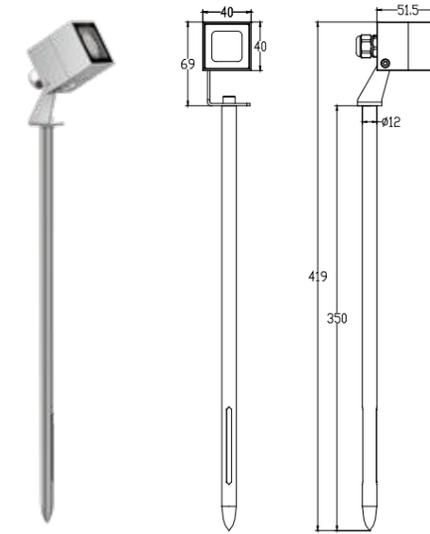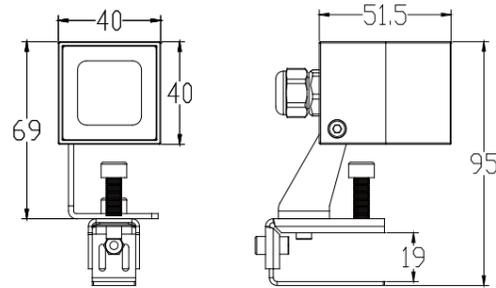

SL1246S

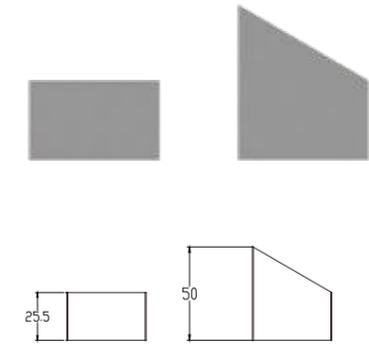

标配 Standard 可选斜罩 Optional visor

技术参数 Specification


产品型号/ Product Code	SL1246FM-1	SL1246FE-1	SL1246FF-1
Led品牌/ Led Brand	CREE	CREE	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	6W	6W	6W
输入电压/ Input Voltage	AC100-264V防水防雷阻气线 / DC12V/DC24V		DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	8° 12.5° 20° 30° 60° 15x30° 10x60°	6°	20° 45° 60° 15x60° 15x25°
控制方式/ Control Mode	CC	CC	DMX512
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%





Flood Light Series

SL1247F


圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

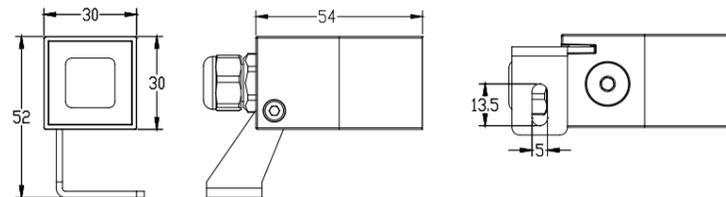

SL1247C

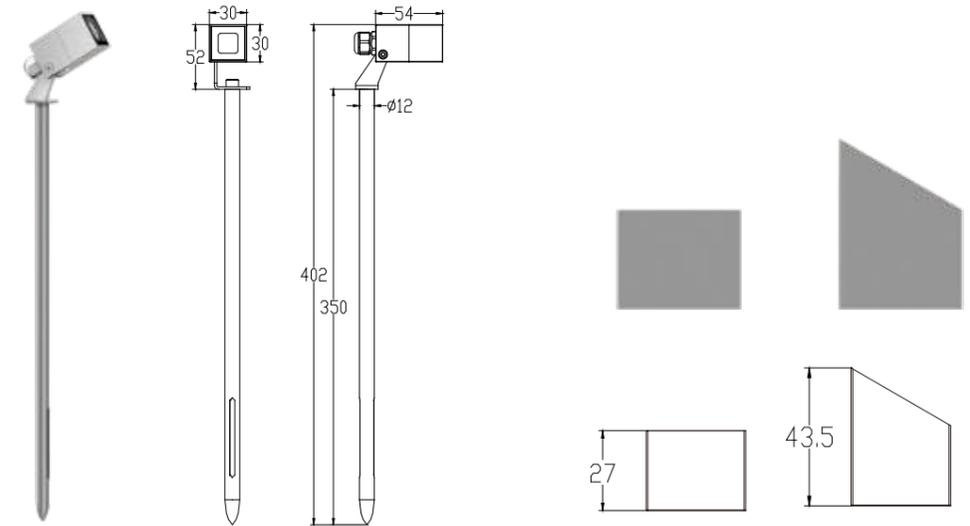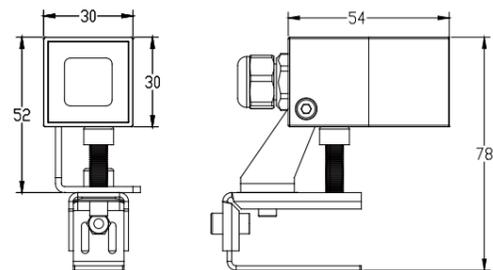

SL1247S

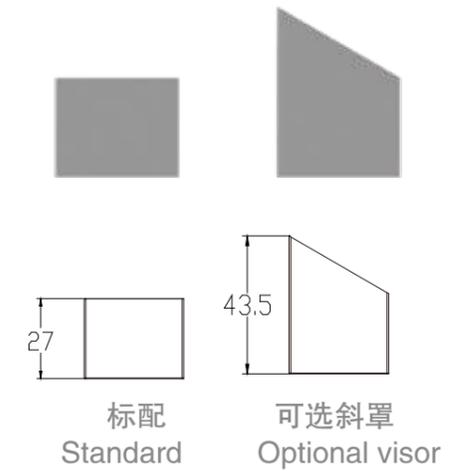

标配
Standard

可选斜罩
Optional visor

技术参数 Specification


产品型号/ Product Code	SL1247FE-1
Led品牌/ Led Brand	CREE
Led数量/ Led Quantity	1pcs
额定功率/ Rated Power	3W
输入电压/ Input Voltage	DC12V/DC24V
频率/ Frequency Range	50/60Hz
颜色 / Color	Single
发光角度/ Beam Angle	20° 30° 45° 60° 25x45°
控制方式/ Control Mode	CC
使用寿命/ Life	50000H
防护等级/ Protection Grade	IP66
环境温度/ Ambient Temperature	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%



Flood Light Series

SL1258U

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

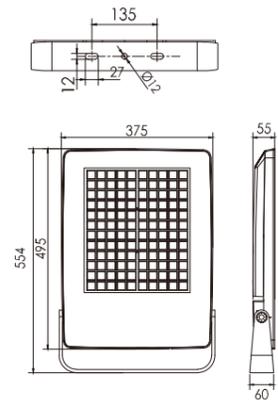

产品简介 Product Introduction



- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/Product Code	SL1258UB-120	SL1258UB-90	SL1258UB-70
LED品牌/LED Brand	CREE	CREE	CREE
LED数量/LED Quantity	120pcs	90pcs	70pcs
额定功率/Rated Power	225W	185W	150W
输入电压/Input Voltage	DC36V/AC90-265V	DC36V/AC90-265V	AC180-305V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	Single
发光角度/Beam Angle	8° 12.5° 20° 30° 60° 15x30° 10x60°		
控制方式/Control Mode	DMX512/CC	DMX512/CC	CC
使用寿命/Life	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66
环境温度/Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	1/6(pcs)	1/6(pcs)	8(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

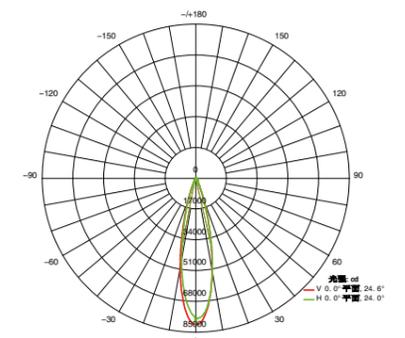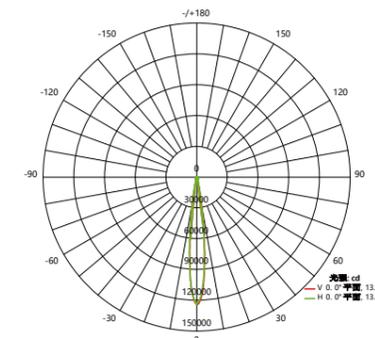

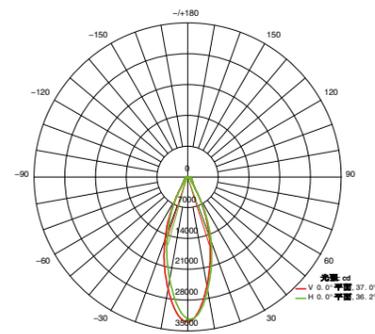

平均光通量: 36.6度
SL1258 30°

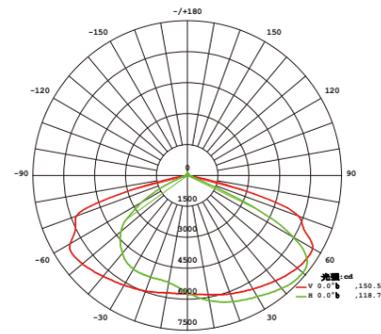

平均光通量: 134.6°
SL1258 150x120°



Flood Light Series

SL1260U

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics




SL1260UB-50



SL1260UB-30F



SL1260G

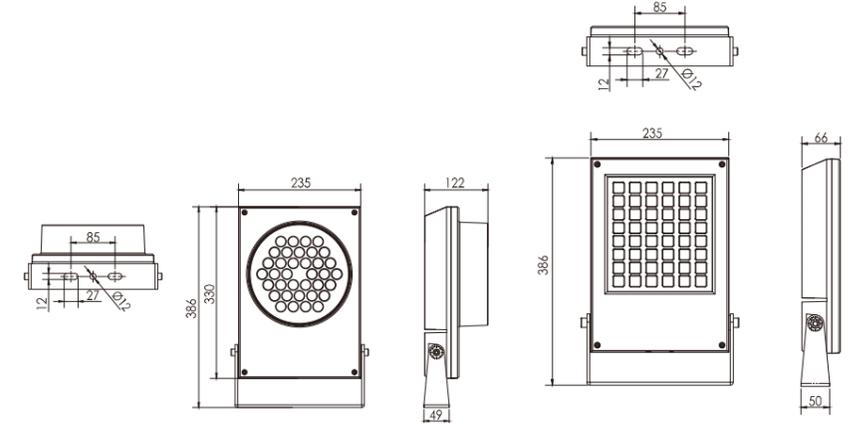





产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。



- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1260UC-50	SL1260UB-50	SL1260UB-30	SL1260UB-30F
Led品牌/ Led Brand	OSRAM	CREE	CREE	CREE
Led数量/ Led Quantity	48pcs	48pcs	30pcs	30pcs
额定功率/ Rated Power	120W	102W/82W	60W	60W
输入电压/ Input Voltage	AC200-240V	DC36V/AC90-265V	DC24V/AC90-265V	AC90-265V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	RGB/Single	RGBW/Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 48° 60° 15x30° 10x60°			120X70°
控制方式/ Control Mode	CC	DMX512/CC	DMX512/CC	CC
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	10pcs	2/12(pcs)	2/22(pcs)	22pcs

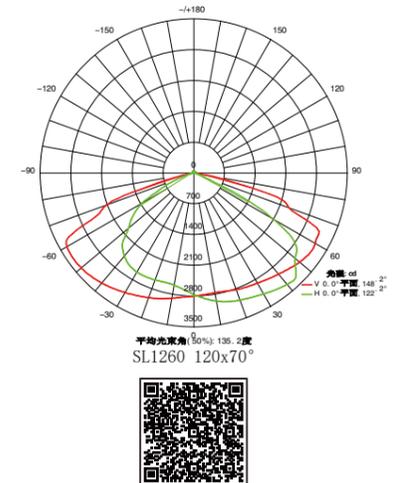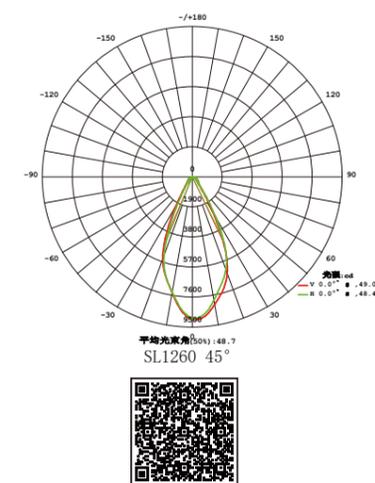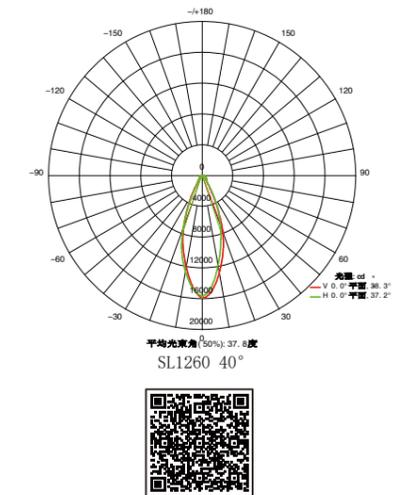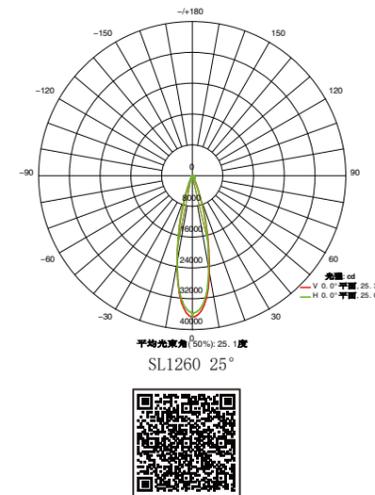

配光曲线 (半角) Distribution Curve Flux (SBC Case)

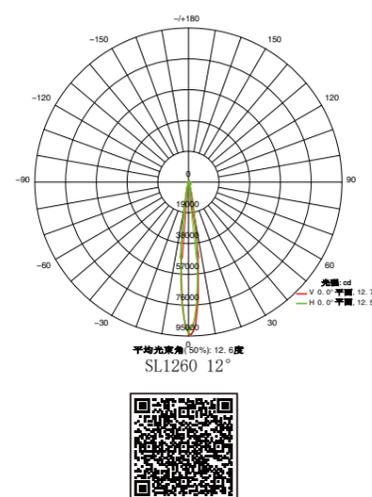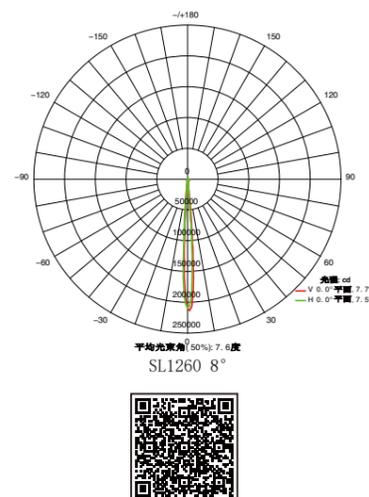

Flood Light Series

SL1260F

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics




SL1260FB-30F



SL1260FB-50





SL1260X

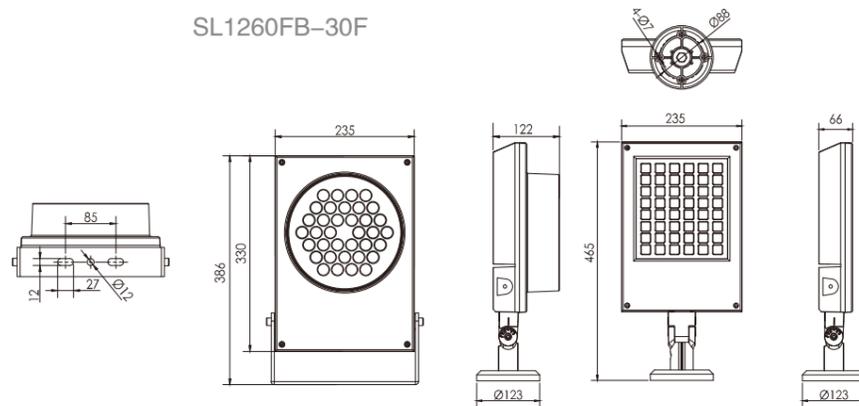

技术参数 Specification

产品型号 / Product Code	SL1260FC-50	SL1260FB-50	SL1260FB-30	SL1260FB-30F
Led品牌 / Led Brand	OSRAM	CREE	CREE	CREE
Led数量 / Led Quantity	48pcs	48pcs	30pcs	30pcs
额定功率 / Rated Power	120W	102W/82W	60W	60W
输入电压 / Input Voltage	AC90-265V	AC90-265V	AC90-265V	AC90-265V
频率 / Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	Single
发光角度 / Beam Angle	8° 12.5° 20° 30° 48° 60° 15x30° 10x60°			120x70°
控制方式 / Control Mode	CC	CC	CC	CC
使用寿命 / Life	50000H	50000H	50000H	50000H
防护等级 / Protection Grade	IP66	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量 / In series(max)	10pcs	12pcs	22pcs	22pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

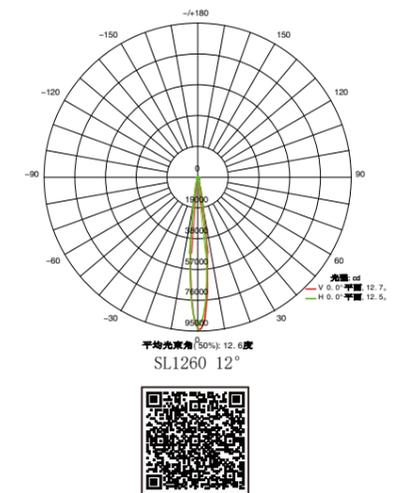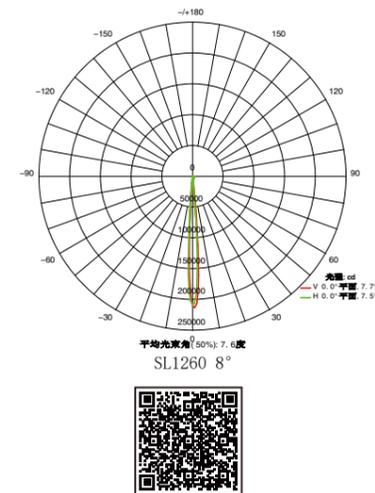


Flood Light Series

SL1262U

蜂窝格栅 Honeycomb glass	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics







SL1262UB-28F

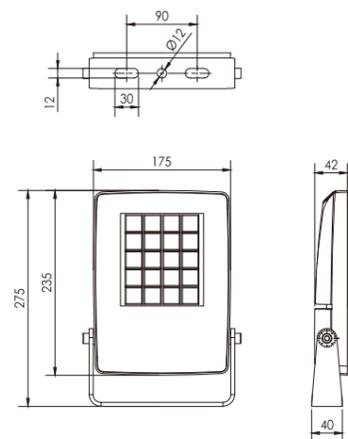

技术参数 Specification

产品型号Product Code	SL1262UB-20	SL1262UB-18	SL1262UB-12	SL1262UB-28F
LED品牌LED Brand	CREE	CREE	CREE	NICHIA/LUMILEDS
LED数量LED Quantity	20pcs	18pcs	12pcs	28pcs
额定功率Rated Power	36W	30W	22W	30W
输入电压Input Voltage	AC90-265V	DC24V	DC24V /AC90-265V	AC90-265V
频率Frequency Range	50/60Hz	/	50/60Hz	50/60Hz
颜色Color	Single	RGB/Single	RGB/Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 48° 60° 15x30° 10x60°			120x70°
控制方式Control Model	CC	DMX512/CC	DMX512/CC	CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	36pcs	4pcs	6/60(pcs)	44pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

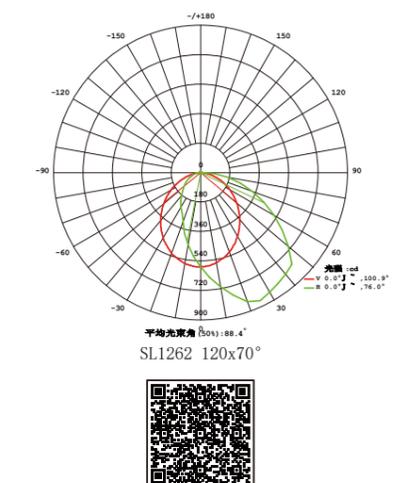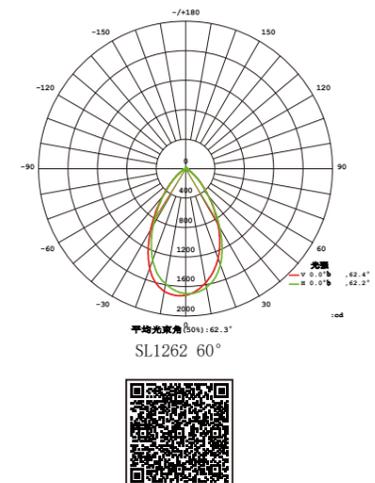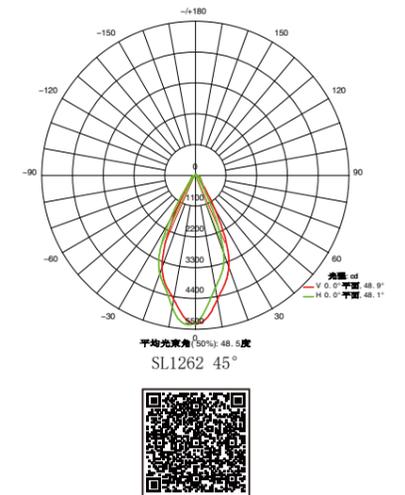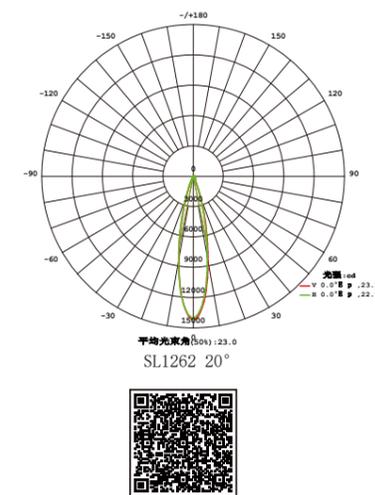

Flood Light Series

SL1318


蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

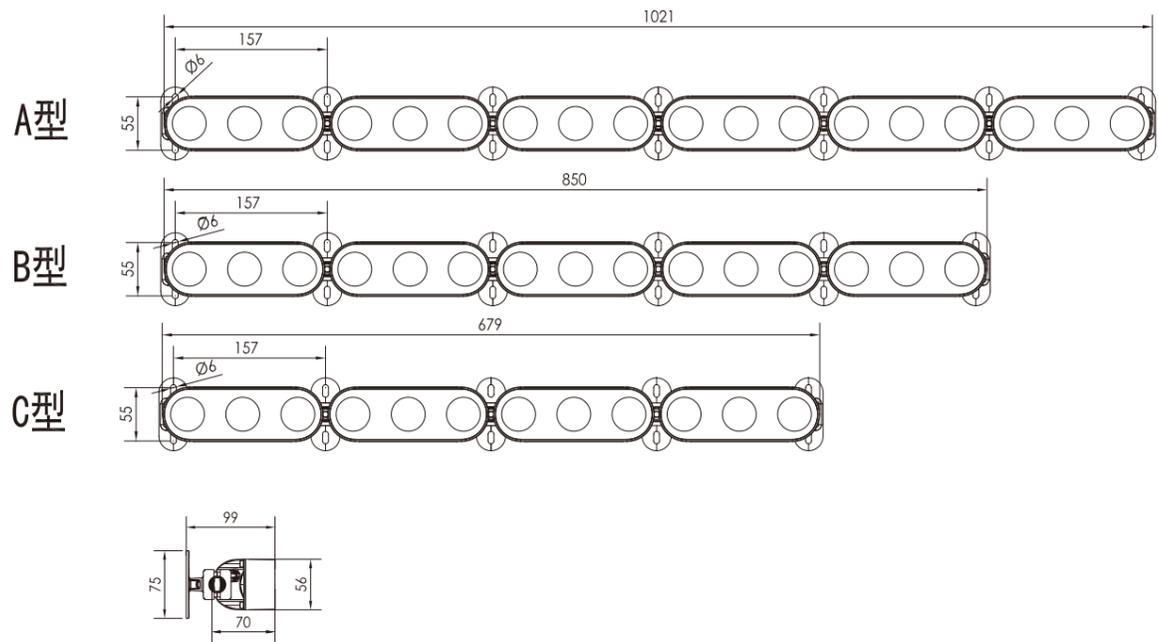


技术参数 Specification

产品型号/ Product Code	SL1318AE-18	SL1318AD-18	SL1318AF-18	SL1318AJ-18
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	18pcs	18pcs	18pcs	18pcs
额定功率/ Rated Power	90W	72W	144W	72W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	14/1(pcs)	18/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1318BE-15	SL1318BD-15	SL1318BF-15	SL1318BJ-15
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	15pcs	15pcs	15pcs	15pcs
额定功率/ Rated Power	75W	60W	120W	60W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	16/2(pcs)	22/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1318CE-12	SL1318CD-12	SL1318CF-12	SL1318CJ-12
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	12pcs	12pcs	12pcs	12pcs
额定功率/ Rated Power	60W	48W	96W	48W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	22/2(pcs)	26/3(pcs)	1pcs	3pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

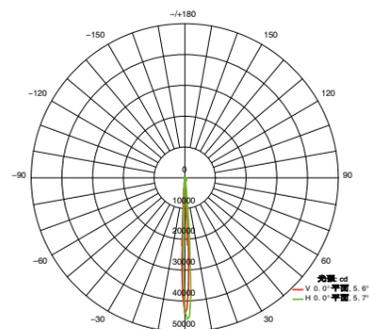


平均光束角 (50%): 5.9 度
SL1318 6°

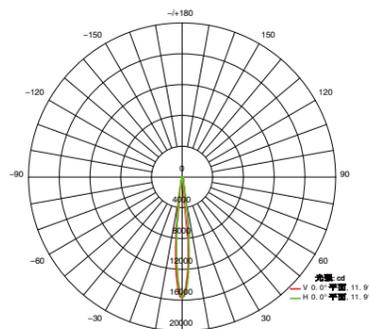


平均光束角 (50%): 11.9 度
SL1318 12°

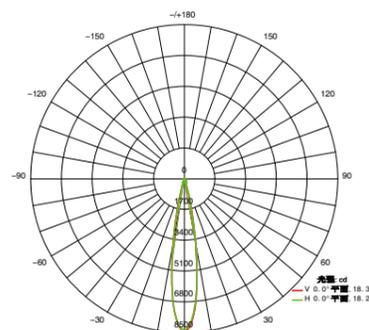


平均光束角 (50%): 18.3 度
SL1318 20°

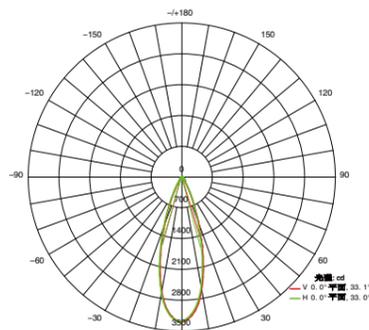

平均光束角 (50%): 33.0 度
SL1318 30°

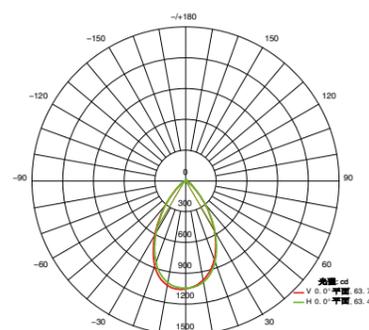

平均光束角 (50%): 63.5 度
SL1318 60°

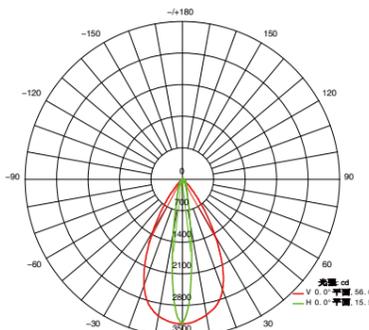


平均光束角 (50%): 36.0 度
SL1318 10x70°



Flood Light Series

SL1318U

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

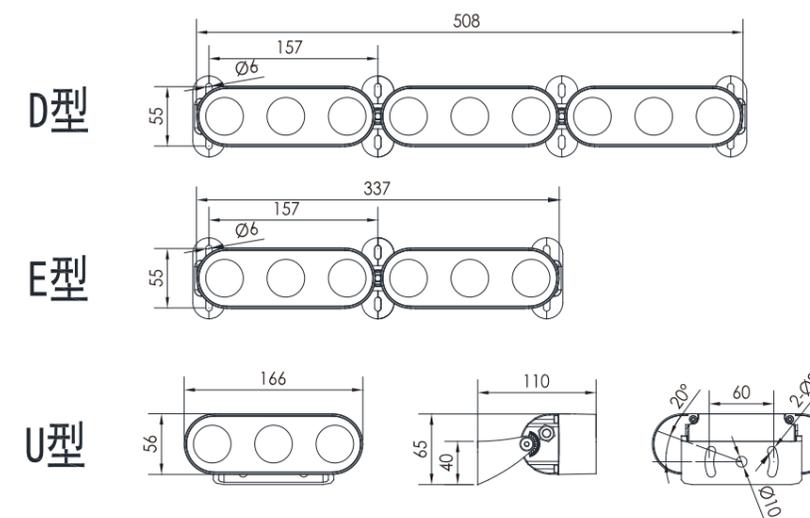

技术参数 Specification

产品型号/ Product Code	SL1318DE-9	SL1318DD-9	SL1318DF-9	SL1318DJ-9
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rated Power	45W	36W	72W	36W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	28/3(pcs)	36/4(pcs)	2pcs	4pcs
产品型号/ Product Code	SL1318EE-6	SL1318ED-6	SL1318EF-6	SL1318EJ-6
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	6pcs	6pcs	6pcs	6pcs
额定功率/ Rated Power	30W	24W	48W	24W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	44/4(pcs)	55/6(pcs)	3pcs	6pcs
产品型号/ Product Code	SL1318UE-3	SL1318UD-3	SL1318UF-3	SL1318UJ-3
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	3pcs	3pcs	3pcs	3pcs
额定功率/ Rated Power	15W	12W	24W	12W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	88/9(pcs)	110/12(pcs)	6pcs	12pcs


Flood Light Series

SL1319

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics




reddot winner 2020

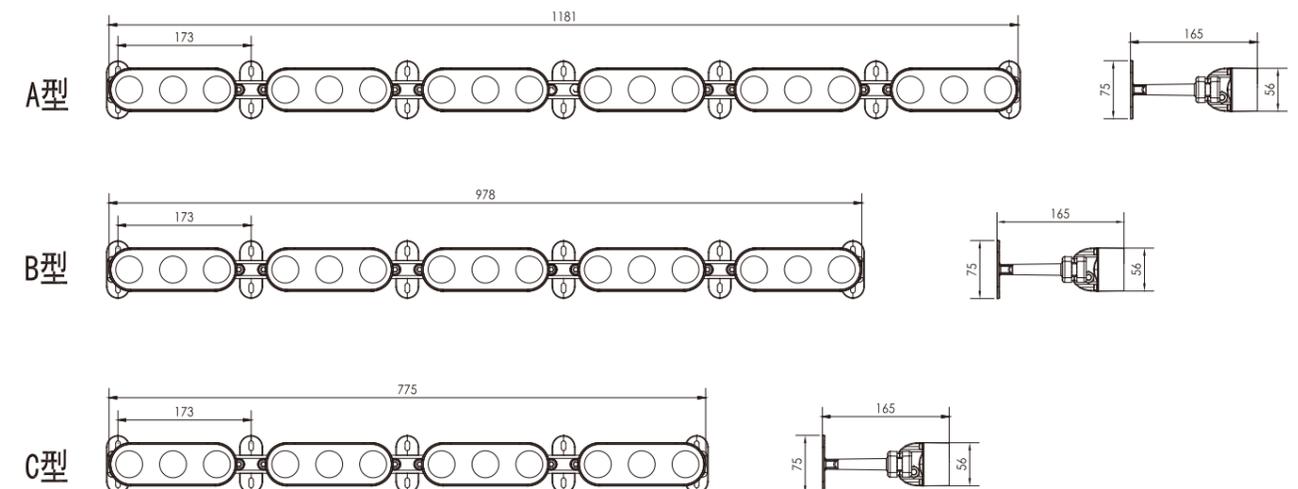


技术参数 Specification

产品型号/ Product Code	SL1319AE-18	SL1319AD-18	SL1319AF-18	SL1319AJ-18
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	18pcs	18pcs	18pcs	18pcs
额定功率/ Rated Power	90W	72W	144W	72W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	14/1(pcs)	18/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1319BE-15	SL1319BD-15	SL1319BF-15	SL1319BJ-15
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	15pcs	15pcs	15pcs	15pcs
额定功率/ Rated Power	75W	60W	120W	60W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	16/2(pcs)	22/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1319CE-12	SL1319CD-12	SL1319CF-12	SL1319CJ-12
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	12pcs	12pcs	12pcs	12pcs
额定功率/ Rated Power	60W	48W	96W	48W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	22/2(pcs)	26/3(pcs)	1pcs	3pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

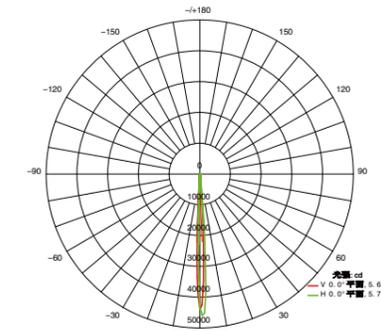


平均光束角(50%): 5.6度
SL1319 6°

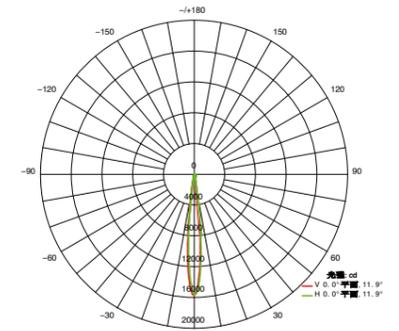


平均光束角(50%): 11.9度
SL1319 12°

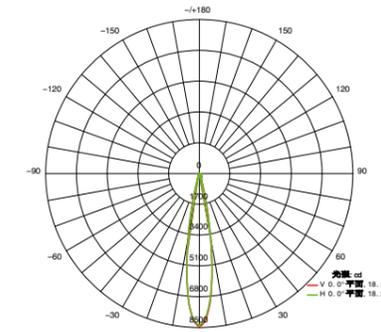


平均光束角(50%): 18.3度
SL1319 20°

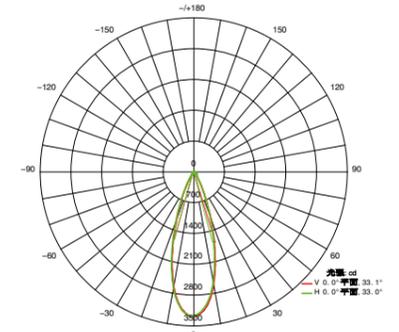

平均光束角(50%): 33.0度
SL1319 30°

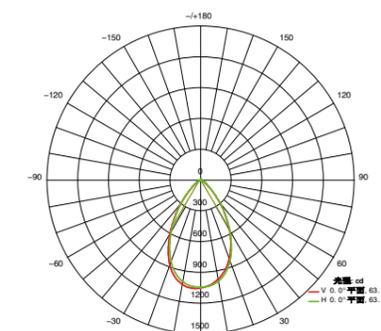

平均光束角(50%): 63.5度
SL1319 60°

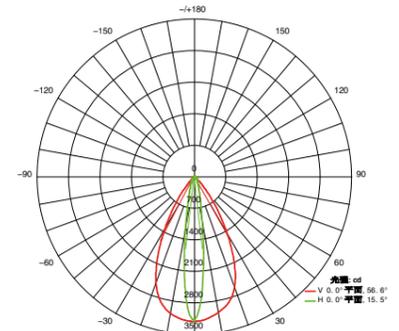


平均光束角(50%): 36.0度
SL1319 10x70°



Flood Light Series

SL1319U

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

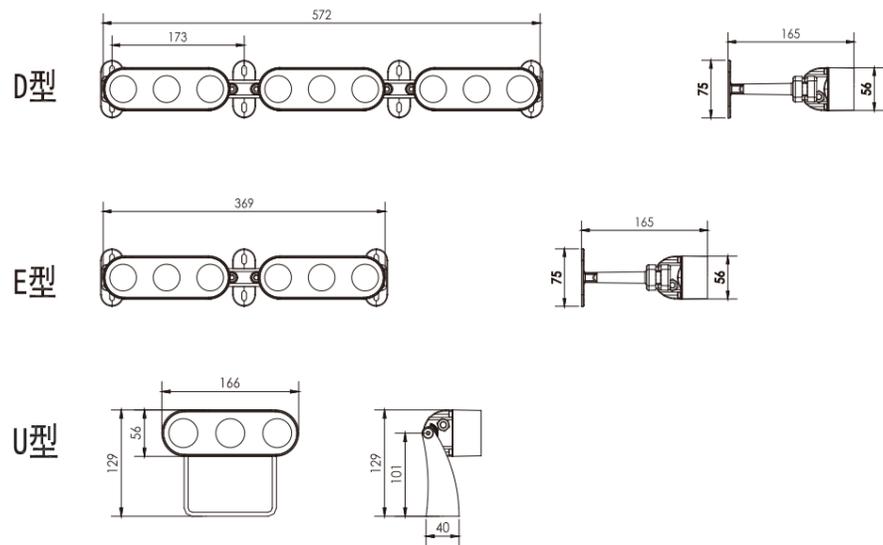

技术参数 Specification

产品型号/ Product Code	SL1319DE-9	SL1319DD-9	SL1319DF-9	SL1319DJ-9
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rated Power	45W	36W	72W	36W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	28/3(pcs)	36/4(pcs)	2pcs	4pcs
产品型号/ Product Code	SL1319EE-6	SL1319ED-6	SL1319EF-6	SL1319EJ-6
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	6pcs	6pcs	6pcs	6pcs
额定功率/ Rated Power	30W	24W	48W	24W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	44/4(pcs)	55/6(pcs)	3pcs	6pcs
产品型号/ Product Code	SL1318UE-3	SL1319UD-3	SL1319UF-3	SL1319UJ-3
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	3pcs	3pcs	3pcs	3pcs
额定功率/ Rated Power	15W	12W	24W	12W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	88/8(pcs)	110/12(pcs)	6pcs	12pcs

Flood Light Series

SL1311 PRO MAX

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics


LED 恒功率全色域染色灯

Dopamine

多巴胺色彩

eyePRO


光学护眼

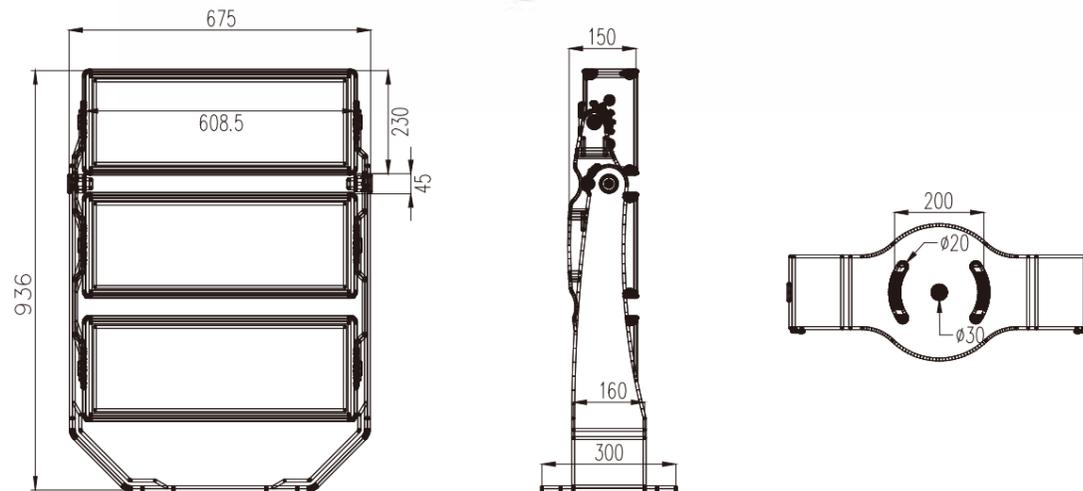

Flood Light Series

SL1311 PRO

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

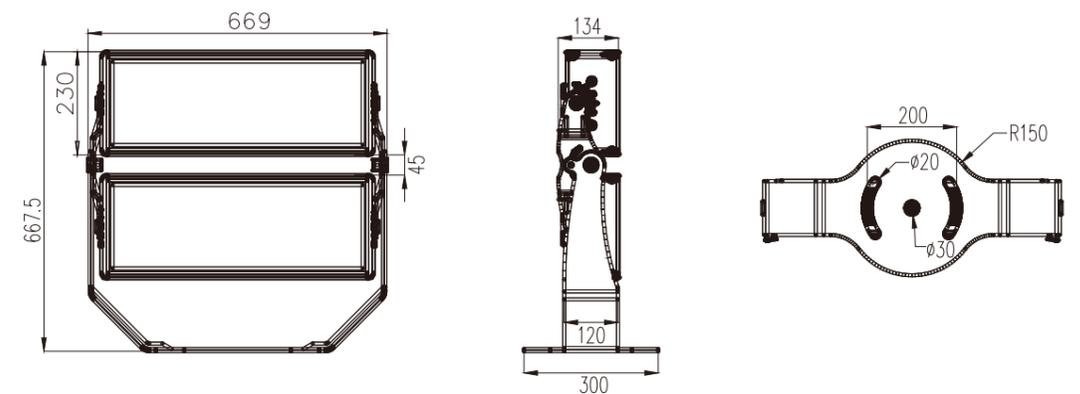

Flood Light Series

SL1311A

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics





LED 恒功率全色域染色灯

Dopamine

多巴胺色彩

EYEPRO

光学护眼

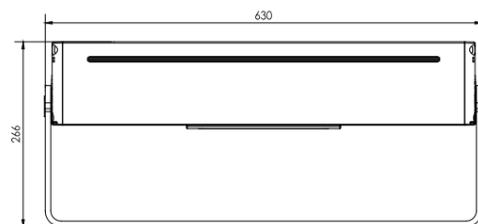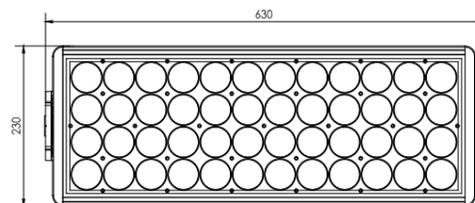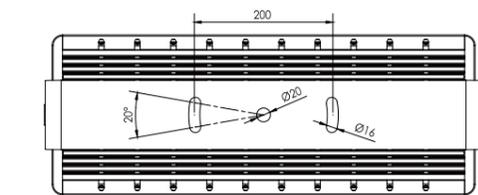

产品简介 Product Introduction

- 一、高功率LED灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可选择三种支架安装方式，满足多种场合的户外工程应用。
- 三、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Three rack mounting ways available can meet the various occasions demands for outdoor projects.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

产品型号/ Product Code	SL1311AM-48	SL1311AE-48	SL1311N-48KP	SL1311Q-48KP
Led品牌/ Led Brand	CREE	CREE	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	48pcs	48pcs	48pcs	48pcs
额定功率/ Rared Power	300W	300W	450W	450W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Rangle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15x60°	8° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10%~90%	10%~90%
产品型号/ Product Code	SL1311AF-48	SL1311AC-192		
Led品牌/ Led Brand	RGBW 4in1	LUXEON5050		
Led数量/ Led Quantity	48pcs	192pcs		
额定功率/ Rared Power	400W	320W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single		
发光角度/ Beam Rangle	5° 10° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°		
控制方式/ Control Mode	DMX512	CC/DALI/0-10V		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境温度/ Ambient Humidity	10%~90%	10% ~ 90%		

Flood Light Series

SL1311B

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics





LED 恒功率全色域染色灯

Dopamine

多巴胺色彩

eyePRO

光学护眼

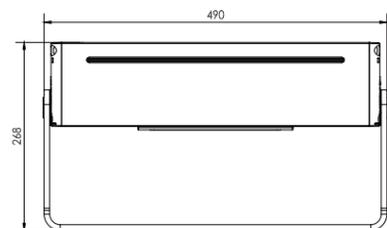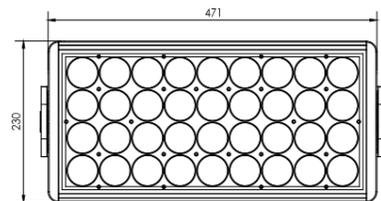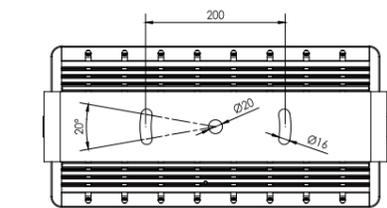

产品简介 Product Introduction

- 一、高功率LED灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可选择三种支架安装方式，满足多种场合的户外工程应用。
- 三、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Three rack mounting ways available can meet the various occasions demands for outdoor projects.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

产品型号/ Product Code	SL1311BM-36	SL1311BE-36	SL1311BN-36KP	SL1311BQ-36KP
Led品牌/ Led Brand	CREE	CREE	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	36pcs	36pcs	36pcs	36pcs
额定功率/ Rared Power	230W	240W	320W	320W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Rangle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15x60°	8° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1311BF-36	SL1311BC-144		
Led品牌/ Led Brand	RGBW 4in1	LUXEON5050		
Led数量/ Led Quantity	36pcs	144pcs		
额定功率/ Rared Power	280W	240W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single		
发光角度/ Beam Rangle	5° 10° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°		
控制方式/ Control Mode	DMX512	CC/DALI/0-10V		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境温度/ Ambient Humidity	10%~90%	10%~90%		

Flood Light Series

SL1311C

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics


LED 恒功率全色域染色灯

Dopamine

多巴胺色彩

eyePRO

光学护眼

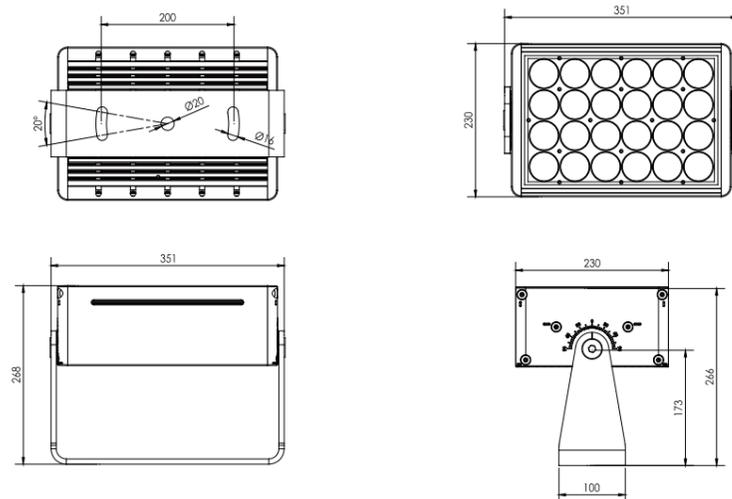

产品简介 Product Introduction

- 一、高功率LED灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可选择三种支架安装方式，满足多种场合的户外工程应用。
- 三、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。


- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Three rack mounting ways available can meet the various occasions demands for outdoor projects.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

产品型号/ Product Code	SL1311CM-24	SL1311CE-24	SL1311CN-24KP	SL1311BQ-24KP
Led品牌/ Led Brand	CREE	CREE	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	24pcs	24pcs	24pcs	24pcs
额定功率/ Rated Power	160W	160W	240W	240W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Rangle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15x60°	8° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
产品型号/ Product Code	SL1311CF-24	SL1311CC-96		
Led品牌/ Led Brand	RGBW 4in1	LUXEON5050		
Led数量/ Led Quantity	24pcs	96pcs		
额定功率/ Rated Power	200W	160W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single		
发光角度/ Beam Rangle	5° 10° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°		
控制方式/ Control Mode	DMX512	CC/DALI/0-10V		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境温度/ Ambient Humidity	10%~90%	10% ~ 90%		

Flood Light Series

SL1310A

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

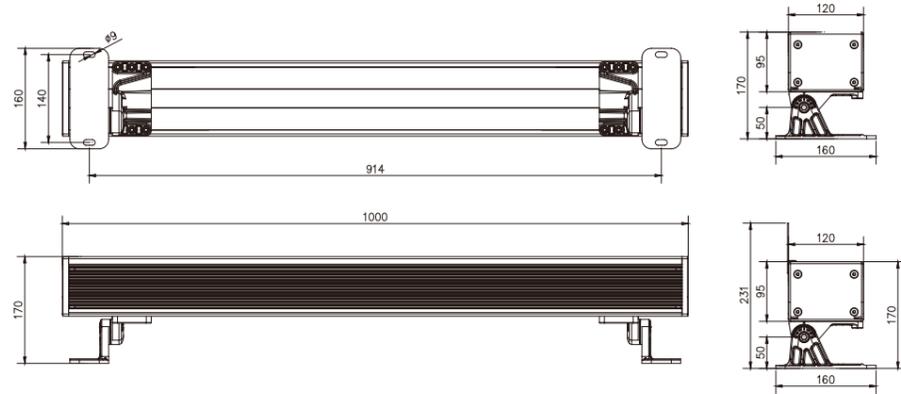

技术参数 Specification



产品型号/ Product Code	SL1310AM-48	SL1310AE-48	SL1310AP-48	SL1310AF-48	SL1310AC-108
LED品牌/ LED Brand	CREE	CREE XP-L/OSRAM P9	RGBWCL 6in1	OSRAM RGBW 4in1	CREE XP-G3
LED数量/ LED Quantity	48pcs	48pcs	48pcs	48pcs	108pcs
额定功率/ Rated Power	300W	300W	300W	300W	300W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBWCL	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512/RDM	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	4pcs	4pcs	4pcs	4pcs	4pcs



Flood Light Series

SL1310B

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

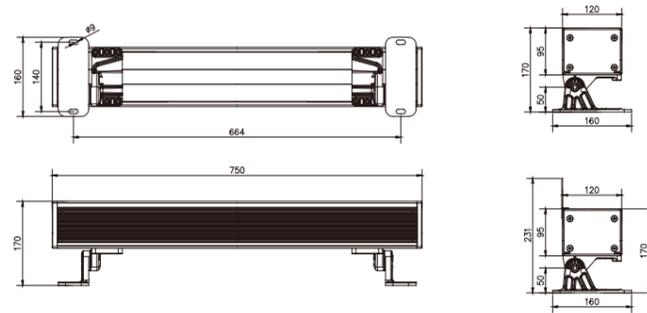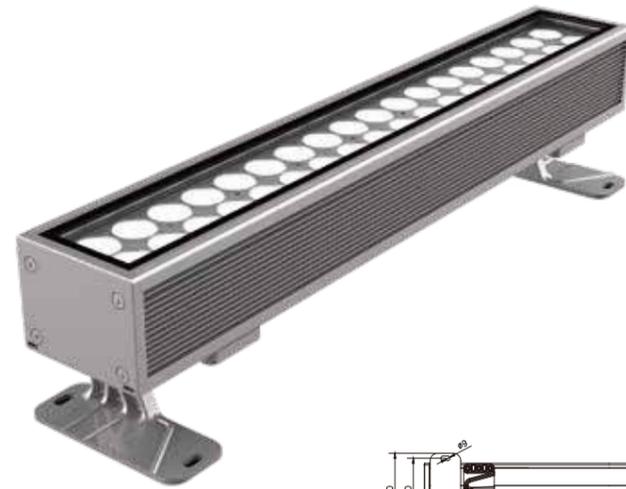



技术参数 Specification

产品型号 / Product Code	SL1310BM-36	SL1310BE-36	SL1310BP-36	SL1310BF-36	SL1310BC-80
LED品牌 / LED Brand	CREE	CREE XP-L/OSRAM P9	RGBWCL 6in1	OSRAM RGBW 4in1	CREE XP-G3
LED数量 / LED Quantity	36pcs	36pcs	36pcs	36pcs	80pcs
额定功率 / Rated Power	230W	240W	240W	240W	220W
输入电压 / Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100V-305V
频率 / Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	RGBWCL	RGBW	Single
发光角度 / Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°
控制方式 / Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512/RDM	CC/DALI/0-10V
使用寿命 / Life	80000H	80000H	80000H	80000H	80000H
防护等级 / Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量 / In series(max)	5pcs	5pcs	5pcs	5pcs	6pcs

Flood Light Series

SL1310C

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

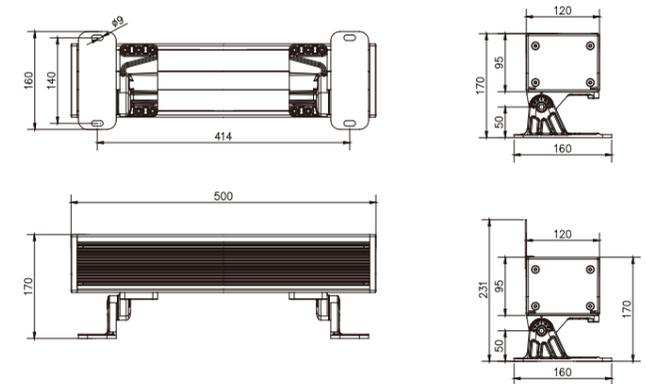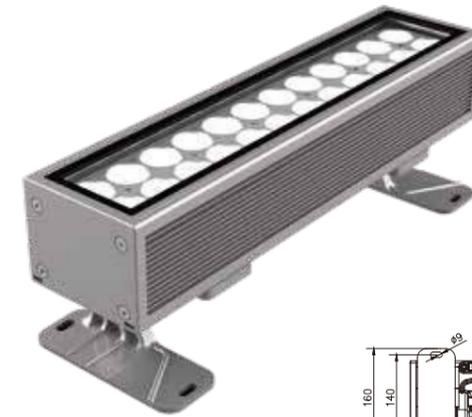


技术参数 Specification

产品型号 / Product Code	SL1310CM-24	SL1310CE-24	SL1310CP-24	SL1310CF-24	SL1310CC-54
LED品牌 / LED Brand	CREE	CREE XP-L/OSRAM P9	RGBWCL 6in1	OSRAM RGBW 4in1	CREE XP-G3
LED数量 / LED Quantity	24pcs	24pcs	24pcs	24pcs	54pcs
额定功率 / Rated Power	160W	160W	160W	160W	160W
输入电压 / Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100V-305V
频率 / Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	RGBWCL	RGBW	Single
发光角度 / Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°		8° 12.5° 20° 30° 60° 15x30° 10x60°
控制方式 / Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512	CC/DALI/0-10V
使用寿命 / Life	80000H	80000H	80000H	80000H	80000H
防护等级 / Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量 / In series(max)	8pcs	8pcs	8pcs	8pcs	8pcs

Flood Light Series

SL1310D

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

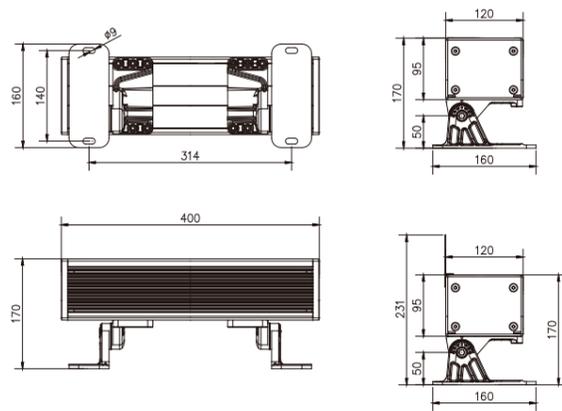


技术参数 Specification

产品型号/ Product Code	SL1310DM-18	SL1310DE-18	SL1310DP-18	SL1310DF-18	SL1310DC-40
LED品牌/ LED Brand	CREE	CREE XP-L/OSRAM P9	RGBWCL 6in1	OSRAM RGBW 4in1	CREE XP-G3
LED数量/ LED Quantity	18pcs	18pcs	18pcs	18pcs	40pcs
额定功率/ Rated Power	120W	120W	120W	120W	120W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBWCL	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	10pcs	10pcs	10pcs	10pcs	10pcs

Flood Light Series

SL1310E

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

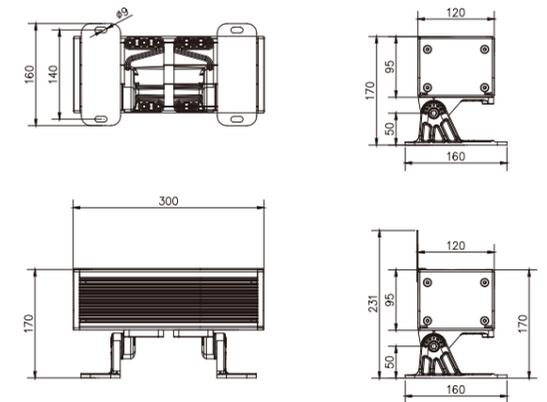

技术参数 Specification

产品型号/ Product Code	SL1310EM-12	SL1310EE-12	SL1310EP-12	SL1310EF-12	SL1310EC-28
LED品牌/ LED Brand	CREE	CREE XP-L/OSRAM P9	RGBWCL 6in1	OSRAM RGBW 4in1	CREE XP-G3
LED数量/ LED Quantity	12pcs	12pcs	12pcs	12pcs	28pcs
额定功率/ Rated Power	80W	80W	80W	80W	80W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBWCL	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	15pcs	15pcs	15pcs	15pcs	15pcs




Flood Light Series

SL1312A

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

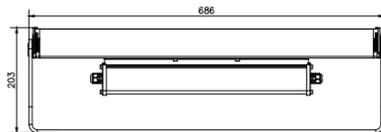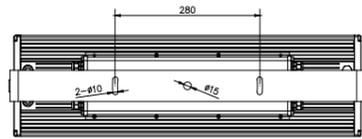

技术参数 Specification

产品型号/ Product Code	SL1312A-180	SL1312A-480
Led品牌/ Led Brand	LUXEON5050	LUXEON3030
Led数量/ Led Quantity	180pcs	480pcs
额定功率/ Rated Power	300W	300W
输入电压/ Input Voltage	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Range	150x60° 40x70° Tilt60° TYPEI TYPEII TYPEIII TYPEIV	15° 25° 40° 60° 90° 120° 40x110° 90x120°
控制方式/ Control Mode	CC/DALI/1-10V/PLC电力载波控制/RS-485控制系统	
使用寿命/ Life	80000H	80000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%




Flood Light Series

SL1312B

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

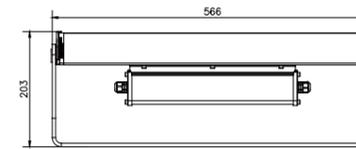

技术参数 Specification

产品型号/ Product Code	SL1312B-144	SL1312B-384
Led品牌/ Led Brand	LUXEON5050	LUXEON3030
Led数量/ Led Quantity	144pcs	384pcs
额定功率/ Rated Power	200W	200W
输入电压/ Input Voltage	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Range	150x60° 40x70° Tilt60° TYPEI TYPEII TYPEIII TYPEIV	15° 25° 40° 60° 90° 120° 40x110° 90x120°
控制方式/ Control Mode	CC/DALI/1-10V/PLC电力载波控制/RS-485控制系统	
使用寿命/ Life	80000H	80000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%


Flood Light Series

SL1312C

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

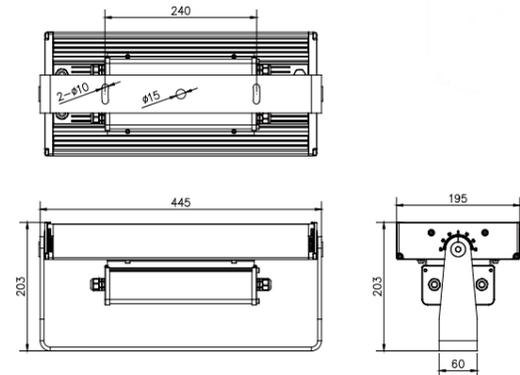

技术参数 Specification

产品型号/ Product Code	SL1312C-180	SL1312C-288
Led品牌/ Led Brand	LUXEON5050	LUXEON3030
Led数量/ Led Quantity	108pcs	288pcs
额定功率/ Rated Power	150W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Rangle	150x60° 40x70° Tilt60° TYPEI TYPEII TYPEIII TYPEIV	15° 25° 40° 60° 90° 120° 40x110° 90x120°
控制方式/ Control Mode	CC/DALI/1-10V/PLC电力载波控制/RS-485控制系统	
使用寿命/ Life	80000H	80000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%


Flood Light Series

SL1312D

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

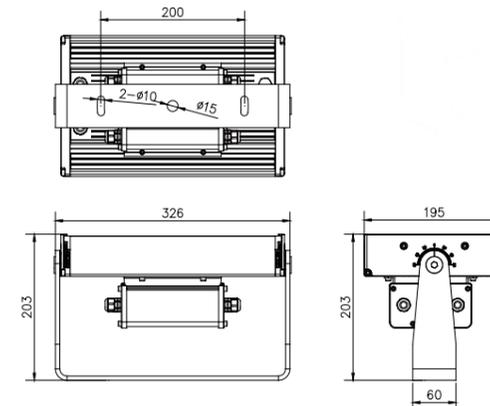

技术参数 Specification

产品型号/ Product Code	SL1312D-72	SL1312D-192
Led品牌/ Led Brand	LUXEON5050	LUXEON3030
Led数量/ Led Quantity	72pcs	192pcs
额定功率/ Rated Power	100W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Rangle	150x60° 40x70° Tilt60° TYPEI TYPEII TYPEIII TYPEIV	15° 25° 40° 60° 90° 120° 40x110° 90x120°
控制方式/ Control Mode	CC/DALI/1-10V/PLC电力载波控制/RS-485控制系统	
使用寿命/ Life	80000H	80000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%

Flood Light Series

SL1315

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO


光学护眼



隧道灯/Tunnel Light



投光灯/Flood Light

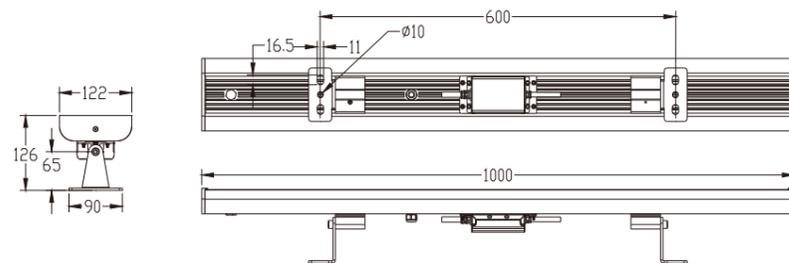

产品简介 Product Introduction

- 一、高功率LED灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可选择三种支架安装方式，满足多种场合的户外工程应用。
- 三、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐摩擦，具有优良的雨水清洁能力。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Three rack mounting ways available can meet the various occasions demands for outdoor projects.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color.;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1315-288A	SL1315-288C	SL1315-48
Led品牌/ Led Brand	LUXEON2835	LUXEON2835	LUXEON5050
Led数量/ Led Quantity	288pcs	288pcs	48pcs
额定功率/ Rated Power	26W	100W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single
发光角度/ Beam Rangle	95°110° 均匀无颗粒感配光	95°110° 均匀无颗粒感配光	8° 12° 20° 30° 45° 60° 10x60°
控制方式/ Control Mode	CC/DALI/1-10V/PLC电力载波控制/RS-485控制系统		
使用寿命/ Life	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10%~90%	10%~90%	10%~90%



LED Tree Light

SL1132T

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

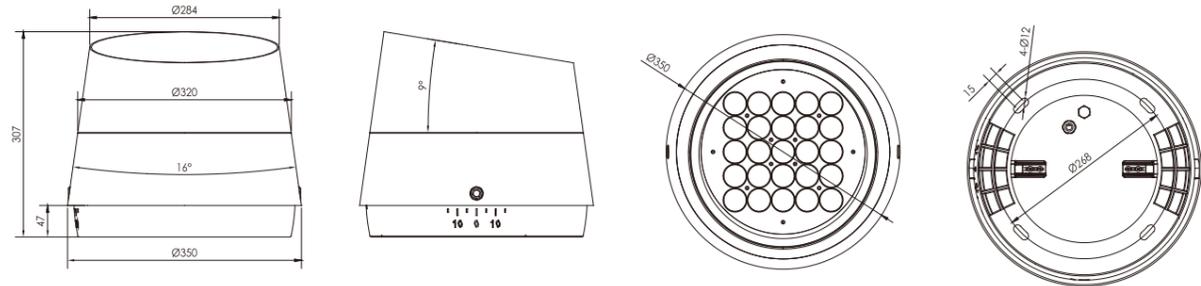


产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1132TE-25	SL1132TD-25	SL1132TF-24	SL1132TC-72
Led品牌/ Led Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in1	CREE XP-E2
Led数量/ Led Quantity	25pcs	25pcs	24pcs	72pcs
额定功率/ Rated Power	120W	85W	150W/200W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC36V / AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5X20		15° 20° 30° 15x60°	5° 8° 12.5° 30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%

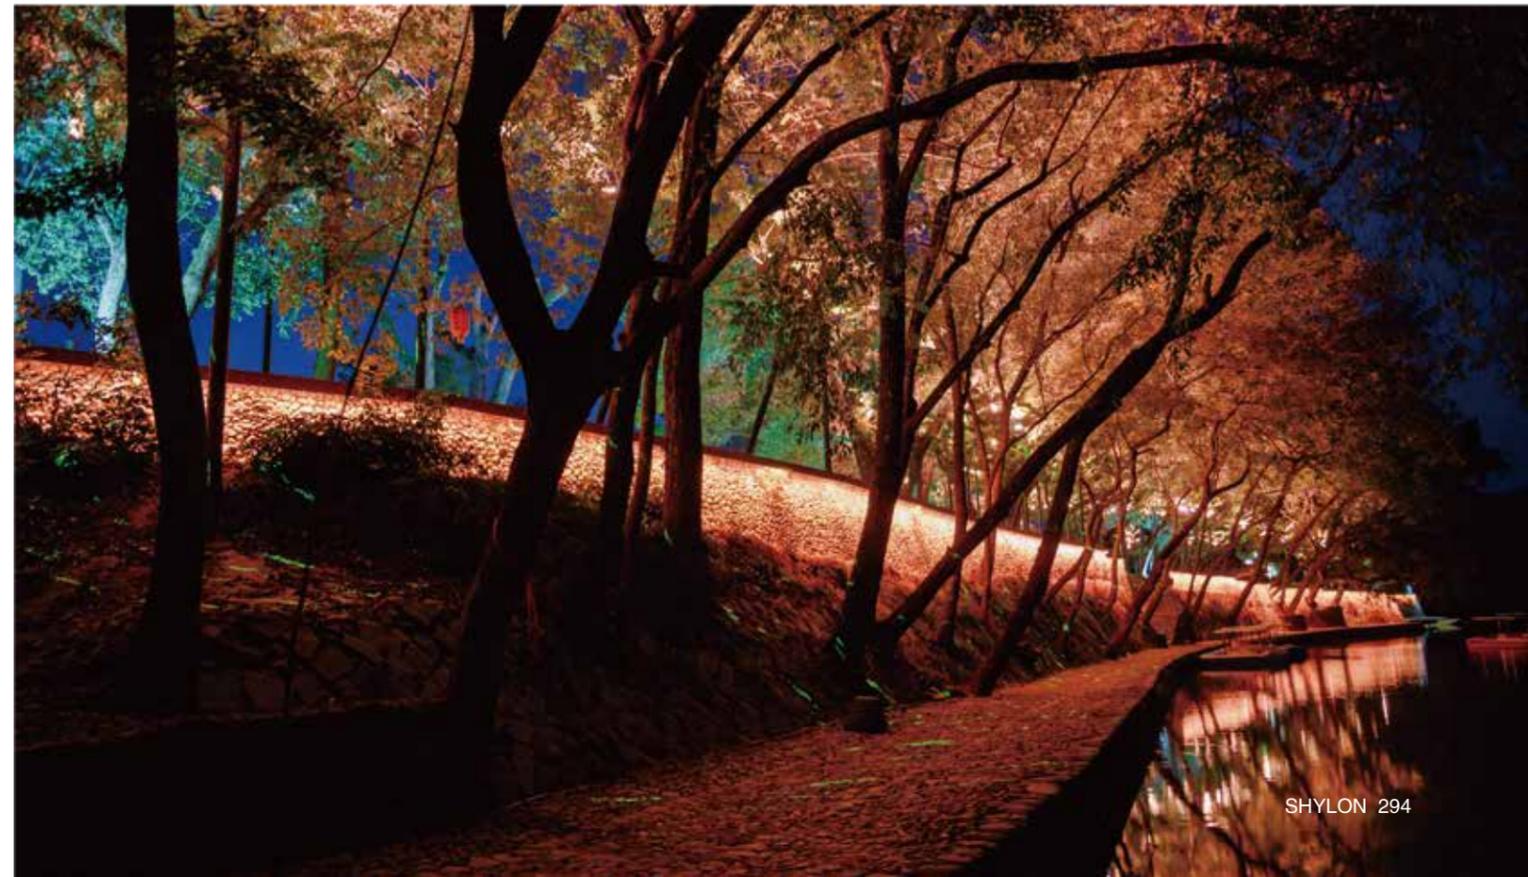


配光曲线 (半角) Distribution Curve Flux (SBC Case)

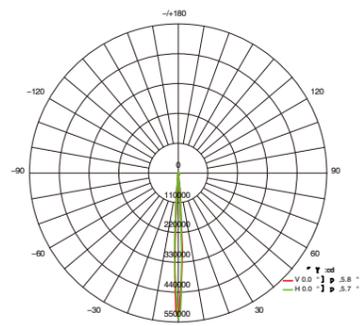


SL1132 6°

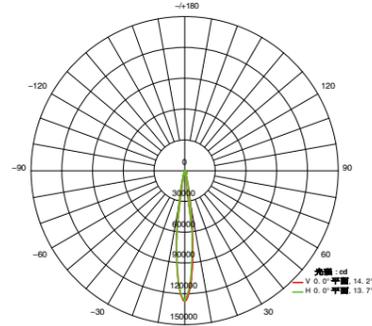


SL1132 15°

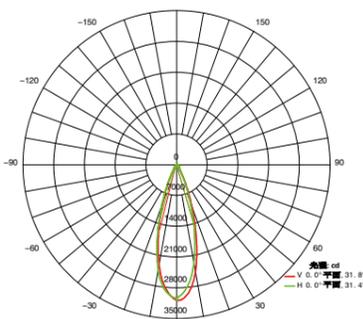


SL1132 30°

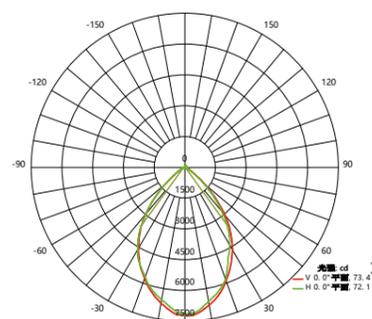

SL1132 60°

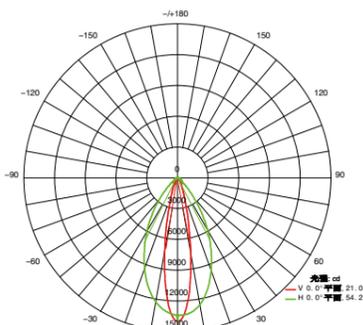

SL1132 15x60°

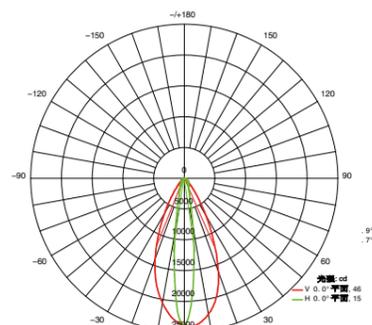

SL1132 10x70°







LED Tree Light

SL1135T

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



reddot winner 2020



产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design, could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1135TE-16	SL1135TD-16	SL1135TF-16	SL1135TC-48
Led品牌/ Led Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in1	CREE XP-E2
Led数量/ Led Quantity	16pcs	16pcs	16pcs	48pcs
额定功率/ Rated Power	75W	60W	100W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC36V / AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20		15° 20° 30° 15x60°	5° 8° 12.5° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	16pcs	22pcs	2/12pcs	2/12pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

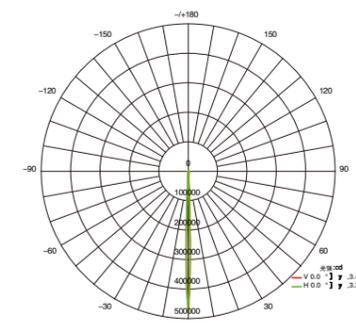


SL1135 3.5°

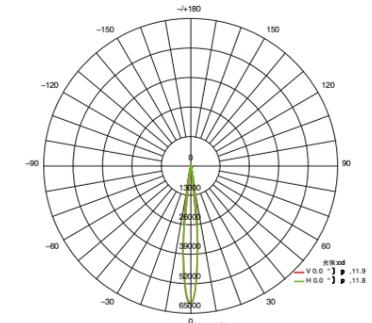


SL1135 12°

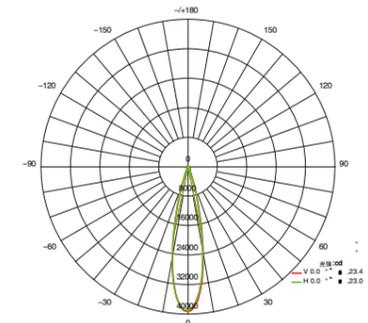


SL1135 20°

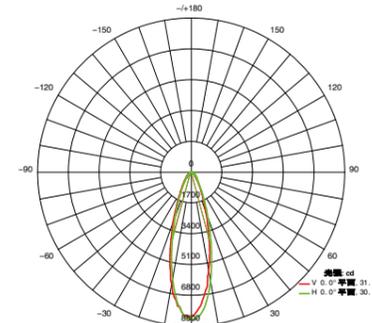

SL1135 30°

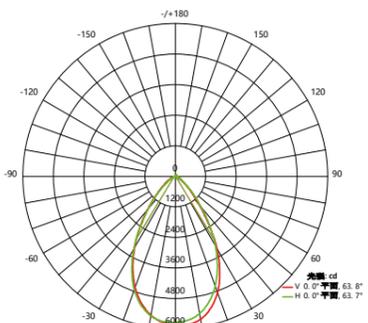

SL1135 60°

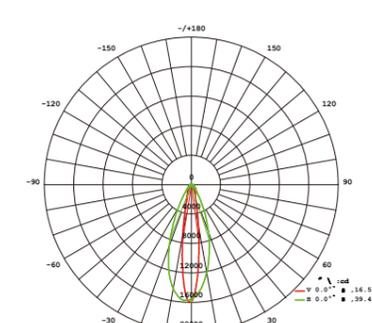


SL1135 10x70°



LED Tree Light

SL1136T

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

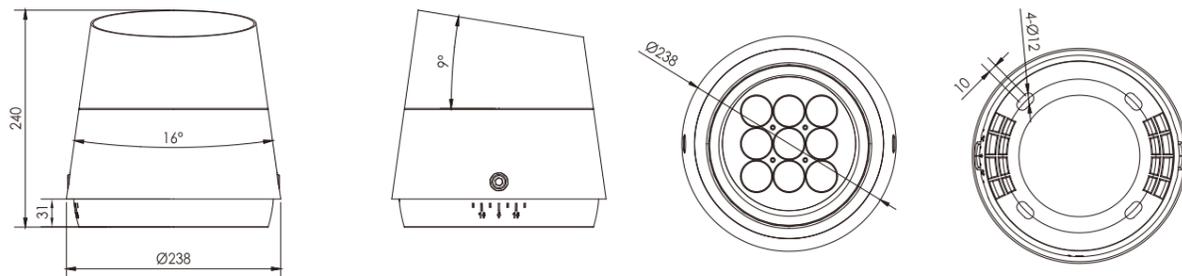


技术参数 Specification

产品型号/ Product Code	SL1136TE-9	SL1136TD-9	SL1136TF-9	SL1136TC-27
Led品牌/ Led Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in1	CREE XP-E2
Led数量/ Led Quantity	9pcs	9pcs	9pcs	27pcs
额定功率/ Rated Power	45W	35W	60W	60W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC36V / AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20°		15° 20° 30° 15x60°	5° 8° 12.5° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	28pcs	36pcs	3/22pcs	3/22pcs

SL1132T / SL1135T / SL1136T / SL1137T




配光曲线 (半角) Distribution Curve Flux (SBC Case)

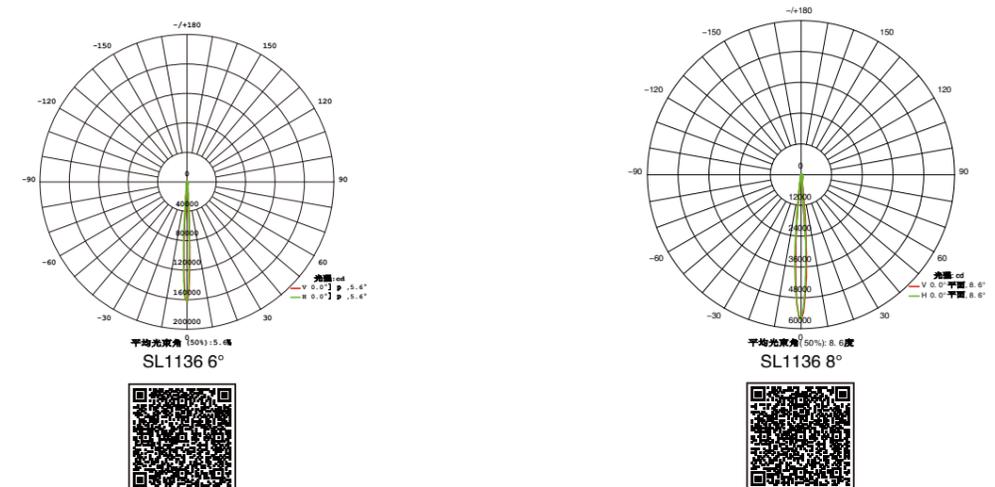


LED Tree Light SL1137T


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

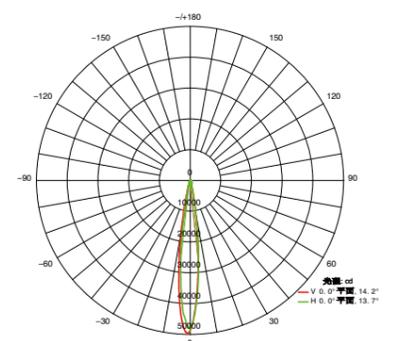


平均光束角 (50%) : 13.0度
SL1136 12°

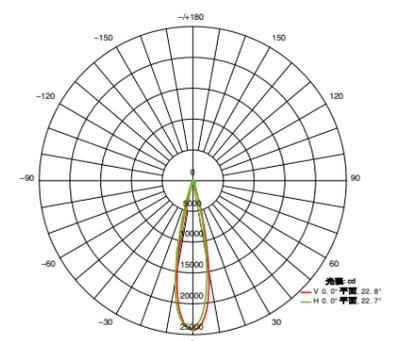


平均光束角 (50%) : 22.8度
SL1136 20°

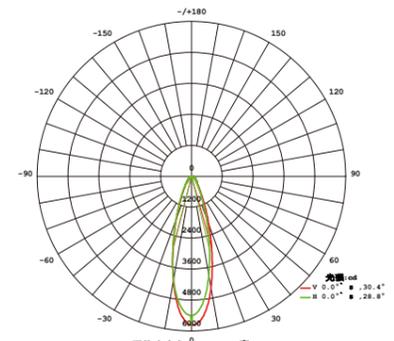


平均光束角 (50%) : 29.6度
SL1136 30°

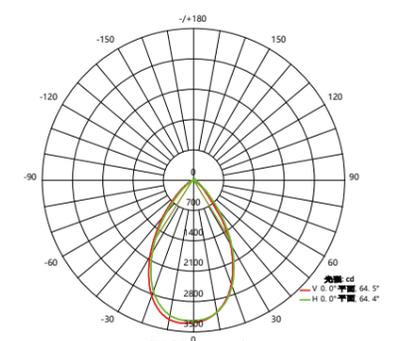

平均光束角 (50%) : 64.5度
SL1136 60°

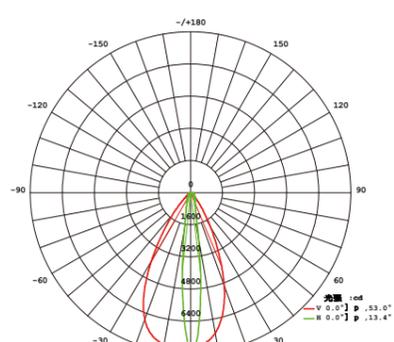





平均光束角 (50%) : 33.2°
SL1136 10x70°

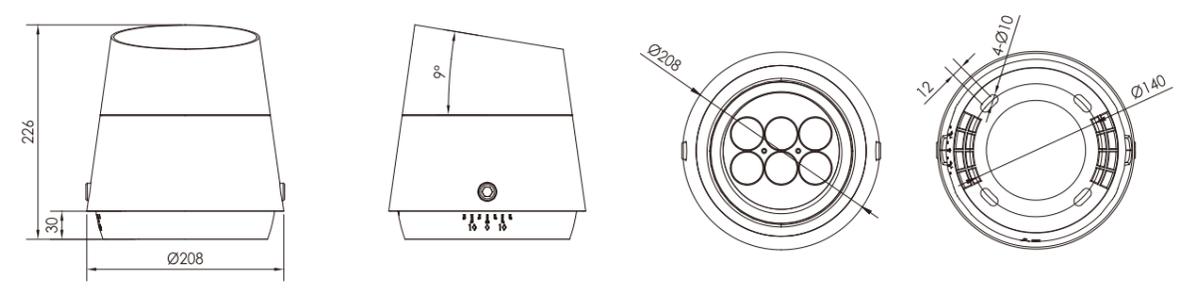

技术参数 Specification

产品型号/ Product Code	SL1137TE-6	SL1137TD-6	SL1137TF-6	SL1137TC-18
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	CREE XP-E
LED数量/ LED Quantity	6pcs	6pcs	6pcs	18pcs
额定功率/ Rated Power	30W	22W	30W	36W
输入电压/ Input Voltage	AC100-264V	AC100-DC264V	DC24V/AC100-264V	DC24V/AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20°	60° 10x70° 5x20°	15° 20° 30° 15x60°	5° 8° 12.5° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	44pcs	60pcs	4/44pcs	4/36pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

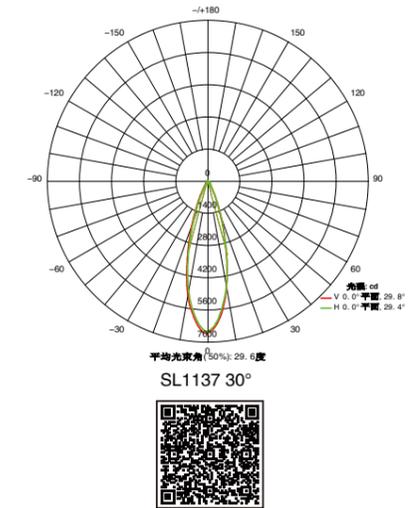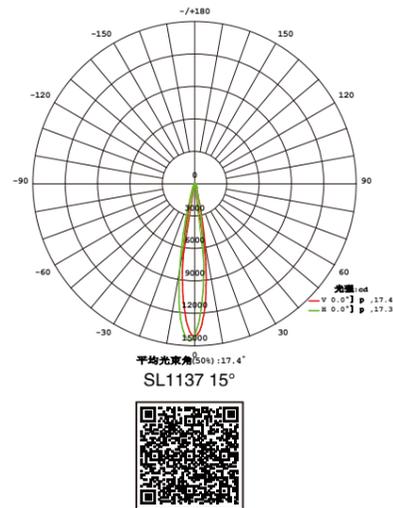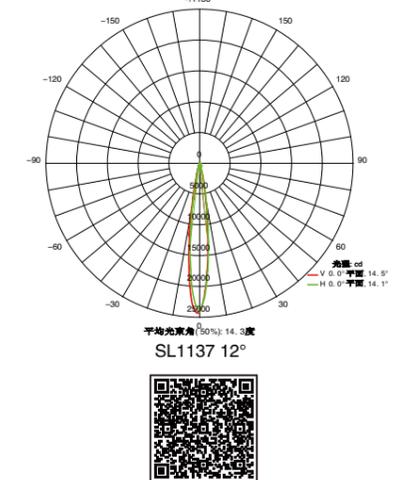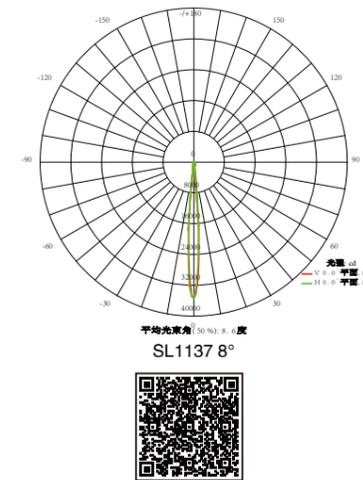



灯体自带30度一体化遮光罩，内部采用高端博物馆照明的防眩光方案，可选用圆孔格栅，蜂窝格栅，布纹玻璃等防眩和控光措施实现见光不见灯的效果。

With external 30 degree Integrated hood and internal anti-glare solution which usually for high-end museum lighting, this uplight also provides round-meshed grill, honeycomb grill, textured glass to get the "only lighting no lamp" effect.



全系列产品均已通过3C、CE、ETL认证测试要求，并获得认证证书。产品工业设计由芯龙欧洲设计中心完成，正在申报全球多个设计大奖，产品的光学和结构组合在国内已申请发明专利。

Designed by SHYLON Europe Design Centre, whole uplight series have got CCC, CE, ETL certificates, and is applying for various Industrial design awards, and the optical design and body structure have applied for patent in China. .

产品标配美国CREE LED，根据LED的光学特点自主开发3.5° /12° /20° /30° /60° /10X70° /5X20° /照树配光等全系列私模透镜实现精准光学。

Based on CREE LED chips, we develop 3.5° /12° /20° /30° /60° /10X70° /5X20° private lens for professional tree lighting, which can realize precise lighting effect.

发明了一种特殊结构，灯体上只有两个固定点就可实现灯具前后调角15度，水平调角15度，操作方便，安装牢固；灯具的核心部件全部位于灯体上部，底座预留了130mm以上的空间容纳支架和配件部分，不超130mm水深的浸水淹没，对灯具没有影响。

We develop a special structure which can adjust 15deg by vertically and horizontally realized by two fixed points, and it is easy to operate and securely installed; All core parts are in the upper space of uplight, there is 130mm height for brackets and fitting parts, no influences on uplight for water lower than 130mm.

高压铸铝灯体，平均壁厚大于2.5mm,专利技术内外组合式散热设计；采用进口硅胶密封圈,耐高低温,耐老化。产品表面双层氟碳喷涂，耐候能力十年以上。灯具的安装底座采用抗UV增强型PC（聚碳酸酯），适合长期接触地面，防腐性能优良。

High pressure die casting aluminum light body with more than 2.5mm thickness; Patented internal and external combined heat dissipation design;

Imported silicone sealing ring ensures resistance to high/low temperature and aging; Double layer fluorocarbon coating provides a 10years ; Made in UV-resistant PC, Light base is suitable for long-term contact with the ground and has excellent corrosion resistance.



Inground Light Series

SL2311A

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

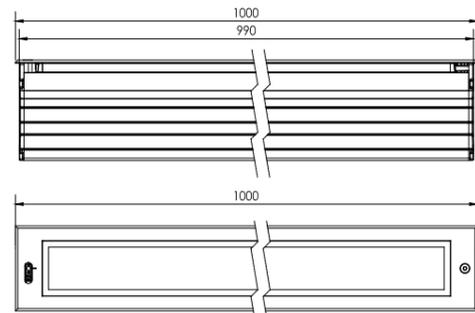

开孔尺寸: L990*W100*H130



技术参数 Specification

产品型号 / Product Code	SL2311AM-20	SL2311AE-20	SL2311AD-20	SL2311AF-20	SL2311AH-20
LED品牌 / LED Brand	CREE/OSRAM	CREE XP-L	CREE XP-G3	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量 / LED Quantity	20pcs	20pcs	20pcs	20pcs	20pcs
额定功率 / Rated Power	100W	100W	60W	100W	60W
输入电压 / Input Voltage	AC176-264V	AC176-264V	AC90-264V	AC176-264V	AC90-264V
频率 / Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	RGBW
发光角度 / Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	8° 15° 20° 30° 45° 10x30° 10x60°
控制方式 / Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命 / Life	50000H	50000H	50000H	50000H	50000H
防护等级 / Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度 / Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度 / Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量 / In series(max)	12pcs	12pcs	20pcs	12pcs	20pcs




Inground Light Series

SL2311B

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

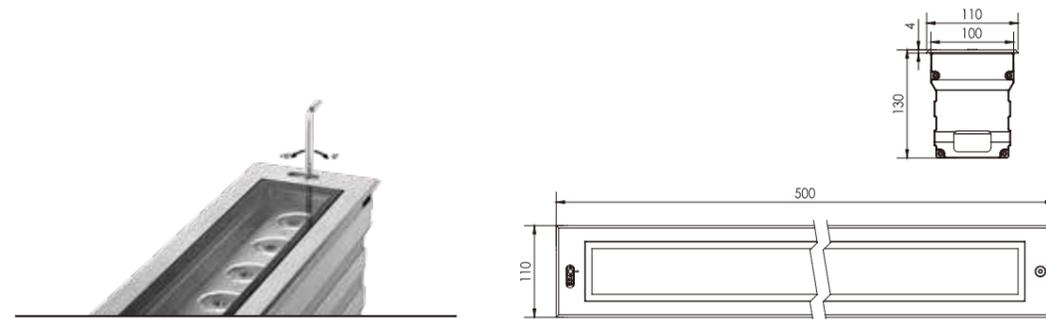

技术参数 Specification

产品型号/ Product Code	SL2311BM-10	SL2311BE-10	SL2311BD-10	SL2311BF-10	SL2311BH-10
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE XP-G3	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量/ LED Quantity	10pcs	10pcs	10pcs	10pcs	10pcs
额定功率/ Rated Power	50W	50W	30W	50W	30W
输入电压/ Input Voltage	AC90-264V	AC90-264V	AC90-264V	AC90-264V	AC90-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	20° 30° 10x30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	26pcs	26pcs	40pcs	26pcs	40pcs


Inground Light Series

SL2311C

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

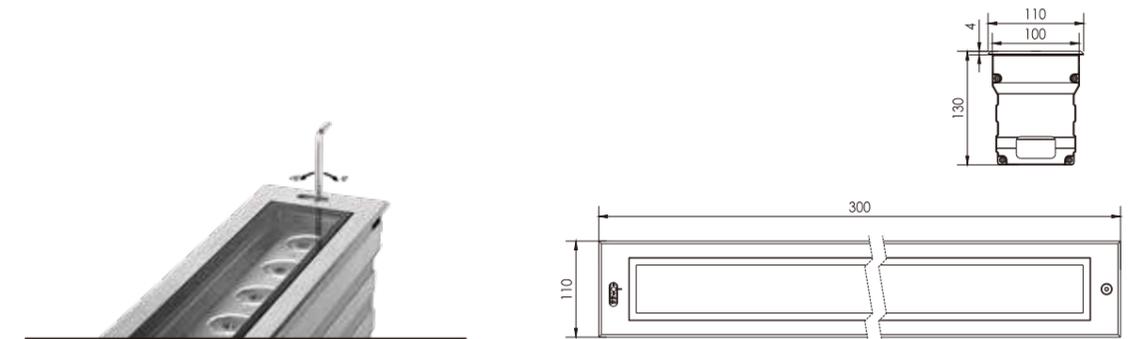


技术参数 Specification

产品型号/ Product Code	SL2311CM-5	SL2311CE-5	SL2311CD-5	SL2311CF-5	SL2311CH-5
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE XP-G3	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量/ LED Quantity	5pcs	5pcs	5pcs	5pcs	5pcs
额定功率/ Rated Power	30W	30W	20W	30W	20W
输入电压/ Input Voltage	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	20° 30° 10x30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	40pcs	40pcs	60pcs	40pcs	60pcs

Inground Light Series


SL2312

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

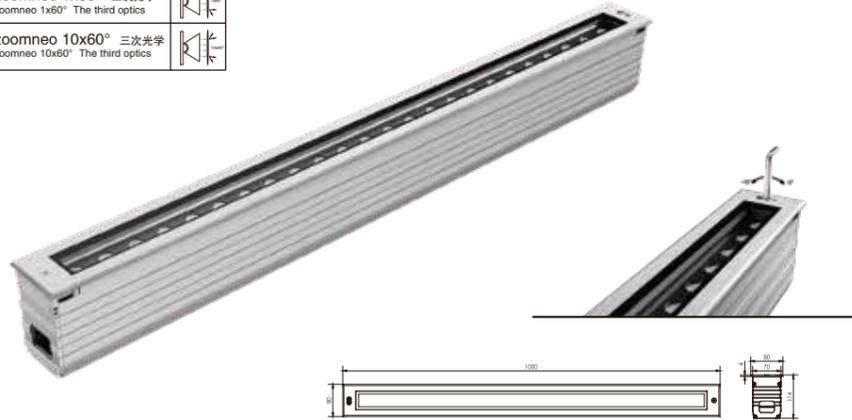

技术参数 Specification



产品型号/Product Code	SL2312B-24	SL2312A-24	SL2312A-18	SL2312B-12(0.5m)	SL2312H-24	
LED品牌/LED Brand	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	OSRAM	
LED数量/LED Quantity	24pcs	24pcs	18pcs	12pcs	24pcs	
额定功率/Rated Power	45W	28W	21W	28W	48W	
输入电压/Input Voltage	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-240V	DC24V/AC100-265V	
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	
颜色/Color	Single	Single	Single	Single	RGBW 4IN1	
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°				20° 45° 60° 15x25° 15x60°	
控制方式/Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	
环境温度/Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	
串联数量/ In series(max)	3/20pcs	5/46pcs	6/60pcs	5/46pcs	3/20pcs	
产品型号/Product Code	SL2312A-12(0.5m)	SL2312A-9(0.5m)	SL2312A-8(0.3m)	SL2312A-6(0.3m)	SL2312H-12(0.5m)	SL2312H-6(0.3m)
LED品牌/LED Brand	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	12pcs	9pcs	9pcs	6pcs	12pcs	6pcs
额定功率/Rated Power	14W	11W	11W	7W	24W	12W
输入电压/Input Voltage	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	Single	Single	Single	Single	RGBW 4IN1	RGBW 4IN1
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°				20° 45° 60° 15x25° 15x60°	
控制方式/Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	10/80pcs	13/120pcs	6/54pcs	13/120pcs	20/150pcs	12/110pcs

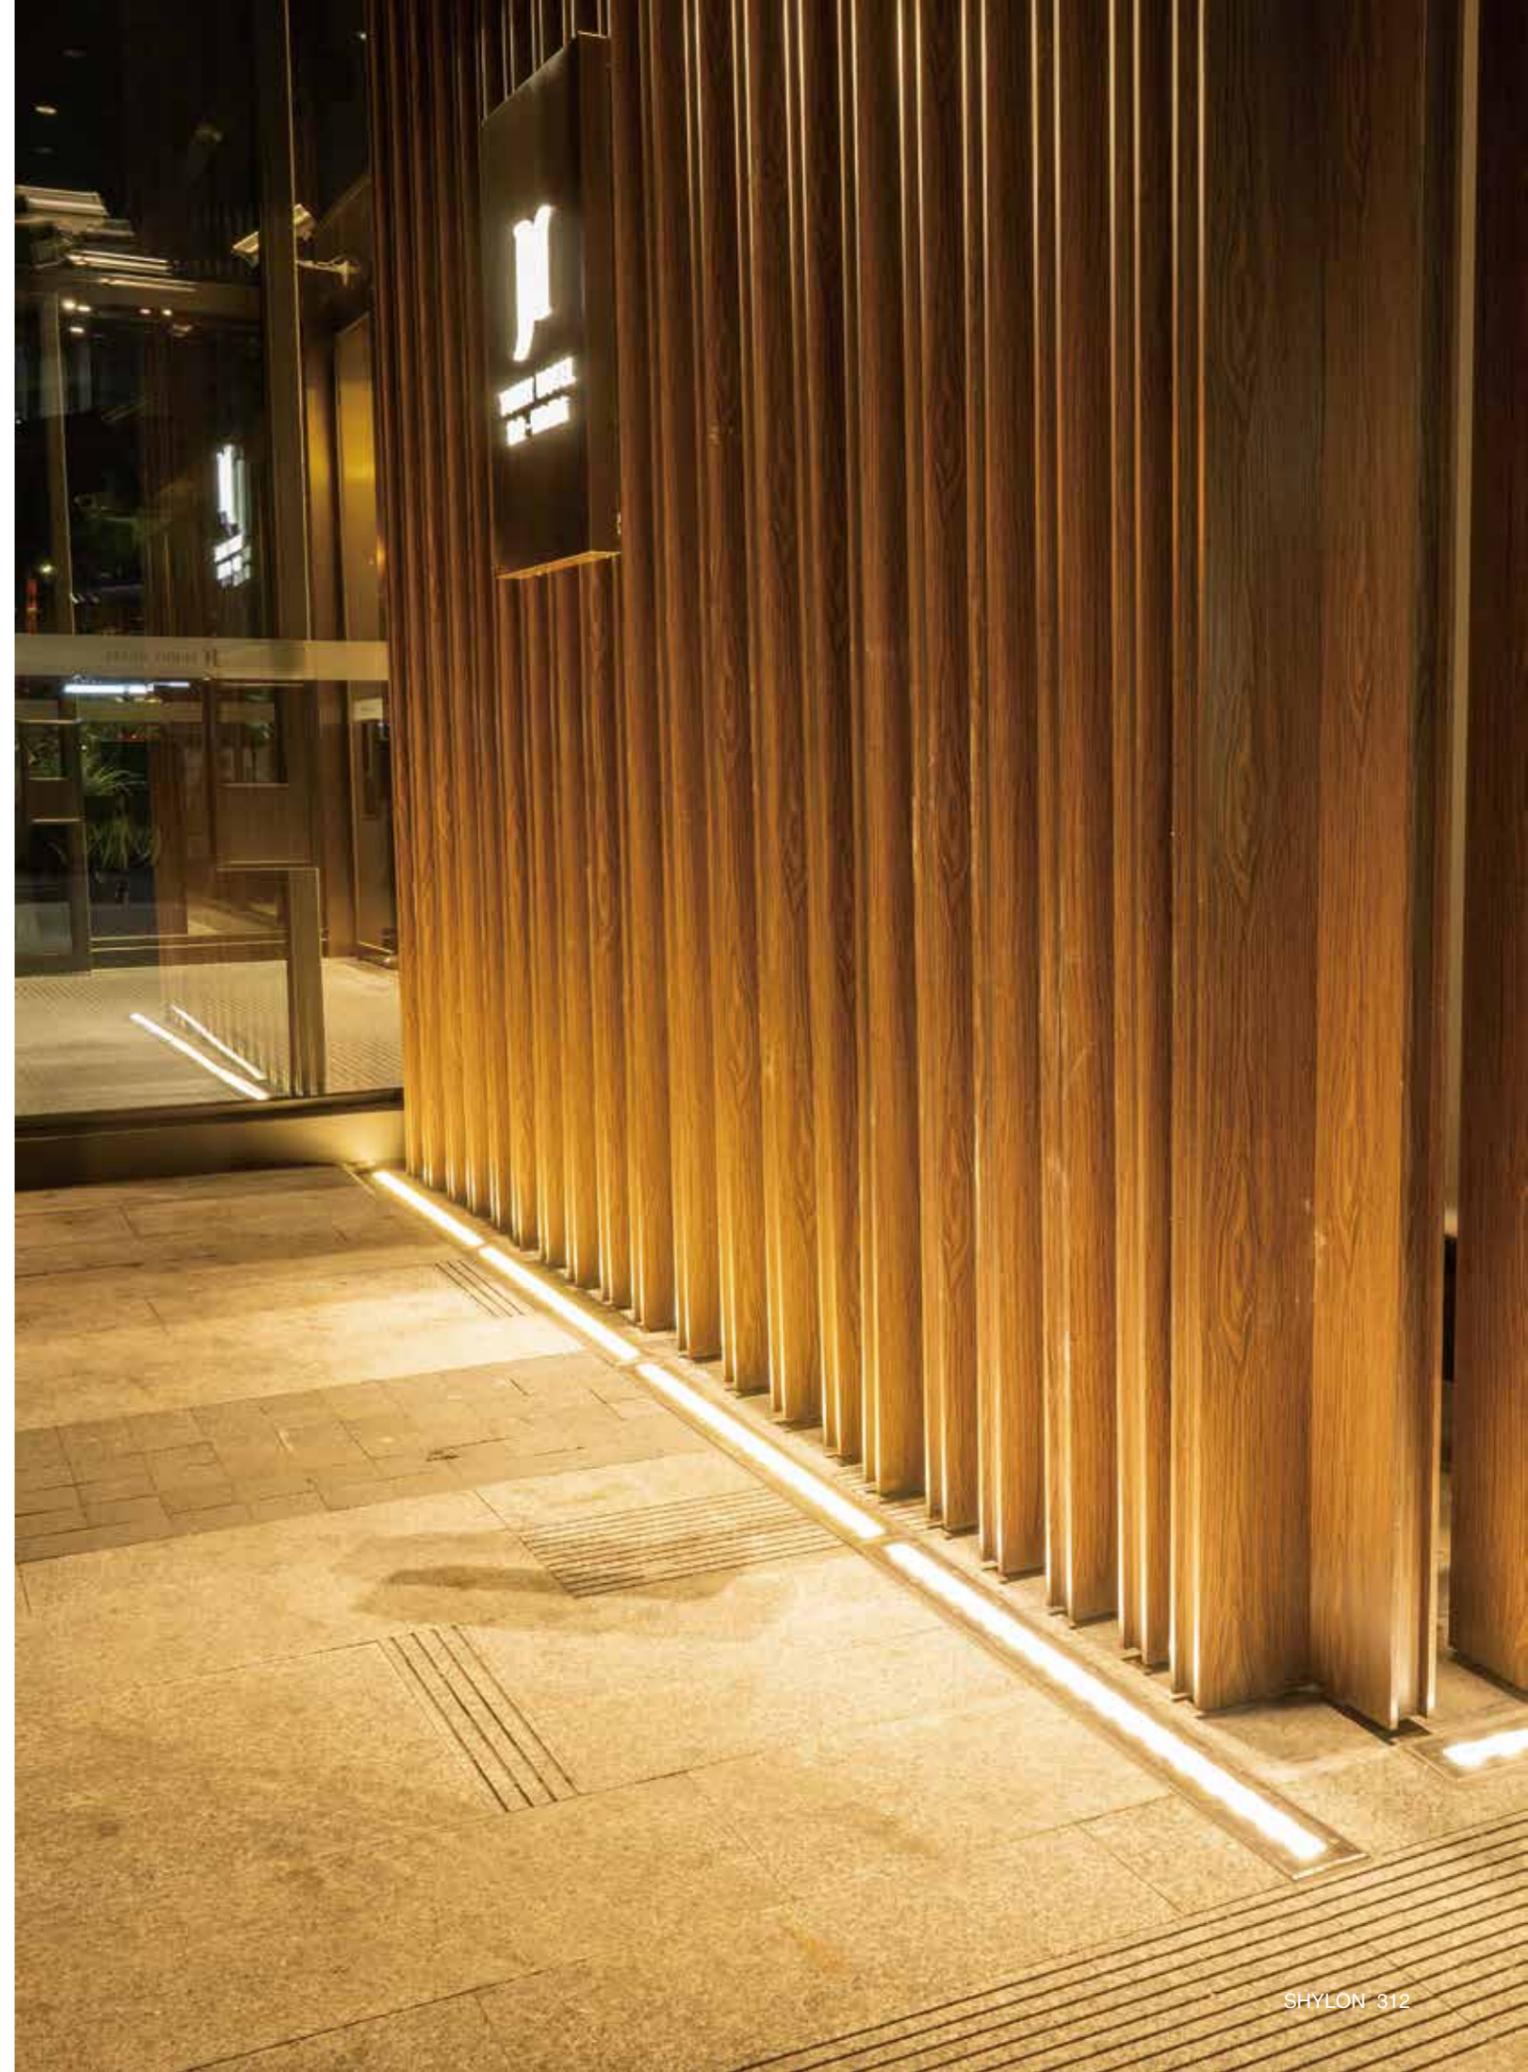

Inground Light Series

SL1307P

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

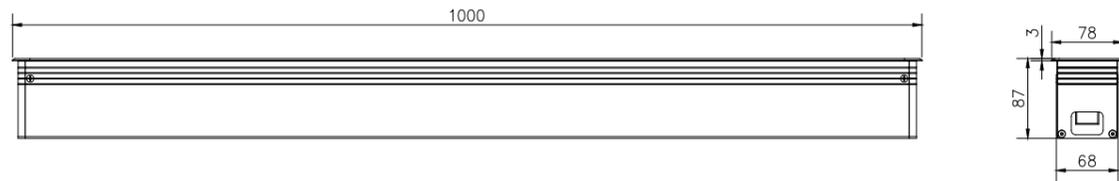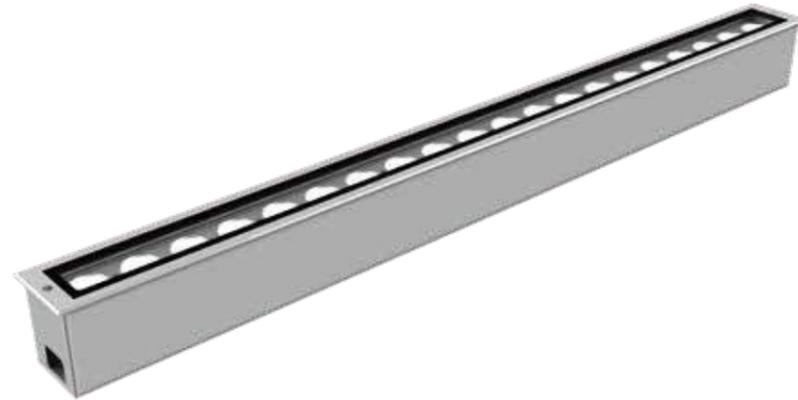


技术参数 Specification

产品型号/Product Code	SL1307PE-20	SL1307PE-10(0.5m)	SL1307PE-6(0.3m)	SL1307PF-20	SL1307PF-10(0.5m)	SL1307PF-6(0.3m)
LED品牌/LED Brand	CREE/OSRAM	CREE/LUMILEDS	CREE/LUMILEDS	OSRAM RGBW 4in1	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量/LED Quantity	20pcs	10pcs	6pcs	20pcs	10pcs	6pcs
额定功率/Rated Power	95W	48W	30W	100W	50W	30W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	6° 12° 20° 30° 60° 10x70° 5x20°			9° 15° 20° 30° 45° 15x60°		
控制方式/Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

Inground Light Series

SL2306

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

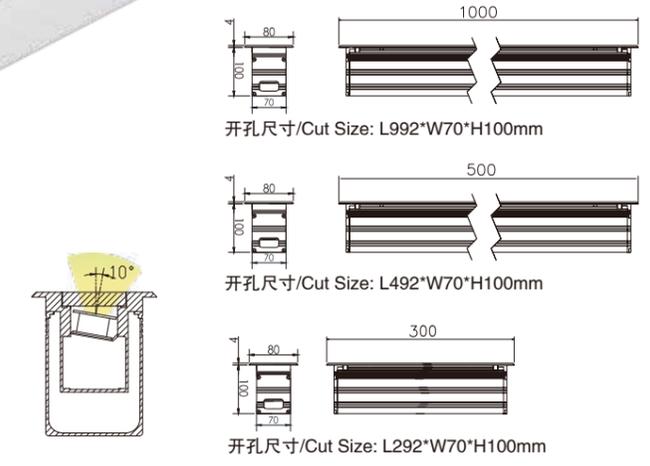

产品简介 Product Introduction



- 一、埋地式条形LED洗墙灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可调角度的光源模块，实现精准完美的投光和洗墙效果。
- 三、不锈钢面板；灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦，铝合金预埋件。
- 四、采用美国CREE原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、Recessed in-ground liner LED wall washer, fashion and beautiful appearance; with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Adjustable beam angle illuminant module make the effect of washing wall accurate and perfect.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment; Faceplate use stainless steel; Lampshade adopts high strength toughened glass, resist the impact and friction. and use aluminum alloy buried barrel.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL2306A-36	SL2306A-24	SL2306A-18	SL2306A-9(0.5m)	SL2306A-6(0.3m)	SL2306-48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	6pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	7W	11W
输入电压/Input Voltage	DC24V/AC100-240V	DC36V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°					>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	30000H	30000H	30000H	30000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/30(pcs)	5/46(pcs)	6/60(pcs)	13/120(pcs)	20/180(pcs)	13/120(pcs)
产品型号/Product Code	SL2306H-24					
LED品牌/LED Brand	CREE RGBW 4 in1					
LED数量/LED Quantity	24pcs					
额定功率/Rated Power	48W					
输入电压/Input Voltage	DC24V					
频率/Frequency Range	/					
颜色/Color	RGBW					
发光角度/Beam Angle	20° 45° 60° 15x60°					
控制方式/Control Mode	DMX512					
使用寿命/Life	30000H					
防护等级/Protection Grade	IP67					
环境温度/Ambient Temperature	-25℃ ~ 50℃					
环境湿度/Ambient Humidity	10% ~ 90%					
串联数量/ In series(max)	3pcs					


配光曲线 (半角) Distribution Curve Flux (SBC Case)

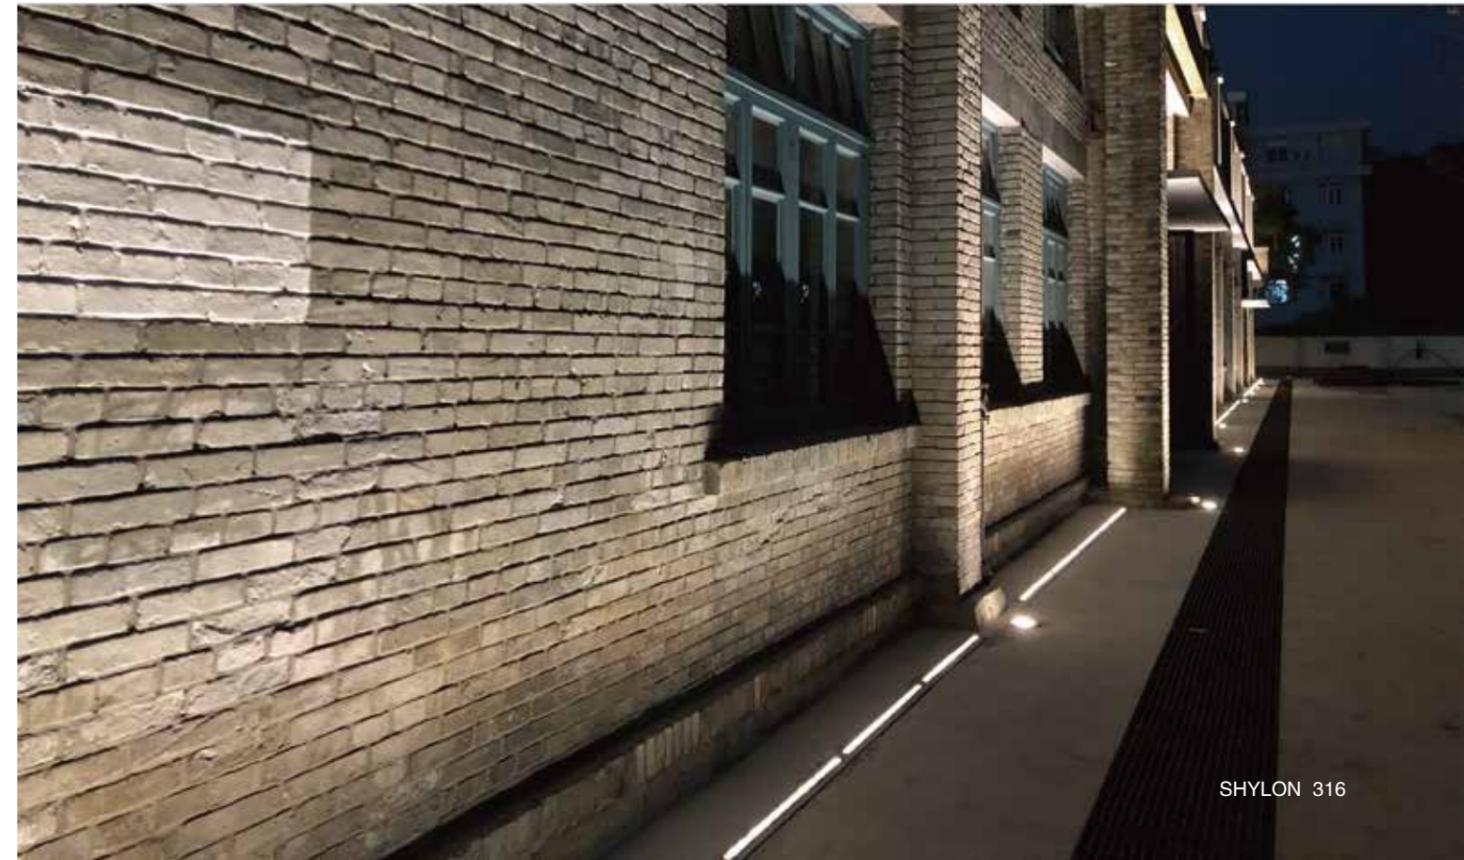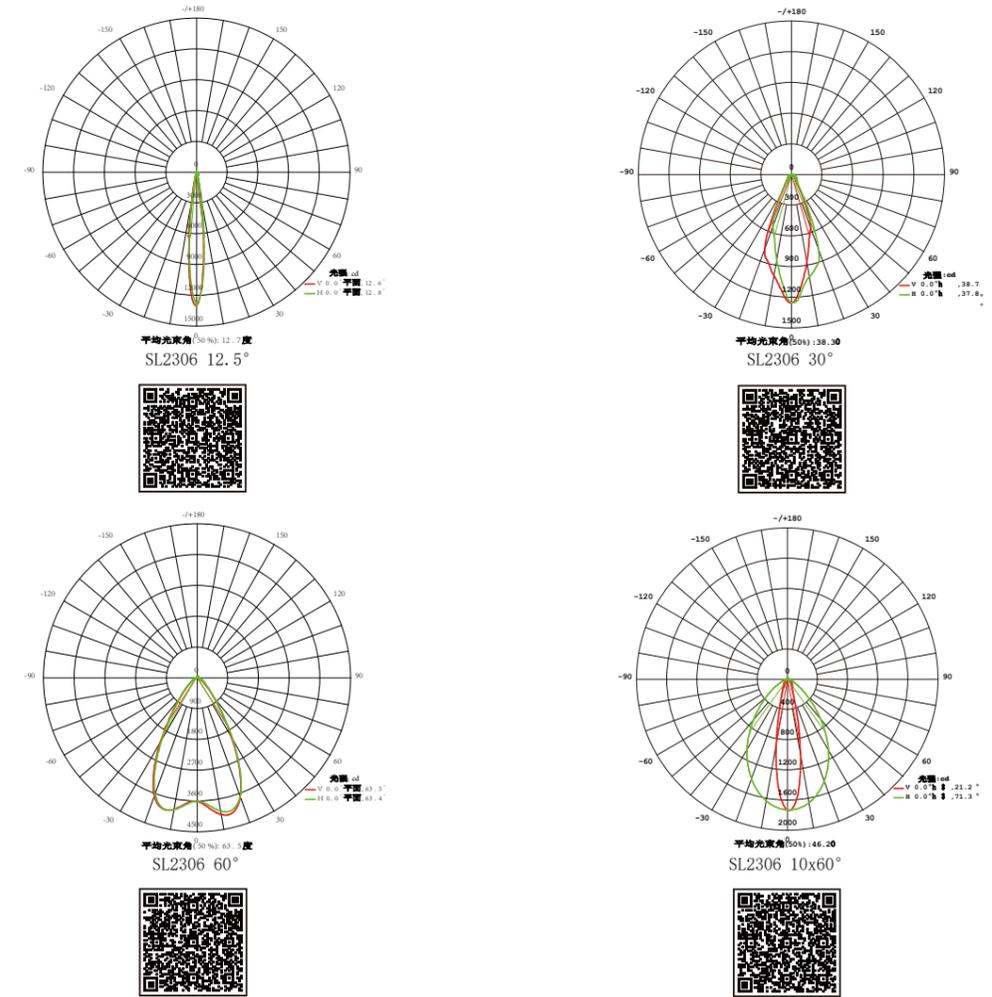

Inground Light Series

SL2307

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

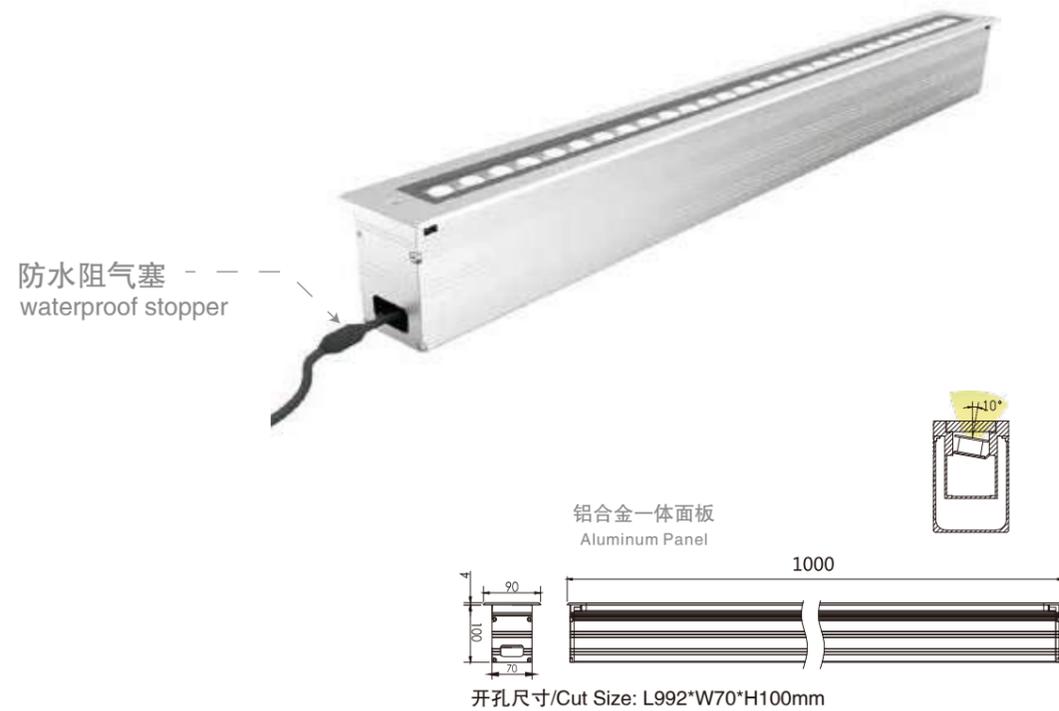


技术参数 Specification


产品型号/Product Code	SL2307A-36	SL2307A-24	SL2307A-18	SL2307A-9(0.5m)	SL2307A-6(0.3m)	SL2307-48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	6pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	7W	11W
输入电压/Input Voltage	DC24V/AC100-240V	DC36V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°					>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3/30(pcs)	6/46(pcs)	6/60(pcs)	13/120(pcs)	20/180(pcs)	13/120(pcs)

产品型号/Product Code	SL2307H-24				
LED品牌/LED Brand	CREE CLQ6A 4in1				
LED数量/LED Quantity	24pcs				
额定功率/Rated Power	48W				
输入电压/Input Voltage	DC24V				
频率/Frequency Range	/				
颜色/Color	RGBW				
发光角度/Beam Angle	20° 40° 60° 15X60°				
控制方式/Control Mode	DMX512				
使用寿命/Life	50000H				
防护等级/Protection Grade	IP67				
环境温度/Ambient Temperature	-25℃~50℃				
环境湿度/Ambient Humidity	10%~90%				
串联数量/ In series(max)	3pcs				


配光曲线 (半角) Distribution Curve Flux (SBC Case)

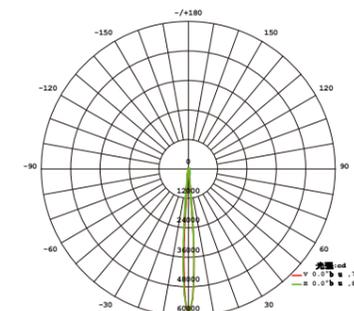

平均光束角 (50%) : 8.1°
SL2307 8°

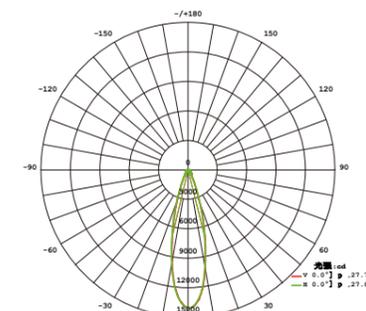

平均光束角 (50%) : 27.7°
SL2307 30°

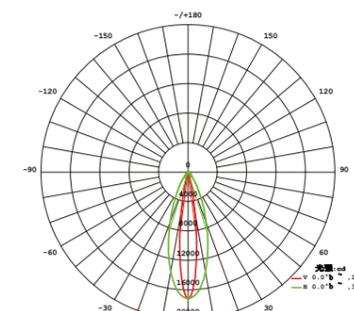

平均光束角 (50%) : 25.5°
SL2307 15x30°




Inground Light Series

SL2315

Foldlight
单反光学



304不锈钢灯体和预埋盒
Entirely 304#Stainless Steel

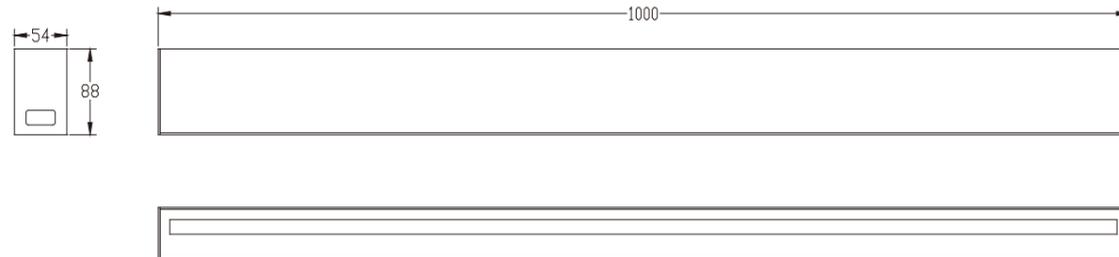


技术参数 Specification

产品型号/Product Code	SL2315H-48	SL2315A-48	SL2315H-24(0.5m)	SL2315A-24(0.5m)	SL2315H-16(0.3m)	SL2315A-16(0.3m)
LED品牌/LED Brand	OSRAM	LUMILEDS 3030	OSRAM	LUMILEDS 3030	OSRAM	LUMILEDS 3030
LED数量/LED Quantity	48pcs	48pcs	24pcs	24pcs	16pcs	16pcs
额定功率/Rated Power	48W	48W	24W	24W	16W	16W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	RGBW 4in1	Single	RGBW 4in1	Single	RGBW 4IN1	Single
发光角度/Beam Angle	Wallwash 23°25° P5°					
控制方式/Control Mode	DMX512	CC	DMX512	CC	DMX512	CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP68	IP68	IP68	IP68	IP68	IP68
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

Inground Light Series

SL2308

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics




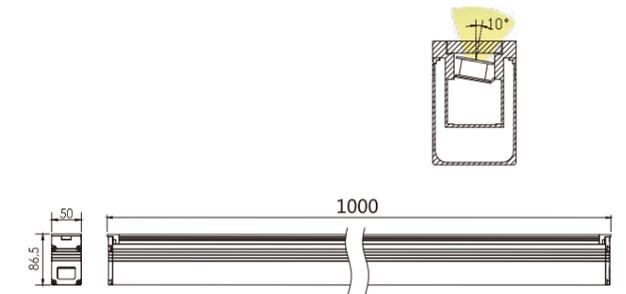


开孔尺寸/Cut Size: L999*W50*H87mm

技术参数 Specification

产品型号/Product Code	SL2308A-36	SL2308A-24	SL2308A-18	SL2308A-9(0.5m)	SL2308-48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	11W
输入电压/Input Voltage	DC24V	DC36V/DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60° (Tilted 10 degrees:15° 30° 45° 20x35°)				>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3/30(pcs)	7/5(pcs)	6pcs	13pcs	13pcs




配光曲线 (半角) Distribution Curve Flux (SBC Case)

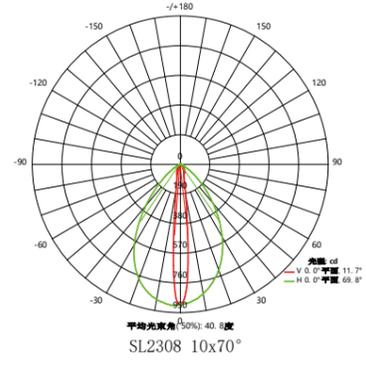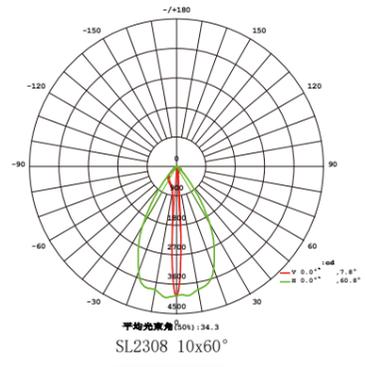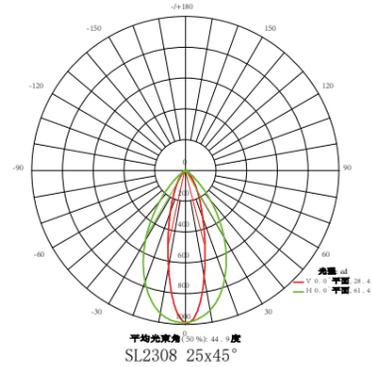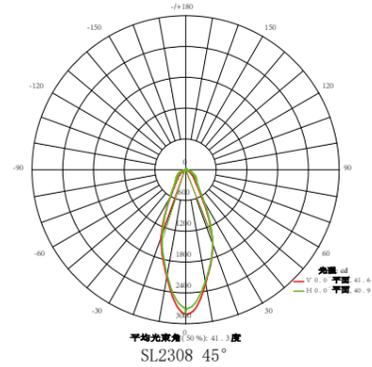

Inground Light Series

SL2308P

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

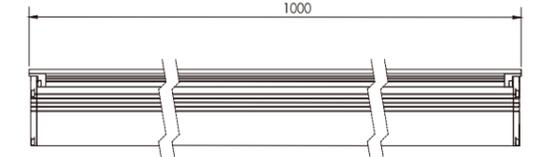


开孔尺寸/Cut Size: L999*W50*H87mm

技术参数 Specification

产品型号/Product Code	SL2308PA-36	SL2308PA-24	SL2308PA-18	SL2308PA-9(0.5m)	SL2308P-48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	11W
输入电压/Input Voltage	DC24V	DC36V/DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60° (Tilted 10 degrees:15° 30° 45° 20x35°)				>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/30(pcs)	7/5(pcs)	6pcs	13pcs	13pcs

Inground Light Series

SL2309

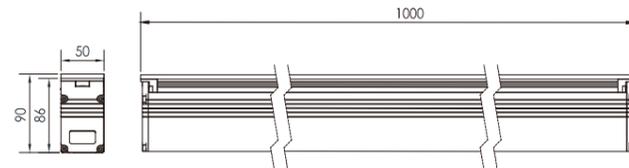

开孔尺寸/Cut Size: L999*W50*H87mm

技术参数 Specification

产品型号/Product Code	SL2309-48	SL2309-156
LED品牌/LED Brand	EPISTAR	EPISTAR
LED数量/LED Quantity	48pcs	156pcs
额定功率/Rated Power	11W	15W/10W
输入电压/Input Voltage	DC24V	DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	Single
发光角度/Beam Angle	>120°	>120°
控制方式/Control Mode	DMX512/CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP67	IP67
环境温度/Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3pcs	9pcs

Inground Light Series

SL2304



reddot winner 2021




技术参数 Specification


产品型号/Product Code	SL2304-288
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	288pcs
额定功率/Rated Power	15W/10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	Single/RGB
发光角度/Beam Angle	>120°
控制方式/Control Mode	CC/DMX 512
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	-25°C~50°C
环境湿度/Ambient Humidity	10%~90%
串联数量/ In series(max)	9pcs

Inground Light Series

SL2305




配光曲线 (半角) Distribution Curve Flux (SBC Case)

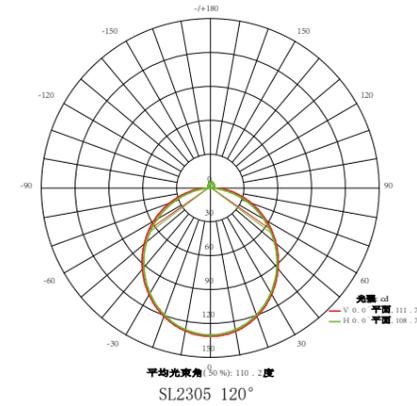

技术参数 Specification

产品型号/Product Code	SL2305-156
LED品牌/LED Brand	EPISTAR
LED数量/LED Quantity	156pcs
额定功率/Rated Power	15W/10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	Single/RGB
发光角度/Beam Angle	>120°
控制方式/Control Mode	CC/DMX 512
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	-25°C~50°C
环境湿度/Ambient Humidity	10%~90%
串联数量/ In series(max)	9pcs

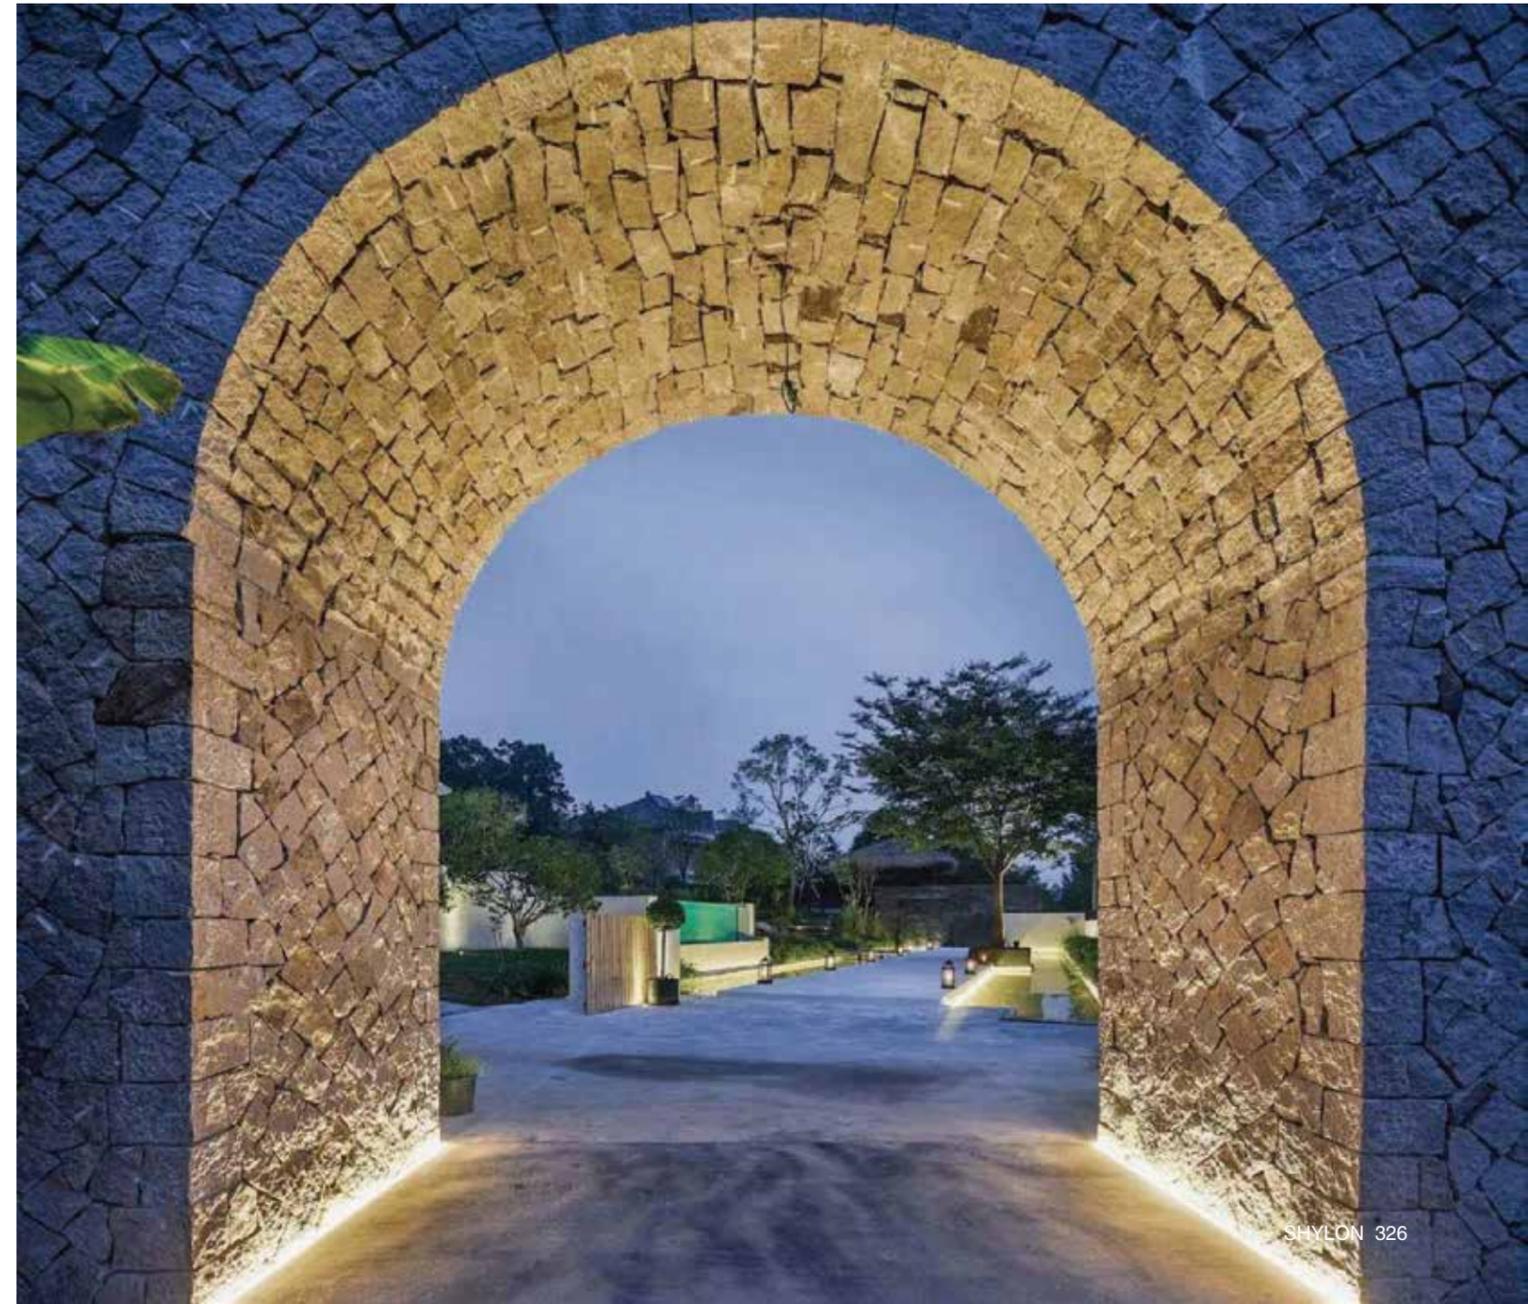

Inground Light Series

SL2270

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics


LED 恒功率全色域染色灯

Dopamine

多巴胺色彩

eyePRO

光学护眼

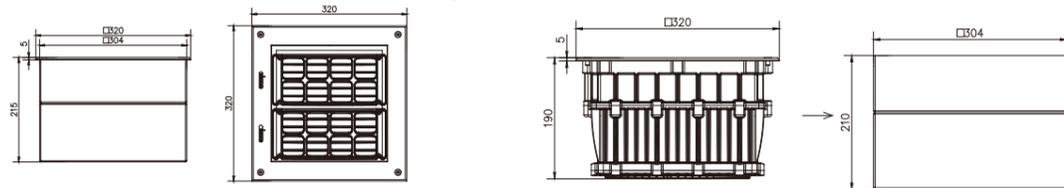

技术参数 Specification

产品型号/ Product Code	SL2270M-16	SL2270E-16	SL2270N-16KP	SL2270F-16	SL2270C-64	SL2270A-144
LED品牌/ LED Brand	CREE	CREE XP-L	RGBWCLA 7in1 Keepower	CREE/OSRAM 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	16pcs	16pcs	16pcs	16pcs	64pcs	144pcs
额定功率/ Rated Power	120W	120W	150W	150W	120W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBWCLA	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15x60°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	CC
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	26pcs	26pcs	26pcs	40pcs	26pcs	40pcs


Inground Light Series

SL2269

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

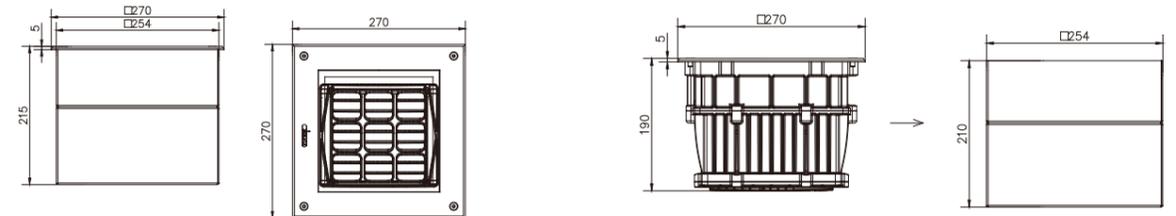

技术参数 Specification

产品型号/ Product Code	SL2269M-9	SL2269E-9	SL2269F-9	SL2269C-36	SL2269A-81
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	36pcs	81pcs
额定功率/ Rated Power	70W	80W	90W	80W	90W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	CC
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	26pcs	26pcs	40pcs	26pcs	40pcs






Inground Light Series

SL2264

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼



技术参数 Specification

产品型号/ Product Code	SL2264M-4	SL2264E-4	SL2264F-4	SL2264C-16	SL2264A-36
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	4pcs	4pcs	4pcs	16pcs	36pcs
额定功率/ Rated Power	30W	30W	40W	30W	40W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-264V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	26pcs	26pcs	40pcs	26pcs	40pcs




Inground Light Series

SL2169C

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

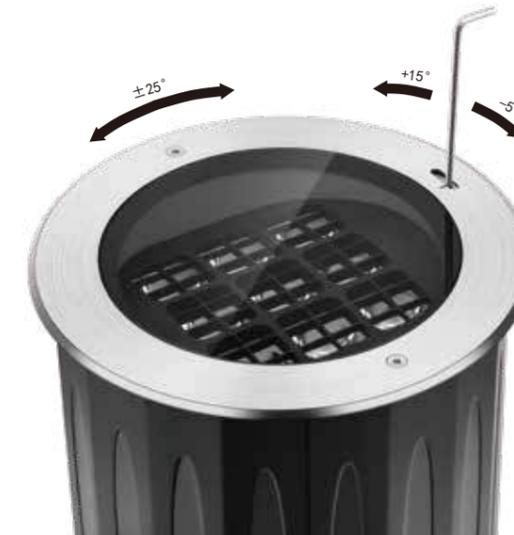

技术参数 Specification

产品型号/ Product Code	SL2169CM-9	SL2169CE-9	SL2169CF-9	SL2169CC-36	SL2169CA-81
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	36pcs	81pcs
额定功率/ Rated Power	70W	80W	90W	80W	90W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100V-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	CC/DALI/0-10V	CC	DMX512	CC/DALI/0-10V	DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	14pcs	14pcs	14pcs	14pcs	14pcs




Inground Light Series

SL2166C

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼



技术参数 Specification

产品型号/ Product Code	SL2166CM-6	SL2166CE-6	SL2166CF-6	SL2166CC-24	SL2166CA-54	SL2166C-40
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM	OSRAM
LED数量/ LED Quantity	6pcs	6pcs	6pcs	24pcs	54pcs	1pcs
额定功率/ Rated Power	40W	50W	60W	50W	60W	40W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100V-305V	AC100V-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW	2700K/3000K 6500K
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°	Wallwash 22°x25° P5° 34° x55° P20° 35° x73° P30° 45° x98° P40°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	CC	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	20pcs	20pcs	20pcs	20pcs	20pcs	



Inground Light Series

SL2164C


蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼



EXPO
世博版

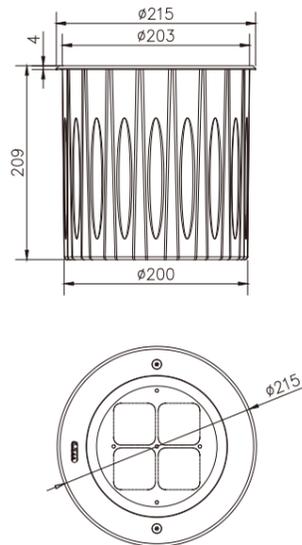

技术参数 Specification

产品型号/ Product Code	SL2164CM-4	SL2164CE-4	SL2164CF-4	SL2164CC-16	SL2164CA-36	SL2164C-30
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM	OSRAM
LED数量/ LED Quantity	4pcs	4pcs	4pcs	16pcs	36pcs	1pcs
额定功率/ Rated Power	30W	30W	40W	30W	40W	30W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100V-305V	AC100V-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW	2700K/3000K 6500K
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°	Wallwash 22°x25° P5° 34° x55° P20° 35° x73° P30° 45° x98° P40°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	30pcs	30pcs	30pcs	30pcs	30pcs	30pcs

Inground Light Series

SL2162C


蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼



EXPO
世博版

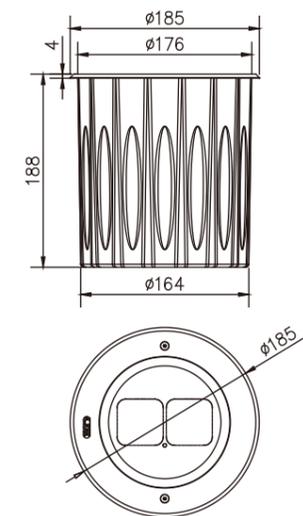

技术参数 Specification

产品型号/ Product Code	SL2162CM-2	SL2162CE-2	SL2162CF-2	SL2162CC-8	SL2162CA-18	SL2162C-20
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM	OSRAM
LED数量/ LED Quantity	2pcs	2pcs	2pcs	8pcs	18pcs	1pcs
额定功率/ Rated Power	16W	20W	20W	20W	20W	20W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100V-305V	AC100V-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW	2700K/3000K 6500K
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°	Wallwash 23°x25° P5° 40° x53° P20° 37° x73° P30° 50° x96° P40°
控制方式/ Control Mode	DMX512	CC	DMX512/RDM	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	60pcs	60pcs	60pcs	60pcs	60pcs	60pcs


Inground Light Series

SL2161C

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

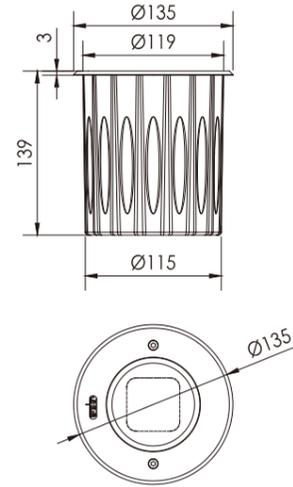

技术参数 Specification

产品型号/ Product Code	SL2161CM-1	SL2161CE-1	SL2161CF-1	SL2161CC-4	SL2161CA-9	SL2161C-10
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM	OSRAM
LED数量/ LED Quantity	1pcs	1pcs	1pcs	4pcs	1pcs	1pcs
额定功率/ Rated Power	10W	10W	10W	10W	10W	10W
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC12V/DC24V	AC100V-305V	DC24V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW	2700K/3000K 6500K
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°	Wallwash 23°x25°P5° 36° x65° P20° 35° x84° P30° 48° x90° P40°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	120pcs	120pcs	7pcs	120pcs	7pcs	120pcs


Inground Light Series

SL2160C

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

eyePRO

光学护眼

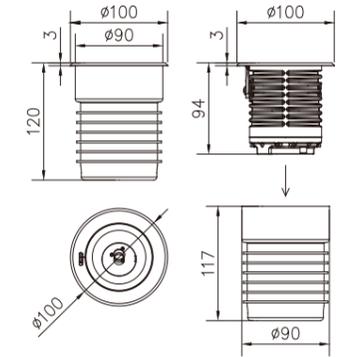


技术参数 Specification

产品型号/ Product Code	SL2160CM-1	SL2160CE-1	SL2160CF-1
LED品牌/ LED Brand	CREE	CREE XP-L	CREE/OSRAM XM-L 4in1
LED数量/ LED Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	6W	6W	10W
输入电压/ Input Voltage	AC100-264V / DC12V	AC100-264V / DC12V	DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC	CC	DMX512
使用寿命/ Life	50000H	80000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	60pcs	60pcs	60pcs

Inground Light Series

SL2152C

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防滑玻璃 Anti-slip glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

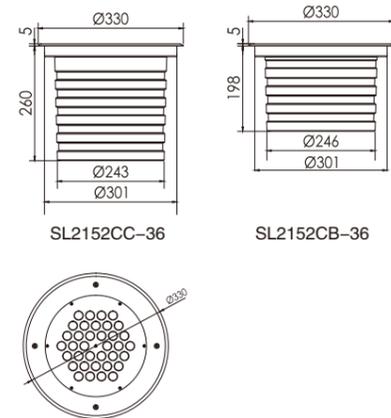


产品简介 Product Introduction



- 一、高功率LED地埋灯，外型时尚美观；灯体采用加大的散热结构设计，灯具预埋筒采用铝合金材质模压成型，表面静电喷塑处理，具备优良的结构强度和防腐能力，比普通的工程塑料材质导热率高出200倍以上，满足LED灯体向外部混凝土和土壤的热传导，充分保证LED的稳定性和长寿命。
 - 二、不锈钢面板；灯体采用高强度压铸铝成型；灯罩采用高强度钢化玻璃.抗冲击耐磨擦。
 - 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.
 - 2、Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号Product Code	SL2152CC-36	SL2152CB-36
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	36pcs	36pcs
额定功率Rated Power	72W	56W
输入电压Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	RGB/Single	RGB/Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式Control Mode	DMX512/CC	DMX512/CC
使用寿命Life	80000H	80000H
防护等级Protection Grade	IP67	IP67
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	2/18(pcs)	2/22(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)

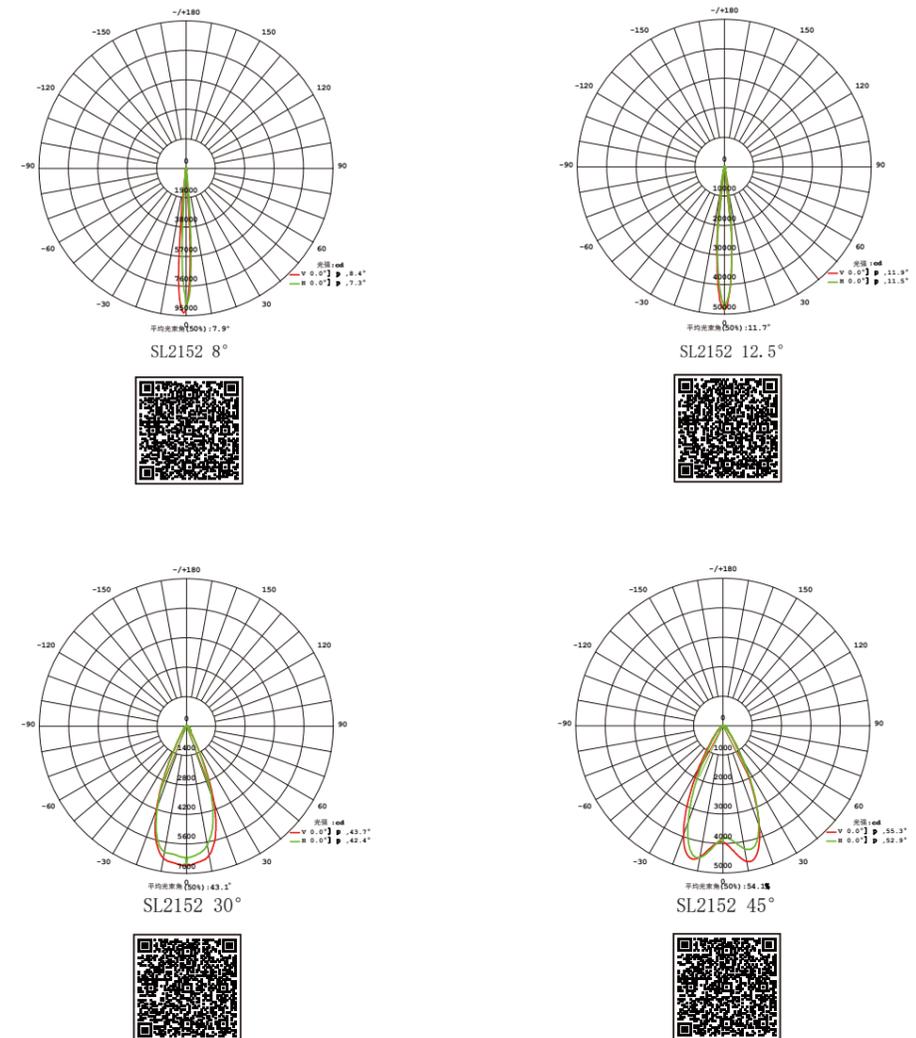

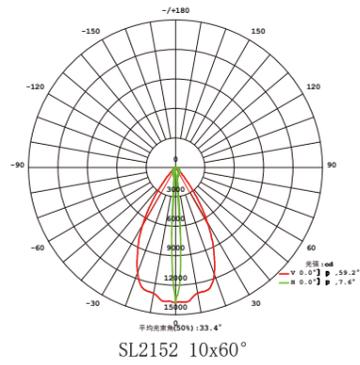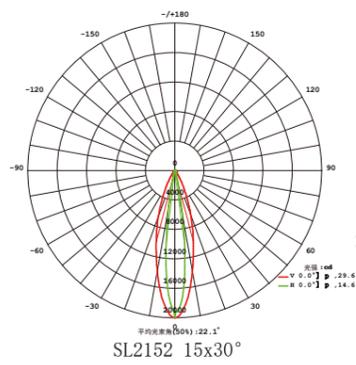


接线示意图 Wiring Diagram


RGB A 型

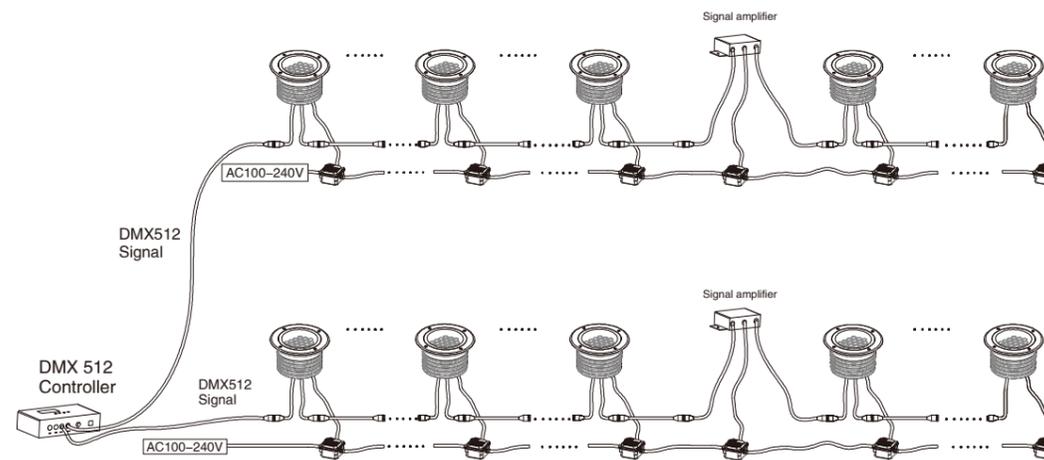

RGB B 型

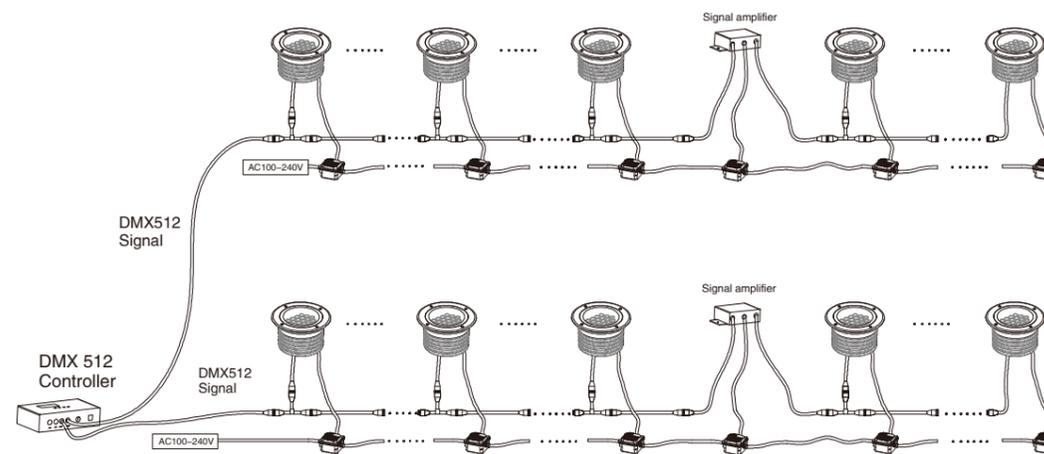


单色 (Single Color)

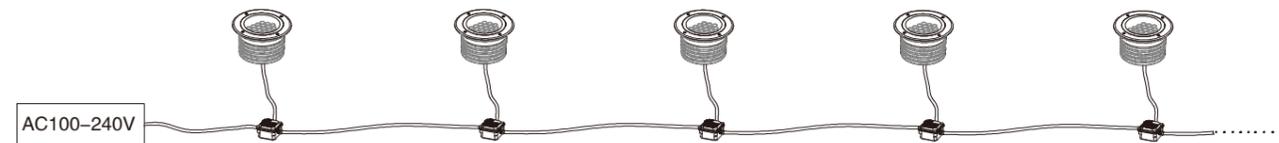

Inground Light Series

SL2150C

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防滑玻璃 Anti-slip glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

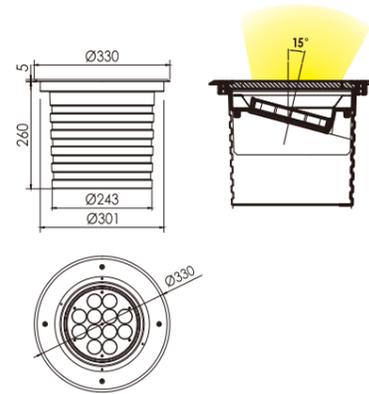





产品简介 Product Introduction



- 一、高功率LED地埋灯，外型时尚美观；灯体采用加大的散热结构设计，灯具预埋筒采用铝合金材质模压成型，表面静电喷塑处理，具备优良的结构强度和防腐能力，比普通的工程塑料材质导热率高出200倍以上，满足LED灯体向外部混凝土和土壤的热传导，充分保证LED的稳定性和长寿命。
 - 二、不锈钢面板；灯体采用高强度压铸铝成型；灯罩采用高强度钢化玻璃.抗冲击耐磨擦。
 - 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.
 - 2、Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL2150CE-12	SL2150CD-12	SL2150CC-24	SL2150CB-24	SL2150CF-12	SL2150CB-64
LED品牌 LED Brand	CREE	CREE	CREE	CREE	CREE RGBW 4 in 1	CREE
LED数量 LED Quantity	12pcs	12pcs	24pcs	24pcs	12pcs	64pcs
额定功率 Rated Power	60W	42W	60W	42W	100W	100W
输入电压 Input Voltage	AC100-240V	AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC36V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	RGB/Single	RGB/Single	RGBW	RGBW
发光角度 Beam Angle	6° 8° 12° 20° 30° 60° 10x70°	8° 12.5° 20° 30° 45°	60° 15x30° 10x60°	9° 15° 20° 30° 45° 15x60°	12° 30° 55° 25x45°	
控制方式 Control Mode	CC	CC	DMX512/CC	DMX512/CC	DMX512	DMX512
使用寿命 Life	80000H	80000H	80000H	80000H	80000H	80000H
防护等级 Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度 Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	22pcs	30pcs	3/22(pcs)	3/30(pcs)	1/12(pcs)	1/12(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

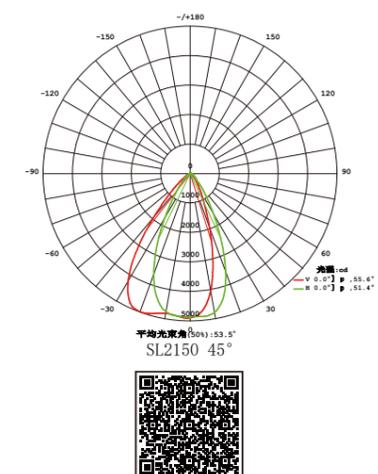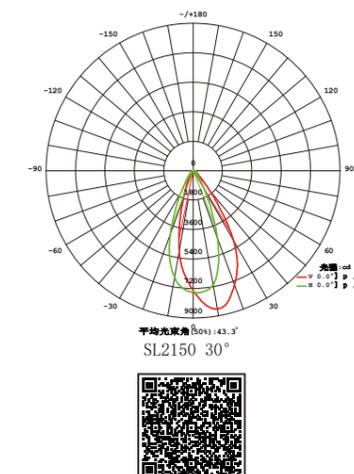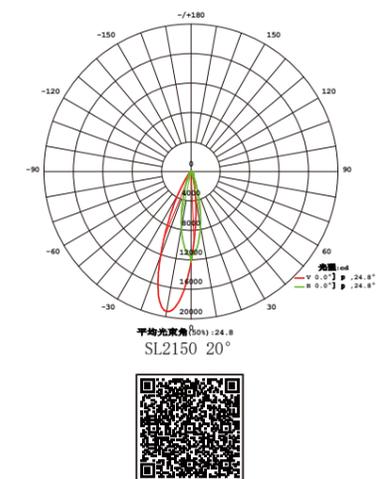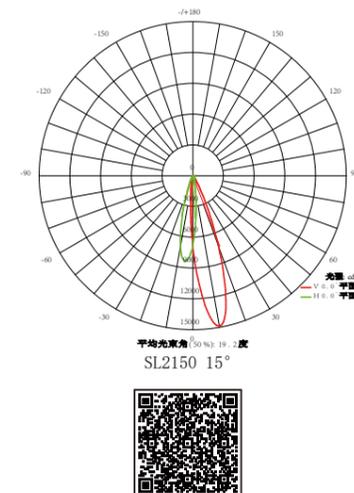


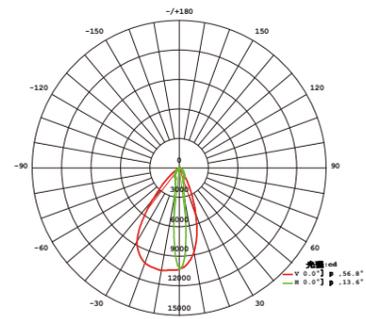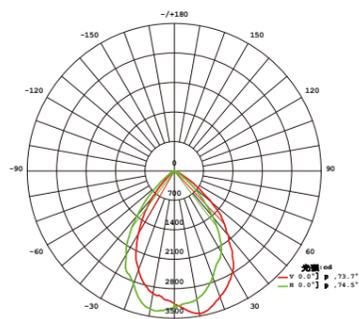

Inground Light Series

SL2130C

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防滑玻璃 Anti-slip glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics






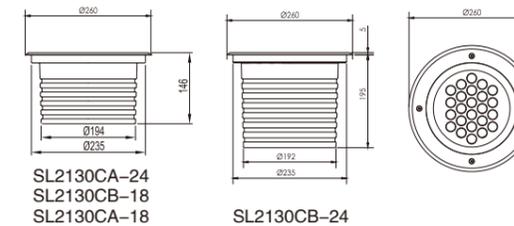


产品简介 Product Introduction

- 一、高功率LED埋灯，外型时尚美观；灯体采用加大的散热结构设计，灯具预埋筒采用铝合金材质模压成型，表面静电喷塑处理，具备优良的结构强度和防腐能力，比普通的工程塑料材质导热率高出200倍以上，满足LED灯体向外部混凝土和土壤的热传导，充分保证LED的稳定性和长寿命。
 - 二、不锈钢面板；灯体采用高强度压铸铝成型；灯罩采用高强度钢化玻璃.抗冲击耐磨擦。
 - 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.
 - 2、Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.



配光曲线 (半角) Distribution Curve Flux (SBC Case)

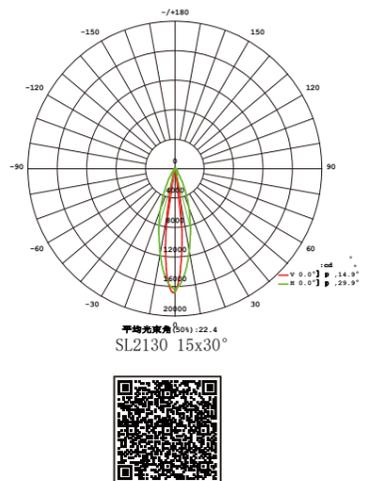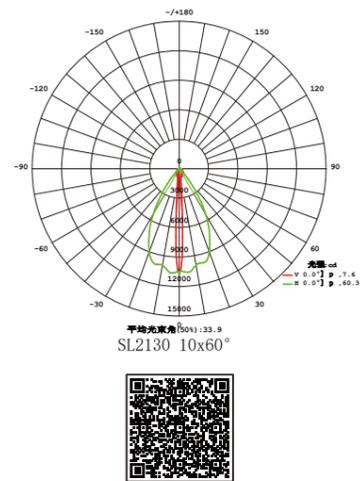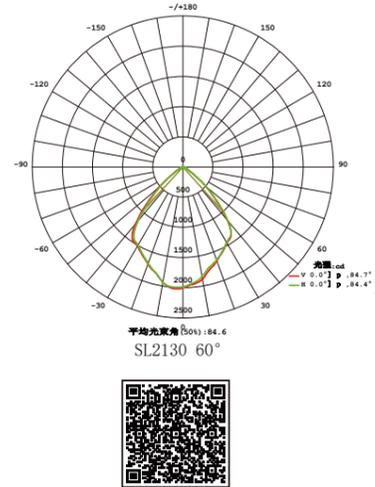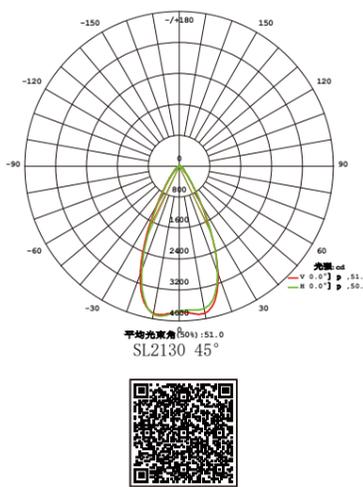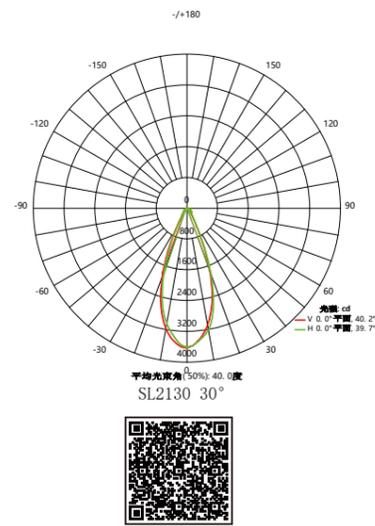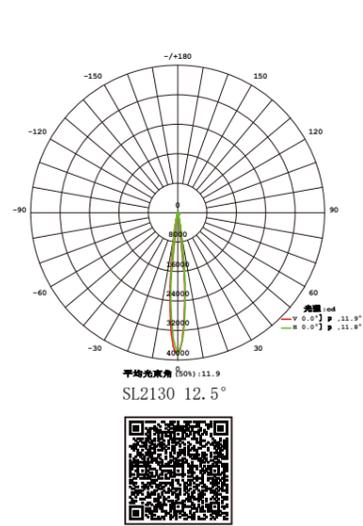

技术参数 Specification




产品型号/Product Code	SL2130CB-24	SL2130CA-24	SL2130CB-18	SL2130CA-18	SL2130CF-9
LED品牌 LED Brand	CREE	CREE	CREE	CREE	CREE RGBW 4 in 1
LED数量 LED Quantity	24pcs	24pcs	18pcs	18pcs	9pcs
额定功率 Rated Power	40W	30W	30W	21W	72W
输入电压 Input Voltage	DC36V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGBW
发光角度 Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°				9° 15° 20° 30° 15x60°
控制方式 Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512
使用寿命 Life	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度 Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	5/30(pcs)	4/44(pcs)	4/44(pcs)	6/60(pcs)	2/18(pcs)









Inground Light Series

SL2128C

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防滑玻璃 Anti-slip glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics




配光曲线 (半角) Distribution Curve Flux (SBC Case)

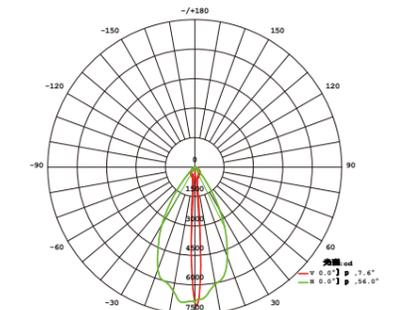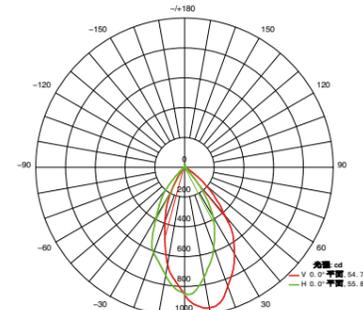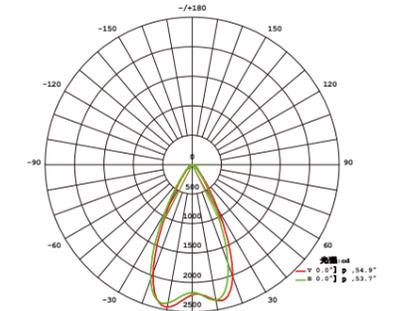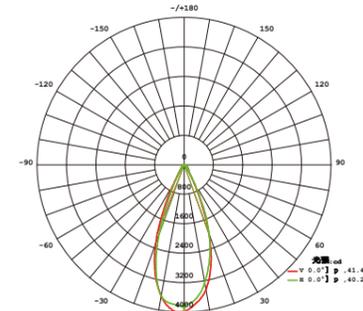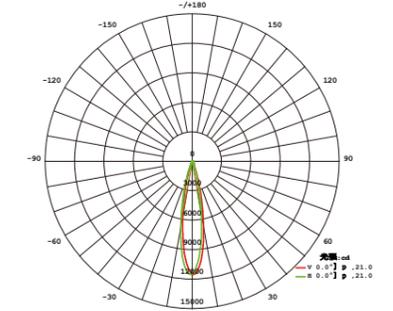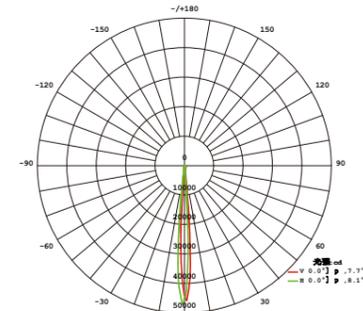

技术参数 Specification


产品型号Product Code	SL2128CC-12	SL2128CA-12
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	12pcs	12pcs
额定功率Rated Power	32W	14W
输入电压Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	RGB/Single	RGB/Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式Control Mode	DMX512/CC	DMX512/CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP67	IP67
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	4/40(pcs)	10/90(pcs)

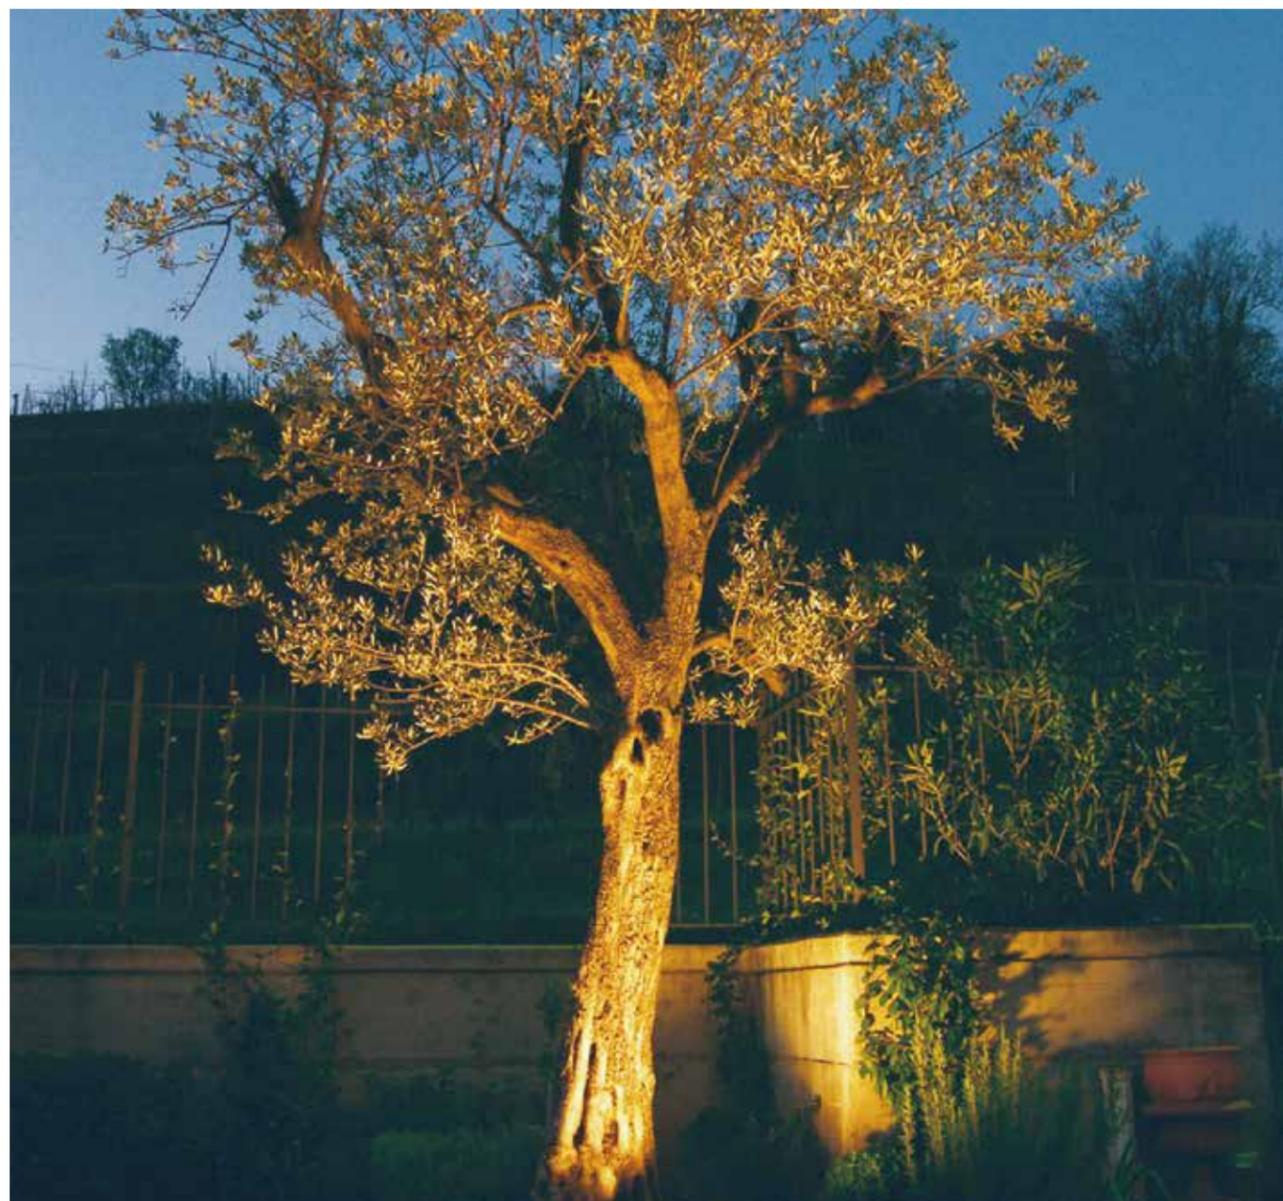







Inground Light Series

SL2112C

圆孔格栅 Round-mashed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防滑玻璃 Anti-slip glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

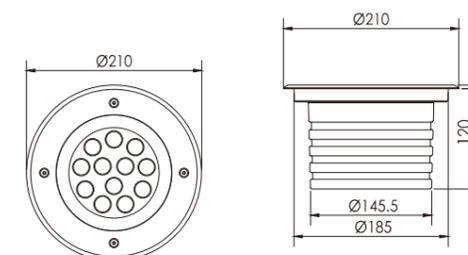

配光曲线 (半角) Distribution Curve Flux (SBC Case)

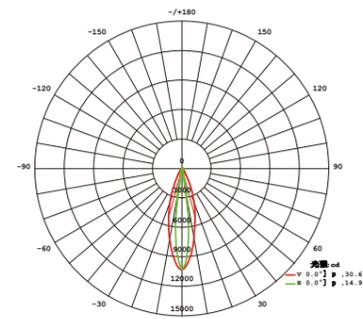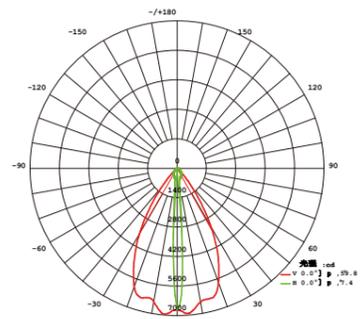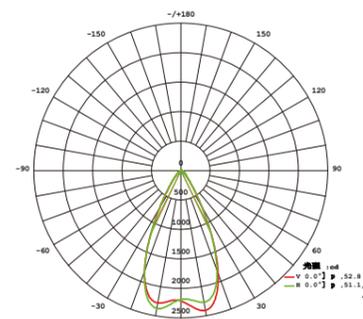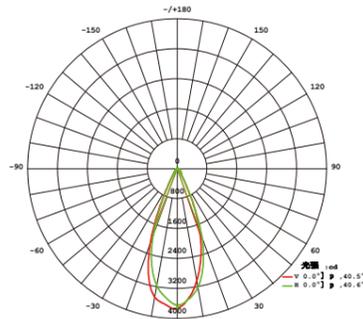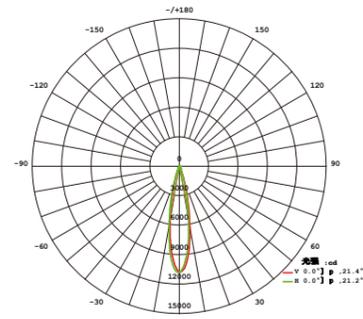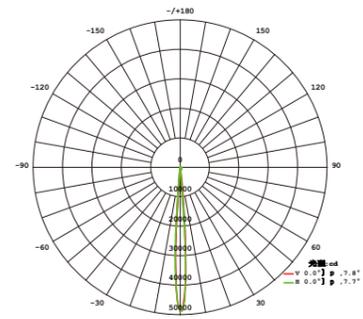

技术参数 Specification




产品型号 Product Code	SL2112CB-12	SL2112CA-12
LED品牌 LED Brand	CREE	CREE
LED数量 LED Quantity	12pcs	12pcs
额定功率 Rated Power	22W	14W
输入电压 Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz
颜色 Color	RGB/Single	RGB/Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式 Control Mode	DMX512/CC	DMX512/CC
使用寿命 Life	50000H	50000H
防护等级 Protection Grade	IP67	IP67
环境温度 Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量 / In series(max)	6/60(pcs)	10/90(pcs)









Inground Light Series

SL2110C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



配光曲线 (半角) Distribution Curve Flux (SBC Case)

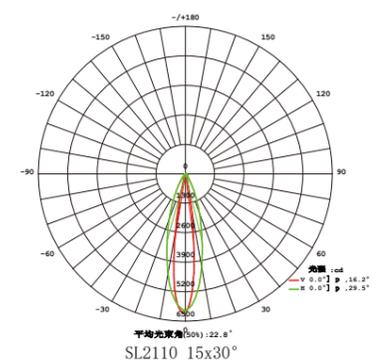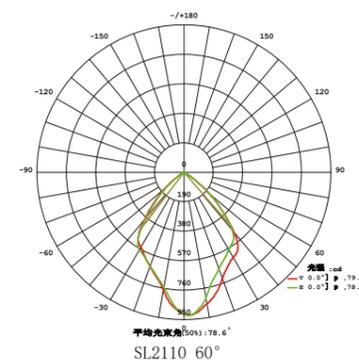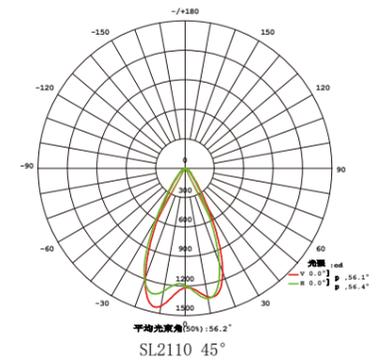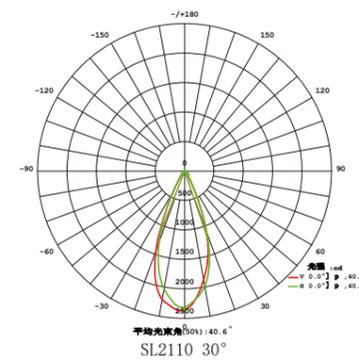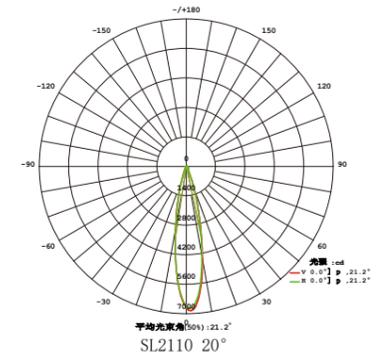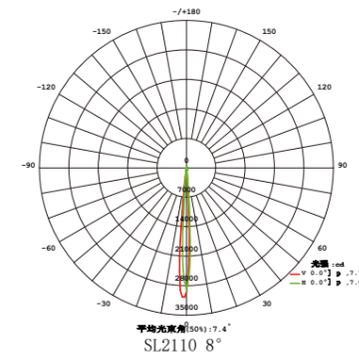




技术参数 Specification

产品型号 Product Code	SL2110CC-7	SL2110CC-6
LED品牌 LED Brand	CREE	CREE
LED数量 LED Quantity	7pcs	6pcs
额定功率 Rated Power	16W	14W
输入电压 Input Voltage	AC100-240V	DC24V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz
颜色 Color	Single	RGB
发光角度 Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式 Control Mode	CC	DMX512/CC
使用寿命 Life	50000H	50000H
防护等级 Protection Grade	IP67	IP67
环境温度 Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量 / In series(max)	80pcs	10/90pcs


Inground Light Series

SL2109C

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防滑玻璃 Anti-slip glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics




SL2109C-C12

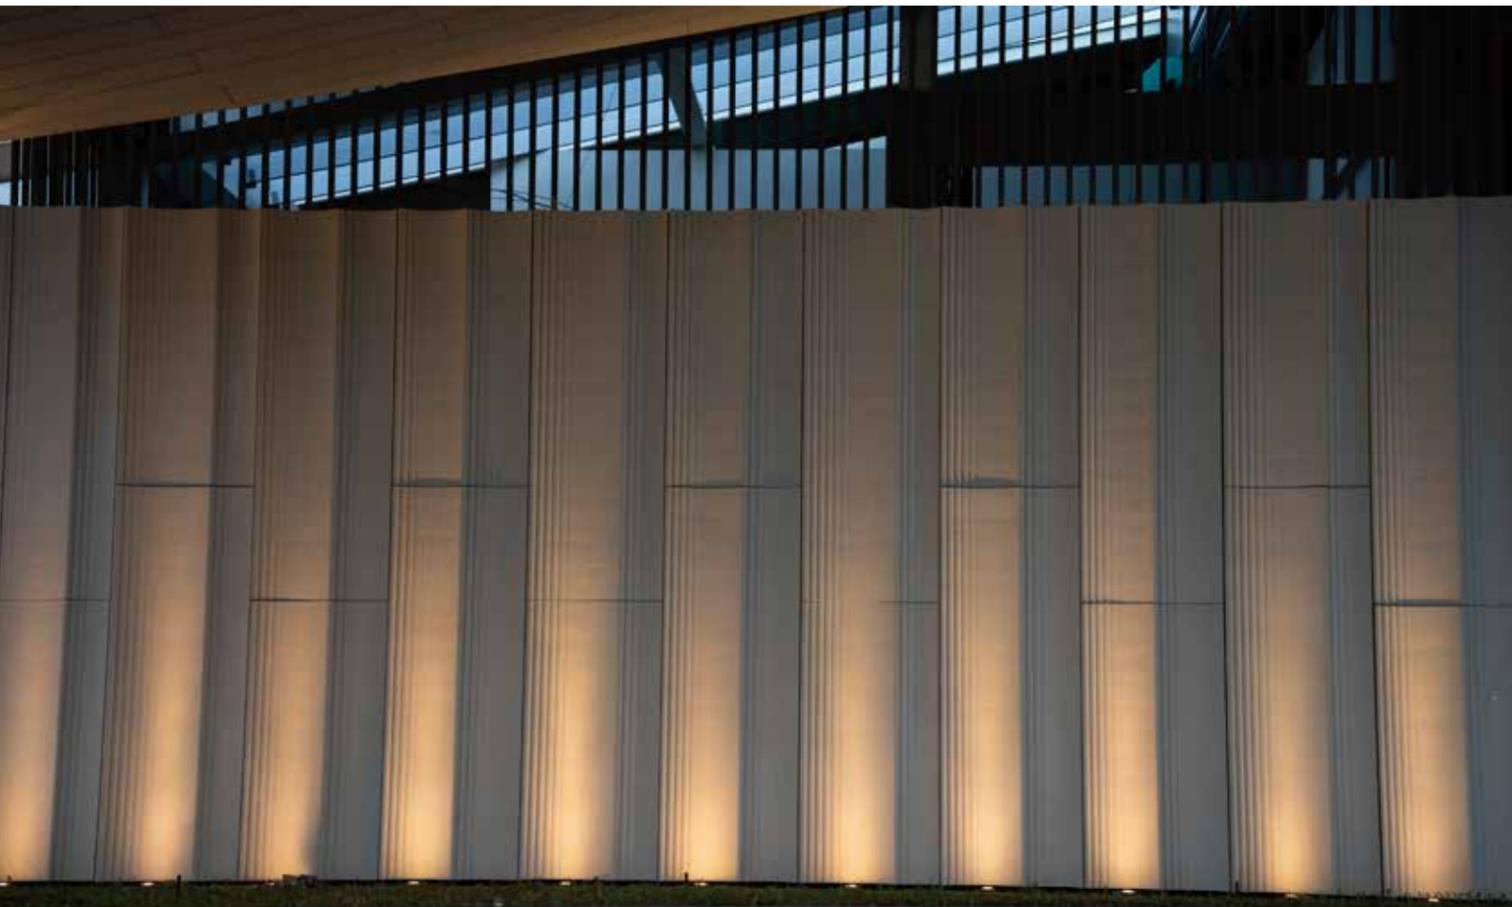


技术参数 Specification

产品型号/ Product Code	SL2109CB-9	SL2109CA-9	SL2109C-C12
Led品牌/ Led Brand	CREE	CREE	CREE COB
Led数量/ Led Quantity	9pcs	9pcs	1pcs
额定功率/ Rated Power	16W	11W	12W
输入电压/ Input Voltage	DC12V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGB/Single	RGB/Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60°		25° Tilt.10°
控制方式/ Control Mode	DMX512/CC	DMX512/CC	CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	9/80(pcs)	3/120(pcs)	12/110(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)

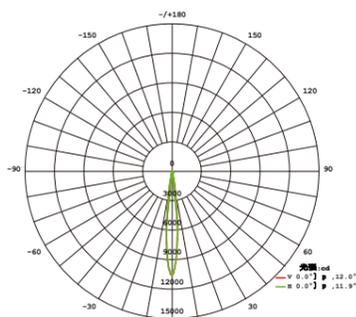


平均光束角 (50%) : 12.0°
SL2109 12.5°

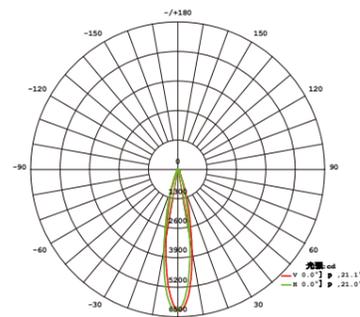

平均光束角 (50%) : 21.1°
SL2109 20°

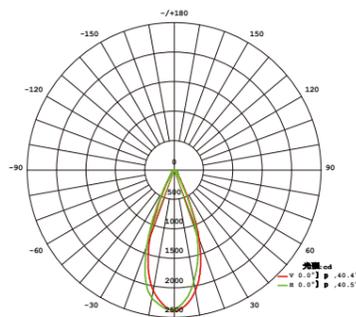

平均光束角 (50%) : 40.5°
SL2109 30°

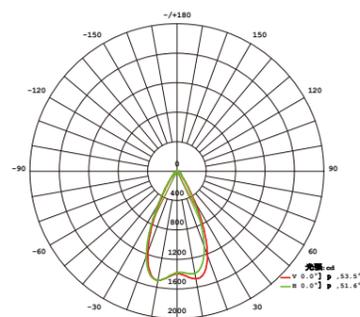



平均光束角 (50%) : 52.5°
SL2109 45°




Inground Light Series

SL2106C

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防滑玻璃 Anti-slip glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics










SL2106C-C8



技术参数 Specification

产品型号/ Product Code	SL2106CB-6	SL2106CA-6	SL2106C-C8
Led品牌/ Led Brand	CREE	CREE	CREE COB
Led数量/ Led Quantity	6pcs	6pcs	1pcs
额定功率/ Rated Power	12W	7W	8W
输入电压/ Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色/ Color	RGB/Single	RGB/Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60°		25° Tilt.10°
控制方式/ Control Mode	DMX512/CC	DMX512/CC	CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	12/110(pcs)	20/180(pcs)	18/160(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)

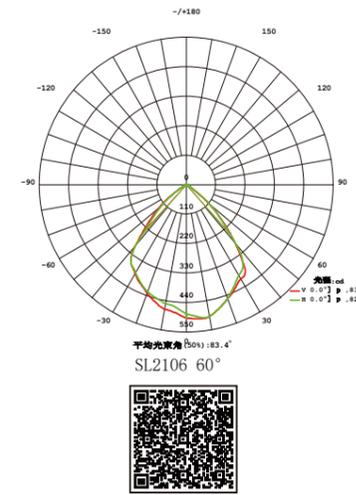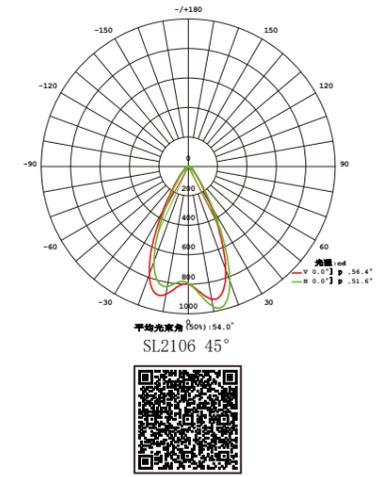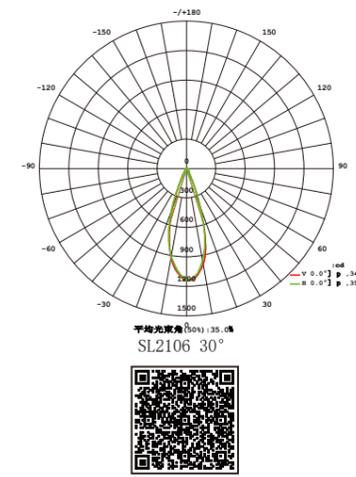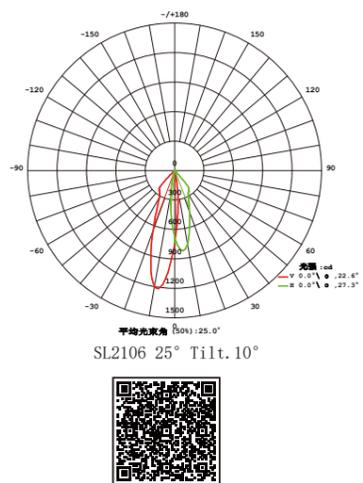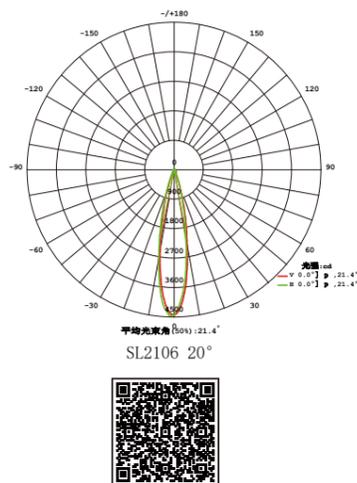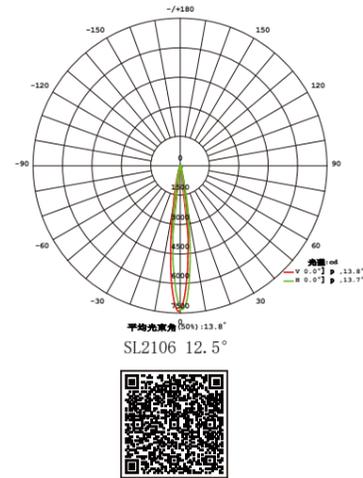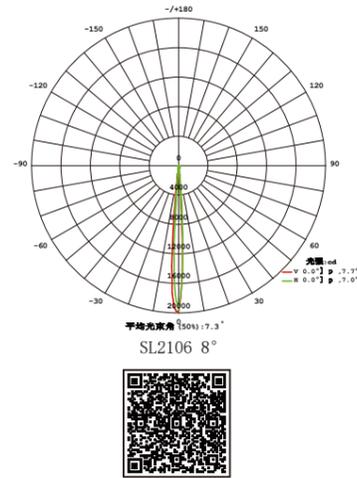


Inground Light Series

SL2103C

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防滑玻璃 Anti-slip glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

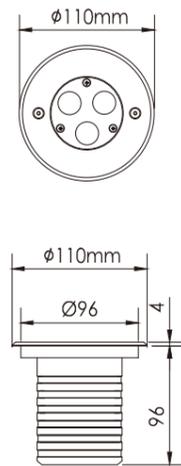



SL2103C-C6



技术参数 Specification

产品型号/ Product Code	SL2103CB-3	SL2103CA-3	SL2103C-C6
Led品牌/ Led Brand	CREE	CREE	CREE COB
Led数量/ Led Quantity	3pcs	3pcs	1pcs
额定功率/ Rated Power	6W	3.5W	6W
输入电压/ Input Voltage	DC12V/AC100-240V	DC12V/AC100-240V	DC12V/AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGB/Single	RGB/Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60°		25° Tilt.10°
控制方式/ Control Mode	PWM/CC	PWM/CC	CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	12/200(pcs)	20/300(pcs)	12/200(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

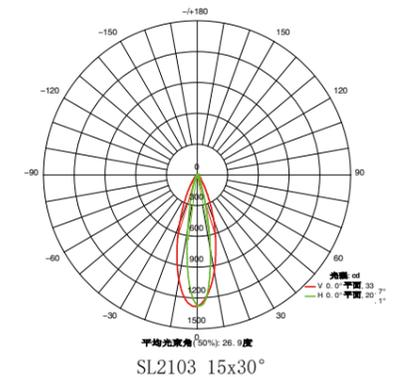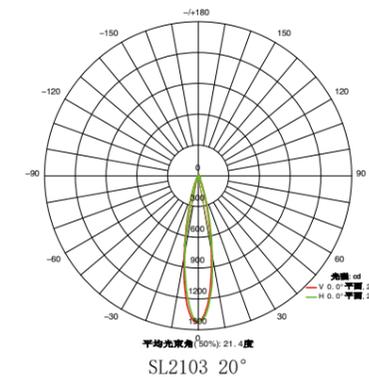


Inground Light Series


SL2102

eyePRO

光学护眼



Wall Wash

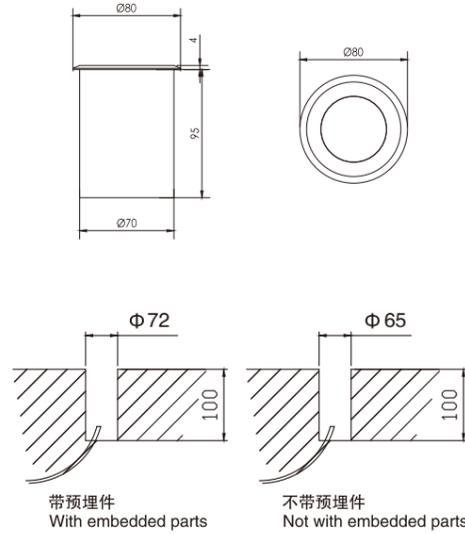

带预埋件
With embedded parts

不带预埋件
Not with embedded parts



技术参数 Specification

产品型号/Product Code	SL2102E-1	SL2102C-1	SL2102F-1	SL2102A-3
LED品牌/LED Brand	CREE XP-L	CREE	CREE	CREE
LED数量/LED Quantity	1pc	1pc	1pc	3pcs
额定功率/Rated Power	6W	3W	5W	4W
输入电压/Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V	DC24V	DC24V/DC12V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	/
颜色/Color	Single	Single	RGBW 4IN1	Single/RGB
发光角度/Beam Angle	8° 12° 20° 30° 45° 60° 45° Tilt.45° (Wall Wash)	8° 12° 20° 30° 45° 60°	15° 20° 30° 45° 15X60°	8° 12.5° 20° 30° 45° 60°
控制方式/Control Mode	CC	CC	DMX512	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%



Inground Light Series

SL2101

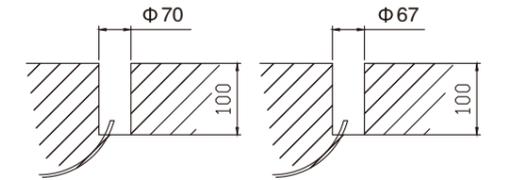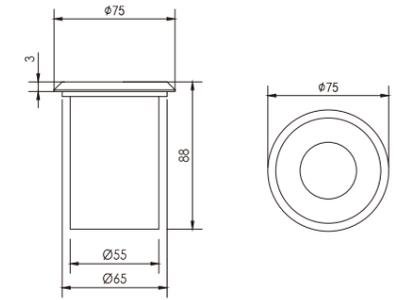

带预埋件
With embedded parts

不带预埋件
Not with embedded parts

技术参数 Specification

产品型号/Product Code	SL2101A-1
LED品牌/LED Brand	CREE
LED数量/LED Quantity	1pc
额定功率/Rated Power	1.5W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	25° 120°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%




Inground Light Series



SL21006

eyePRO

光学护眼



Wall Wash

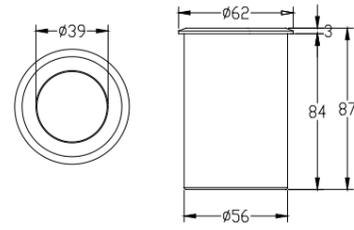

带预埋件
With embedded parts





技术参数 Specification

产品型号/Product Code	SL21006E-1	SL21006F-1
LED品牌/LED Brand	CREE XP-L	CREE RGBW 4 in 1
LED数量/LED Quantity	1pc	1pc
额定功率/Rated Power	6W	6W
输入电压/Input Voltage	DC24V / AC100-240V	DC24V / DC12V
频率/Frequency Range	50/60Hz	/
颜色/Color	Single	RGBW
发光角度/Beam Angle	8° 12° 20° 30° 45° 60° 45° Tilt.45° (Wall Wash)	15° 20° 30° 45° 15X60°
控制方式/Control Mode	CC	DMX512
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP67	IP67
环境温度/Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%



Inground Light Series

SL21005



带预埋件
With embedded parts






不带预埋件
Not with embedded parts

技术参数 Specification


产品型号/Product Code	SL21005A-1	
LED品牌/LED Brand	CREE	
LED数量/LED Quantity	1pc	
额定功率/Rated Power	1.5W	
输入电压/Input Voltage	DC12V/DC24V	
频率/Frequency Range	/	
颜色/Color	RGB/Single	
发光角度/Beam Angle	12.5° 20° 30° 45° 120°	
控制方式/Control Mode	DMX512/PWM/CC	
使用寿命/Life	50000H	
防护等级/Protection Grade	IP67	
环境温度/Ambient Temperature	- 25°C ~ 50°C	
环境湿度/Ambient Humidity	10% ~ 90%	



配光曲线 (半角) Distribution Curve Flux (SBC Case)

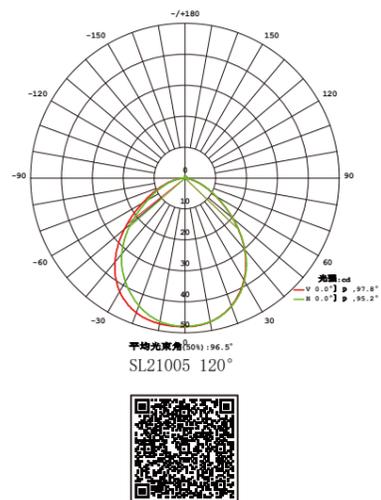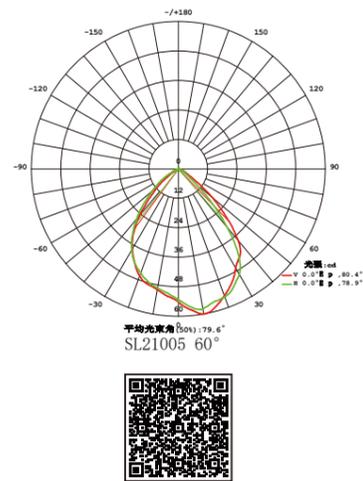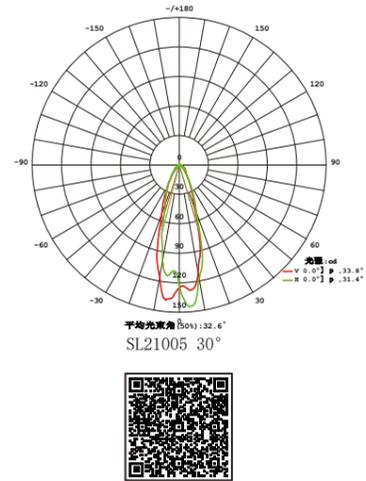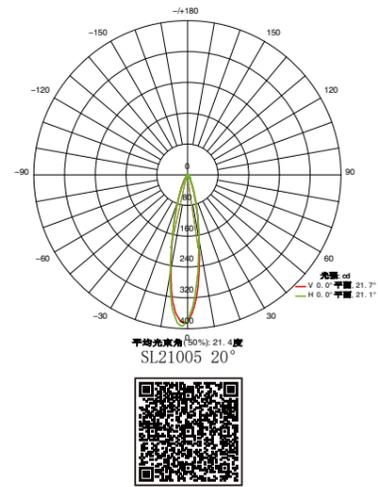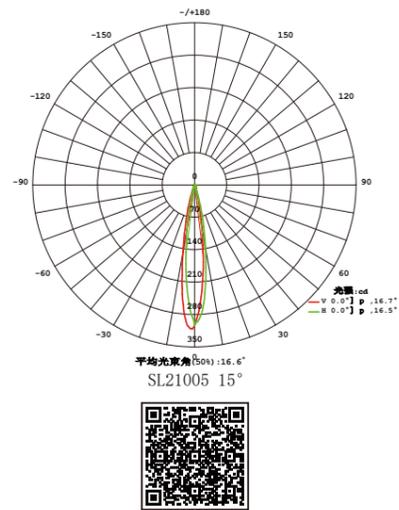

Inground Light Series SL21003

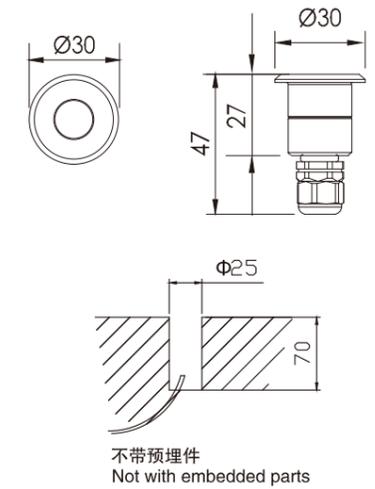


技术参数 Specification

产品型号/Product Code	SL21003A-1
LED品牌/LED Brand	EPISTAR
LED数量/LED Quantity	1pc
额定功率/Rated Power	0.5W
输入电压/Input Voltage	DC12V/DC24V
频率/Frequency Range	/
颜色/Color	Single
发光角度/Beam Angle	120°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	-25°C~50°C
环境湿度/Ambient Humidity	10%~90%



Inground Light Series

SL2108A

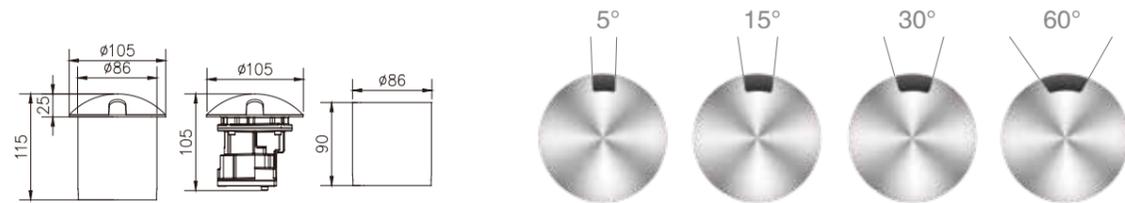


技术参数 Specification

产品型号/Product Code	SL2108AE-1
LED品牌/LED Brand	CREE
LED数量/LED Quantity	1pc
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	5° 15° 30° 60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	-25°C~50°C
环境湿度/Ambient Humidity	10%~90%

Inground Light Series

SL2108B

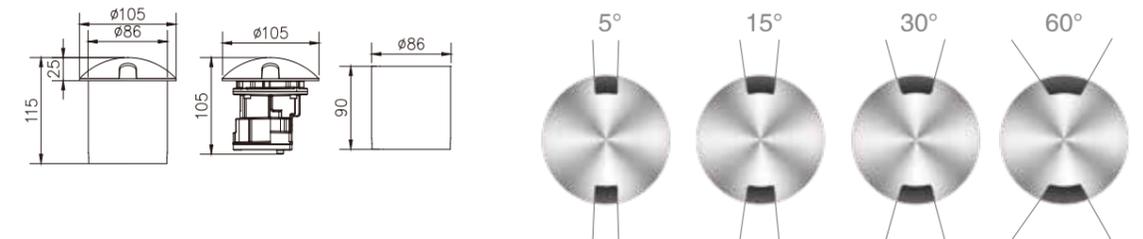


技术参数 Specification

产品型号/Product Code	SL2108BE-2
LED品牌/LED Brand	CREE
LED数量/LED Quantity	2pc
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	2x5° 2x15° 2x30° 2x60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	-25°C~50°C
环境湿度/Ambient Humidity	10%~90%

Inground Light Series


SL2104A

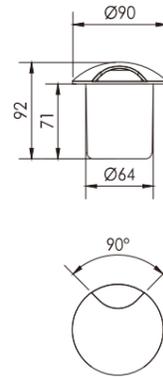

技术参数 Specification


产品型号/Product Code	SL2104AB-1
LED品牌/LED Brand	CREE
LED数量/LED Quantity	1pc
额定功率/Rated Power	3W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

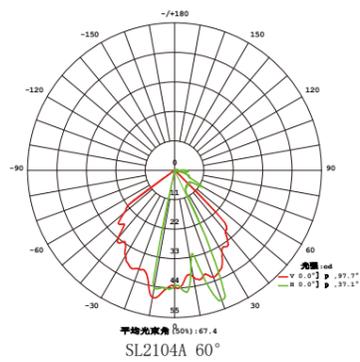

Inground Light Series


SL2104B

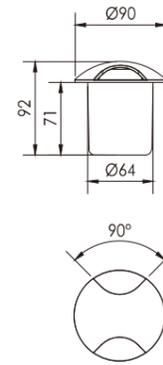

技术参数 Specification


产品型号/Product Code	SL2104BB-2
LED品牌/LED Brand	CREE
LED数量/LED Quantity	2pcs
额定功率/Rated Power	4W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	2x60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

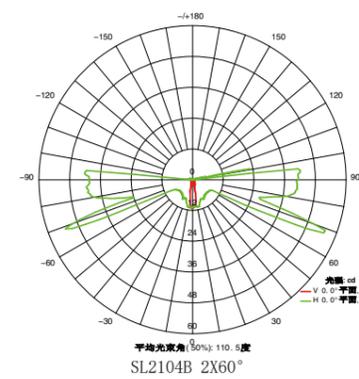

Inground Light Series


SL2104C

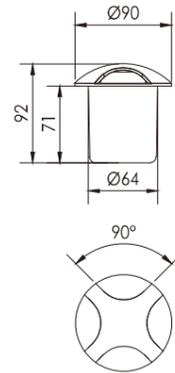

技术参数 Specification


产品型号/Product Code	SL2104CB-4
LED品牌/LED Brand	CREE
LED数量/LED Quantity	4pcs
额定功率/Rated Power	4W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	4x60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)



Inground Light Series


SL2104D

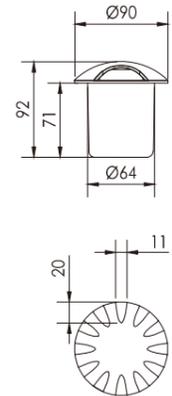

技术参数 Specification

产品型号/Product Code	SL2104DB-12
LED品牌/LED Brand	CREE
LED数量/LED Quantity	4pcs
额定功率/Rated Power	4W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	12x15°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%


配光曲线 (全角) Distribution Curve Flux (SBC Case)





Outline Light Series

SL3315

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

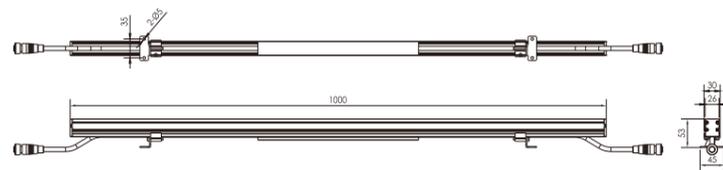

配光曲线 (半角) Distribution Curve Flux (SBC Case)

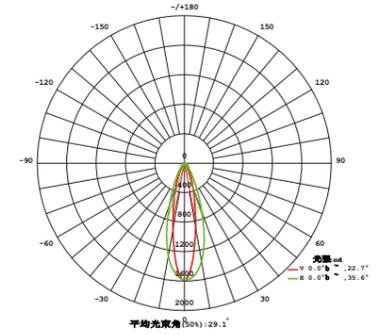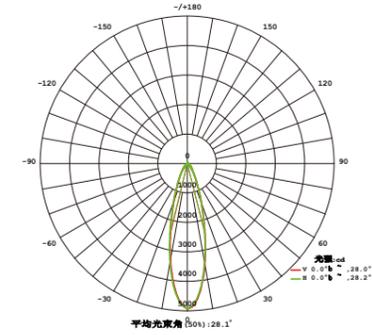

技术参数 Specification


产品型号/Product Code	SL3315-48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W/15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/RGB+W/Single
发光角度/Beam Angle	20° 30° 45° 60° 20x40° 120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10/8(pcs)



Outline light series

SL3316


蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

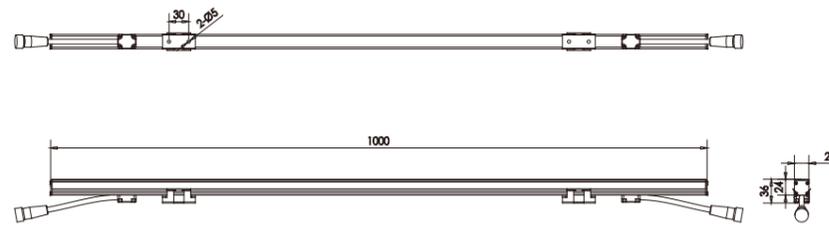

技术参数 Specification



产品型号/Product Code	SL3316-48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W/15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	30° 60° 120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	-25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10/8(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

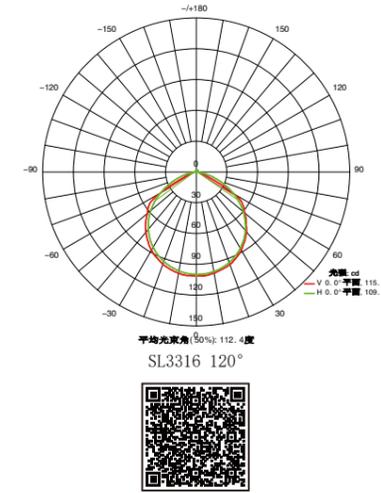

Outline Light Series

SL3317

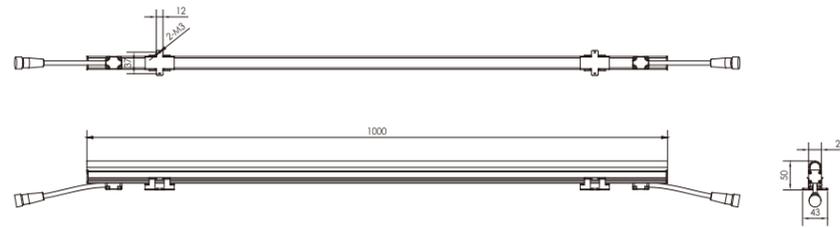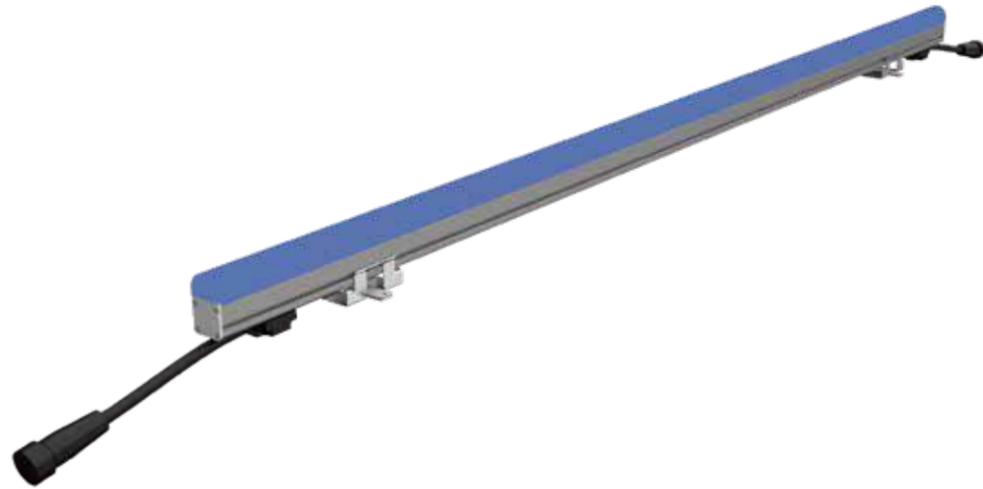

技术参数 Specification


产品型号/Product Code	SL3317-60
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	60pcs
额定功率/Rated Power	15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	>120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10(pcs)

Outline light series

SL3317L





reddot winner 2021

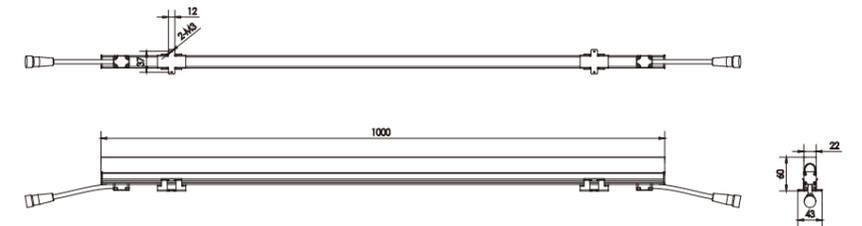

技术参数 Specification

产品型号/Product Code	SL3317L-60
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	60pcs
额定功率/Rated Power	15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	>120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10(pcs)



Outline Light Series
SL3317S

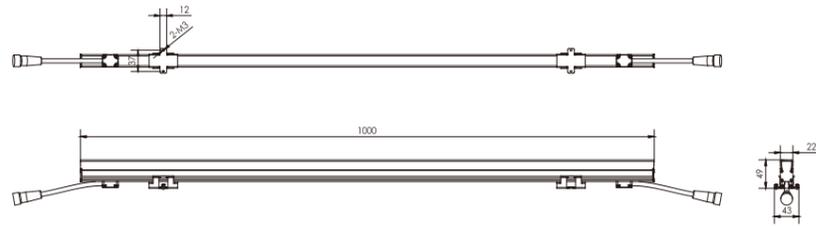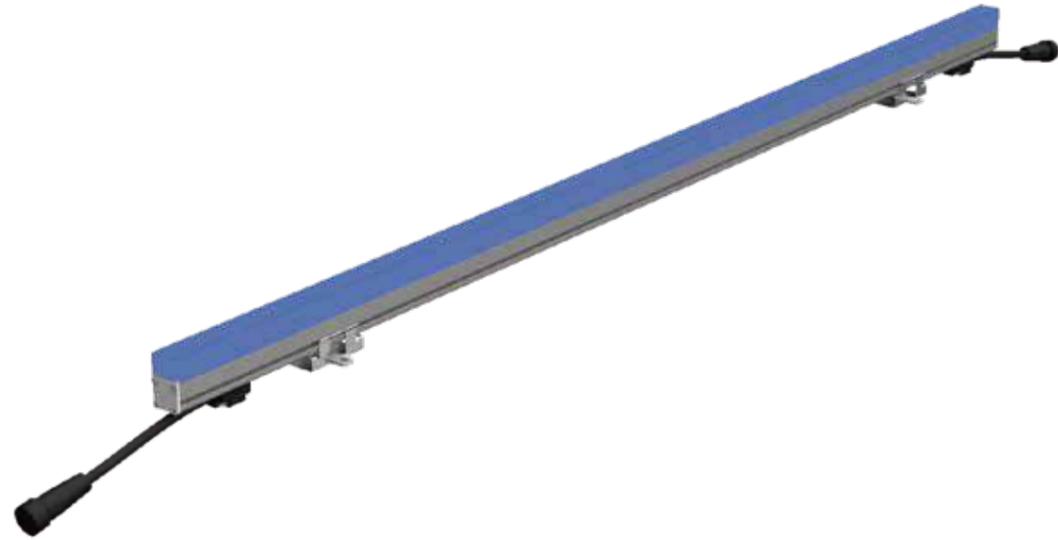

技术参数 Specification

产品型号/Product Code	SL3317S-60
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	60pcs
额定功率/Rated Power	15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	>120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10(pcs)

Outline light series
SL3321

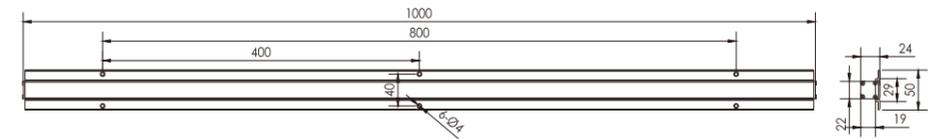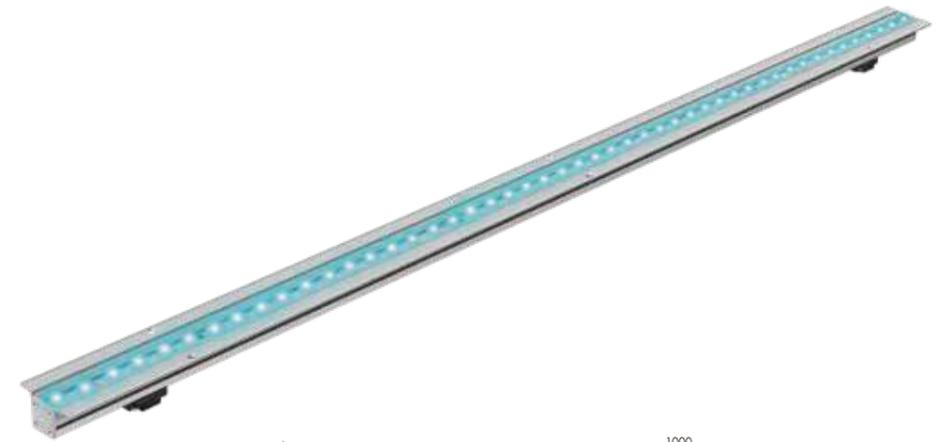


技术参数 Specification

产品型号/Product Code	SL3321-48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/Single
发光角度/Beam Angle	30° 60° 120°
控制方式/Control Model	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10/8(pcs)




Outline Light Series

SL3322

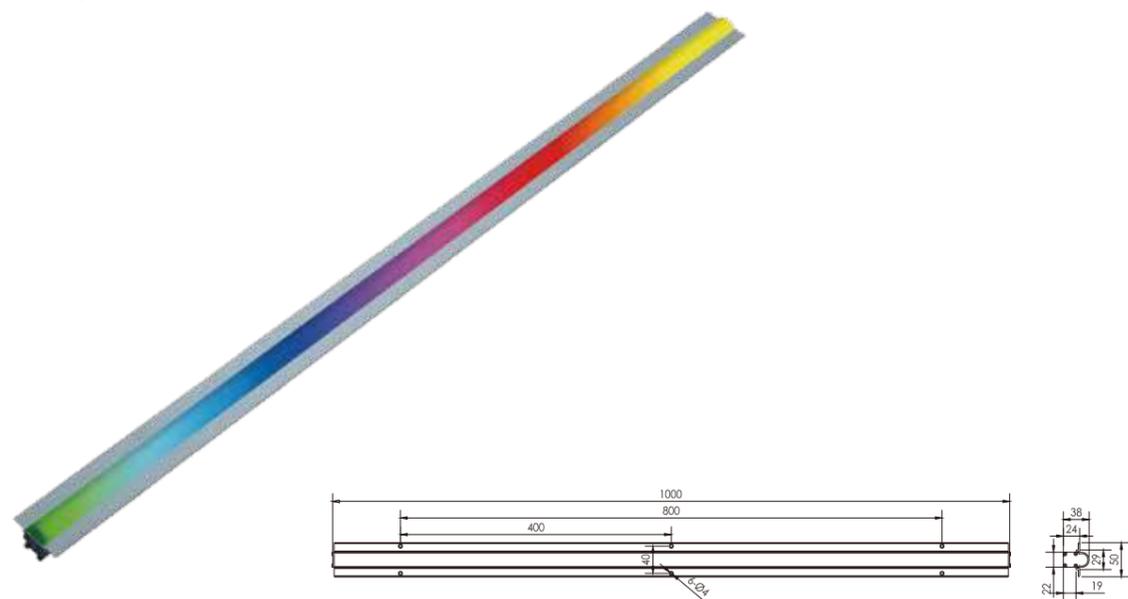

技术参数 Specification

产品型号/Product Code	SL3322-48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/Single
发光角度/Beam Angle	>120°
控制方式/Control Model	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%

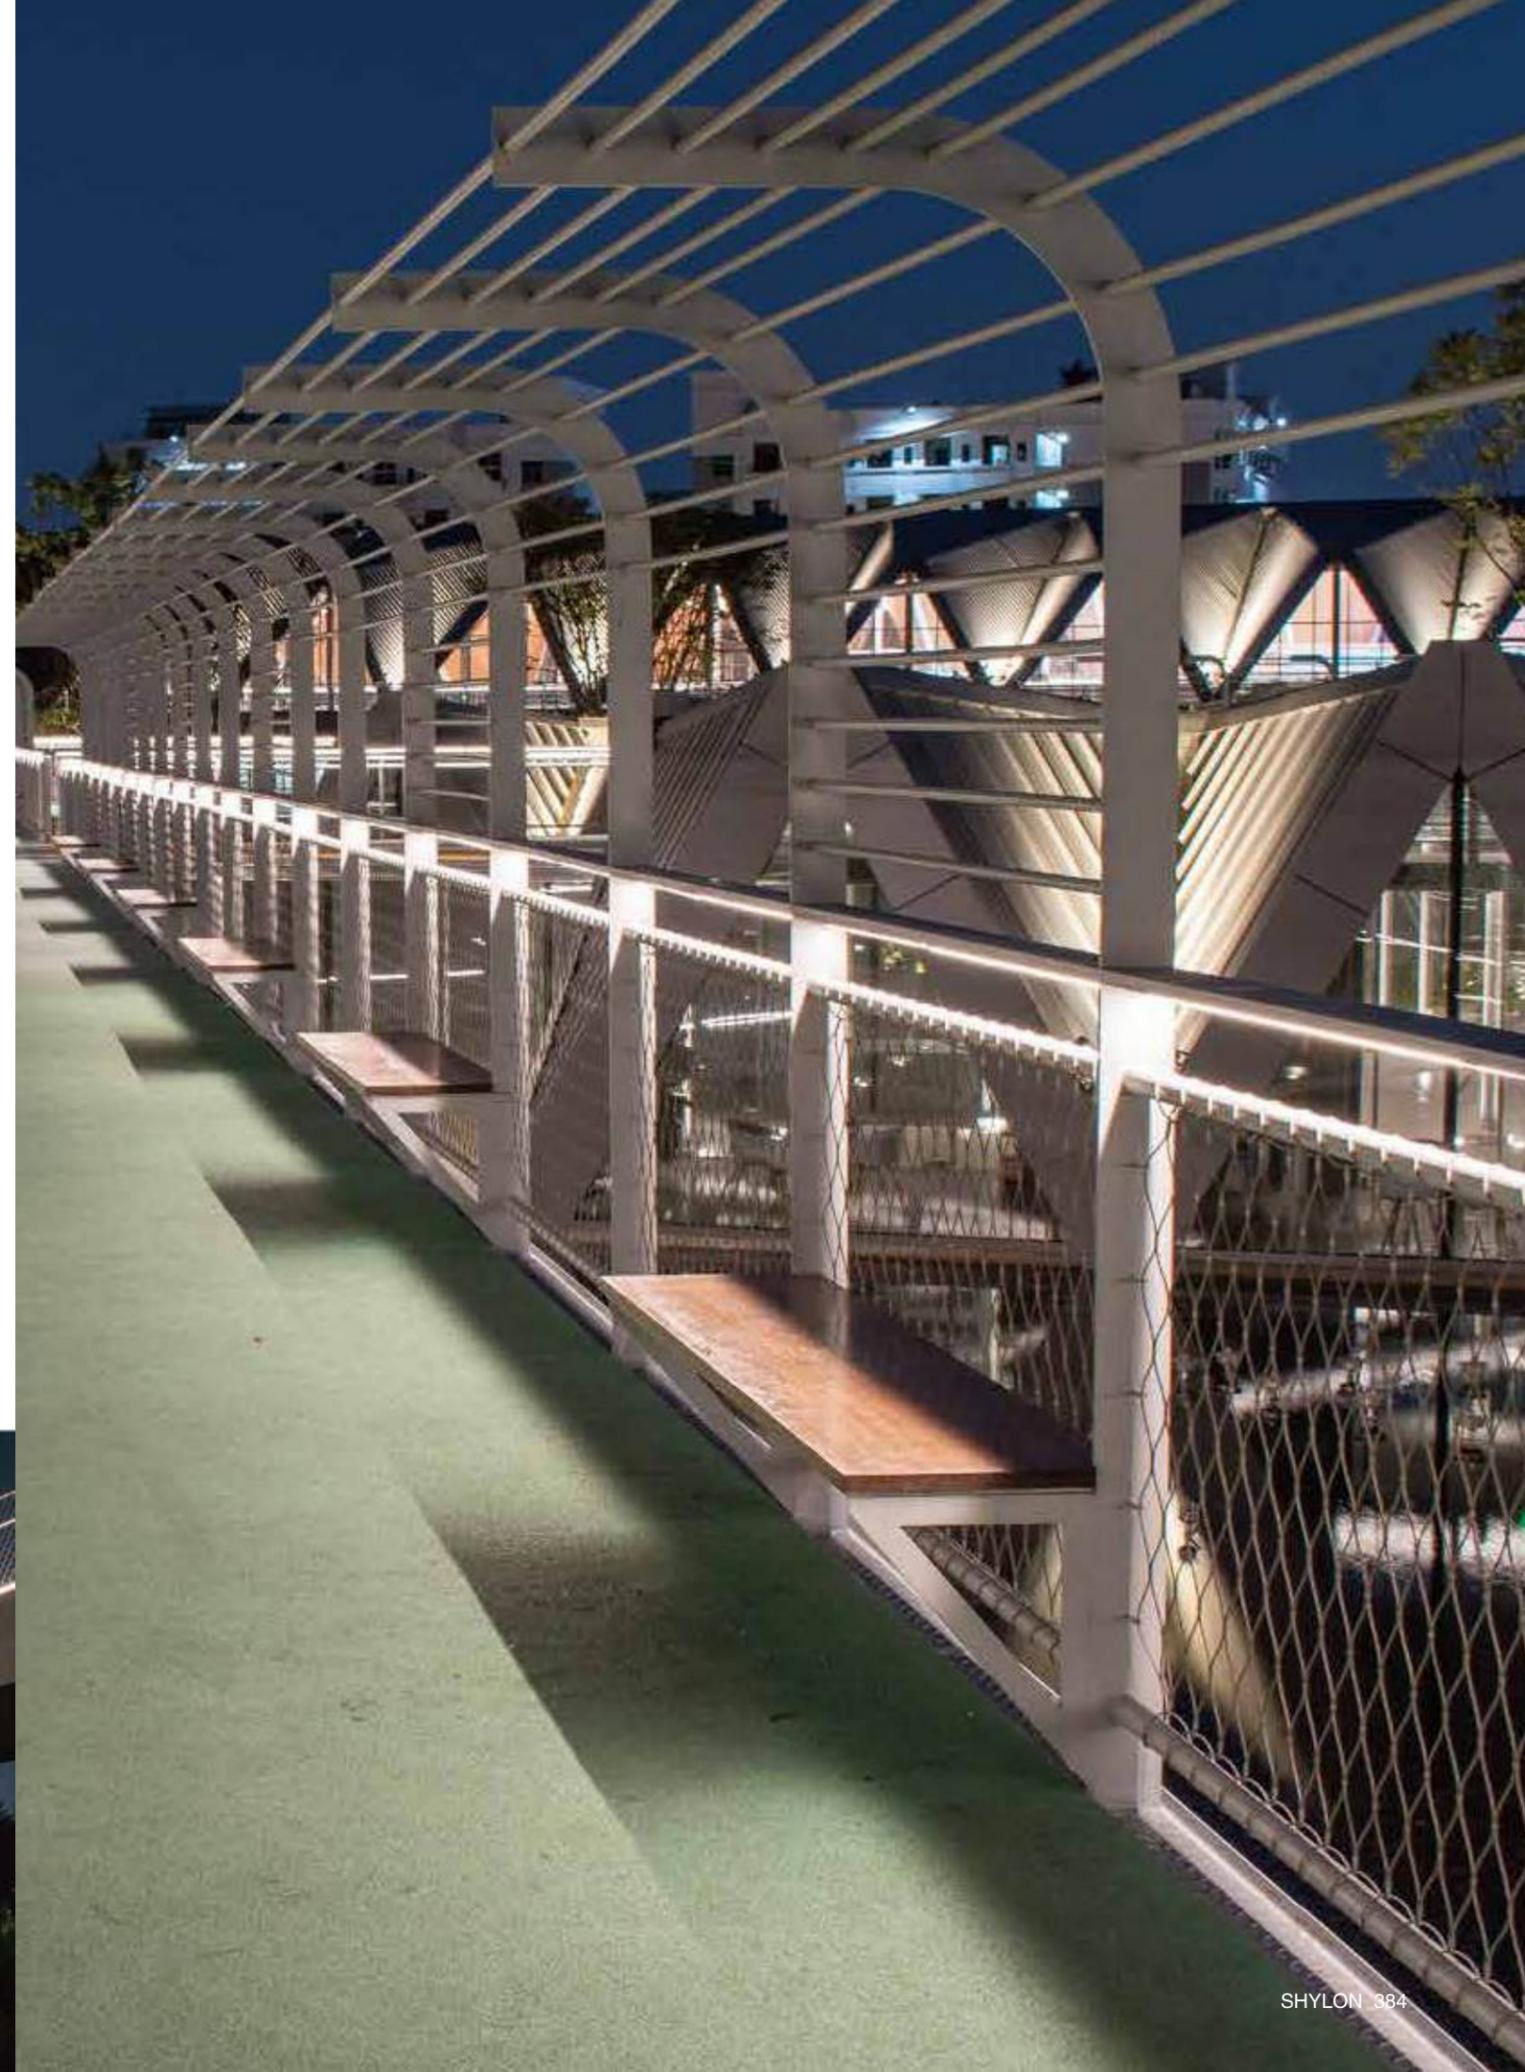

Outline Light Series


SL3313

eye7pro

光学护眼

ONELine

一线天光

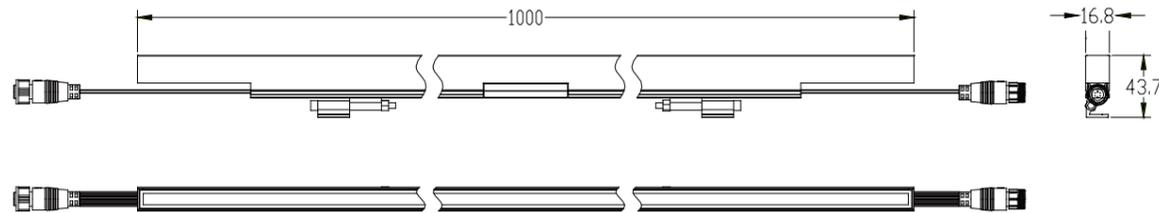


技术参数 Specification

产品型号/ Product Code	SL3313-96	SL3313-48(0.5M)	SL3313-24(0.3M)	SL3313-96	SL3313-48(0.5M)	SL3313-24(0.3M)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	96pcs	48pcs	24pcs	96pcs	48pcs	24pcs
额定功率/ Rated Power	18W	9W	6W	18W	9W	6W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/ Beam Angle	20°60° 30°60°	20°60° 30°60°	20°60° 30°60°	20°60° 30°60°	20°60° 30°60°	20°60° 30°60°
控制方式/ Control Mode	CC	CC	CC	DMX512	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

Outline light series

SL3312A

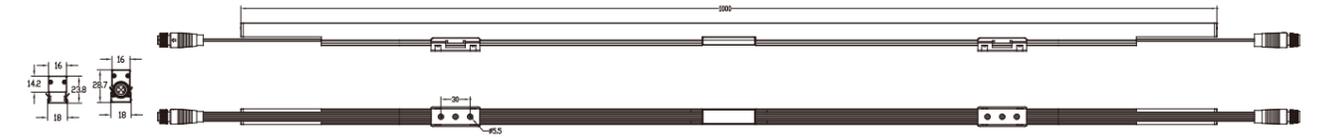


技术参数 Specification

产品型号/Product Code	SL3312A-60	SL3312A-30(0.5m)	SL3312A-18(0.3m)	SL3312A-60	SL3312A-30(0.5m)	SL3312A-18(0.3m)
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	60pcs	30pcs	18pcs	60pcs	30pcs	18pcs
额定功率/Rated Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	120°	120°	120°	120°	120°	120°
控制方式/Control Model	CC	CC	CC	DMX512	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%






Outline light series SL3312B

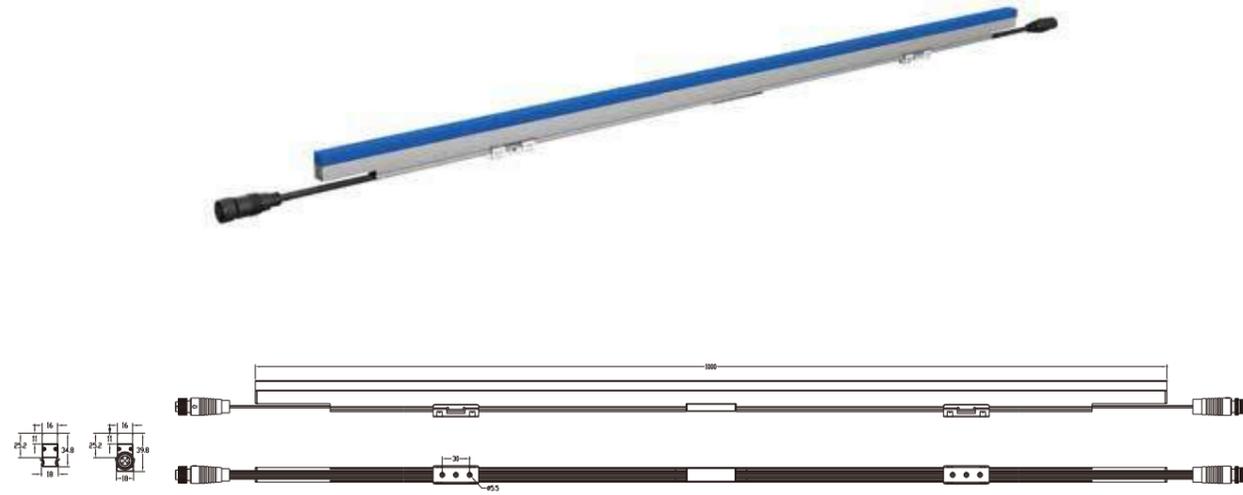

技术参数 Specification

产品型号/Product Code	SL3312B-60	SL3312B-30(0.5m)	SL3312B-18(0.3m)	SL3312B-60	SL3312B-30(0.5m)	SL3312B-18(0.3m)
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	60pcs	30pcs	18pcs	60pcs	30pcs	18pcs
额定功率/Rated Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	160°	160°	160°	160°	160°	160°
控制方式/Control Model	CC	CC	CC	DMX512	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃		-25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

Outline light series SL3312C

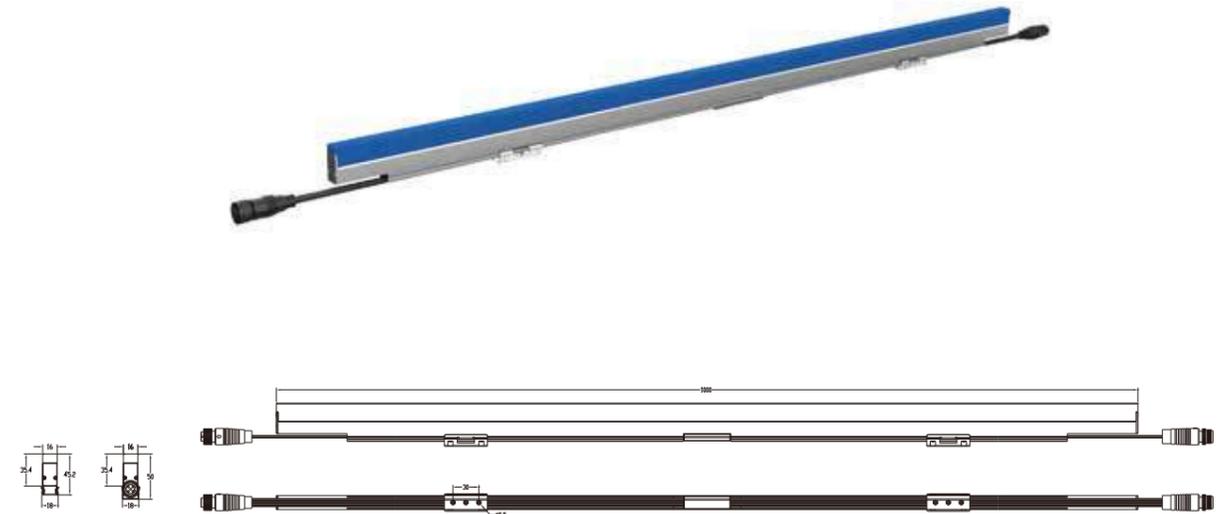


技术参数 Specification

产品型号/Product Code	SL3312C-60	SL3312C-30(0.5m)	SL3312C-18(0.3m)	SL3312C-60	SL3312C-30(0.5m)	SL3312C-18(0.3m)
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	60pcs	30pcs	18pcs	60pcs	30pcs	18pcs
额定功率/Rated Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	160°	160°	160°	160°	160°	160°
控制方式/Control Model	CC	CC	CC	DMX512	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃		-25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%



Outline light series

SL3312D

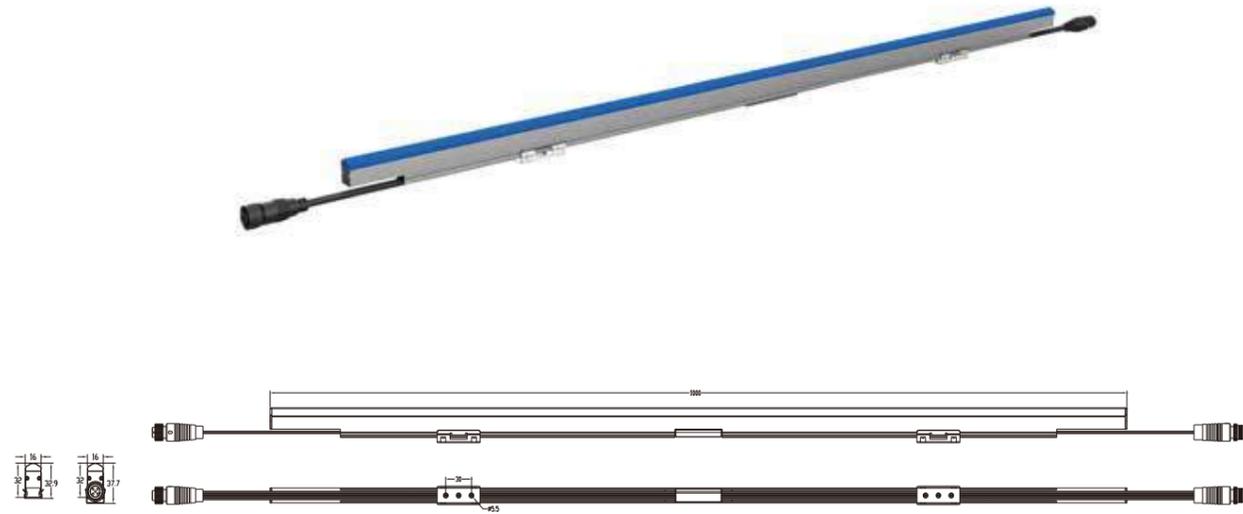


技术参数 Specification

产品型号/Product Code	SL3312D-60	SL3312D-30(0.5m)	SL3312D-18(0.3m)	SL3312D-60	SL3312D-30(0.5m)	SL3312D-18(0.3m)
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	60pcs	30pcs	18pcs	60pcs	30pcs	18pcs
额定功率/Rated Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	25x45°	25x45°	25x45°	25x45°	25x45°	25x45°
控制方式/Control Model	CC	CC	CC	DMX512	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

Outling light Series

SL3371

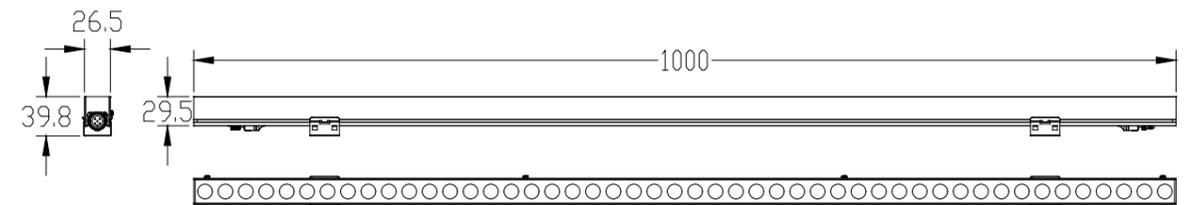

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.




Outling light Series

SL3351


技术参数 Specification

产品型号/ Product Code	SL3371-48	SL3371-24(0.5m)	SL3371-12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs
额定功率/ Rated Power	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	Single	Single	Single
发光角度/ Beam Angle	20° 30° 45° 60° 15x40°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL3371-48	SL3371-24(0.5m)	SL3371-12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs
额定功率/ Rated Power	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	RGBW	RGBW	RGBW
发光角度/ Beam Angle	40° 60° 10X65° 35x45°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%

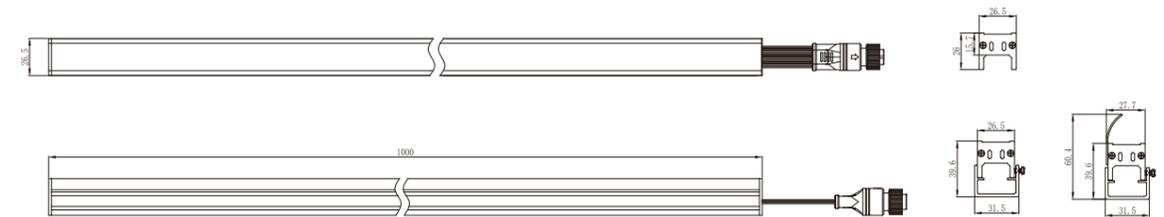



技术参数 Specification

产品型号/ Product Code	SL3351-48	SL3351-24(0.5m)	SL3351-12(0.3m)	SL3351-48	SL3351-24(0.5m)	SL3351-12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs	48pcs	24pcs	12pcs
额定功率/ Rated Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/ Beam Angle	20° 30° 45° 60° 15x40°			40° 60° 10x65° 35x45°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

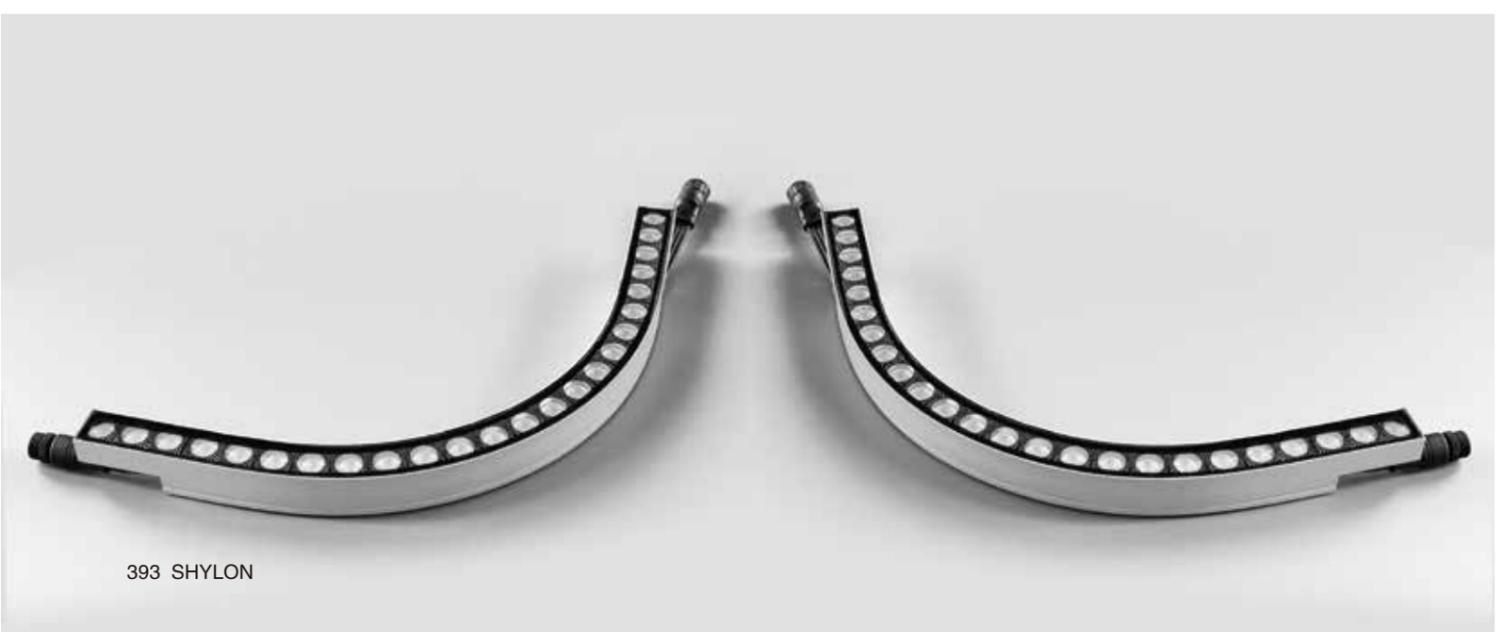

Outling light Series

SL3352

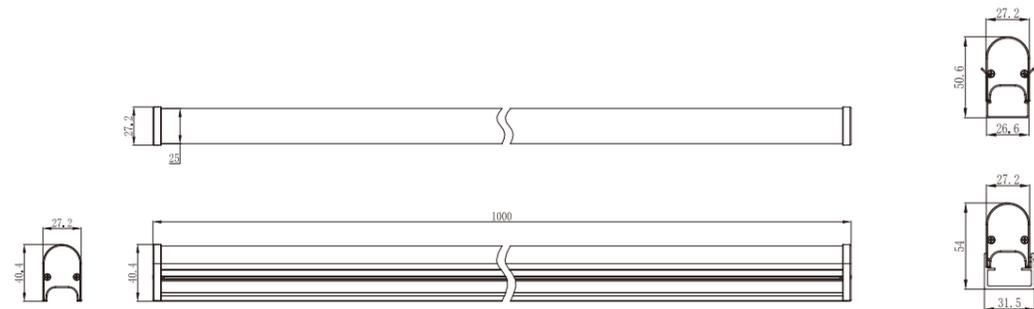
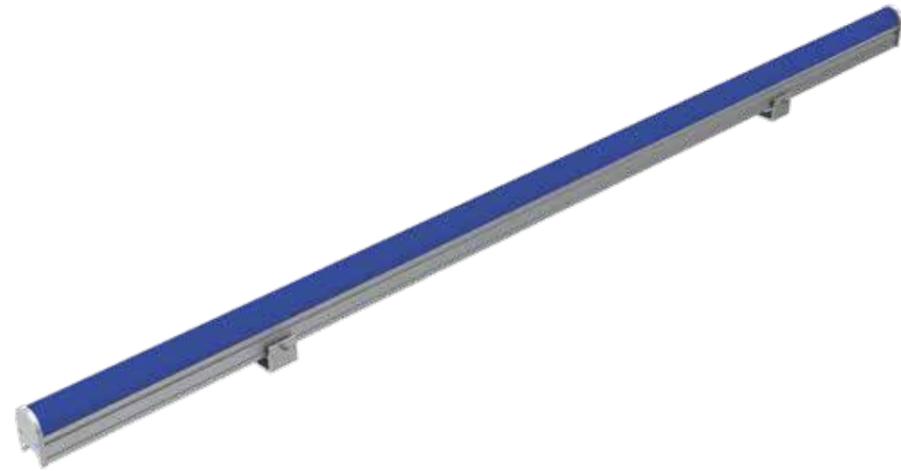


技术参数 Specification

产品型号/ Product Code	SL3352-48	SL3352-24(0.5m)	SL3352-12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs
额定功率/ Rated Power	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	RGBW/Single	RGBW/Single	RGBW/Single
发光角度/ Beam Angle	180°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%

Outling Light Series

SL3353

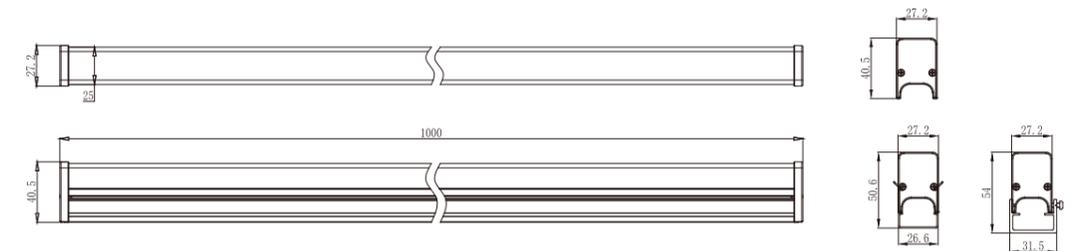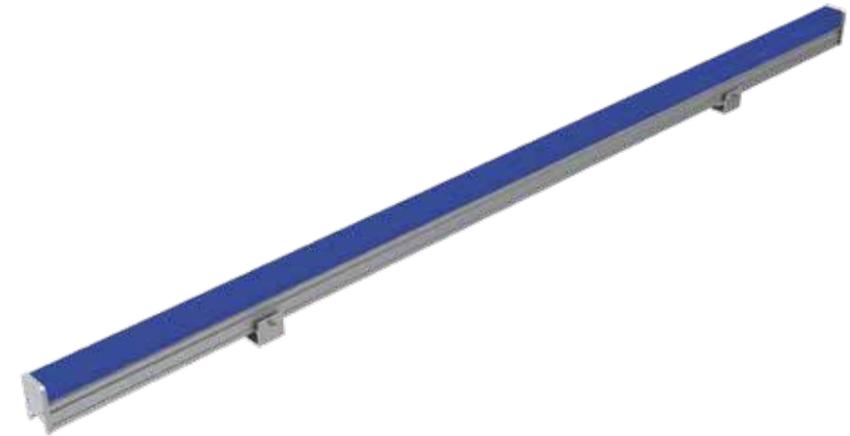

技术参数 Specification

产品型号/ Product Code	SL3353-48	SL3352-24(0.5m)	SL3353-12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs
额定功率/ Rated Power	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	RGBW/Single	RGBW/Single	RGBW/Single
发光角度/ Beam Angle	180°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%

Outling light Series


SL3323

eyePRO

光学护眼



细节 Particulars

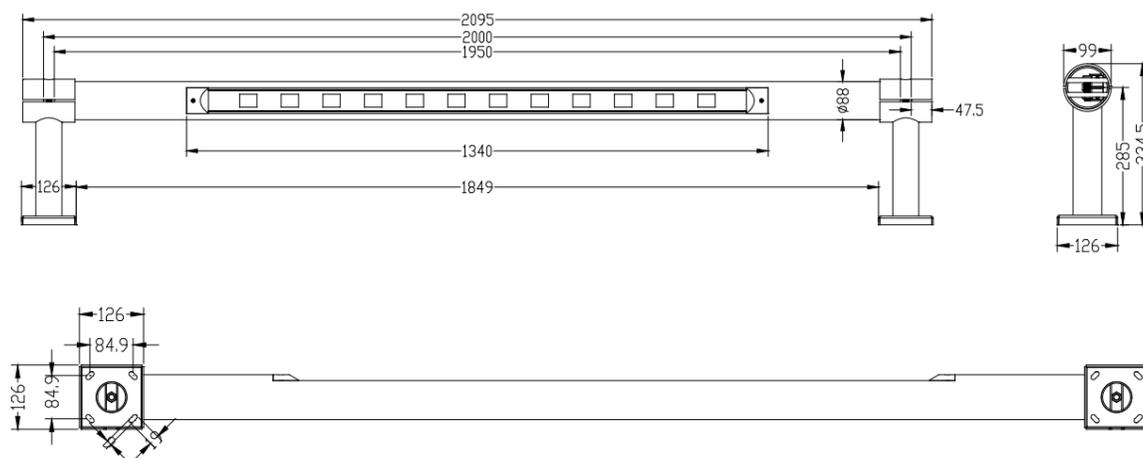


产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color.;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL3323A-24	SL3323A-12
Led品牌/ Led Brand	LUXEON 5050	LUXEON 5050
Led数量/ Led Quantity	12pcs	12pcs
额定功率/ Rated Power	24W	12W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Angle	8x100°	
控制方式/ Control Mode	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
阻燃等级/ Flame retardant grade	UL94V-0	UL94V-0
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%

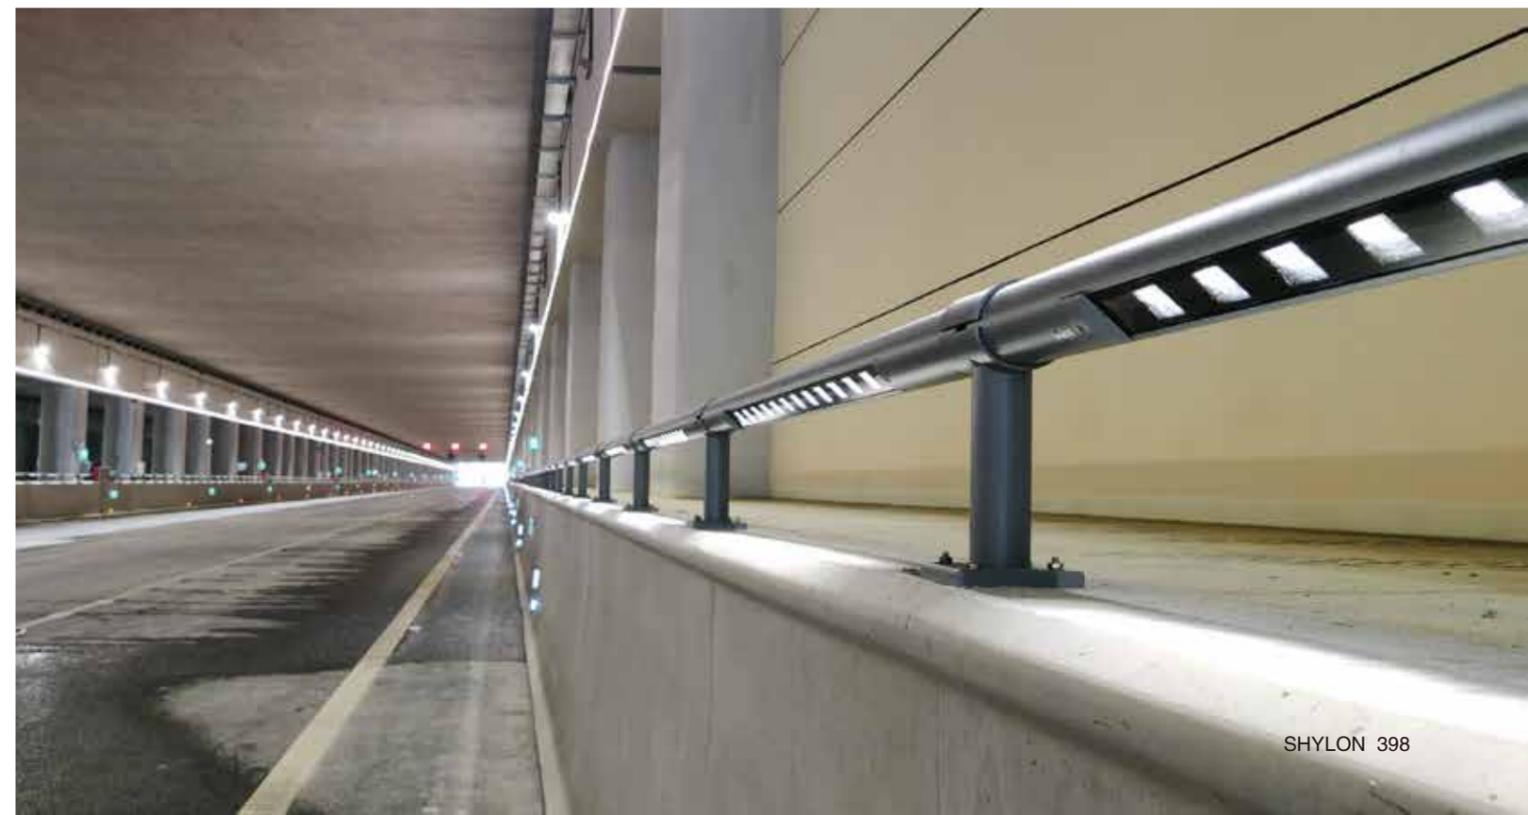

道路类型 Road type	道路宽度 road width	安装高度 installation height	灯具功率 Lamp power	布灯间距 Lamp spacing	平均辉度 Average brightness(cd/m ²)	Uo	UI
2车道(2 lanes)	7.5(m)	0.8~1.2(m)	12(w)	2(m)	4.51	0.74	0.97
3车道(3 lanes)	11.25(m)				3.08	0.70	0.95




平均照度 Average illuminance	最小照度 Min illuminance	最大照度 Max illuminance	g1	g2
71.3lx	60.2lx	88.1lx	0.84	0.68


技术特点 Technical Characteristics

- 1、定制低位照明光学透镜与灯具结构相结合，隐藏光源曝光点，有效降低眩光。避免对行人或驾驶员眩光影响。
 - 2、定制的光学镜头可实现更高的均匀度，照明质量优于相关道路照明标准。
 - 3、定制的光学镜头在满足道路照明设计标准的前提下，可实现大间距的布灯，推荐2-4米，同时可实用多种道路类型。
 - 4、灯具设计了防松动结构，有效保障产品在桥梁项目的可靠性。
1. The combination of customized low level lighting optical lenses and lamp structures hides the exposure points of the light source, effectively reducing glare. Avoid glare effects on pedestrians or drivers.
 2. Customized optical lenses can achieve higher uniformity and better lighting quality than relevant road lighting standards.
 3. Customized optical lenses can achieve large spacing of lamps while meeting road lighting design standards. It is recommended to use 2-4 meters and can be applied to various road types.
 4. The lighting fixtures are designed with an anti loosening structure, effectively ensuring the reliability of the product in bridge projects.

配光曲线 Distribution curve flux

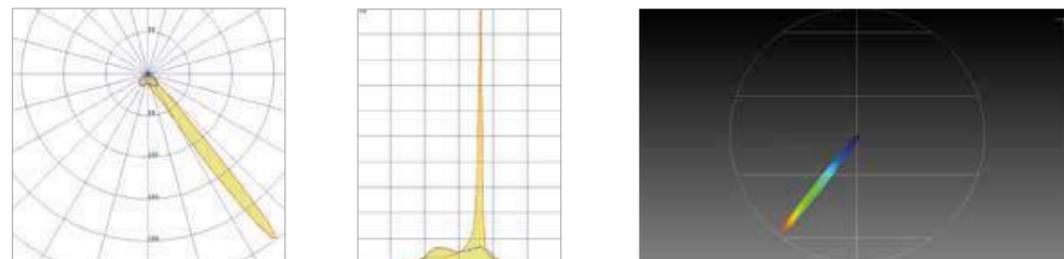


Outling Light Series SL3126




技术参数 Specification

产品型号/ Product Code	SL3126B-1
Led品牌/ Led Brand	CREE
Led数量/ Led Quantity	1Pcs
额定功率/ Rated Power	2W
输入电压/ Input Voltage	DC24V
频率/ Frequency Range	/
颜色 / Color	Single
发光角度/ Beam Angle	45x60 Tilt.15°
控制方式/ Control Mode	CC
使用寿命/ Life	50000H
防护等级/ Protection Grade	IP65
阻燃等级/ Flame retardant grade	UL94V-0
环境温度/ Ambient Temperature	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%

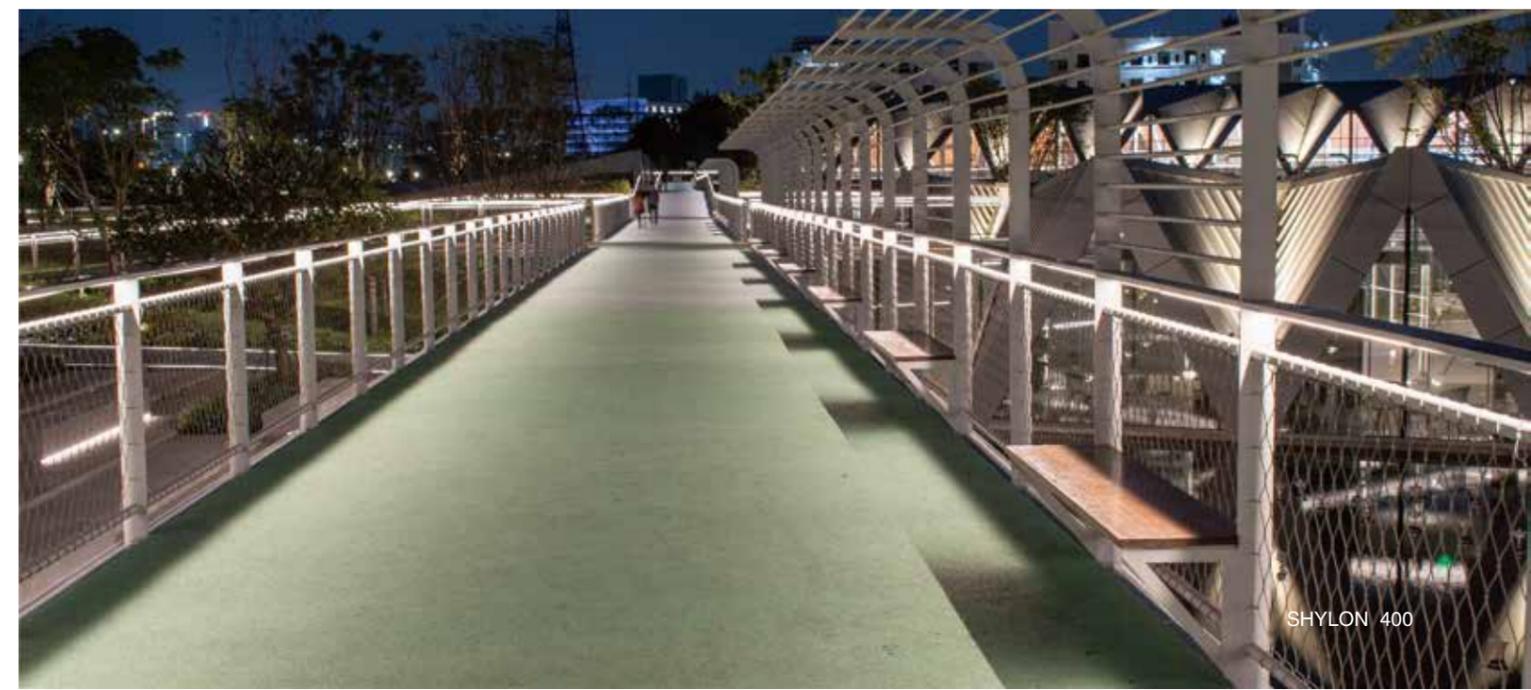

Outling Light Series

SL3121




技术参数 Specification

产品型号/ Product Code	SL3121-9	SL3121-12
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM
Led数量/ Led Quantity	RGB+W	RGB+W
额定功率/ Rated Power	3W	3W
输入电压/ Input Voltage	DC24V	DC24V
频率/ Frequency Range	/	/
颜色 / Color	RGBW	RGB
发光角度/ Beam Angle	120°	
控制方式/ Control Mode	DMX512	DMX512
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
阻燃等级/ Flame retardant grade	UL94V-0	UL94V-0
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%

Outling Light Series

SL3122




技术参数 Specification

产品型号/ Product Code	SL3122-9	SL3122-6
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM
Led数量/ Led Quantity	RGB+W	RGB
额定功率/ Rated Power	1.8W	1.8W
输入电压/ Input Voltage	DC24V	DC24V
频率/ Frequency Range	/	/
颜色 / Color	RGBW	RGB
发光角度/ Beam Angle	120°	
控制方式/ Control Mode	DMX512	DMX512
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
阻燃等级/ Flame retardant grade	UL94V-0	UL94V-0
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%

Outling Light Series

SL3123



技术参数 Specification

产品型号/ Product Code	SL3123-4	SL3123-3
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM
Led数量/ Led Quantity	4pcs 3RGB3in1+1W	3pcs RGB3in1
额定功率/ Rated Power	1W	1W
输入电压/ Input Voltage	DC24V	DC24V
频率/ Frequency Range	/	/
颜色 / Color	RGBW	RGB
发光角度/ Beam Angle	120°	
控制方式/ Control Mode	DMX512	DMX512
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
阻燃等级/ Flame retardant grade	UL94V-0	UL94V-0
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%

Outling Light Series

SL3361



技术参数 Specification

产品型号/Product Code	SL3361A-210	SL3361B-180	SL3361B-120
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	120pcs	120pcs	120pcs
额定功率/Rated Power	18W	16W	16W
输入电压/Input Voltage	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/
颜色/Color	2700K/3000K/4000K/5000K/6000K		
发光角度/Beam Angle	>120°		
控制方式/Control Mode	CC	CC	CC
使用寿命/Life	30000H	30000H	30000H
防护等级/Protection Grade	IP67	IP67	IP67
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%




Outling Light Series

SL3362



Outline light series


SL3110

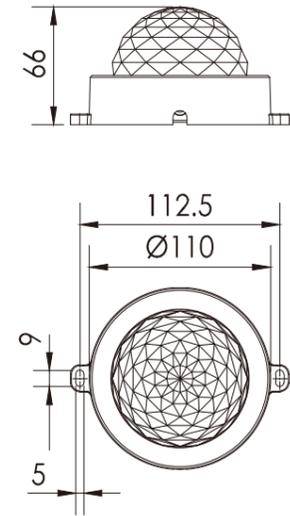

产品简介 Product Introduction

- 一、LED点光源系列具有时尚简约的外形，加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、采用双重防水结构，简易的安装方式，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用光扩散PC或高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
- 四、采用SMD单色或3合1 LED光源；光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、LED point light series have fashionable and simple appearance, with the design of increasing heat dissipation to fully ensure the stability and long life-span of LED fixture.
- 2、Adopt double waterproof structure and easy installation ways meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability
- 4、Adopt SMD single color or 3in1 light source, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing



技术参数 Specification


产品型号/Product Code	SL3362A-120	SL3362B-144
LED品牌/LED Brand	OSRAM	OSRAM
LED数量/LED Quantity	120pcs	144pcs
额定功率/Rated Power	14W	10W
输入电压/Input Voltage	DC24V	DC24V
频率/Frequency Range	/	/
颜色/Color	2700K/3000K/4000K/5000K/6000K	
发光角度/Beam Angle	>120°	
控制方式/Control Mode	CC	CC
使用寿命/Life	30000H	30000H
防护等级/Protection Grade	IP67	IP67
环境温度/Ambient Temperature	-25°C~50°C	-25°C~50°C
环境湿度/Ambient Humidity	10%~90%	10%~90%

技术参数 Specification

产品型号/Product Code	SL3110B-3	SL3110A-3
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	3pcs	3pcs
额定功率/Rated Power	6W	3.5W
输入电压/Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	>120°	>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP66	IP66
环境温度/Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	16/140(pcs)	26/250(pcs)

Outline Light Series

SL3106

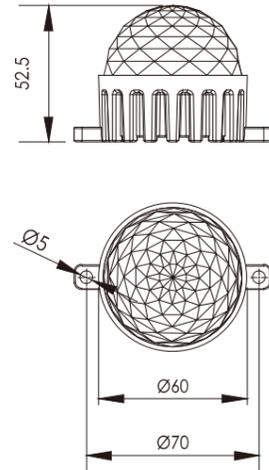


技术参数 Specification

产品型号/Product Code	SL3106C-1	SL3106-9
LED品牌/LED Brand	CREE	EPISTAR
LED数量/LED Quantity	1pc	9pcs
额定功率/Rated Power	3W	2W
输入电压/Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	Single	Single
发光角度/Beam Angle	>120°	>120°
控制方式/Control Mode	CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%



Outline light series



SL3210

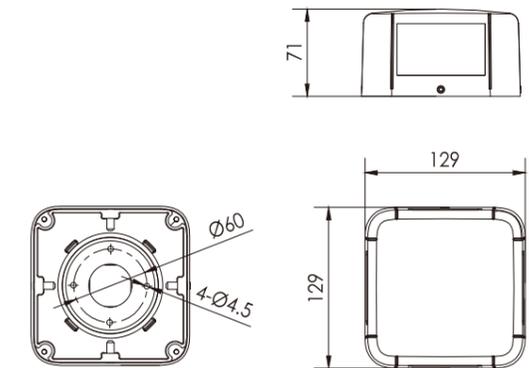

技术参数 Specification

产品型号/Product Code	SL3210R-12	SL3210B-4	SL3210B-2
LED品牌/LED Brand	CREE	CREE	CREE
LED数量/LED Quantity	12pcs	4pcs	2pcs
额定功率/Rated Power	14W	8W	4W
输入电压/Input Voltage	DC24V	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	/	50/60Hz	50/60Hz
颜色/Color	RGB	Single	Single
发光角度/Beam Angle	2° 20° 30° 60°		
控制方式/Control Mode	DMX512	CC	CC
使用寿命/Life	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65
环境温度/Ambient Temperature	-25°C~50°C	-25°C~50°C	-25°C~50°C
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

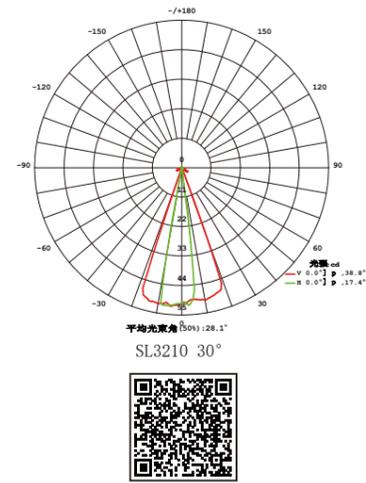
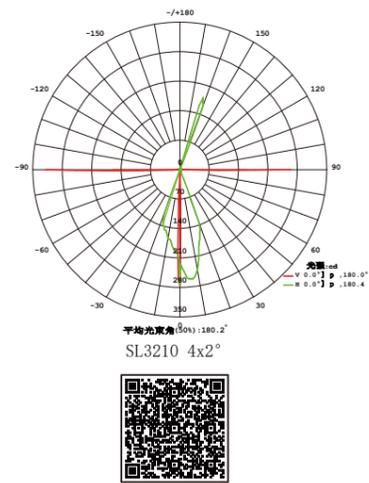


Outline light series

SL3240

eyePRO

光学护眼

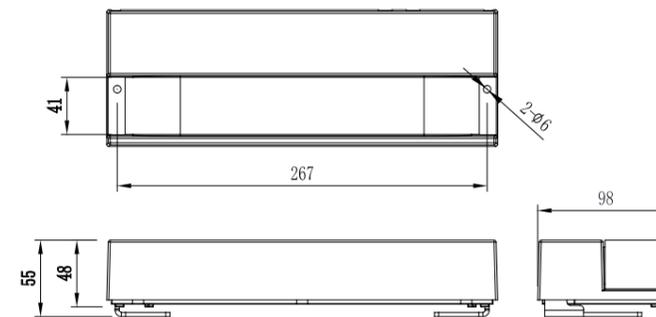

技术参数 Specification


产品型号/Product Code	SL3240C-16	SL3240C-16
LED品牌/LED Brand	LUMILEDS/晶元	LUMILEDS/晶元
LED数量/LED Quantity	16pcs	16pcs
额定功率/Rated Power	36W	36W
输入电压/Input Voltage	AC100-240V	DC24V
频率/Frequency Range	50/60Hz	/
颜色/Color	Single	RGBW
发光角度/Beam Angle	2x180°	2x180°
控制方式/Control Mode	CC	DMX512
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	8(pcs)	8(pcs)

Outline light series

SL3230

eyePRO


光学护眼

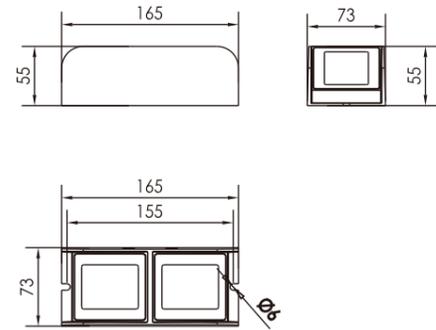

技术参数 Specification

产品型号/Product Code	SL3230C-8
LED品牌/LED Brand	CREE
LED数量/LED Quantity	8pcs
额定功率/Rated Power	20W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGBW/Single
发光角度/Beam Angle	8x180°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

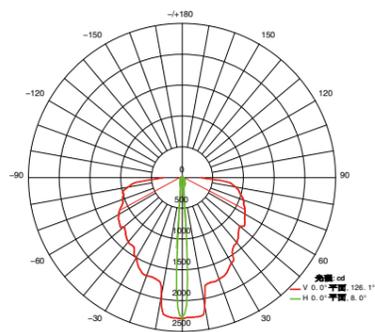


Outline Light Series

SL3220

eyePRO

光学护眼

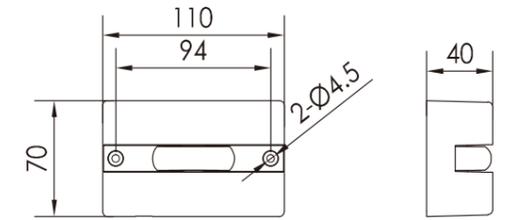


技术参数 Specification

产品型号/Product Code	SL3220A-3	SL3220C-1
LED品牌/LED Brand	CREE	CREE XP-G2
LED数量/LED Quantity	3pcs / 12pcs	1pcs
额定功率/Rated Power	3W	3W
输入电压/Input Voltage	AC100-240V/DC12V	AC100-240V/DC24V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	RGBW/Single	Single
发光角度/Beam Angle	2° X 180°	
控制方式/Control Mode	DMX512/CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%



Underwater Light Series

SL5109

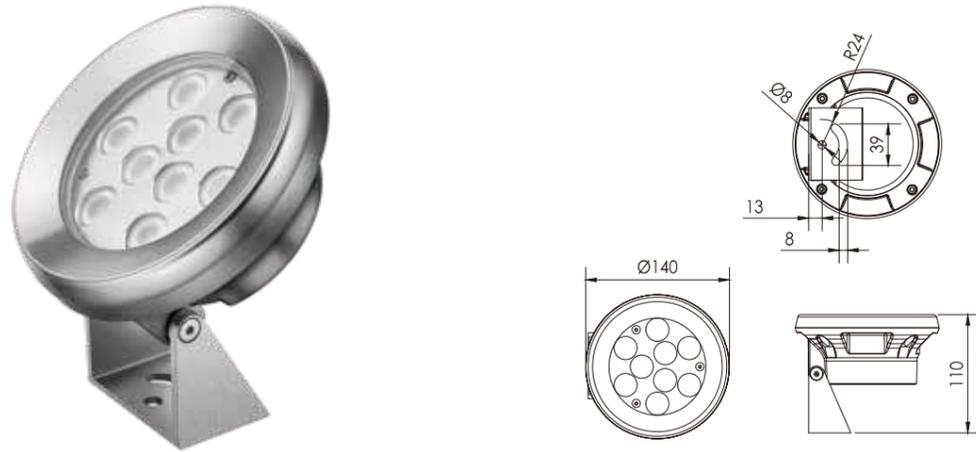


技术参数 Specification

产品型号/Product Code	SL5109B-9	SL5109A-9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	16W	10W
输入电压/Input Voltage	DC12V/DC24V	DC12V/DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	4/9(pcs)	7/14(pcs)



Underwater Light Series



SL5106

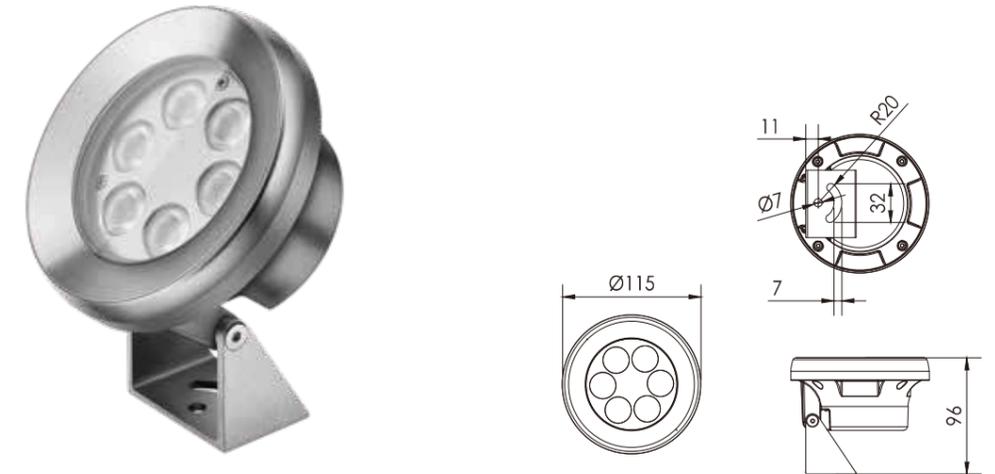

技术参数 Specification



产品型号/Product Code	SL5106B-6	SL5106A-6
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	6pcs	6pcs
额定功率/Rated Power	12W	7W
输入电压/Input Voltage	DC12V/DC24V	DC12V/DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	6/12(pcs)	10/20(pcs)

配光曲线 (全角) Distribution Curve Flux (SBC Case)

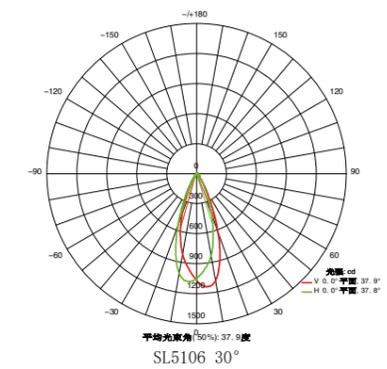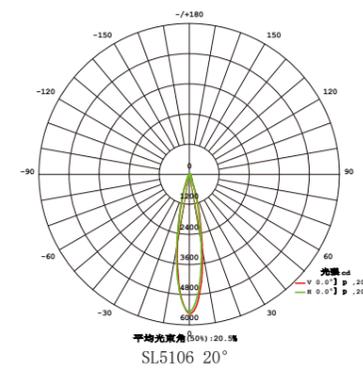

Underwater Light Series

SL5119





技术参数 Specification

产品型号/Product Code	SL5119B-9	SL5119A-9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	16W	10W
输入电压/Input Voltage	DC12V /DC24V	DC12V /DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	4/9(pcs)	7/14(pcs)



Underwater Light Series


SL5116




技术参数 Specification

产品型号/Product Code	SL5116B-6	SL5116A-6
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	6pcs	6pcs
额定功率/Rated Power	12W	7W
输入电压/Input Voltage	DC12V /DC24V	DC12V /DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	6/22(pcs)	10/20(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

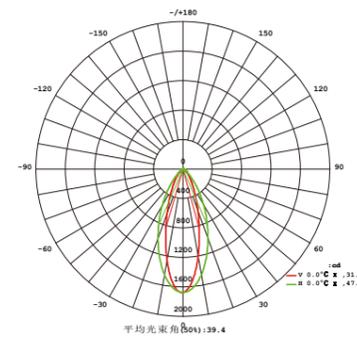

SL3351-48 12W 4000K 15X40D

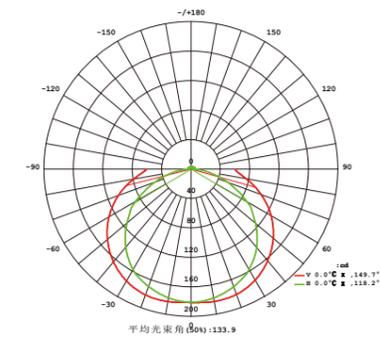

SL3353-48 12W 4000K 120D

INTERNATIONAL WATCH CO.



TAG Heuer




BOBBI BROWN



Wall light series

SL6165 SL6132

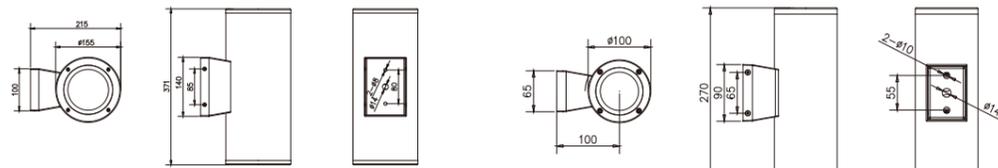


SL6165

SL6132

产品型号/Product Code	SL6165E-8	SL6165-C60	SL6132-C40
发光方向 Light direction	Up and down	Up and down	Up and Down
LED品牌 LED Brand	CREE	CREE COB	CREE COB
LED数量 LED Quantity	4pcsx2	1pcsx2	1pcsx2
额定功率 Rated Power	30Wx2/20Wx2	60W	20Wx2/10Wx2
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 24° 36° 60°	
控制方式 Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

Wall Light Series

SL6166 SL6133

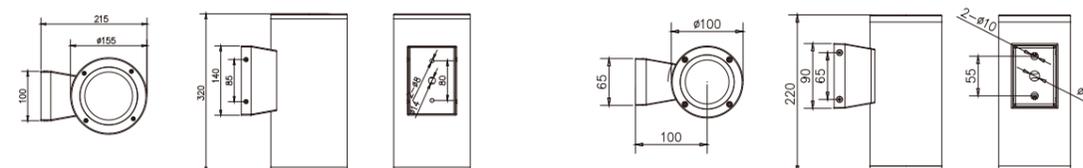


SL6166


SL6133

产品型号/Product Code	SL6166E-4	SL6166-C30	SL6133-C20
发光方向 Light direction	Down	Down	Down
LED品牌 LED Brand	CREE	CREE COB	CREE COB
LED数量 LED Quantity	4pcs	1pcs	1pcs
额定功率 Rated Power	30W	50W/30W	20W/10W
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 24° 36° 60°	
控制方式 Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

Wall light series
SL6167 SL6135

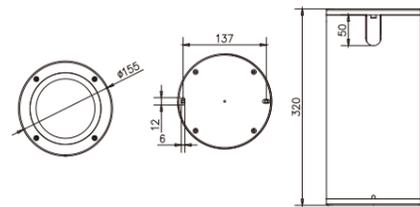


SL6167

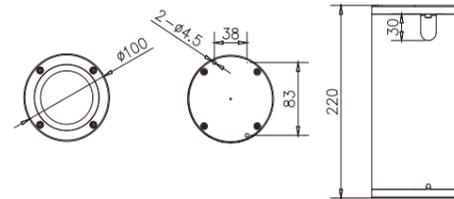



SL6135

产品型号/Product Code	SL6167E-4	SL6167-C30	SL6135-C20
发光方向 Light direction	Down	Down	Down
LED品牌 LED Brand	CREE	CREE COB	CREE COB
LED数量 LED Quantity	4pcs	1pcs	1pcs
额定功率 Rated Power	30W	50W/30W	20W/10W
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 24° 36° 60°	
控制方式 Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%


Wall light series
SL6155 SL6122





A型

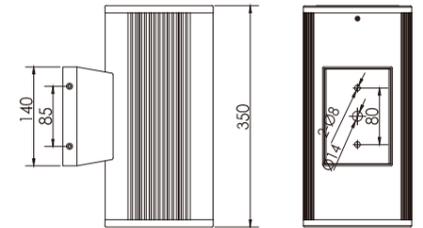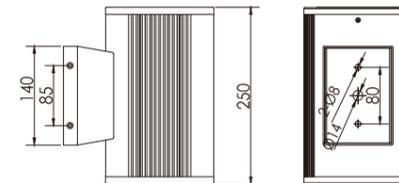

B型




A型

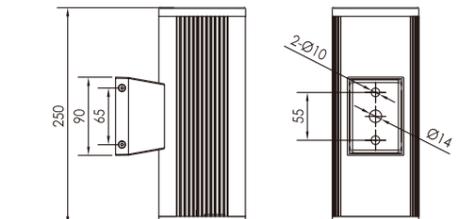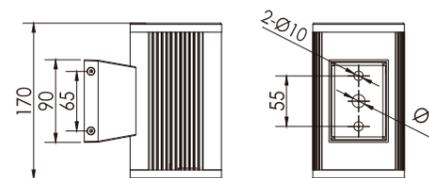


B型

技术参数 Specification


产品型号/Product Code	SL6155B-18	SL6155A-18
发光方向 Light direction	Up and down	Up and down
LED品牌 LED Brand	CREE	CREE
LED数量 LED Quantity	9pcsx2	9pcsx2
额定功率 Rated Power	18Wx2	10.5Wx2
输入电压 Input Voltage	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz
颜色 Color	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°	
控制方式 Control Mode	CC	CC
使用寿命 Life	50000H	50000H
防护等级 Protection Grade	IP66	IP66
环境温度 Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%
产品型号/Product Code	SL6122C-6	SL6122A-6
发光方向 Light direction	Up and down	Up and down
LED品牌 LED Brand	CREE	CREE
LED数量 LED Quantity	3pcsx2	3pcsx2
额定功率 Rated Power	8Wx2	4Wx2
输入电压 Input Voltage	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz
颜色 Color	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°	
控制方式 Control Mode	CC	CC
使用寿命 Life	50000H	50000H
防护等级 Protection Grade	IP66	IP66
环境温度 Ambient Temperature	-25℃ ~ 50℃	-25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%

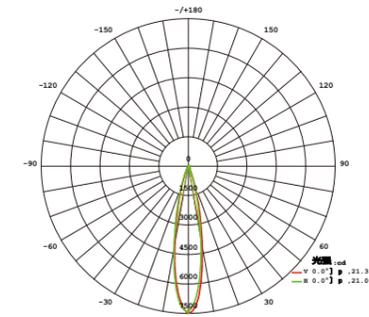


平均光束角 (θ_{0.5}): 21.15°
SL6155 20°

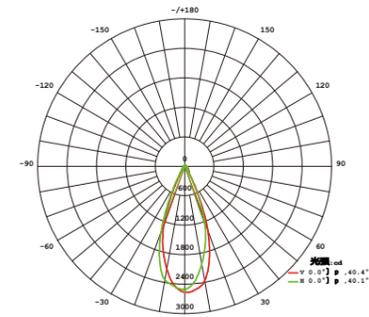

平均光束角 (θ_{0.5}): 40.2°
SL6155 30°

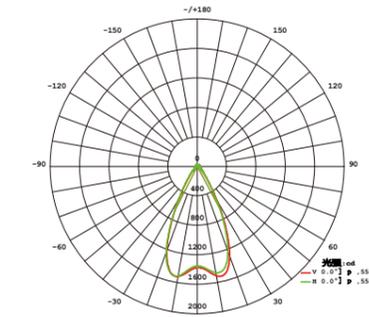


平均光束角 (θ_{0.5}): 55.0°
SL6155 45°

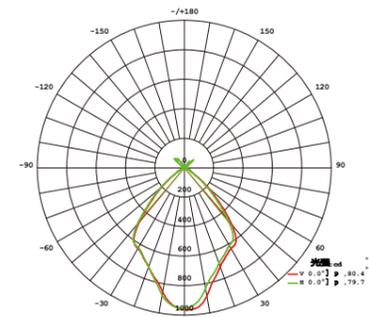


平均光束角 (θ_{0.5}): 80.0°
SL6155 60°




配光曲线 (全角) Distribution Curve Flux (SBC Case)

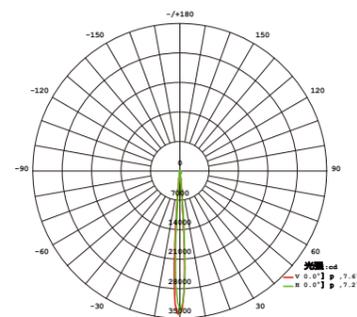


平均光束角 (θ_{0.5}): 7.48°
SL6155 8°

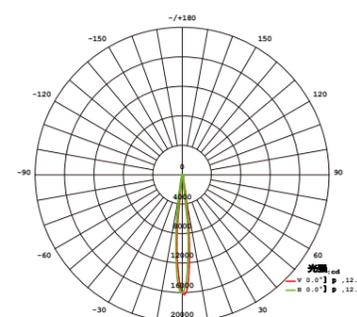

平均光束角 (θ_{0.5}): 12.0°
SL6155 12.5°

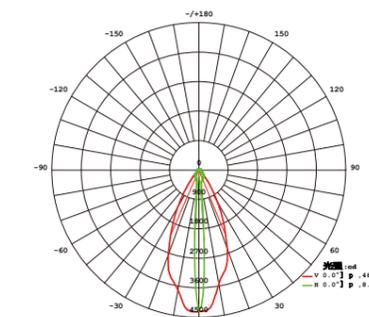

平均光束角 (θ_{0.5}): 27.35°
SL6155 10x60°

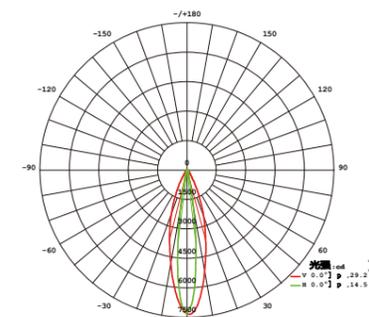


平均光束角 (θ_{0.5}): 21.9°
SL6155 15x30°



Wall Light Series


SL6156 SL6123

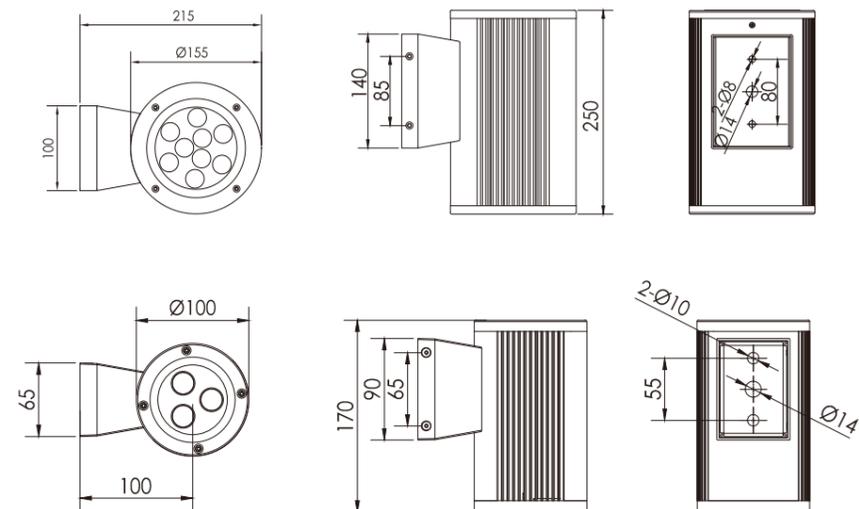

技术参数 Specification


产品型号/Product Code	SL6156B-9	SL6156A-9	SL6156-C20
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	9pcs	9pcs	1pc
额定功率 Rated Power	16W	11W	26W
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		15°
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
产品型号/Product Code	SL6123C-3	SL6123A-3	SL6123-C10
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	3pcs	3pcs	1pc
额定功率 Rated Power	8W	3.5W	10W
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		15°
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

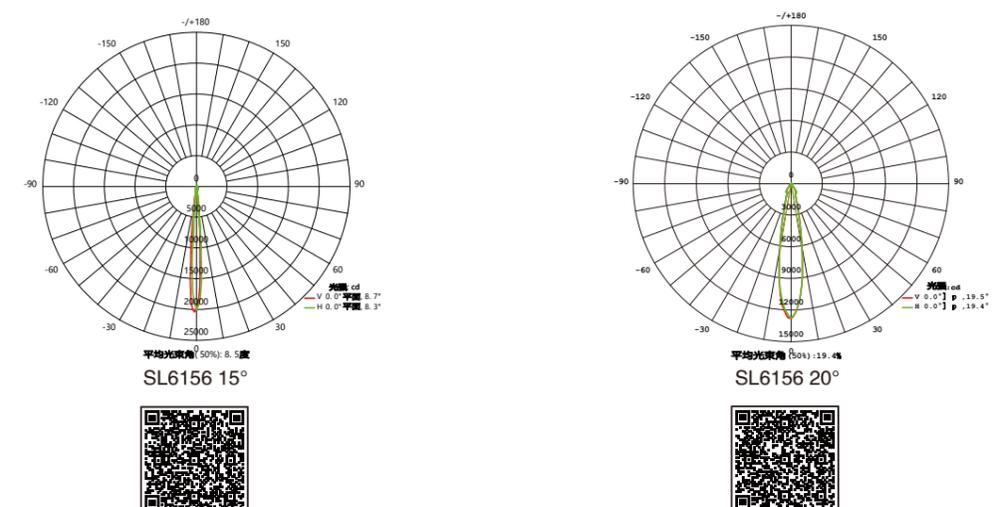

Wall light series

SL6157 SL6125

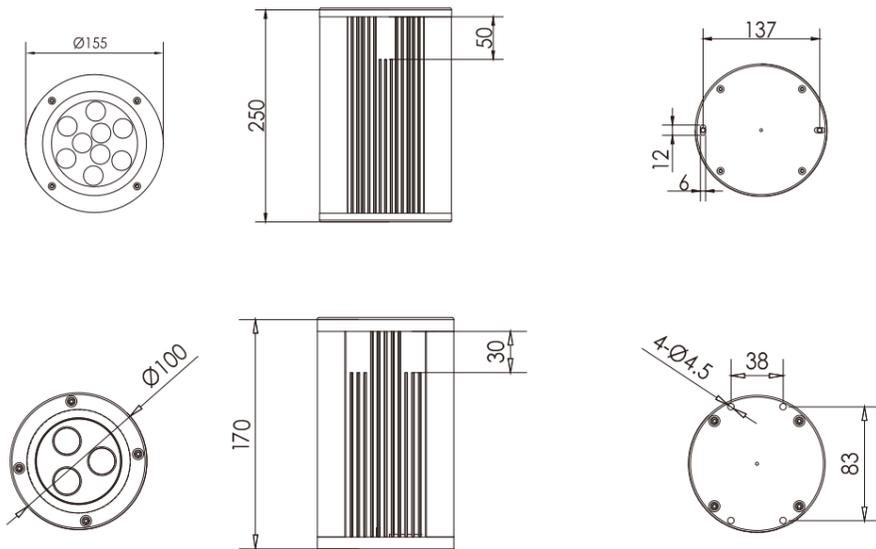


技术参数 Specification

产品型号/Product Code	SL6157B-9	SL6157A-9	SL6157-C20
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	9pcs	9pcs	1pc
额定功率 Rated Power	16W	11W	26W
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
产品型号/Product Code	SL6125C-3	SL6125A-3	SL6125-C10
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	3pcs	3pcs	1pc
额定功率 Rated Power	8W	3.5W	10W
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%



Road Light Series

SL7500




产品简介 Product Introduction

- 一、独创的流体雕塑式灯体结构,卡扣式开启,内置快速插拔连接器,开盖后自动断电,安装维护方便安全。
 - 二、灯体采用高强度压铸铝材料,表面氟碳喷涂处理;灯罩采用透光率94%的高性能钢化玻璃。
 - 三、采用美国CREE大功率LED光源,高光通量输出,光色一致性优良;具有多种透镜角度可选,合理控制光的分布,保证理想的路面亮度及均匀度。
 - 四、输入电压100-305V AC,驱动电源效率高达93%,防雷击6KV;内置主动式功率因数校正,功率因数大于0.95;电源内建PWM恒流技术,效率高,热量低,恒流精度高。
 - 五、可加装防雷保护模块,防浪涌电流高达20KA。
- 1、The luminaire is shaped as original fluid sculpture ,designed to lift up by snapping, and in-built quick plug connector. The luminaire enables to switch off automatically after removing the lid, which keeps the installation and maintenance secure and convenient.
 - 2、The housing is high strength die-casting aluminum, the appearance with fluorine carbon spraying; diffuser is high-performance tempered glass which owns 94% light transmittance.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; provide types of optional beam angle, control the light distribution rationally, ensure street surface with ideal brightness and uniformity.
 - 4、The diver in- built which owns power efficiency as high as 93% is with the input voltage 100-305V AC and 6KV lightning stroke resistance, in-built active power factor with correction surpasses 0.95; Construct PWM constant current technology internal with the performance of high efficiency, low heat and superior precision of constant current.
 - 5、Support the installation of lightning protection module which can prevent the luminaire from attack of surge as high as 20KA.

技术参数 Specification

产品型号/ Product Code	SL7500-M235	SL7500-M200	SL7500-M180	SL7500-M150	SL7500-C215
Led品牌/ Led Brand	LUMILEDS	LUMILEDS	LUMILEDS	LUMILEDS	CREE
Led数量/ Led Quantity	80pcs	64pcs	64pcs	48pcs	80pcs
额定功率/ Rated Power	235W	205W	180W	155W	215W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K				
发光角度/ Beam Angle	120x50° 150x65° 150x60° 140x30° 148°				
控制方式/ Control Mode	CC / PLC / Zigbee / Light-operated control				
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
功率因数/ Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL7500-C180	SL7500-C150	SL7500-M235HE	SL7500-M200HE	
Led品牌/ Led Brand	CREE	CREE	LUMILEDS	LUMILEDS	
Led数量/ Led Quantity	80pcs	80pcs	117Pcs	96Pcs	
额定功率/ Rated Power	180W	150W	235W	200W	
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	3000K / 4000K / 5000K / 6000K		3000K4000K/5000K/6000K		
发光角度/ Beam Angle	120x50° 150x65° 150x60° 140x30° 148°		150x60° 90°		
控制方式/ Control Mode	CC / PLC / Zigbee / Light-operated control		CC / PLC/ zigbee / Light-operated control		
使用寿命/ Life	80000H	80000H	80000H	80000H	
功率因数/Power Factor	>0.95	>0.95	>0.95	>0.95	
防浪涌电压/Surge Voltage	>6KV	>6KV	>6KV	>6KV	
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	

Road Light Series
SL7501

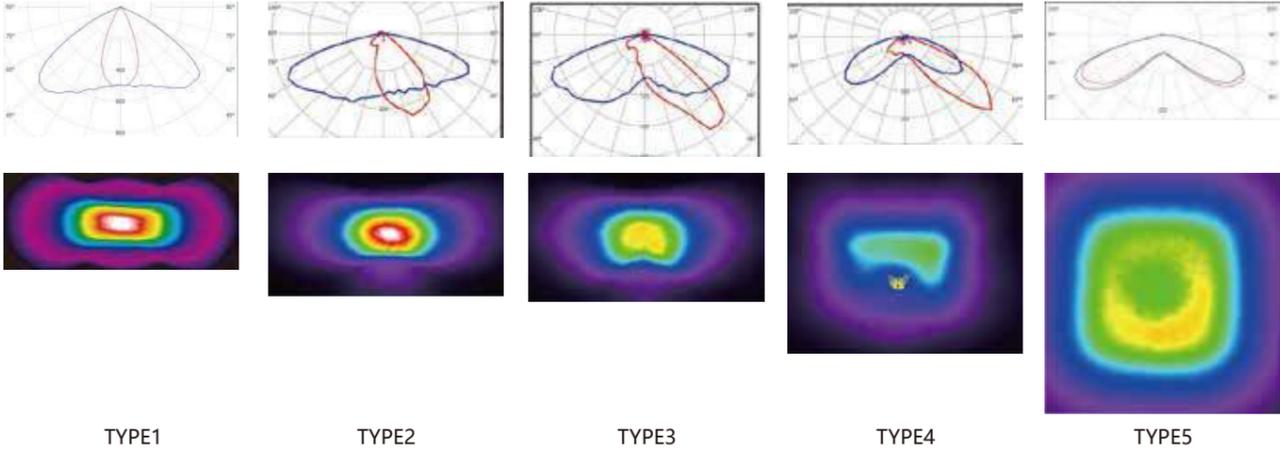



TYPE1

TYPE2

TYPE3


TYPE4

TYPE5

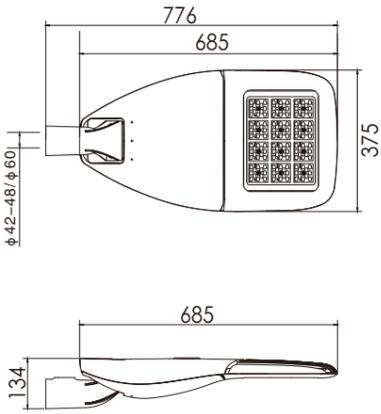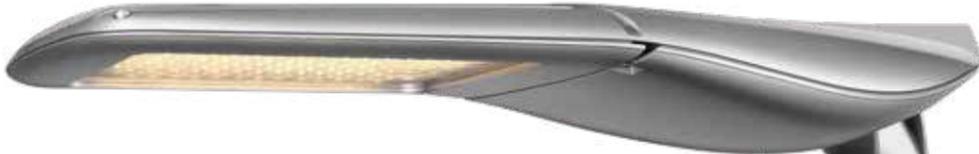

技术参数 Specification

产品型号/ Product Code	SL7501-M155	SL7501-M125	SL7501-M105	SL7501-M80	SL7501-C135
Led品牌/ Led Brand	LUMILEDS	LUMILEDS	LUMILEDS	LUMILEDS	CREE
Led数量/ Led Quantity	48pcs	48pcs	32pcs	32pcs	48pcs
额定功率/ Rated Power	155W	125W	105W	80W	135W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K				
发光角度/ Beam Angle	120X50° 150X65° 150X60° 140X30° 148°				
控制方式/ Control Mode	CC / PLC / Zigbee / Light-operated control				
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
功率因数/ Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL7501-C110	SL7501-C80	SL7501-M150HE	SL7501-M125HE	
Led品牌/ Led Brand	CREE	CREE	LUMILEDS	LUMILEDS	
Led数量/ Led Quantity	48pcs	36pcs	72Pcs	70Pcs	
额定功率/ Rated Power	110W	80W	155W	125W	
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	3000K / 4000K / 5000K / 6000K				
发光角度/ Beam Angle	120x50° 150x65° 150x60° 140x30° 148°		150x60° 90°		
控制方式/ Control Mode	CC / PLC / Zigbee / Light-operated control		CC / PLC/ Zigbee / Light-operated control		
使用寿命/ Life	80000H	80000H	80000H	80000H	
功率因数/ Power Factor	>0.95	>0.95	>0.95	>0.95	
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV	>6KV	
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	

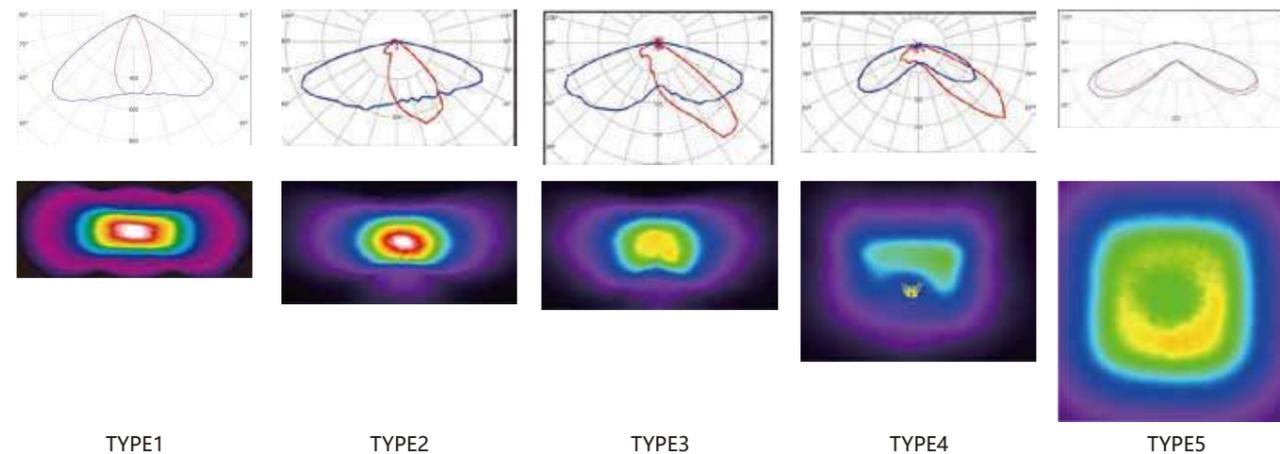

TYPE1


TYPE2

TYPE3

TYPE4


TYPE5

SL7500/SL7501/SL7502/SL7503

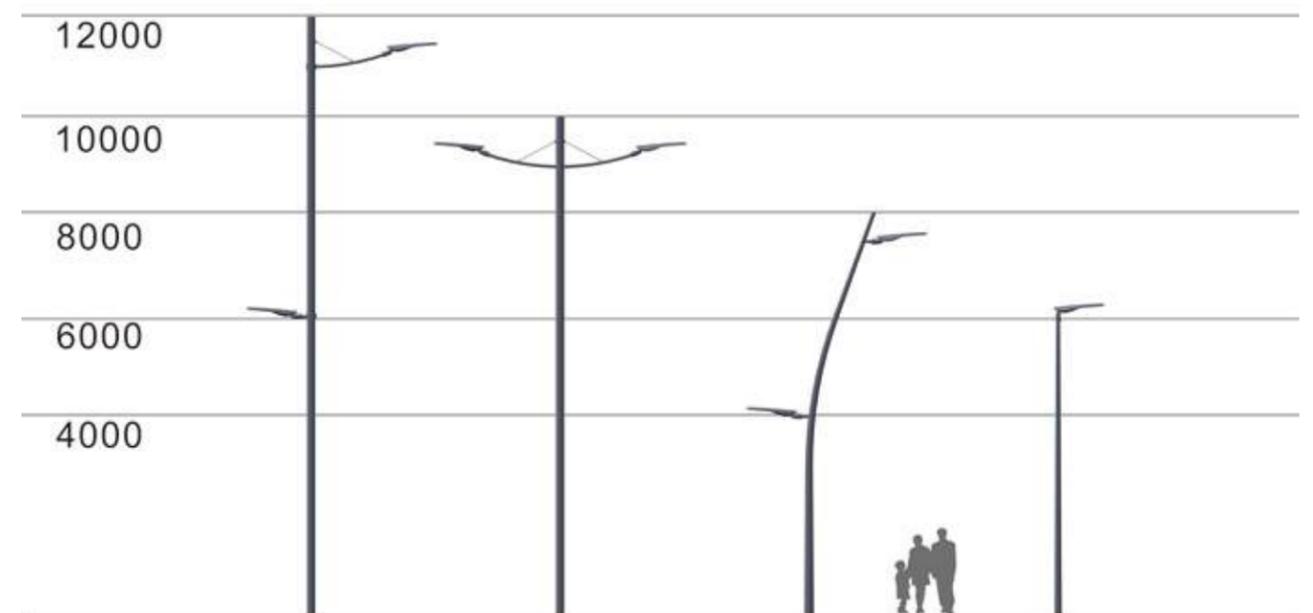


Road Light Series

SL7502

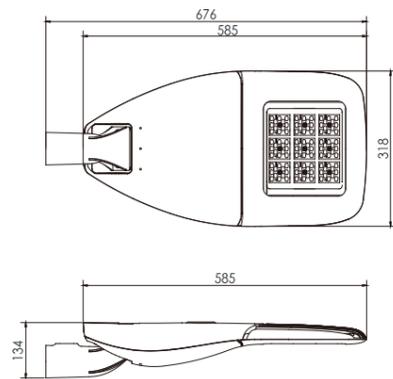


技术参数 Specification

产品型号 / Product Code	SL7502-M110	SL7502-M80	SL7502-C80	SL7502-M110HE	SL7502-M80HE
Led品牌 / Led Brand	LUMILEDS	LUMILEDS	CREE	LUMILEDS	LUMILEDS
Led数量 / Led Quantity	36pcs	24pcs	36pcs	54pcs	42pcs
额定功率 / Rated Power	105W	80W	80W	110W	80W
输入电压 / Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率 / Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K				
发光角度 / Beam Angle	120x50° 150x65° 150x60° 140x30° 148°			150x60° 90°	
控制方式 / Control Mode	CC / PLC/ zigbee / Light-operated control			CC / PLC/ zigbee / Light-operated control	
使用寿命 / Life	80000H	80000H	80000H	80000H	80000H
功率因数 / Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
防浪涌电压 / Surge Voltage	>6KV	>6KV	>6KV	>6KV	>6KV
防护等级 / Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度 / Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

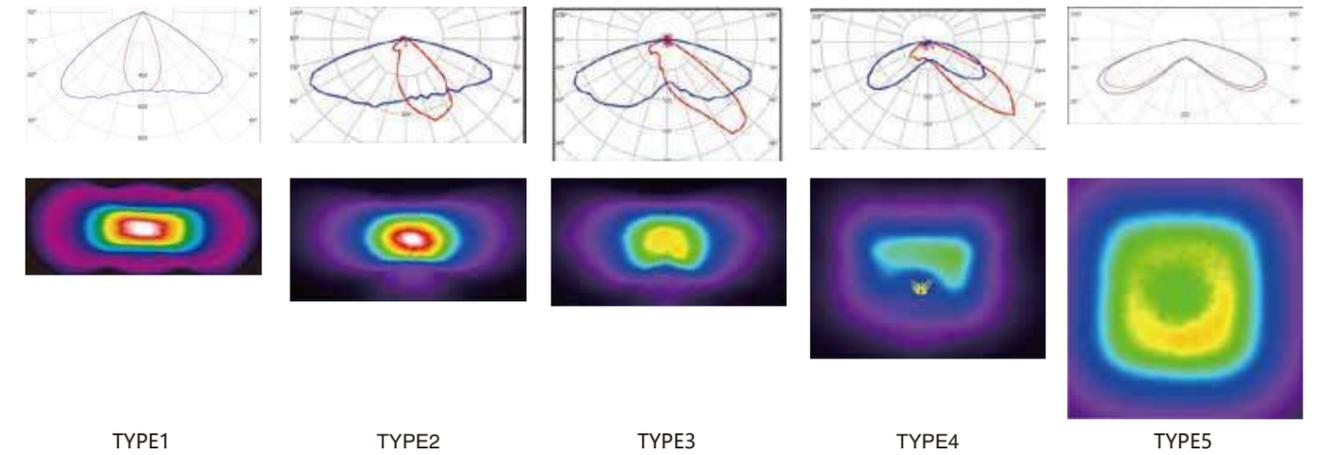

配光曲线 (全角) Distribution Curve Flux (SBC Case)

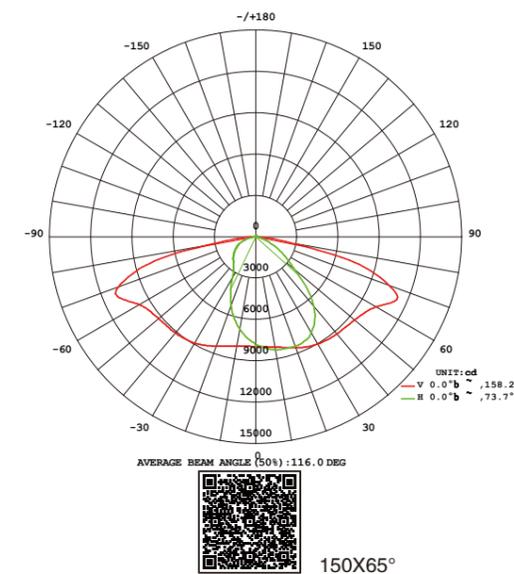


Height	Eavg, Emax	Angle: 73.72deg	Diameter
1m	5300, 80481x		149.94cm
2m	1325, 20121x		299.89cm
3m	588.9, 894.21x		449.83cm
4m	331.2, 503.01x		599.77cm
5m	212.0, 321.91x		749.71cm
6m	147.2, 223.61x		899.66cm
7m	108.2, 164.21x		1049.60cm
8m	82.81, 125.81x		1199.54cm
9m	65.43, 99.361x		1349.48cm
10m	53.00, 80.481x		1499.43cm

Flux out: 9455 lm


Road Light Series

SL7503

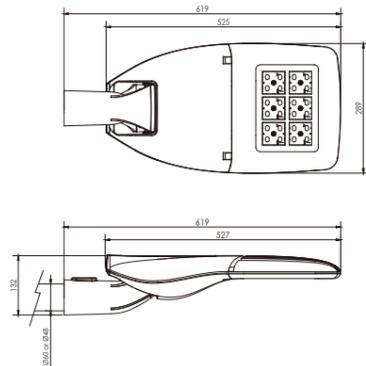


技术参数 Specification

产品型号 / Product Code	SL7503-M60	SL7503-C60	SL7503-M60HE
Led品牌 / Led Brand	LUMILEDS	CREE	LUMILEDS
Led数量 / Led Quantity	24pcs	24pcs	42pcs
额定功率 / Rated Power	60W/40W	60W	60W
输入电压 / Input Voltage	AC100-305V	AC100-305V	AC100-305V
频率 / Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K		
发光角度 / Beam Angle	120x50°	150x65°	150x60° 140x30° 148°
控制方式 / Control Mode	CC / PLC / zigbee / Light-operated control		
使用寿命 / Life	80000H	80000H	80000H
功率因数 / Power Factor	>0.95	>0.95	>0.95
防浪涌电压 / Surge Voltage	>6KV	>6KV	>6KV
防护等级 / Protection Grade	IP66	IP66	IP66
环境温度 / Ambient Temperature	-25°C ~ 50°C	-25°C ~ 50°C	-25°C ~ 50°C
环境湿度 / Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

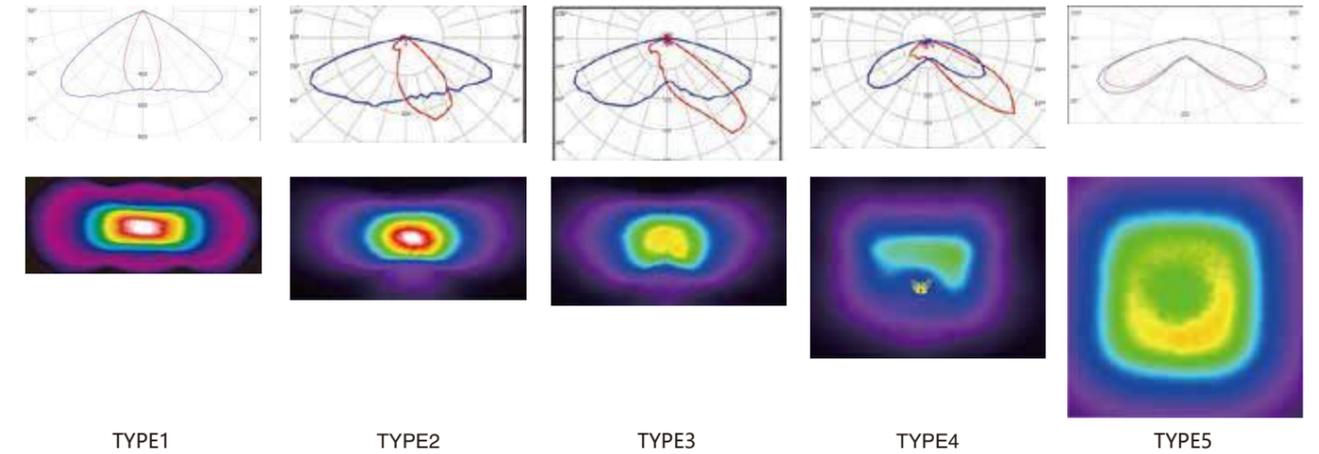

配光曲线 (全角) Distribution Curve Flux (SBC Case)

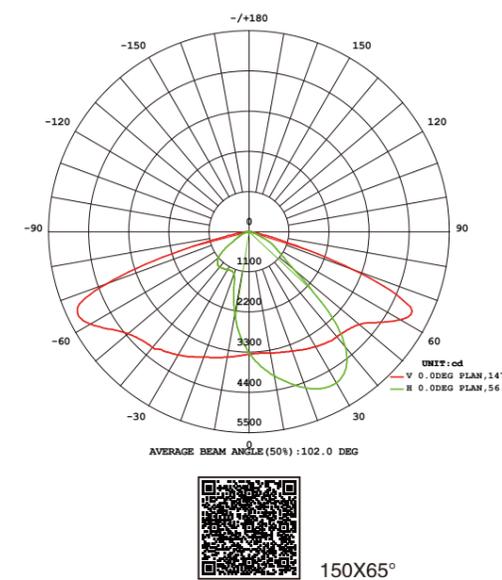

Height	Eavg, Emax	Angle: 82.86deg	Diameter
1m	2030, 3862lx		176.50cm
2m	507.4, 965.4lx		353.01cm
3m	225.5, 429.1lx		529.51cm
4m	126.8, 241.3lx		706.01cm
5m	81.18, 154.5lx		882.52cm
6m	56.38, 107.3lx		1059.02cm
7m	41.42, 78.81lx		1235.52cm
8m	31.71, 60.34lx		1412.03cm
9m	25.06, 47.67lx		1588.53cm
10m	20.30, 38.62lx		1765.03cm

CURTILAGE LIGHT SERIES 太阳能庭院灯

EXPO
世博版

材质 Material

高强度钢制灯体, 成型后热镀锌处理。
High-strength steel lamp body, hot-dip galvanized after forming.

表面聚酯静电喷涂, 不锈钢紧固件, 耐腐蚀
The surface is coated with polyester static electricity, stainless steel fastener, anti-corosive

热处理高强度钢化玻璃透光罩
Toughened glass difuser with heating treatment

特性 Characteristics

不用市电, 无运行费用
It doesn't use electricity and hasn't running fee.

优质高亮度 LED 光源, 使用寿命长, 功耗低, 发热量少
High quality and luminance LED photosource, the service life is long, power loss is low, emit less calorific.

无需铺设电缆, 社会及环保效益显著
Doesn't need to lay down electric cable, the society and environmental protection benefit is remarkable.

高强度钢制灯体, 结构坚固、抗震性佳, 确保灯具能在严峻的室外环境下工作
The high-strength steel lamp body provides robust construction and excellent shock resistance, ensuring reliable operation in harsh outdoor environments.

钢化玻璃透光罩, 有效增加抗击性能
Toughened glass difuser, effective increase resistance performance



THE CITY'S
GUARDIAN
ANGEL

技术参数 Specification



SV7624062901

名称 / Name	型号 / Model	V	I	实际功率 W / Actual Power W
LED	20W	12	1.67A	20W

solutions to bring meaningful moments to people in public spaces










DSL7621051901CC-64 庭院灯

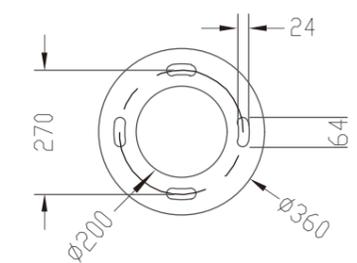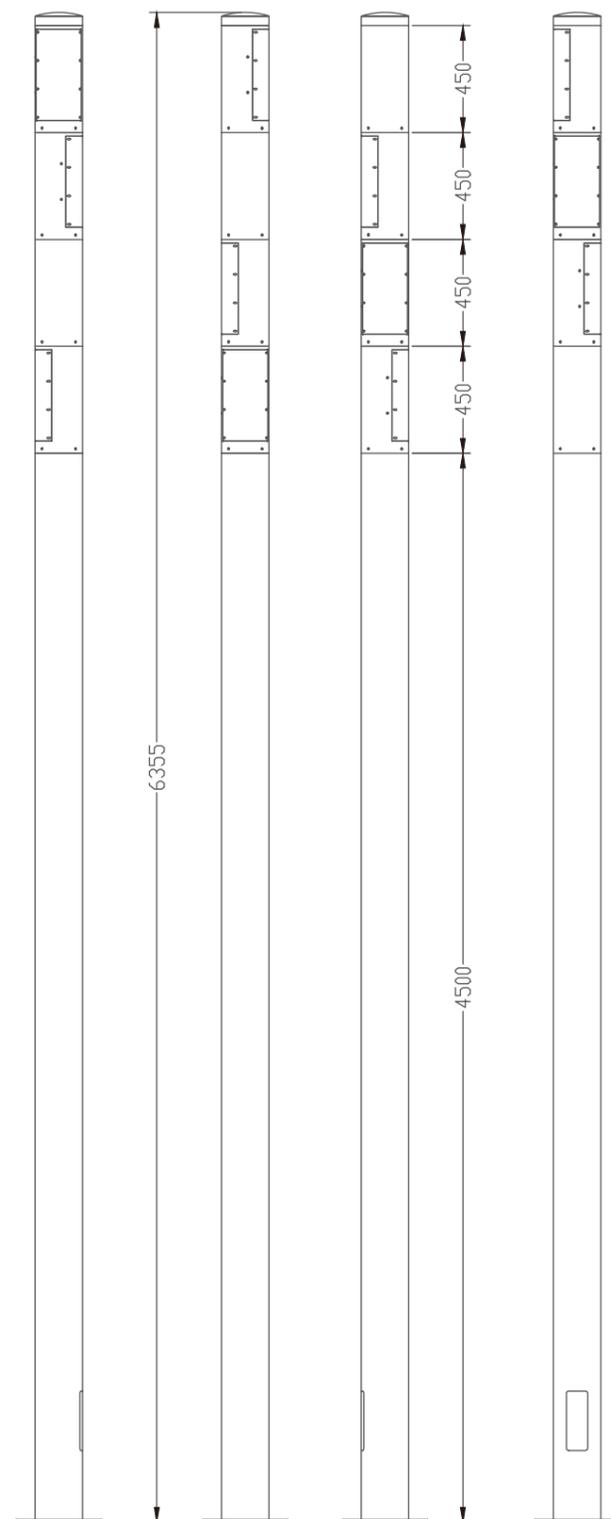


SHYLON LED

DSL7621051901CC-64

庭院灯

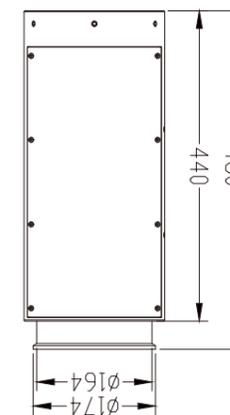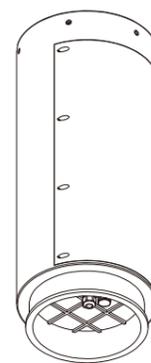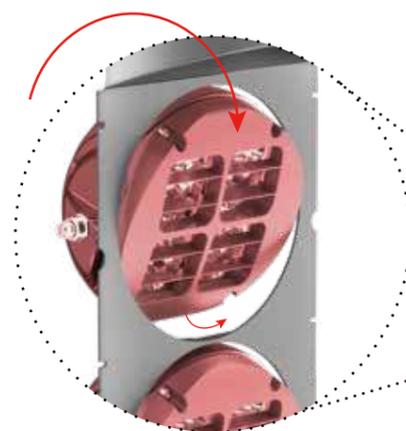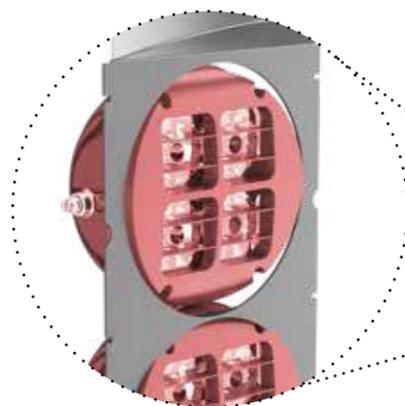

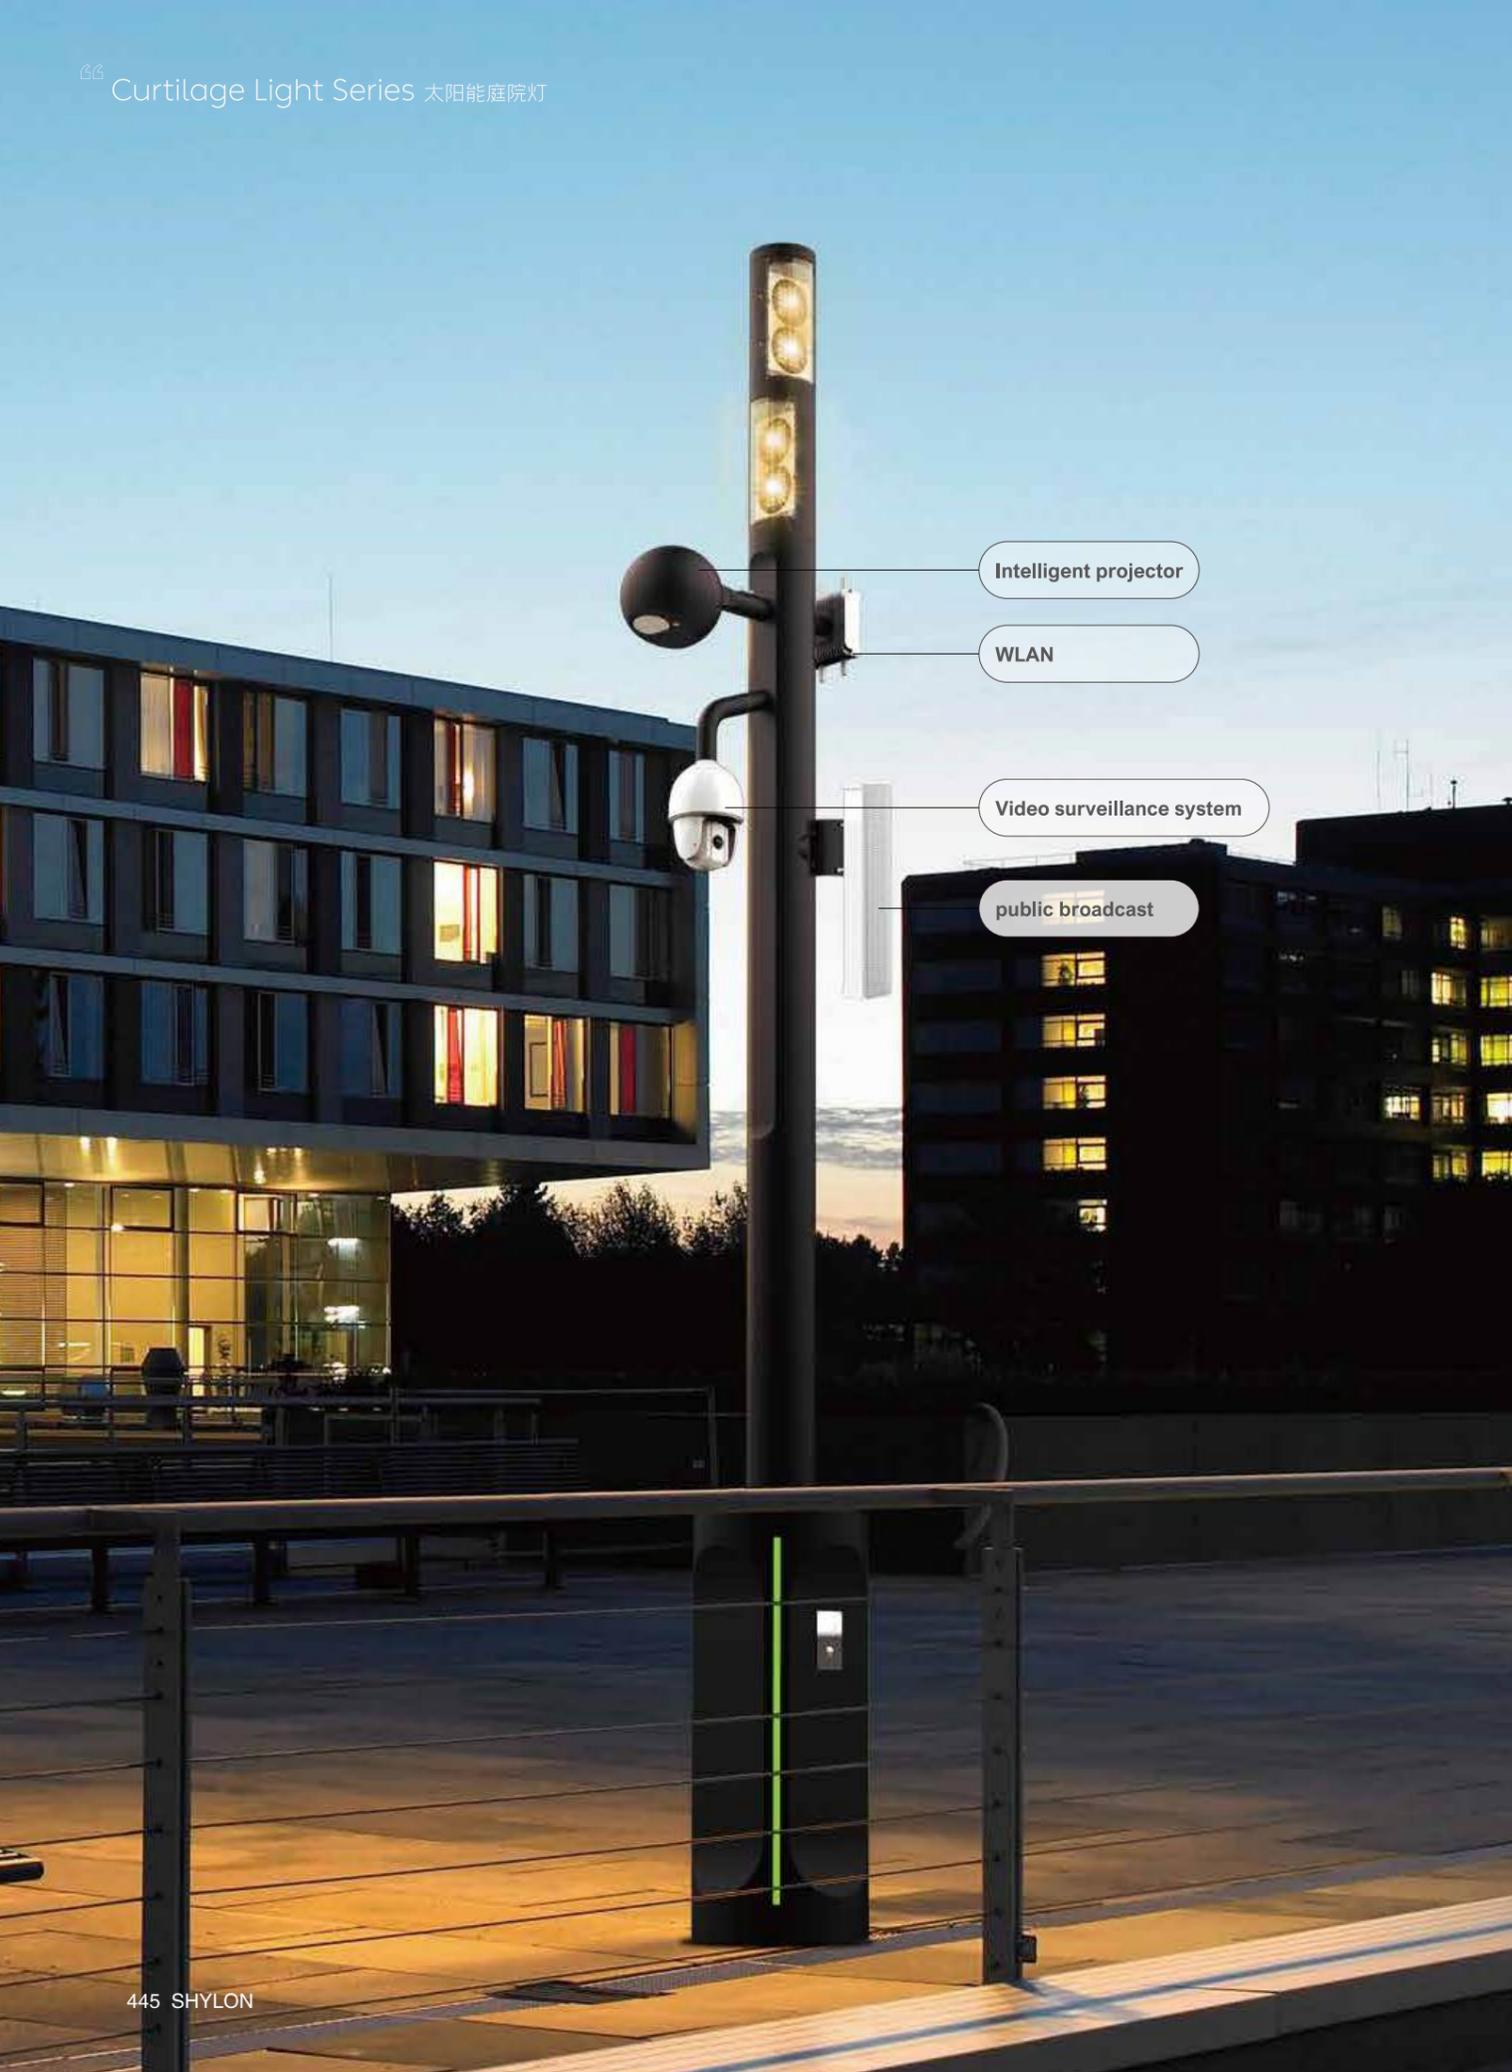

Intelligent projector

WLAN

Video surveillance system

public broadcast



公共 WLAN Public WLAN

无线网络，提供利用无线终端或无线技术获取信息的服务，并实现无线公共接入、无线定位、视频服务、无线支付等功能。

智能投影 Intelligent projector

视频动画发布，呈现精美画质。球形外观一体式防水设计，自适应户外环境，根据场景不同提供多重不同的投射比。可通过无线或有线技术播放视频画面，或即时发布信息。

公共广播 public broadcast

公共广播系统可按区域和功能提供音频广播，可远程控制播放内容，如政府公告、应急指挥信息等。

视频监控 Video surveillance system

是安全防范系统的重要组成部分，完整的视频监控系统是由摄像、传输、控制、显示、记录登记 5 大部分组成。



技术参数 / Specification

产品型号 / Product Code	DSL7621051901CC-64
LED品牌 / LED Brand	CREE XP-G3
LED数量 / LED Quantity	64Pcs
额定功率 / Rated Power	300W (75W*4)
输入电压 / Input Voltage	AC100-305V
频率 / Frequency Range	50/60HZ
颜色 / Color	Single
发光角度 / Beam Angle	5° 8° 12.5° 20° 30° 60° 15X30° 10X60°
控制方式 / Control Mode	CC / DMX512
使用寿命 / Life	50000H
功率因数 / power factor	>0.95
防浪涌电压 / Surge voltage	>6KV
防护等级 / Protection Grade	IP66
环境温度 / Ambient Temperature	- 25°C ~ 50°C
环境湿度 / Ambient Humidity	10% ~ 90%

技术参数 / Specification

产品型号 / Product Code	DSL7621051901CC-32
LED品牌 / LED Brand	CREE XP-G3
LED数量 / LED Quantity	32Pcs
额定功率 / Rated Power	150W (75W*2)
输入电压 / Input Voltage	AC100-305V
频率 / Frequency Range	50/60HZ
颜色 / Color	Single
发光角度 / Beam Angle	5° 8° 12.5° 20° 30° 60° 15X30° 10X60°
控制方式 / Control Mode	CC / DMX512
使用寿命 / Life	50000H
功率因数 / power factor	>0.95
防浪涌电压 / Surge voltage	>6KV
防护等级 / Protection Grade	IP66
环境温度 / Ambient Temperature	- 25°C ~ 50°C
环境湿度 / Ambient Humidity	10% ~ 90%

产品型号 / Product Code	DSL7621051901CC-48
LED品牌 / LED Brand	CREE XP-G3
LED数量 / LED Quantity	48Pcs
额定功率 / Rated Power	225W (75W*3)
输入电压 / Input Voltage	AC100-305V
频率 / Frequency Range	50/60HZ
颜色 / Color	Single
发光角度 / Beam Angle	5° 8° 12.5° 20° 30° 60° 15X30° 10X60°
控制方式 / Control Mode	CC / DMX512
使用寿命 / Life	50000H
功率因数 / power factor	>0.95
防浪涌电压 / Surge voltage	>6KV
防护等级 / Protection Grade	IP66
环境温度 / Ambient Temperature	- 25°C ~ 50°C
环境湿度 / Ambient Humidity	10% ~ 90%



产品型号 / Product Code	DSL7621051901CC-16
LED品牌 / LED Brand	CREE XP-G3
LED数量 / LED Quantity	16Pcs
额定功率 / Rated Power	75W
输入电压 / Input Voltage	AC100-305V
频率 / Frequency Range	50/60HZ
颜色 / Color	Single
发光角度 / Beam Angle	5° 8° 12.5° 20° 30° 60° 15X30° 10X60°
控制方式 / Control Mode	CC / DMX512
使用寿命 / Life	50000H
功率因数 / power factor	>0.95
防浪涌电压 / Surge voltage	>6KV
防护等级 / Protection Grade	IP66
环境温度 / Ambient Temperature	- 25°C ~ 50°C
环境湿度 / Ambient Humidity	10% ~ 90%




SHYLON

DSL7621061001-C50
庭院灯

New visual sensation

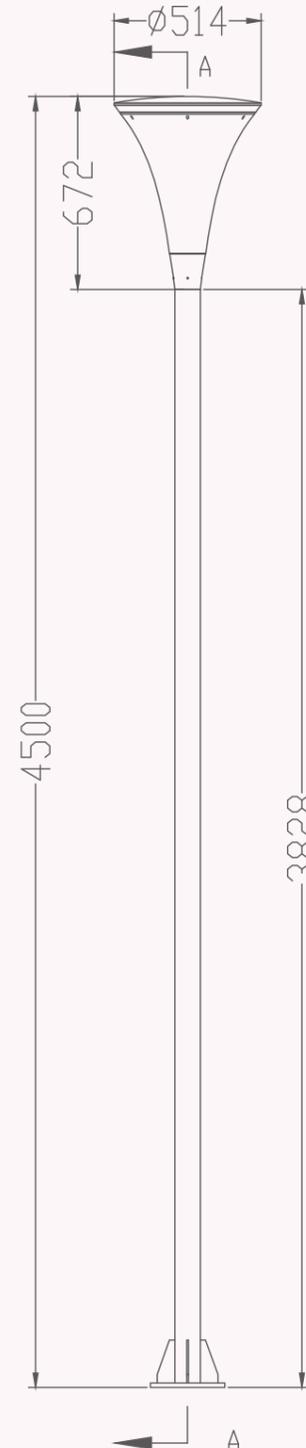


THE CITY'S GUARDIAN ANGEL

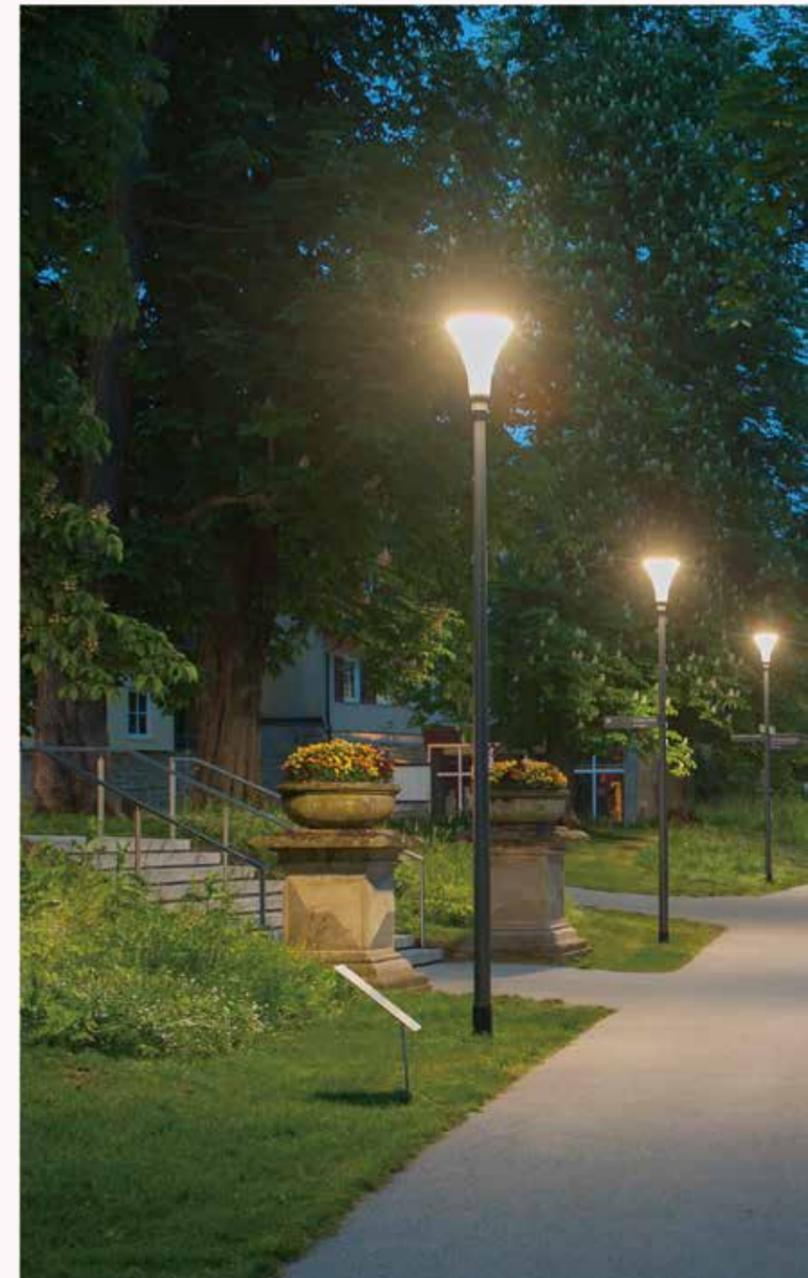

solutions to bring meaningful moments to people in public spaces

CURTILAGE LIGHT SERIES 太阳能庭院灯

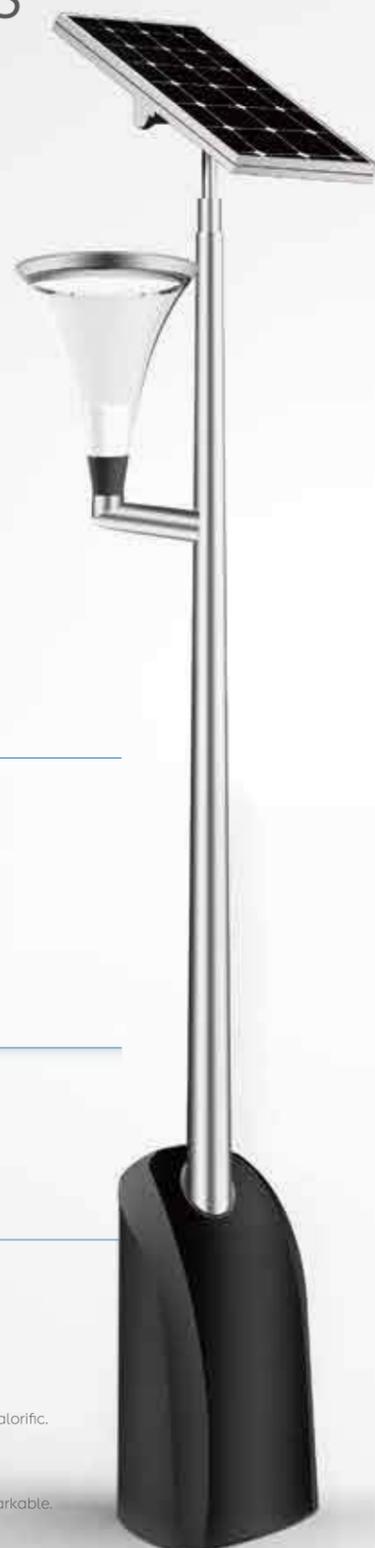

SV7624o62902

技术参数 Specification

名称 Name	型号 Model	V	I	实际功率 W Actual Power W
LED	20W	12	1.67A	20W



THE CITYS' GUARDIAN ANGEL

材质 Material

高强度钢制灯体, 成型后热镀锌处理。
High-strength steel lamp body, hot-dip galvanized after forming.

表面聚酯静电喷涂, 不锈钢紧固件, 耐腐蚀
The surface is coated with polyester static electricity, stainless steel fastener, anti-corosive

热处理高强度钢化玻璃透光罩
Toughened glass difuser with heating treatment

特性 Characteristics

不用市电, 无运行费用
It doesn't use electricity and hasn't running fee.

优质高亮度 LED 光源, 使用寿命长, 功耗低, 发热量少
High quality and luminance LED photosource, the service life is long, power loss is low,emit less calorific.

无需铺设电缆, 社会及环保效益显著
Doesn't need to lay down electric cable, the society and environmental protection benefit is remarkable.

高强度钢制灯体, 结构坚固、抗震性佳、确保灯具能在严峻的室外环境下工作
The high-strength steel lamp body provides robust construction and excellent shock resistance, ensuring reliable operation in harsh outdoor environments.

钢化玻璃透光罩, 有效增加抗击性能
Toughened alass difuser, effective increase resistance performance

DSL7621061001-C50
庭院灯



PRODUCT
SHOW SCENES.
LIGHT EFFECT DISPLAY



LI01051515 101051515 101051515



技术参数 / Specification

产品型号 / Product Code	DSL7621061001-C50
LED品牌 / LED Brand	CREE XP-G3
LED数量 / LED Quantity	CREE COB
额定功率 / Rated Power	50W
输入电压 / Input Voltage	AC100-305V
频率 / Frequency Range	50/60HZ
颜色 / Color	Single
发光角度 / Beam Angle	12° 24° 38°
控制方式 / Control Mode	CC / DMX512
使用寿命 / Life	50000H
功率因数 / power factor	>0.95
防浪涌电压 / Surge voltage	>6KV
防护等级 / Protection Grade	IP66
环境温度 / Ambient Temperature	- 25°C ~ 50°C
环境湿度 / Ambient Humidity	10% ~ 90%



New visual sensation

457 SHYLON



智能照明的未来

任何地方都很简单 处处简单



为您的照明项目发现新的形状、高效的照明技术和更多种类的产品!

它扩展了专业灯光控制的可能性，并将灯光和建筑结合成一个整体概念。一个不断适应和发展的概念。并利用诸如窄带物联网 (Narrowband IoT) 等最新技术。

为您提供了一个展示小型照明装置和带有智能灯的大型照明项目的机会。无论您身在何处：您都可以通过现代直观的应用程序从任何位置控制、规划和监控单个灯具。




SHYLON 458

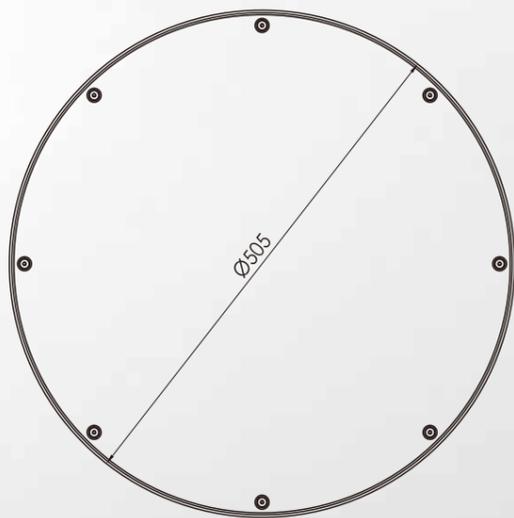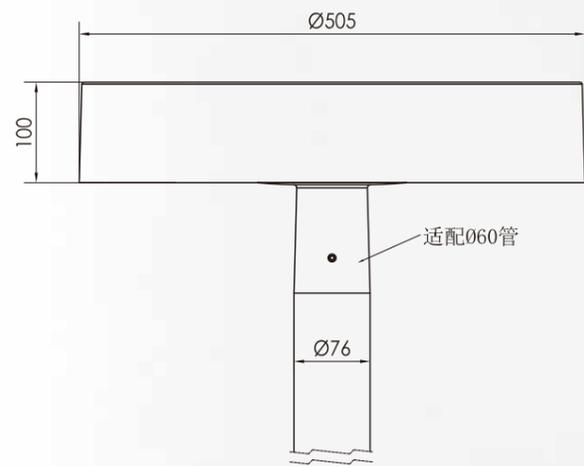

SL7101-120

CURTILAGE LIGHT SERIES

太阳能庭院灯

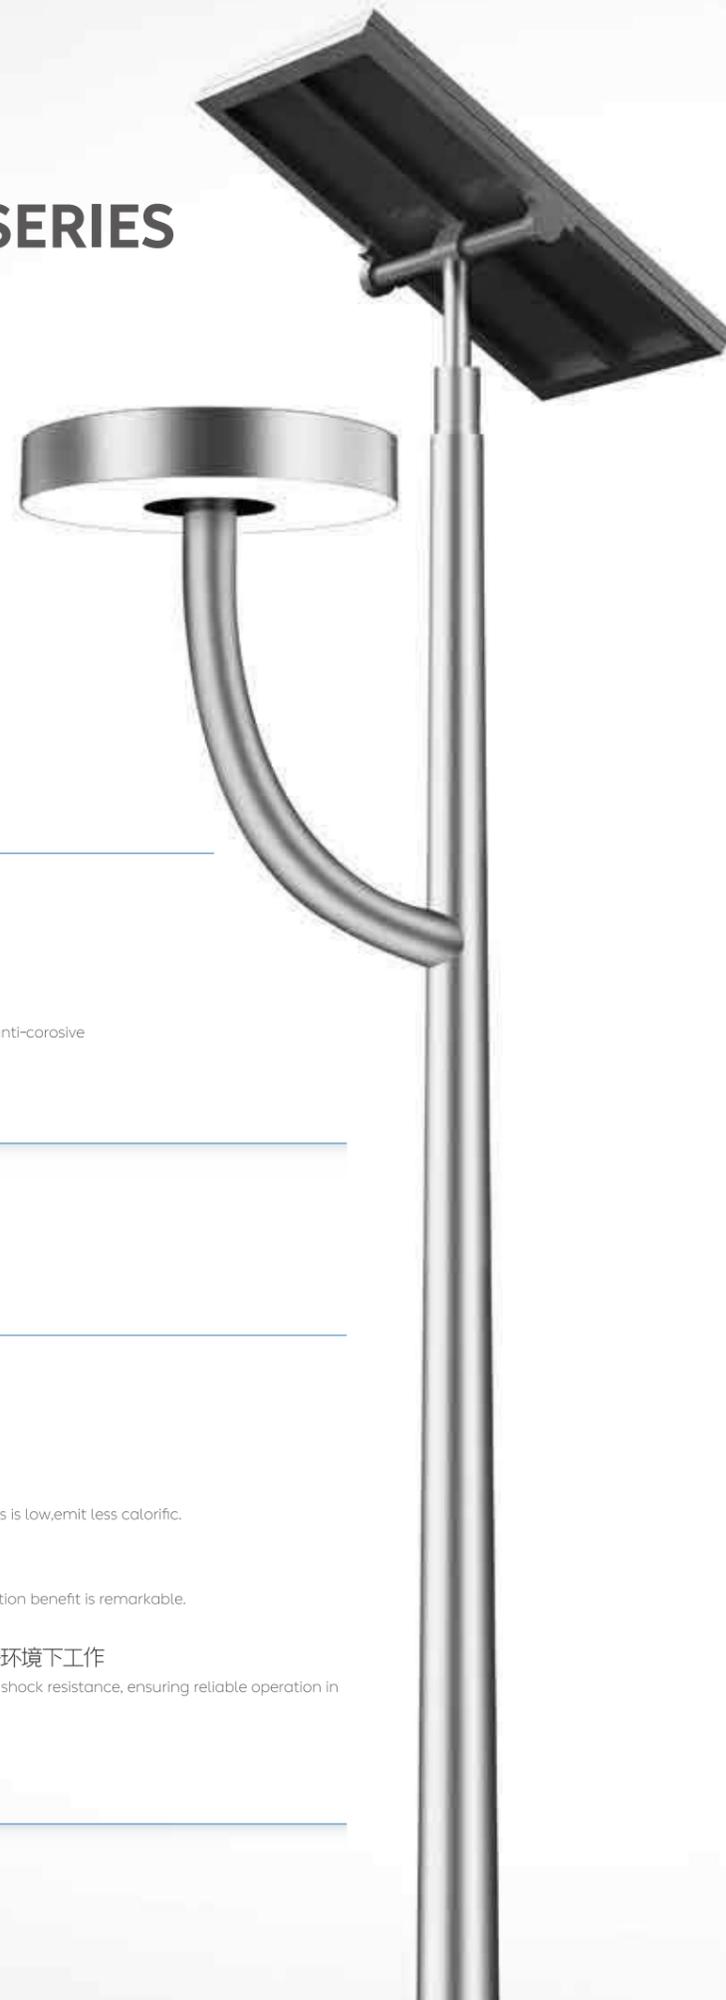

SV7624062903

技术参数 Specification

名称 Name	型号 Model	V	I	实际功率 W	Actual Power W
LED	20W	12	1.67A	20W	

材质 Material

高强度钢制灯体, 成型后热镀锌处理。
High-strength steel lamp body, hot-dip galvanized after forming.

表面聚酯静电喷涂, 不锈钢紧固件, 耐腐蚀
The surface is coated with polyester static electricity, stainless steel fastener, anti-corosive

热处理高强度钢化玻璃透光罩
Toughened glass difuser with heating treatment

特性 Characteristics

不用市电, 无运行费用
It doesn't use electricity and hasn't running fee.

优质高亮度 LED 光源, 使用寿命长, 功耗低, 发热量少
High quality and luminance LED photosource, the service life is long, power loss is low, emit less calorific.

无需铺设电缆, 社会及环保效益显著
Doesn't need to lay down electric cable, the society and environmental protection benefit is remarkable.


高强度钢制灯体, 结构坚固、抗震性佳、确保灯具能在严峻的室外环境下工作
The high-strength steel lamp body provides robust construction and excellent shock resistance, ensuring reliable operation in harsh outdoor environments.

钢化玻璃透光罩, 有效增加抗击性能
Toughened glass difuser, effective increase resistance performance



技术参数 / Specification

产品型号 / Product Code	SL7101-120
LED品牌 / LED Brand	Lumileds
LED数量 / LED Quantity	120Pcs
额定功率 / Rated Power	50W
输入电压 / Input Voltage	AC100-305V
频率 / Frequency Range	50/60HZ
颜色 / Color	Single
发光角度 / Beam Angle	120°
控制方式 / Control Mode	CC / DMX512
使用寿命 / Life	50000H
功率因数 / power factor	>0.95
防浪涌电压 / Surge voltage	>6KV
防护等级 / Protection Grade	IP66
环境温度 / Ambient Temperature	- 25°C ~ 50°C
环境湿度 / Ambient Humidity	10% ~ 90%

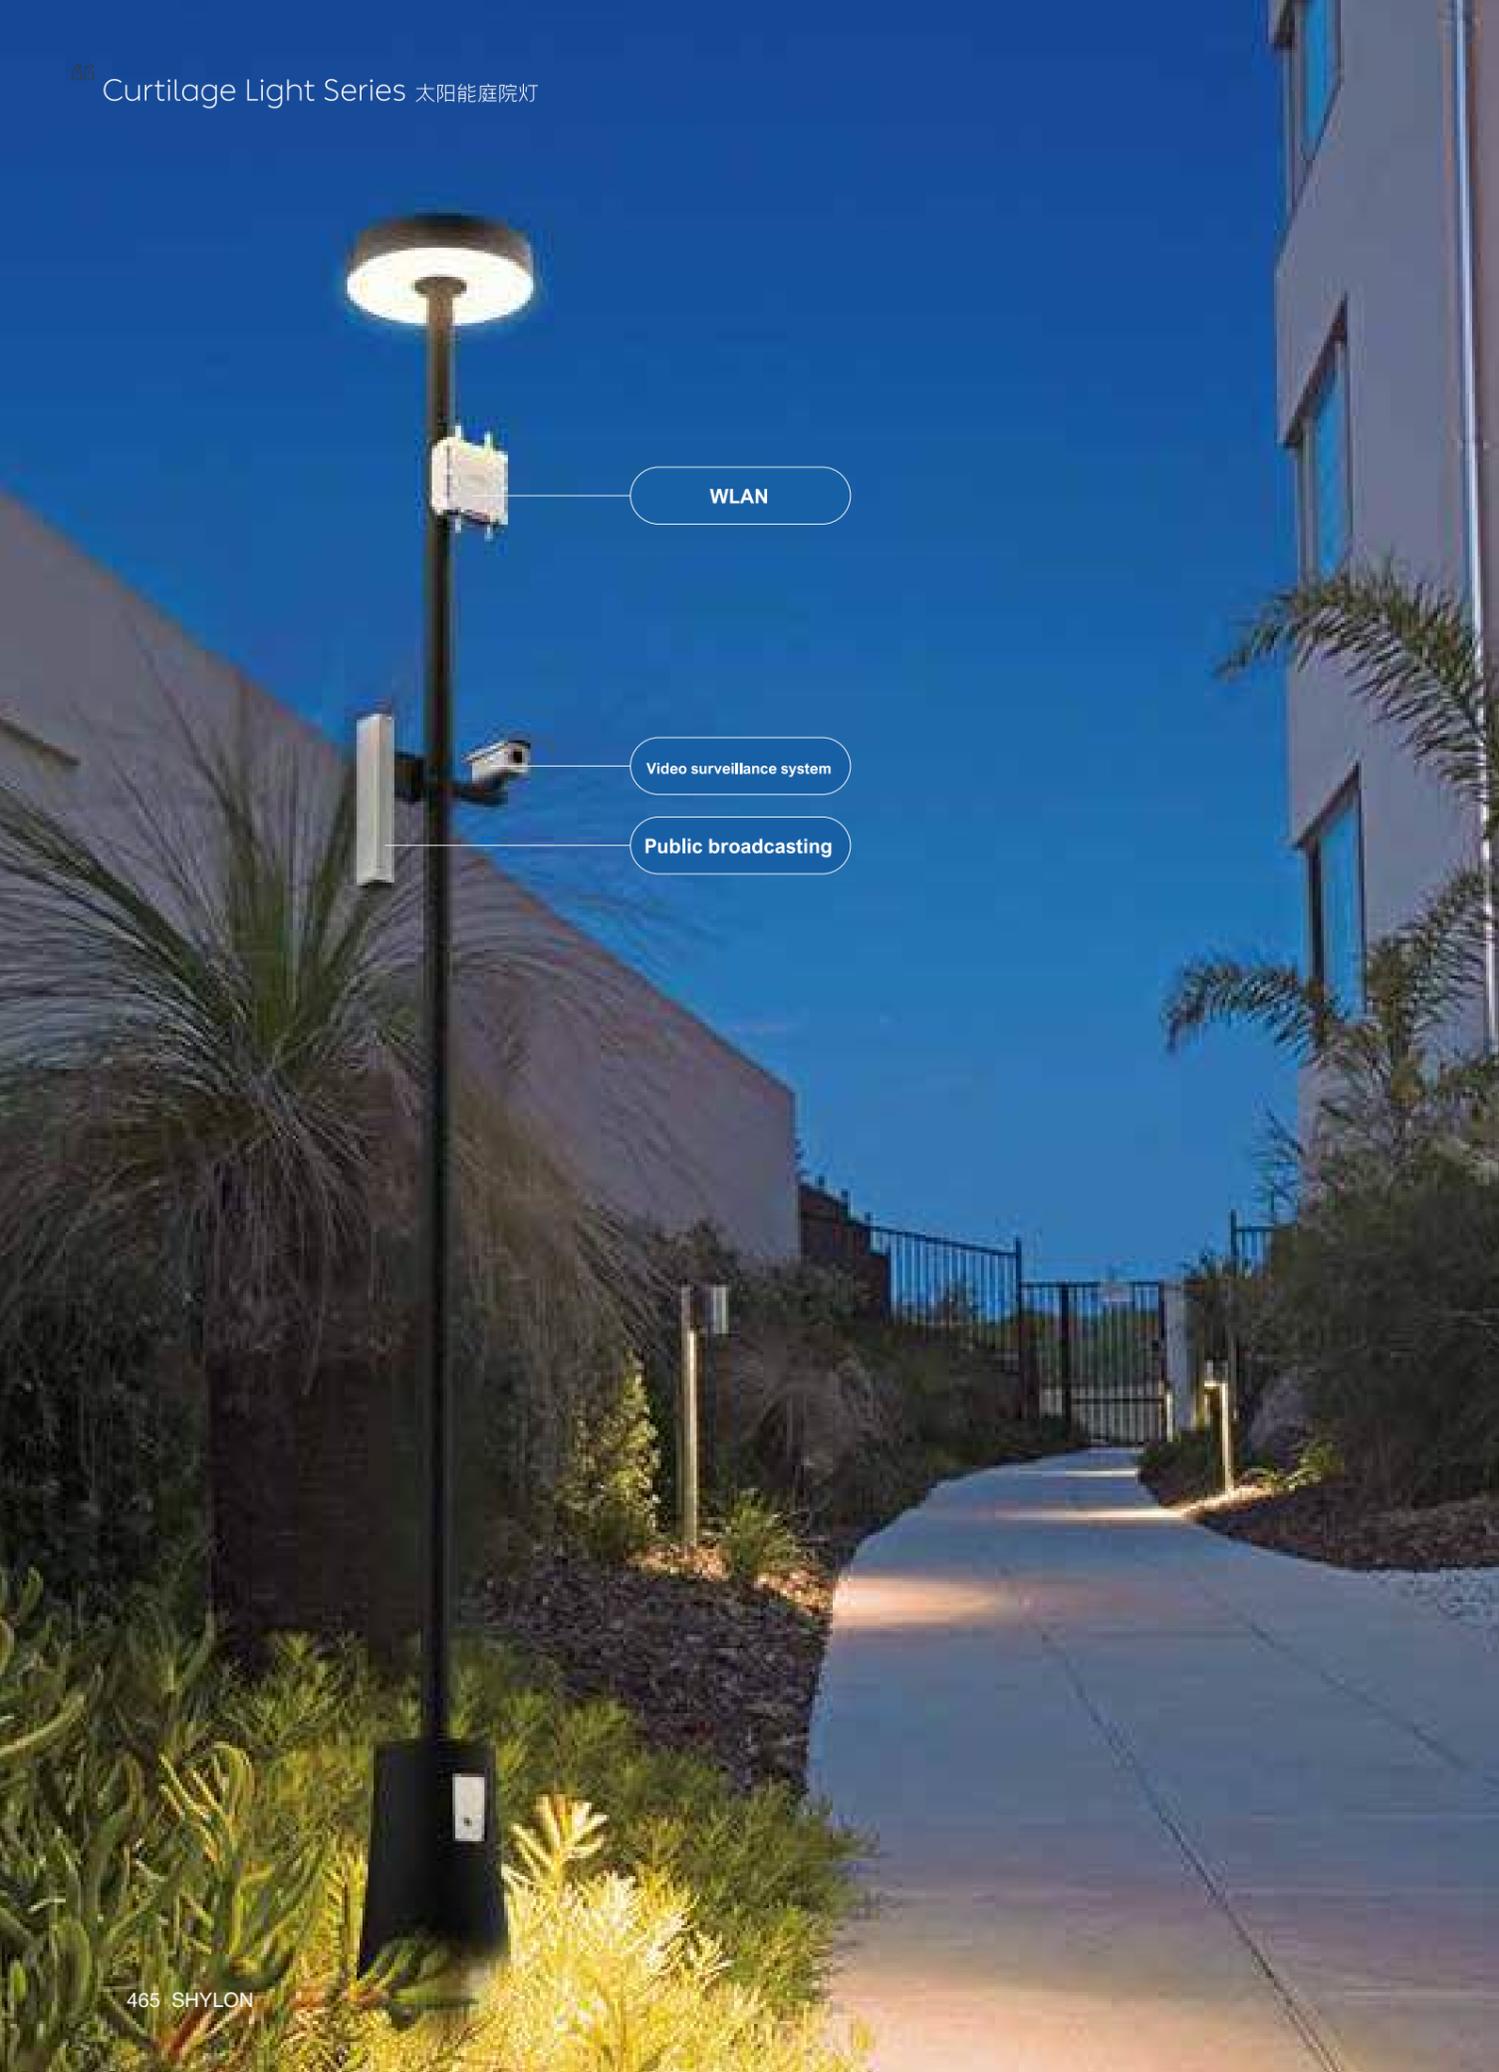

WLAN

Video surveillance system


Public broadcasting





Keen

具有令人印象深刻的远距离效果的均匀照明

在照明设计中必须综合考虑具体的照明应用、建筑特点和所用灯具的性能范围。除了照度，在选择合适的灯具以实现所需舞台的有针对性的实施时，光分布也是一个决定性参数。

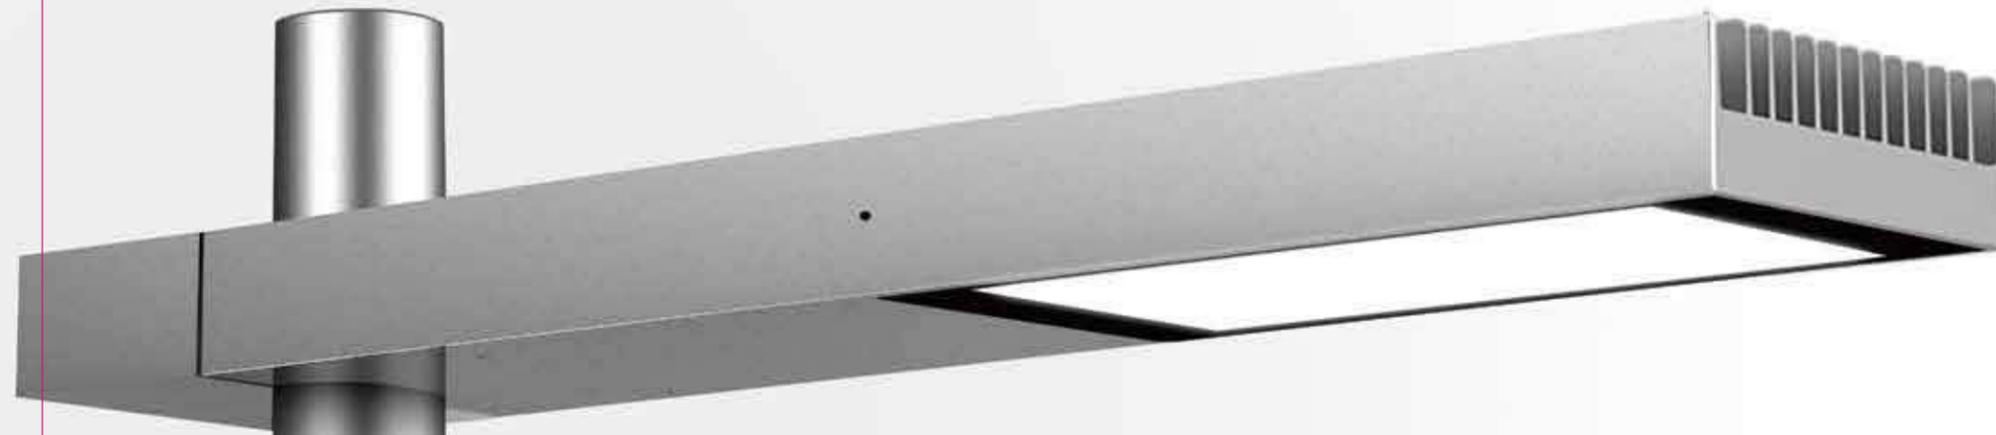


Feel the vitality of line

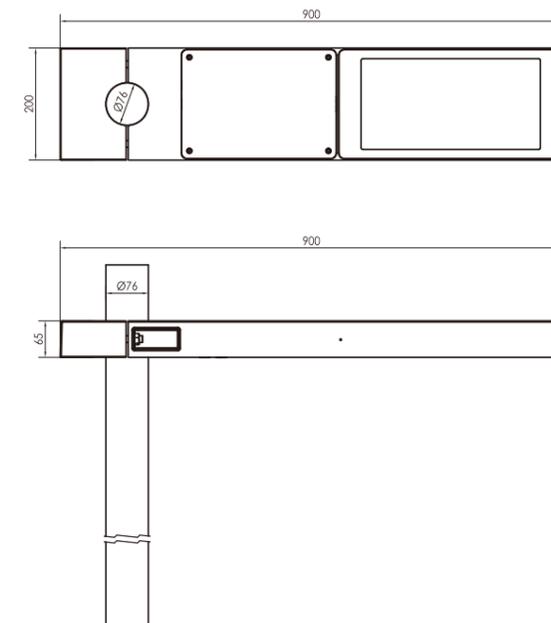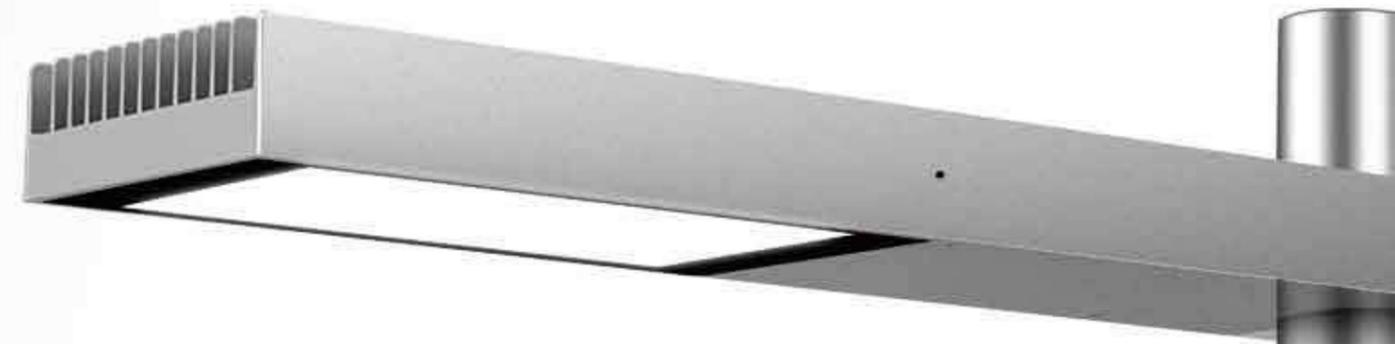

DSL7219032601-M150

CURTLAGE LIGHT SERIES

太阳能庭院灯

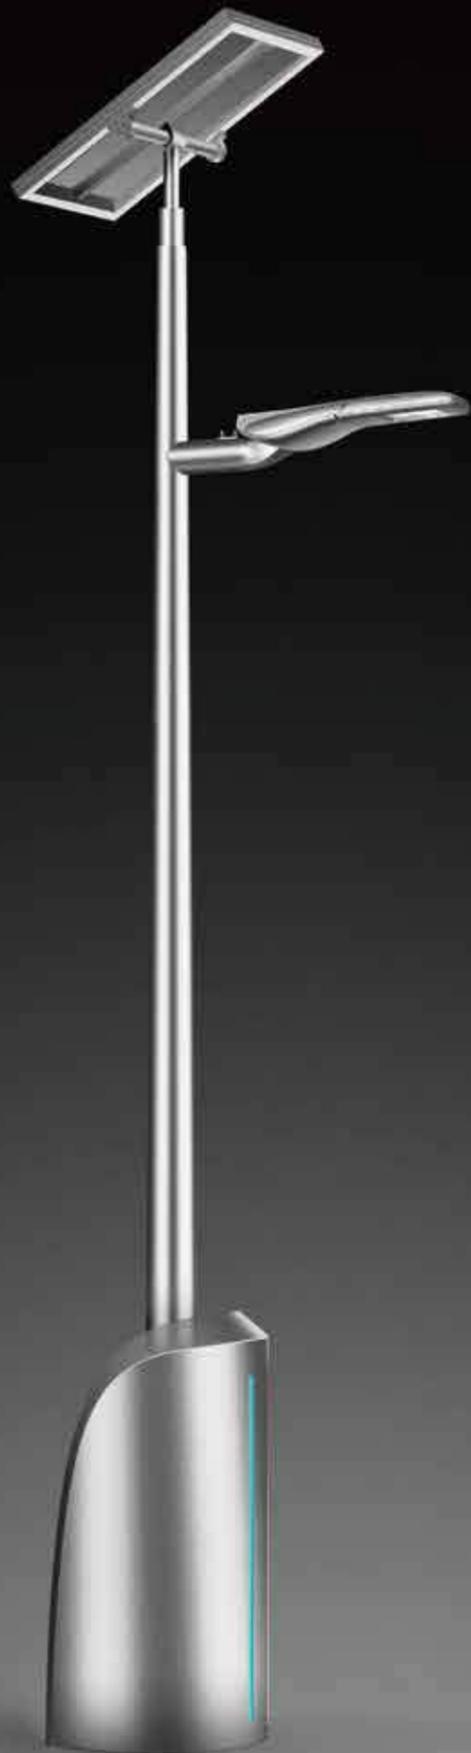

THE CITY'S
GUARDIAN
ANGEL

材质 Material

高强度钢制灯体, 成型后热镀锌处理。
High-strength steel lamp body, hot-dip galvanized after forming.

表面聚酯静电喷涂, 不锈钢紧固件, 耐腐蚀
The surface is coated with polyester static electricity, stainless steel fastener, anti-corosive

热处理高强度钢化玻璃透光罩
Toughened glass difuser with heating treatment

特性 Characteristics

不用市电, 无运行费用
It doesn't use electricity and hasn't running fee.

优质高亮度LED光源, 使用寿命长, 功耗低, 发热量少
High quality and luminance LED photosource, the service life is long, power loss is low, emit less calorific.

无需铺设电缆, 社会及环保效益显著
Doesn't need to lay down electric cable, the society and environmental protection benefit is remarkable.

高强度钢制灯体, 结构坚固, 抗震性佳, 确保灯具能在严峻的室外环境下工作
The high-strength steel lamp body provides robust construction and excellent shock resistance, ensuring reliable operation in harsh outdoor environments.

钢化玻璃透光罩, 有效增加抗击性能
Toughened glass difuser, effective increase resistance performance

SV7624o62904

技术参数 Specification

名称 Name	型号 Model	V	I	实际功率 W Actual Power W
LED	20W	12	1.67A	20W



New visual sensation



Hello BETTER LIGHT
BETTER WORLD



技术参数 / Specification

产品型号 / Product Code	DSL7219032601-M150
LED品牌 / LED Brand	Lumileds
LED数量 / LED Quantity	72Pcs
额定功率 / Rated Power	150W
输入电压 / Input Voltage	AC100-305V
频率 / Frequency Range	50/60HZ
颜色 / Color	3000K4000K/5000K/6000K
发光角度 / Beam Angle	120X50° / 150X65° / 150X60° / 140X30° / 148°
控制方式 / Control Mode	CC / DMX512
使用寿命 / Life	50000H
功率因数 / power factor	>0.95
防浪涌电压 / Surge voltage	>6KV
防护等级 / Protection Grade	IP66
环境温度 / Ambient Temperature	- 25°C ~ 50°C
环境湿度 / Ambient Humidity	10% ~ 90%



The function

Street Light

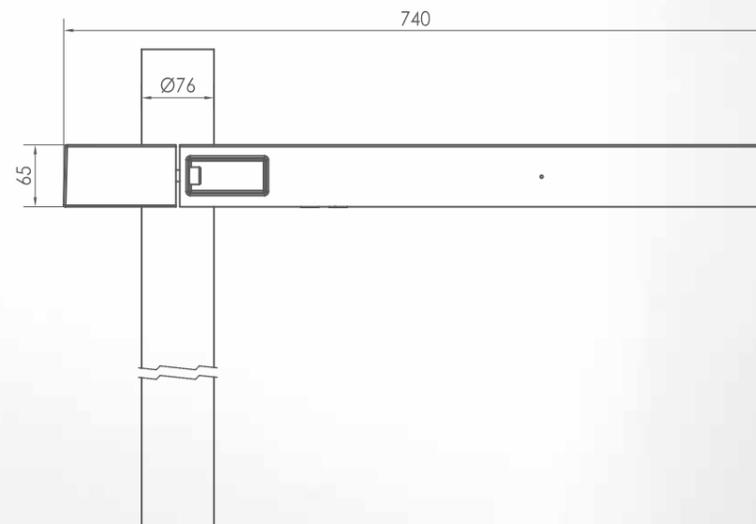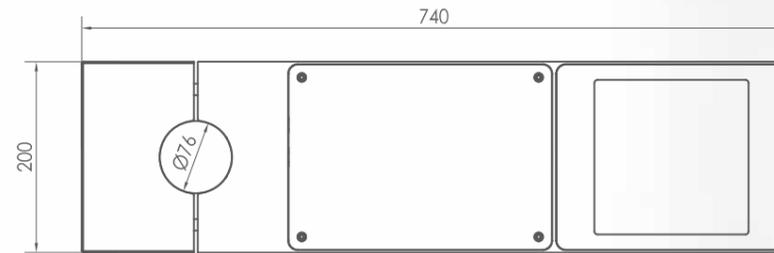

DSL7219032602-M80


PureNight: dark sky, bright ideas



技术参数 / Specification

产品型号 / Product Code	DSL7219032602-M80
LED品牌 / LED Brand	Lumileds
LED数量 / LED Quantity	36Pcs
额定功率 / Rated Power	80W
输入电压 / Input Voltage	AC100-305V
频率 / Frequency Range	50/60HZ
颜色 / Color	3000K4000K/5000K/6000K
发光角度 / Beam Angle	120X50° / 150X65° / 150X60° / 140X30° / 148°
控制方式 / Control Mode	CC / DMX512
使用寿命 / Life	50000H
功率因数 / power factor	>0.95
防浪涌电压 / Surge voltage	>6KV
防护等级 / Protection Grade	IP66
环境温度 / Ambient Temperature	- 25°C ~ 50°C
环境湿度 / Ambient Humidity	10% ~ 90%



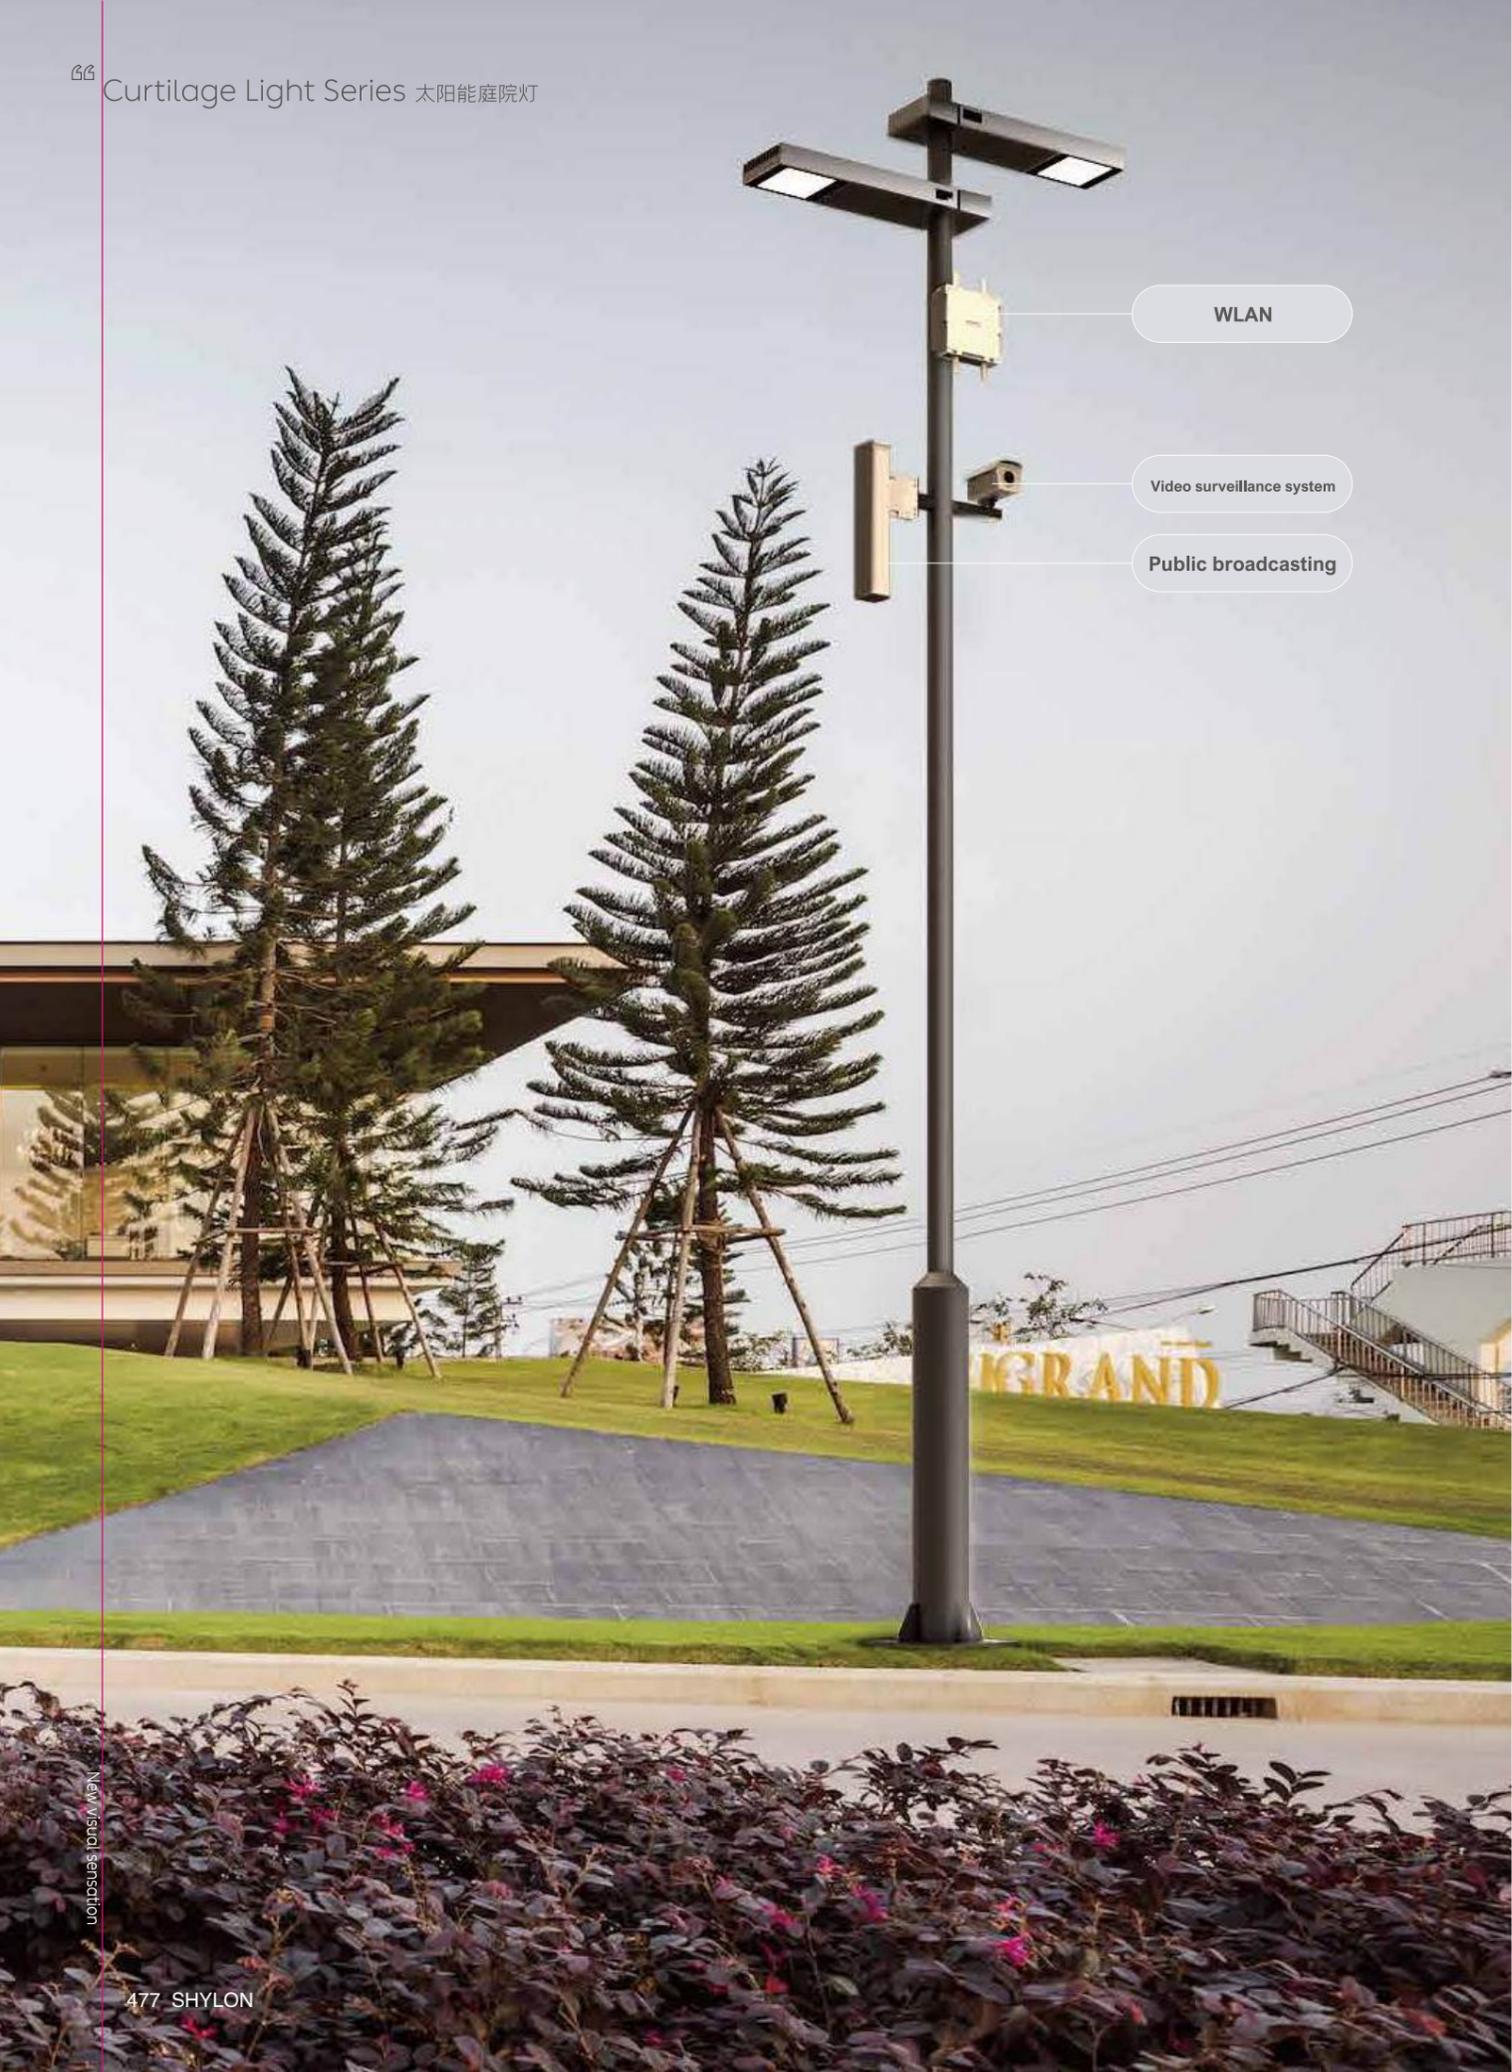

WLAN

Video surveillance system

Public broadcasting



智能照明系统

智慧路灯是通往真正智慧城市的大门。通过利用这些基础设施，城市可以提供以人为本的智能服务，从而改善可持续交通、提高安全性、提高舒适度、保护野生动物、连接世界各地的人们、支持公共服务并促进社会互动。

量身定制的灯光和智能灯光管理

保证完美照明的城市

照明系统在一个令人赏心悦目的列中提供多种技术。


这种巧妙的设计减少了公共空间的混乱，

同时为户外生活空间带来了美感。



LED Highbay Light Series

SL0180U

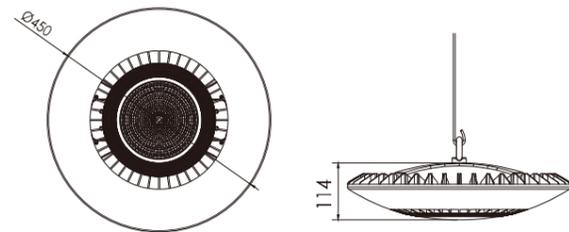



产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计,外型时尚美观;采用隔离双腔体结构,独立通风散热,充分保证LED的稳定性和长寿命。
- 二、采用美国CREE芯片,低光衰,长寿命.整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型,表面静电喷塑处理;灯罩采用高透光率聚碳酸酯.抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.
- 四、可完美兼容0-10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60°配光反射器,旋转对称,适合中高天棚及公共区域的通用照明,同时在不加灯罩的情况下具有防眩光功能。

- 1、 Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、 Adopt American CREE LED light source, low light decay, long life-span, the light effect for complete luminarie is as high as 130 lm/W
- 3、 Light body adopts high pressure die-casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet-proof.
- 4、 Perfectly compatible with 0-10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、 Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti-glare function under the condition of without shade.

技术参数 Specification

产品型号/Product Code	SL0180U-200	SL0180U-150
LED品牌/LED Brand	CREE / LUMILEDS	CREE / LUMILEDS
LED数量/LED Quantity	64Pcs	48Pcs
额定功率/Rated Power	208W	155W
输入电压/Input Voltage	AC100-305V	AC100-305V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°	60° 120°
控制方式/Control Mode	CC/0-10V Dimming/DALI	CC/0-10V Dimming/DALI
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%

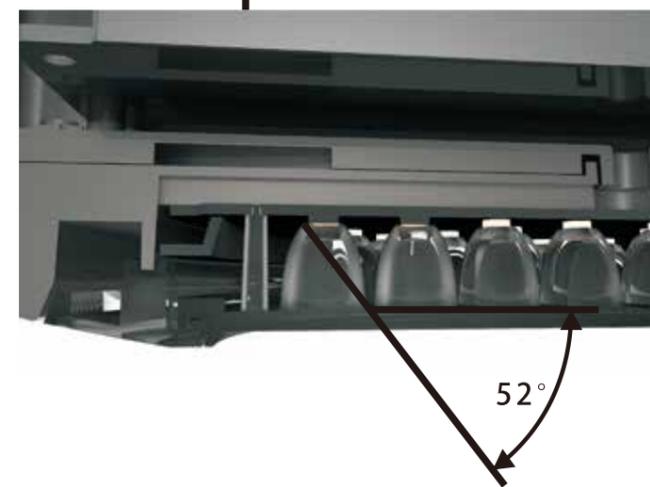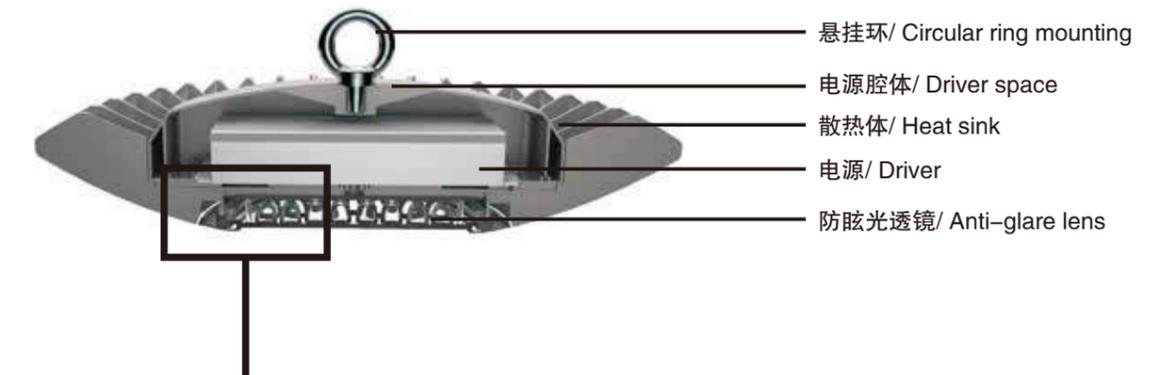

通常仰角30度内的视线,不会直视到LED光源。
Generally, LED source won't be looked directly within the sight of 30degree angle of elevation.

LED Highbay Light Series

SL0180C



产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计,外型时尚美观;采用隔离双腔体结构,独立通风散热,充分保证LED的稳定性和长寿命.
- 二、采用美国CREE芯片,低光衰,长寿命.整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型,表面静电喷塑处理;灯罩采用高透光率聚碳酸酯.抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.
- 四、可完美兼容0-10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60°配光反射器,旋转对称,适合中高空棚及公共区域的通用照明,同时在不加灯罩的情况下具有防眩光功能.

- 1、 Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、 Adopt American CREE LED light source, low light decay, long life-span, the light effect for complete luminarie is as high as 130 lm/W
- 3、 Light body adopts high pressure die-casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet-proof.
- 4、 Perfectly compatible with 0-10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、 Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti-glare function under the condition of without shade.

技术参数 Specification

产品型号/Product Code	SL0180C-200	SL0180C-150
LED品牌/LED Brand	CREE / LUMILEDS	CREE / LUMILEDS
LED数量/LED Quantity	64Pcs	48Pcs
额定功率/Rated Power	208W	155W
输入电压/Input Voltage	AC100-305V	AC100-305V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°	60° 120°
控制方式/Control Mode	CC/0-10V Dimming/DALI	CC/0-10V Dimming/DALI
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	- 25°C ~ 50°C	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

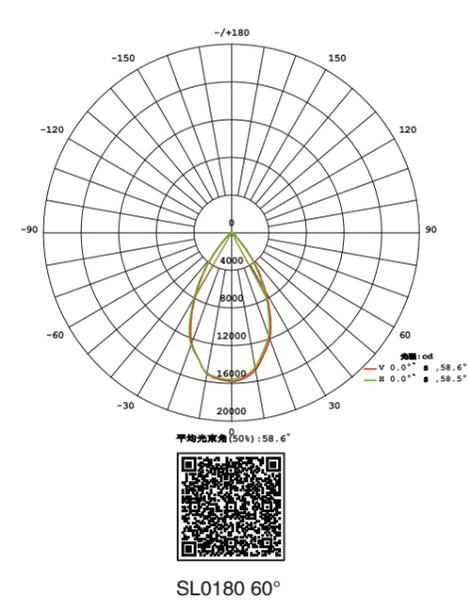


光通输出: 9572 lm

高度	Eavg, Emax	光束角: 58.54	直径
1m	9141, 15770lx		112.09cm
2m	2285, 3942lx		224.18cm
3m	1016, 1752lx		336.27cm
4m	571.3, 985.6lx		448.36cm
5m	365.6, 630.8lx		560.45cm
6m	253.9, 438.0lx		672.54cm
7m	186.5, 321.8lx		784.63cm
8m	142.8, 246.4lx		896.72cm
9m	112.8, 194.7lx		1008.81cm
10m	91.41, 157.7lx		1120.91cm



LED Highbay Light Series

SL0181U

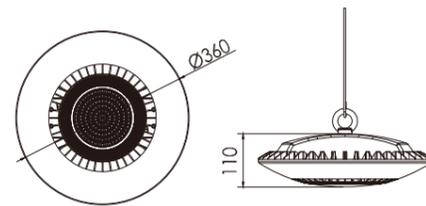


产品简介 Product Introduction

- 一、拥有自主知识产权的原设计,外型时尚美观;采用隔离双腔体结构,独立通风散热,充分保证LED的稳定性和长寿命.
- 二、采用美国CREE芯片,低光衰,长寿命.整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型,表面静电喷塑处理;灯罩采用高透光率聚碳酸酯.抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.
- 四、可完美兼容0-10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60°配光反射器,旋转对称,适合中高天棚及公共区域的通用照明,同时在不加灯罩的情况下具有防眩光功能.

- 1、 Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、 Adopt American CREE LED light source, low light decay, long life-span, the light effect for complete luminarie is as high as 130 lm/W
- 3、 Light body adopts high pressure die-casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet-proof.
- 4、 Perfectly compatible with 0-10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、 Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti-glare function under the condition of without shade.

技术参数 Specification

产品型号/Product Code	SL0181U-110
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	33Pcs
额定功率/Rated Power	110W
输入电压/Input Voltage	AC100-305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0-10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

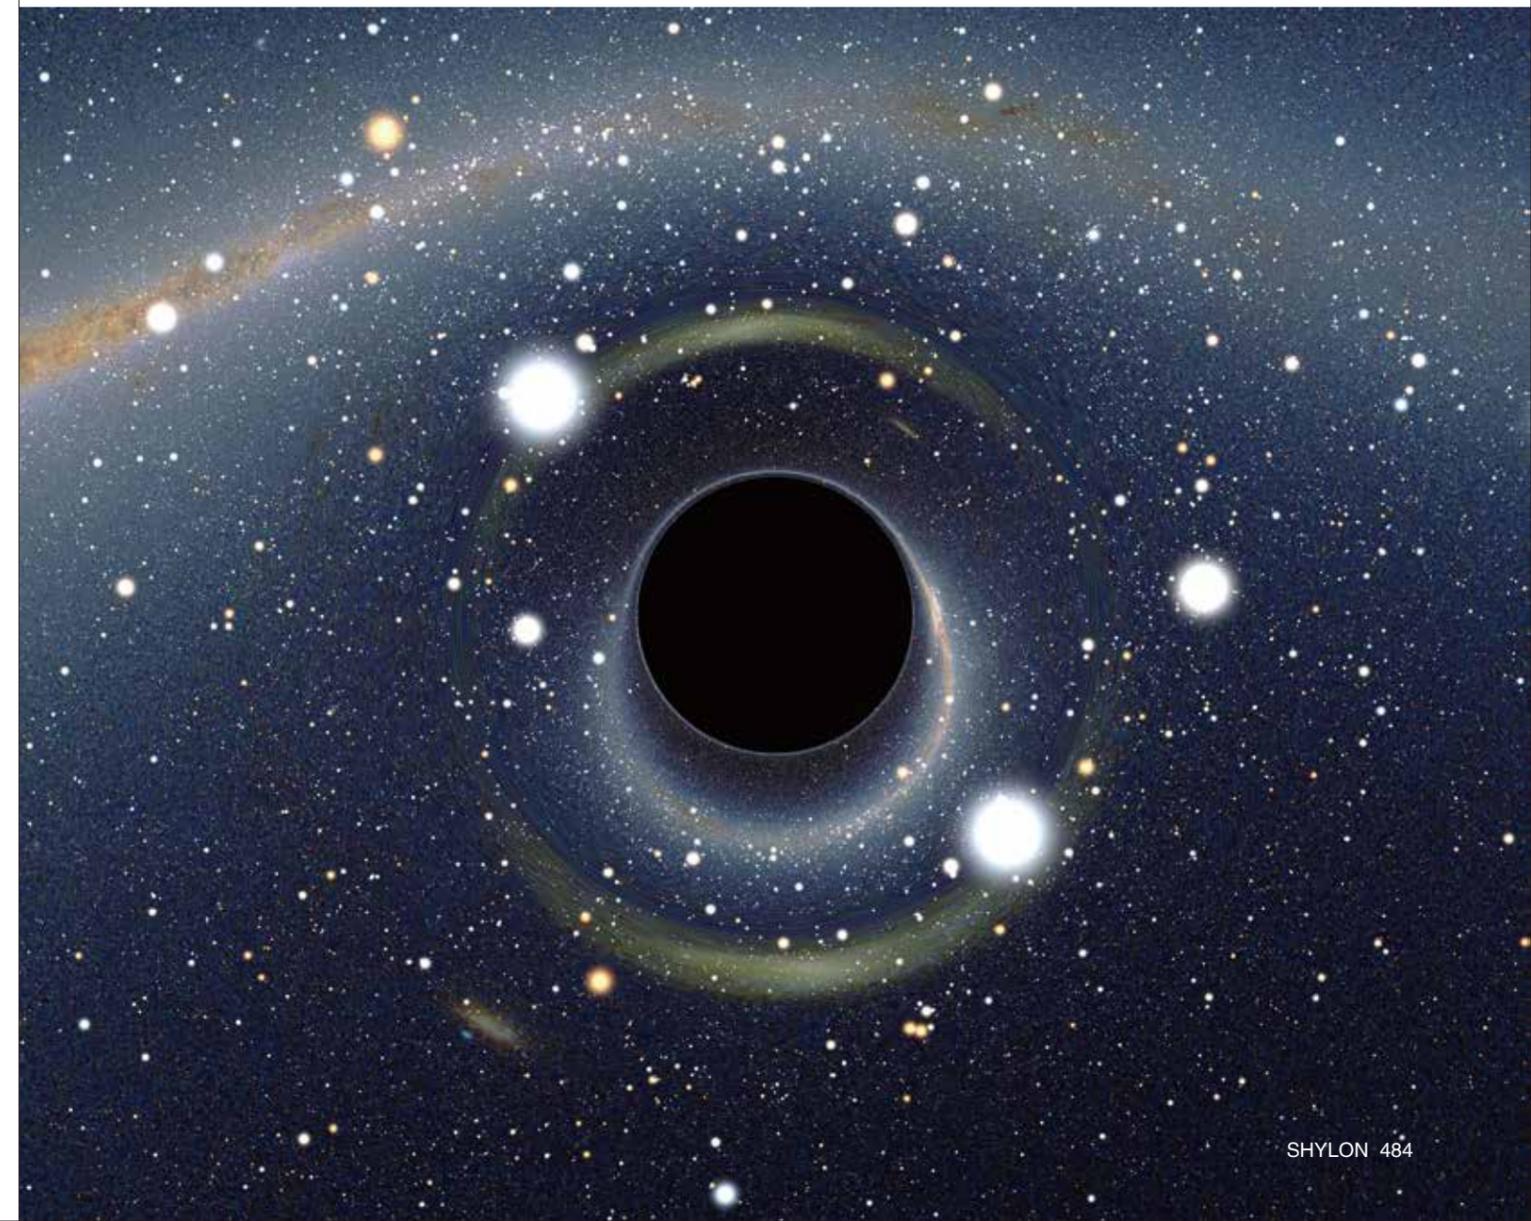

LED Highbay Light Series

SL0181C



产品简介 Product Introduction



- 一、拥有自主知识产权的原創设计,外型时尚美观;采用隔离双腔体结构,独立通风散热,充分保证LED的稳定性和长寿命.
- 二、采用美国CREE芯片,低光衰,长寿命.整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型,表面静电喷塑处理;灯罩采用高透光率聚碳酸酯.抗冲击耐摩擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.
- 四、可完美兼容0-10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60°配光反射器,旋转对称,适合中高天棚及公共区域的通用照明,同时在不加灯罩的情况下具有防眩光功能.

- 1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、Adopt American CREE LED light source, low light decay, long life-span, the light effect for complete luminarie is as high as 130 lm/W
- 3、Light body adopts high pressure die-casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate, resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet-proof.
- 4、Perfectly compatible with 0-10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti-glare function under the condition of without shade.

技术参数 Specification


产品型号/Product Code	SL0181C-110
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	33pcs
额定功率/Rated Power	110W
输入电压/Input Voltage	AC100-305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0-10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	-25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

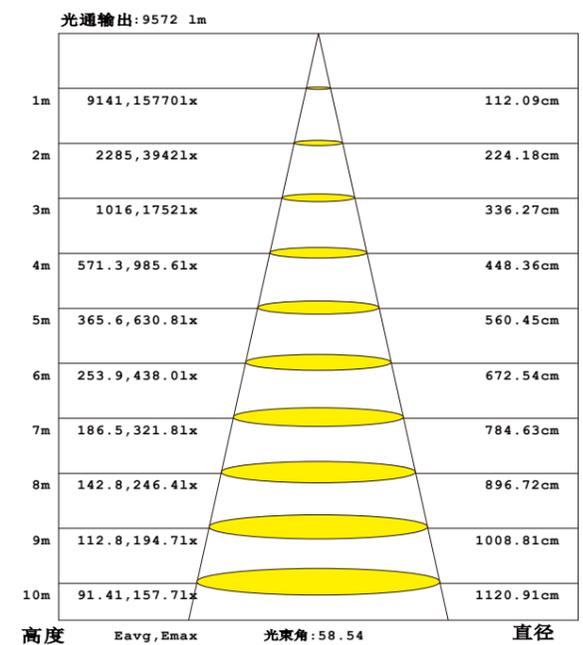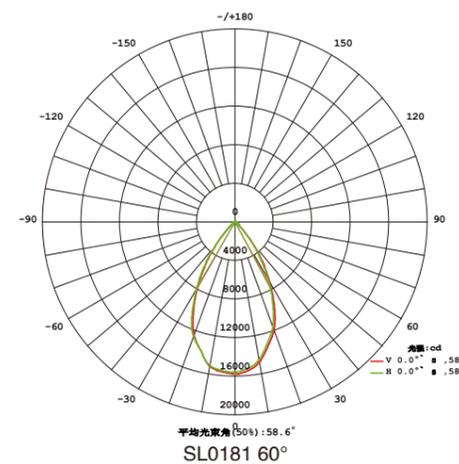

LED Highbay Light Series

SL0182U

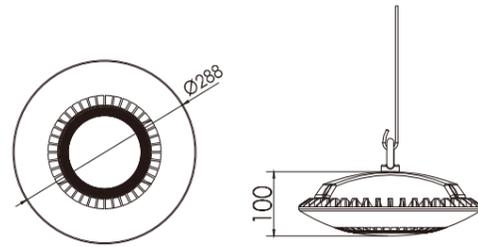

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计,外型时尚美观;采用隔离双腔体结构,独立通风散热,充分保证LED的稳定性和长寿命.
- 二、采用美国CREE芯片,低光衰,长寿命.整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型,表面静电喷塑处理;灯罩采用高透光率聚碳酸酯.抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.
- 四、可完美兼容0-10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60°配光反射器,旋转对称,适合中高天棚及公共区域的通用照明,同时在不加灯罩的情况下具有防眩光功能.

- 1、 Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、 Adopt American CREE LED light source, low light decay, long life-span, the light effect for complete luminarie is as high as 130 lm/W
- 3、 Light body adopts high pressure die-casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet-proof.
- 4、 Perfectly compatible with 0-10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、 Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti-glare function under the condition of without shade.


技术参数 Specification

产品型号/Product Code	SL0182U-55
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	20Pcs
额定功率/Rated Power	55W
输入电压/Input Voltage	AC100-305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0-10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%



LED Highbay Light Series

SL0182C

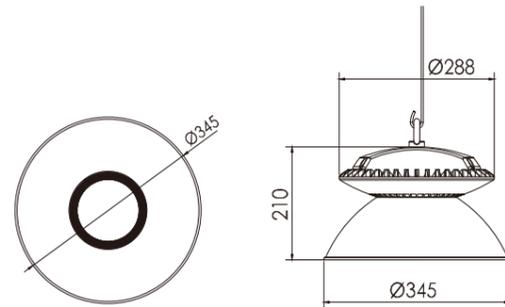


产品简介 Product Introduction

- 一、拥有自主知识产权的原设计,外型时尚美观;采用隔离双腔体结构,独立通风散热,充分保证LED的稳定性和长寿命.
- 二、采用美国CREE芯片,低光衰,长寿命.整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型,表面静电喷塑处理;灯罩采用高透光率聚碳酸酯.抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入.
- 四、可完美兼容0-10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60°配光反射器,旋转对称,适合中高天棚及公共区域的通用照明,同时在不加灯罩的情况下具有防眩光功能.

- 1、 Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、 Adopt American CREE LED light source, low light decay, long life-span, the light effect for complete luminarie is as high as 130 lm/W
- 3、 Light body adopts high pressure die-casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet-proof.
- 4、 Perfectly compatible with 0-10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、 Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti-glare function under the condition of without shade.

技术参数 Specification

产品型号/Product Code	SL0182C-55
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	20Pcs
额定功率/Rated Power	55W
输入电压/Input Voltage	AC100-305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0-10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25°C ~ 50°C
环境湿度/Ambient Humidity	10% ~ 90%

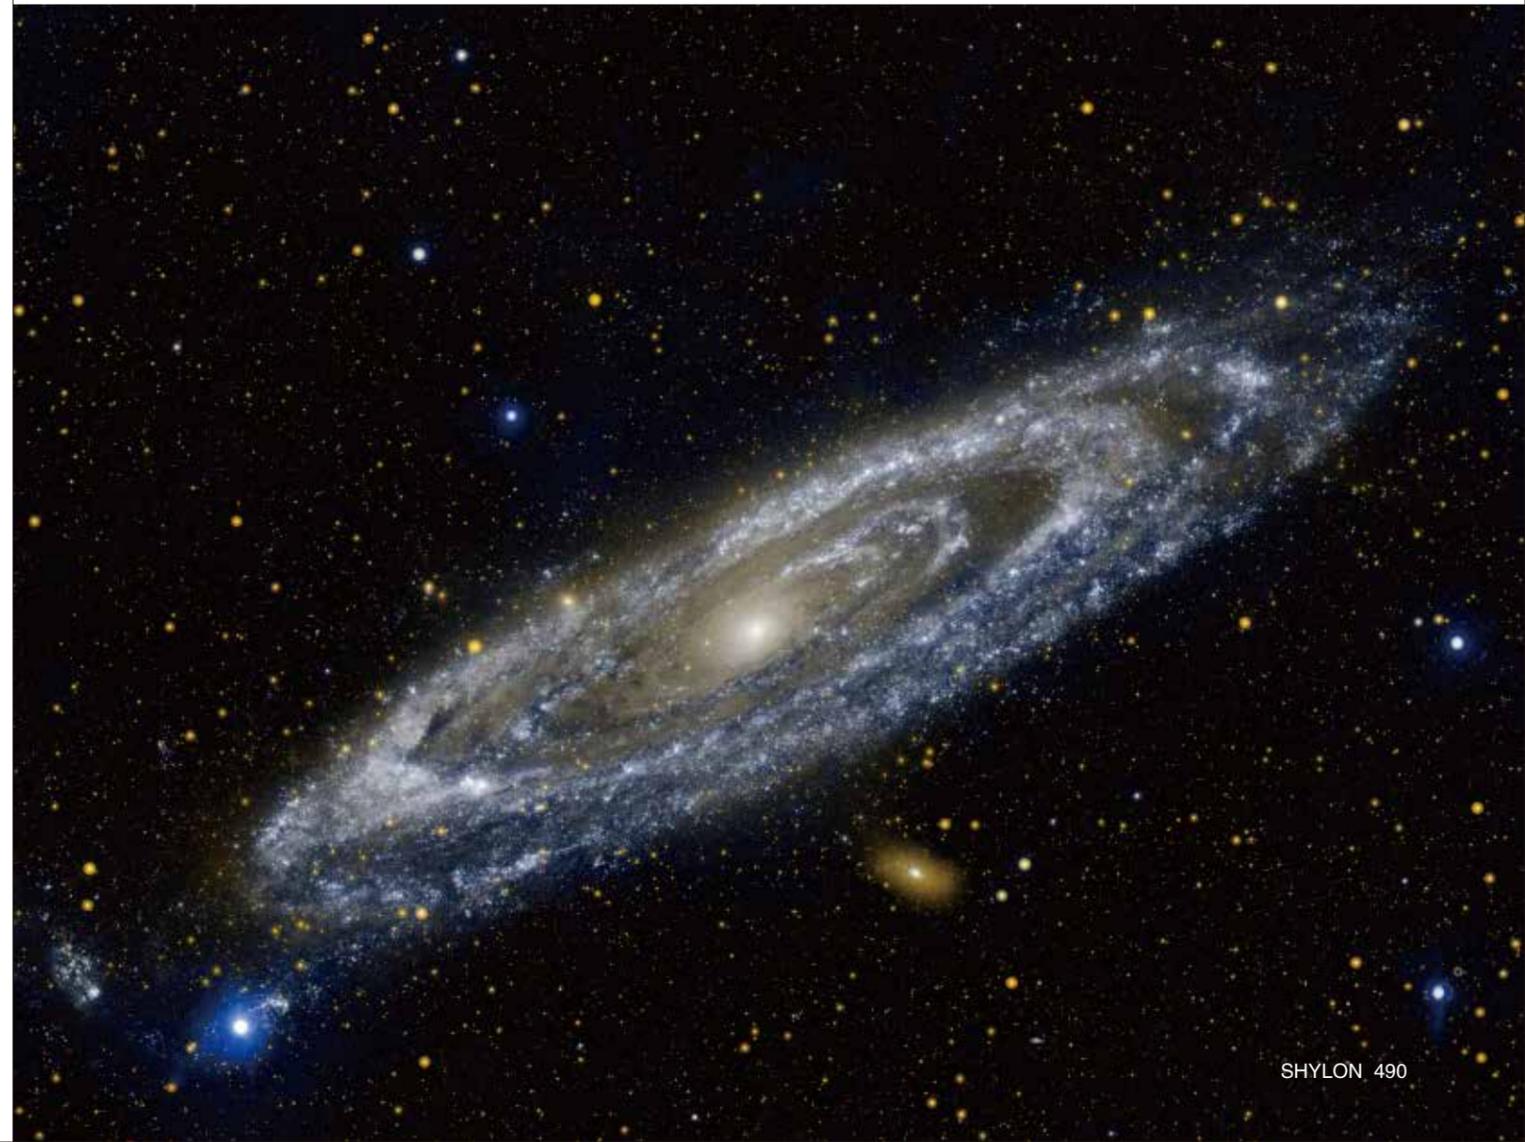

Control System

SL-E2120K 联机主控器

SL-E2120K Master Controller

产品简介 Product Introduction

SL-E2120K是一台大型联机主控制器，配合SL-E3200分控器使用；可带载15W个像素点，SD卡存储，外配遥控器，可实现节目片段选择、整体亮度调整、白平衡调整、播放速度调整、内置动画测试程序、RGBW四色灯具控制等功能；即可以控制DMX512通讯的灯具又可以控制SPI、单线、双线灯具（不可同时控制）极大满足了客户再应用及调试中的多种需求。

SL-E2120K is a large-scale online master controller, cooperates with slave controller-SL-E3200 in application. SL-D2120K is access to load 0.15 million pixels with SD card storage and remote controller, which can implement function, such as the play fragment selection, overall brightness adjustment, the white balance adjustment, play speed adjustment, built-in animation test program, RGBW four-color fixture lighting control and etc. SL-E2120K is the combination of DMX512 and SPI, single wire, dual wire lamps serial control (can not be selected simultaneously), which immensely meets the various demand from customers during the application and debugging.

主要性能特点 Main performance

- 1、采用16GB的大容量U盘存储数据，花样更丰富多彩；
- 2、具有LCD中文或者英文显示界面，操作直观方便。
- 3、具有节目选择、速度调节及亮度设置等功能满足不同场所的需要
- 4、控制器及灯具排列方式任意，灵活性超强
- 5、具备同步控制（联机）和异步控制（脱机）双功能；既可以同步直播电脑的视频，也可以播放U盘里的视频；当同时连接电脑和插入U盘时，优先播放电脑的视频。
- 6、多种控制方式，具DMX512、SPI、单线、双线控制于一身；配合分控可带载15万像素点，适用于大型项目。
- 7、支持H264(MPEG-4)格式视频实时播放

- (1) Adopt the large volume of 16GB SD card to store data with various programs.
- (2) Own LCD Chinese and English display interface with features of easy operation intuitive.
- (3) Equip with function of program selection, speed adjustment and brightness set-up and etc. to satisfy demands on various occasions.
- (4) Allow the arbitrary layout with controllers and luminaires, achieving high flexibility.
- (5) Support working on-line, and cooperate with slave controller off-line; when on line, it achieves real-time synchronization work, the working performance of LED luminaire is matched with the display on a computer screen.
- (6) Offer various controller methods, such as DMX512 and SPI; SL-D8000 is access to load 0.12 million pixels when cooperated with slave controller, it is especially applied to large-scale projects.

规格参数表 Specification

序号/NO.	名称/Parameter	参数/Parameter
1	名称 / Product name	LED智能主 控制器/ LED intelligent master controller
2	型 号 / Item No.	SL-E2120K
3	尺寸 / Dimension	288(L)x158 (W) x45 (H) mm
4	电 源 / Driver	AC100~220V 60/50Hz
5	额定功率 / Rated power	15W
6	控制点数 / Control pixel	15万像素点/0.15million pixels
7	控制效果 / Control effect	任意花样的文字动画 图案 视频影像/Present various words, animation, images, video
8	SD卡容量/SD card volume	16GB
9	通讯接口 / Communication interface	RJ45、HDMI
10	节目数量/Program quantity	≤99个 / ≤99 units
11	速度等级 / Speed grade	100级 / 100 Grade
12	可调亮度等级 / Brightness adjustment grade	100级 / 100 Grade
13	防护等级 / Protection grade	IP20
14	工作温度 / Work temperature	-40℃ ~ 50℃
15	固定孔间距 / Fixed hole interval	268mm
16	适用场所 / Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project



Control System

SL-E3200K 分控器

SL-E3200 Slave Controller

产品简介 Product Introduction

SL-E3200是一套配合SL-E2120K使用的分控器，控制系统实现R G B各256级灰度，共可表现1677万种颜色，真正实现全彩色。8端口输出，每端口可带载170个全彩点并支持扩展。独有的在线自动寻址技术，以最方便简洁的线路排布实现复杂的控制功能，极大地提高了产品的可靠性和稳定性。既可以连接电脑同步工作，又可以连接脱机播放器同步工作。在联机同步控制时，可轻松将文字、动画、图像、视频等媒体信息完整再现于您的LED工程项目中。配套主控为SL-E2120K。

SL-E3200 is a slave controller which cooperates with master controller -SL-M2120K in application. SL-E3200 enables it achieving the R G B each 256 gray level, totally presenting 16.77 million kinds of color, authentically realizing full color. There are 8 ports output with load of 170 pixels per port which supports extension. SL-E3200 is equipped with online automatic addressing technology, the complex control function is accomplished by this most concise and convenient approach, which tremendously improves reliability and stability of the products. SL-E3200 supports working on-line or connecting the off-line player to achieve synchronization work; In the system of connection with many controllers, it is simple to make words, animation, images, video and etc media information completely be represented in your LED project.



主要性能特点 Main performance

1. 每台可控制1360个全彩点并支持扩展，可无限级联；需配套主控或脱机播放器共同使用。
2. 控制器间通讯采用以太网接口和UDP网络协议，传输距离最大为100米。
3. 512级三基色独立亮度控制，使精确调整白平衡更加简单有效；
4. 控制器显示模块及时显示控制器参数、状态。
5. 双网络接口，可以实现控制器间级联；控制器自动检测，软件直观显示连接状态。
6. 支持多种播放模式：手动、节假日、每日、时段及自定义等。可以轻松实现任意日期、时间自动定时播放，周一至周日播放不同的节目。
7. 播放速度可调范围是1—100帧每秒，亮度可调范围是1—100。
8. 支持红，绿，蓝，白四色灯具控制；支持音乐频谱显示，外部视频调用；支持不中断显示画面播放即时消息；布线支持导入CAD，导入参考图片等特殊功能，满足客户多样化需求。
1. Support 1360 full color pixels, extension on each port, infinite cascade connection when cooperated with master controller or off-line player.
2. Adopt Ethernet interface and UDP internet protocol between controllers, the maximum transmission distance is 100 meters.
3. 512 Grade three primary colors control brightness independently, which makes the white balance adjustment more simple and effective.
4. The controller displays module presents its parameter and status timely.
5. Double internet interface can realize the cascade connection between controllers; the controller makes self-detected automatically, then the software indicates the connection status intuitively.
6. Support multiple display modes: manual, holidays, day, fragment, self-define and so on. It can easily realize arbitrary date, automatic timing play and different programs play within 7 days(one week), also can operate it manually.
7. The adjustable range for play speed is 1-100 frames per second, 1-100 grade for brightness.
8. Allow the control of luminaire with red, green, blue, white four colors; support music spectrum presentation, external video usage, play instant message without interrupting the display screen, wiring layout lead CAD, reference pictures and other special functions, immensely meet the diversified demands from customers.

规格参数表 Specification

序号/NO.	名称/Parameter	参数/Parameter
1	名称 / Product name	LED智能分控制器/ LED intelligent slave controller
2	型 号 / Item No.	SL-E3200K
3	尺寸 / Dimension	288(L)x158 (W) x45 (H) mm
4	电 源 / Driver	AC100~220V 60/50Hz
5	额定功率 / Rated power	15W
6	控制点数 / Control pixel	15万像素点/0.15million pixels
7	控制效果 / Control effect	任意花样的文字动画 图案 视频影像/Present various words, animation, images, video
8	SD卡容量/SD card volume	16GB
9	通讯接口 / Communication interface	RJ45
10	节目数量/Program quantity	≤99个 / ≤99 units
11	速度等级 / Speed grade	100级 / 100 Grade
12	可调亮度等级 / Brightness adjustment grade	100级 / 100 Grade
13	防护等级 / Protection grade	IP20
14	工作温度 / Work temperature	-40℃ ~ 50℃
15	固定孔间距 / Fixed hole interval	268mm
16	适用场所 / Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL-M2220K 联机主控器

SL-M2220K On-line Master Controller

产品简介 Product Introduction

SL-M2220K是一台大型联机主控制器，配合SL-M3301分控器使用；可带载15万个像素点，SD卡存储，外配遥控器，可实现节目片段选择、整体亮度调整、白平衡调整、播放速度调整、内置动画测试程序、RGBW四色灯具控制等功能；即可以控制DMX512通讯的灯具又可以控制SPI、单线、双线灯具（不可同时控制）极大满足了客户再应用及调试中的多种需求。

SL-M2220K is a large-scale online master controller, cooperates with slave controller SL - M3301 in application. SL-M2220K is access to load 0.15 million pixels with SD card storage and the remote control, which can implement function, such as the off-line timing play, play fragment selection, overall brightness adjustment, the white balance adjustment, play speed adjustment, built-in animation test program, RGBW four-color fixture lighting control and etc. SL - M2220K is the combination of DMX512 and SPI serial control(can not be selected simultaneously), which immensely meets the various demand from customers during the application and debugging.

主要性能特点 Main performance

- 1、采用8GB的大容量SD存储卡存储数据，花样更丰富多彩。
- 2、具有LCD中文或者英文显示界面，操作直观方便。
- 3、具有节目选择、速度调节及亮度设置等功能满足不同场所的需要。
- 4、控制器及灯具排列方式任意，灵活性超强。
- 5、既可以与电脑联机同步工作，又可以配合分控脱机工作。与电脑联机实时同步工作，LED灯具显示效果与电脑屏幕一致。
- 6、多种控制方式，具DMX512、SPI、单线、双线控制于一身；配合分控可带载15万个像素点，适用于大型项目。

- 1、Adopt the large volume of 8GB SD card to store data with various programs.
- 2、Own LCD English display interface with features of easy operation intuitive.
- 3、Equip with function of program selection, speed adjustment set-up and etc. to satisfy demand on various occasion.
- 4、Allow the arbitrary layout with controllers and luminaires, achieve high flexibility.
- 5、Support working on-line, and cooperate with slave controller off-line; when on line, it achieves real-time synchronization work, the working performance of LED luminaire is matched with the display on a computer screen.
- 6、Offer various controller methods, such as DMX512 and SPI; SL-M2102K is access to load 0.15 million pixels when cooperated with slave controller, it is especially applied to large-scale projects.



Control System

SL-M3301 分控器

SL-M3301 Slave Controller

产品简介 Product Introduction

SL-M3301是一套配合SL-M2220K使用的分控器，控制系统实现R G B各256级灰度，共可表现1677万种颜色，真正实现全彩色。8端口输出，每端口可带载170个全彩点并支持扩展。独有的在线自动寻址技术，以最方便简洁的线路排布实现复杂的控制功能，极大地提高了产品的可靠性和稳定性。既可以连接电脑同步工作，又可以连接脱机播放器同步工作。在多机联合同步控制时，可轻松将文字、动画、图像、视频等媒体信息完整再现于您的LED工程项目中。

SL - M3301 is a slave controller which cooperates with master controller SL -M2220K in application. SL-M3301R enables it achieving the R G B each 256 gray level, totally presenting 16.77 million kinds of color, authentically realizing full color. There are 8 ports output with load of 170 pixels per port which supports extension. SL-M3301R is equipped with online automatic addressing technology, the complex control function is accomplished by this most concise and convenient approach, which tremendously improves reliability and stability of the products. SL-M3301R supports working on-line or connecting the off-line player to achieve synchronization work; In the system of connection with many controllers, it is simple to make words, animation, images, video and etc media information completely be represented in your LED project.

主要性能特点 Main performance

- 1、每台可控制1360个全彩点并支持扩展，可无限级联；需配套主控或脱机播放器共同使用。
- 2、控制器间通讯采用以太网接口和UDP网络协议，传输距离最大为100米。
- 3、512级三基色独立亮度控制，使精确调整白平衡更加简单有效。
- 4、控制器显示模块及时显示控制器参数、状态。
- 5、双网络接口，可以实现控制器间级联；控制器自动检测，软件直观显示连接状态。
- 6、支持多种播放模式：手动、节假日、每日、时段及自定义等。可以轻松实现任意日期、时间自动定时播放，周一至周日播放不同的节目。
- 7、播放速度可调范围是1—100帧每秒，亮度可调范围是1—100。
- 8、支持红，绿，蓝，白四色灯具控制；支持音乐频谱显示，外部视频调用；支持不中断显示画面播放即时消息；布线支持导入CAD，导入参考图片等特殊功能，满足客户多样化需求。

- 1、Support 1360 full color pixels, extension on each port, infinite cascade connection when cooperated with master controller or off-line player.
- 2、Adopt Ethernet interface and UDP internet protocol between controllers, the maximum transmission distance is 100 meters.
- 3、512 Grade three primary colors control brightness independently, which makes the white balance adjustment more simple and effective.
- 4、The controller display module presents its parameter and status timely.
- 5、Double internet interface can realize the cascade connection between controllers; the controller makes self-detected automatically, then the software indicates the connection status intuitively.
- 6、Support multiple display modes: holidays, day, fragment, self-define and so on. It easily realize arbitrary date, automatic timing play and different programs play within 7 days(one week), also can operate it manually.
- 7、The adjustable range for play speed is 1-100 frames per second, 1-100 grade for brightness.
- 8、Allow the control of luminaire with red, green, blue, white four color; support music spectrum presentation, external video usage, play instant message without interrupting the display screen, wiring layout lead CAD, reference pictures and other special function, immensely meet the diversified demand from customers.



规格参数表 Specification

序号/NO.	名称/Product name	参数/Parameter
1	名称/Product name	LED智能主控制器/ LED intelligent master controller
2	型号/Item No.	SL-M2220K
3	外形尺寸/Dimension	283 (L) × 134 (W) × 45 (H) mm
4	电源/Driver	AC 100~240V 60/50Hz
5	额定功率/Rated power	15W
6	控制点数/Control pixel	15万像素点/0.15million pixels
7	控制效果/Control effect	文字 动画 图案 视频 / words,animation,images,video
8	SD卡容量/SD card volume	8GB
9	通讯接口/Communication interface	RJ-45
10	节目数量/Program quantity	≤99个/≤99units
11	速度等级/Speed grade	100级 / 100 Grade
12	可调亮度等级/Brightness adjustment grade	100级 / 100 Grade
13	防护等级/Protection grade	IP20
14	工作温度/Work temperature	-40℃ ~ 50℃
15	固定孔间距/Fixed hole interval	68mm;268mm
16	适用场所/Application	户外、室内LED亮化工程/Outdoor and indoor led lighting project

规格参数表 Specification

序号/NO.		参数/Parameter
1	名称/Product Name	LED智能分控制器 / LED intelligent slave controller
2	型号/Item NO.	SL-M3301
3	外形尺寸/Dimension	283 (L) x134 (W) x45 (H) mm
4	电源/Driver	AC220V 50Hz
5	额定功率/Rated power	15W
6	输出路数/Output ways	8路 (DMX512) / 8 ports for DMX512
7	控制点数/Control points	1360像素可支持扩展 / 1360 pixels for DMX, support extension
8	驱动效果/Control effect	文字 动画 图案 视频 / words,animation,images,video
9	通讯接口/Communication interface	RJ45
10	时钟类型/Communication interface	年、月、日、时、分、秒、星期 / Year, month,day,hour,minute,second,week
11	播放模式/Clock type	手动、节假日、每日、时段、自定义 / Manual, holiday,day,fragment,self-definite
12	速度等级/Speed grade	100级 / 100 grade.
13	可调亮度等级/Brightness adjustment grade	100级 / 100 grade.
14	防护等级/Protection grade	IP20
15	寻址方式/Addressing method	自动寻址, 所有灯具地址可以任意编辑 Automatic addressing (each luminaire can be addressed and located in sequence)
16	工作温度/Work temperature	-40℃ ~ 50℃
17	固定孔间距/Fixed hole interval	68mm ; 268mm
18	适用场所/Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL-M3200R 分控器

SL-M3200R Slave Controller

产品简介 Product Introduction

SL-M3200R控制器支持标准RDM技术标准协议，基于DMX512-A标准协议，组建LED控制应用的RDM系统，其控制系统具备与标准DMX512相关控制应用的全部功能，并集成RDM控制命令的发送、RDM反馈信息的接收、及RDM信息的显示等功能，能够通过控制系统实时检测LED灯具的工作状态，如灯具的电流、电压、温度、运行时间等信息，是一套配合SL-M2120K、SL-B2120K使用的RDM分控器。



SL-M3200R Controller supports standard RDM Technical Standard Protocol, based on DMX512-A Standard Protocol, builds RDM system for LED control application, SL-M3200R control system has all the functions related to the standard DMX512 control application, and also integrates the functions of sending and receiving feedback information of RDM control command and displaying RDM information, etc. SL-M3200R can real-time detect the working state of LED lamps by control system, such as current, voltage, temperature, operating time and so on, it is a set of RDM slave controller used with SL-M2120K, SL-B2120K.

主要性能特点 Main performance

- 1、控制器输出基于标准DMX512-A协议，全面支持标准RDM技术标准协议。
- 2、配合标准RDM协议的LED灯具，支持灯具工作状态的检测，如灯具的电流、电压、功率、温度、运行时间等灯具工作状态参数。
- 3、每台可控制1360个全彩点并支持扩展，可无限级联；需配套主控或脱机播放器共同使用。
- 4、控制器间通讯采用以太网接口和UDP网络协议，传输距离最大为100米。
- 5、512级三基色独立亮度控制，使精确调整白平衡更加简单有效。
- 6、控制器显示模块及时显示控制器参数、状态。

- 7、双网络接口，可以实现控制器间级联；控制器自动检测，软件直观显示连接状态。
- 8、支持多种播放模式：手动、节假日、每日、时段及自定义等；可以轻松实现任意日期、时间自动定时播放，周一至周日播放不同的节目。
- 9、播放速度可调范围是1—100帧每秒，亮度可调范围是1—100。
- 10、支持红，绿，蓝，白四色灯具控制；支持音乐频谱显示，外部视频调用；支持不中断显示画面播放即时消息；布线支持导入CAD，导入参考图片等特殊功能，满足客户多样化需求。

- 1、Controller output based on DMX512-A Standard Protocol, overall support RDM Technical Standard Protocol.
- 2、LED lamps in accordance with RDM Standard Protocol to support the detection of the working state of lamps, such as current, voltage, power, temperature, operating time and other working state parameters
- 3、Support 1360 full color pixels, extension on each port, infinite cascade connection when cooperated with master controller or off-line player.
- 4、Adopt Ethernet interface and UDP internet protocol between controllers, the maximum transmission distance is 100meters.
- 5、512 Grade three primary colors control brightness independently, which makes the white balance adjustment more simple and effective.
- 6、The controller display module presents its parameter and status timely.
- 7、Double internet interface can realize the cascade connection between controllers; the controller makes self-detected automatically, then the software indicates the connection status intuitively.
- 8、Support multiple display modes: holidays, day, fragment, self-define and so on. It easily realize arbitrary date, automatic timing play and different programs play within 7 days(one week), also can operate it manually.
- 9、The adjustable range for play speed is 1-100 frames per second, 1-100 grade for brightness.
- 10、Allow the control of luminaire with red, green, blue, white four color; support music spectrum presentation, external video usage, play instant message without interrupting the display screen, wiring layout lead CAD, reference pictures and other special function, immensely meet the diversified demand from customers.

规格参数表 Specification

序号/NO.		参数/Parameter
1	名称 / Product name	LED智能分控制器 / LED intelligent slave controller
2	型号 / Item No.	SL-M3200R
3	尺寸 / Dimension	283 (L) x134 (W) x45 (H) mm
4	电源 / Driver	AC220V 50Hz
5	额定功率 / Rated power	15W
6	输出路数 / Output port	8路 (DMX512、RDM) / 8 ports for DMX512、RDM
7	控制点数 / Control pixel	1360像素可支持扩展 / 1360 pixels for DMX, support extension
8	控制效果 / Control effect	文字 动画 图案 视频 / words,animation,images,video
9	通讯接口 / Communication interface	RJ45
10	时钟类型 / Communication interface	年、月、日、时、分、秒、星期 / Year, month,day,hour,minute,second,week
11	播放模式 / Clock type	手动、节假日、每日、时段、自定义 / Manual, holiday,day,fragment,self-definite
12	速度等级 / Speed grade	100级 / 100 grade.
13	可调亮度等级 / Brightness adjustment grade	100级 / 100 grade.
14	防护等级 / Protection grade	IP20
15	寻址方式 / Addressing method	自动寻址, 所有灯具地址可以任意编辑 Automatic addressing (each luminaire can be addressed and located in sequence)
16	工作温度 / Work temperature	-40℃ ~ 50℃
17	固定孔间距 / Fixed hole interval	68mm ; 268mm
18	适用场所 / Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL-B2120K BTS基站同步SIM程控主控器

SL-B2120K BTS Base Station Synchronous SIM Program Control Master Controleler

产品简介 Product Introduction

SL-B2120K主控器是基于Android平台与SIM通讯平台开发的远程控制BTS基站同步脱机主控器。

SL-B2120K依托于SIM通讯，通讯采用800MHz-900MHz频段，具备强大的穿透能力，无盲区的覆盖率，保证了远程遥控指令的高稳定性与高有效性。

利用Android平台与SIM通讯的稳定性及普及率，用户可采用Android移动终端的APP软件，通过移动终端SIM通讯发送短信息，来控制卫星同步主控器中的节目片断、播放速度及亮度调整等功能。

SL-B2120K主控器采用BTS基站通讯模块，通过连接设备所在地周边通讯基站，取得基站中高精度的授时信号以实现同步联动控制。

SL-B2120K 主控器实现稳定、简便的远程遥控功能，主要应用于多栋楼宇联动的脱机项目，针对于项目甲方越加严格的工程要求，SL-B2120K主控器这种远程遥控技术极大的满足了客户的需求。



SL-B2120K master controller is one remote control BTS base offline master controller which is based on the Android platform and the SIM communication platform.

SL-B2120K relies on SIM communication, and the communication adopts 800MHz-900MHz frequency band, has a strong penetrating ability, no blind area coverage, to ensure the high stability and high efficiency of remote command.

With the Android platform and the SIM communication stability and penetration, the users can send messages to control the satellite synchronization master controller's program clips, playback speed, and brightness adjustments via mobile terminal APP of android.

SL-B2120K adopts BTS base station communication module, through connecting the equipment around the communication base stations to obtain high accuracy signal and reach the synchronized linkage control

SL-B2120K master controller realized stable and simple remote control function, mainly used in the offline project of multiple buildings. Regarding the strict engineering requirements of project party A, SL-B2120K master controller with the remote control technology is greatly satisfying the requirements of customers.

规格参数表 Specification

序号/NO.	参数/Parameter
1	名称/Product name BTS基站同步SIM程控主控器/ BTS base station synchronous SIM program control master controleler
2	型号/Item No. SL-B2120K
3	外形尺寸/Dimension 283 (L) × 134 (W) × 45 (H) mm
4	电源/Driver AC 100~240V 60/50Hz
5	额定功率/Rated power 15W
6	控制点数/Control pixel 15万像素点/0.15million pixels
7	控制效果/Control effect 文字 动画 图案 视频 / words,animation,images,video
8	SD卡容量/SD card volume 8GB
9	通讯接口/Communication interface RJ-45
10	节目数量/Program quantity ≤99个/≤99units
11	速度等级/Speed grade 100级 / 100 Grade
12	可调亮度等级/Brightness adjustment grade 100级 / 100 Grade
13	防护等级/Protection grade IP20
14	工作温度/Work temperature -40℃ ~ 50℃
15	固定孔间距/Fixed hole interval 68mm;268mm
16	适用场所/Application 户外、室内LED亮化工程/Outdoor and indoor led lighting project

Control System

SL-Y2100 主控制器

SL-Y2100 Master Controller

产品简介 Product Introduction

SL-Y2100主控制器是DL-Y2000主控器的升级产品；是一套用于建筑室内外亮化控制的LED全彩控制系统，控制系统实现R G B各256级灰度，共可表现1677万种色彩，真正实现全彩色。集DMX512与SPI串行控制于一身的控制器；SL-Y2100控制器采用触摸屏控制，配备一块4.3英寸电容屏，完美的人机交互界面，轻松上手，操作简单，功能完善。



SL-Y2100 master controller is an upgraded product of the SL-Y2000 which is applied to lighting for the indoor and outdoor building, achieving the R G B each 256 gray level, totally presenting 16.77 million kinds of color, authentically realizing full color. SL-Y2100 controller combines DMX512 with SPI serial control; applies touch screen control with 4.3 inch capacitor screen. Perfect human-machine interface, easy to use, simplify to operate and with perfect function.

主要性能特点 Main performance

- 1、采用4G TF卡（标配）存储数据，花样更丰富多彩。
- 2、系统支持自动，定时，节日预设效果播放。
- 3、控制器的触摸屏采用下沉设计，有效地保护触摸屏，防误接触。
- 4、可实现节目片段选择、整体亮度调整、白平衡调整、播放速度调整等。
- 5、具有DMX512信号，兼容同步串行移位数据信号（不可同时输出），方便灵活的满足客户的多种需求。
- 6、不可联机；可选择GPRS同步、交流同步、同步线同步或者无同步。

- 1、Adopt 4GB TF card to store data with various programs.
- 2、The system supports playing programs automatically, timing, and festival preset effects.
- 3、The touch screen of the controller with sinking design, which can protect touch screen effectively, prevented mistaking touch.
- 4、SL-Y2100 can realize program segment selection, overall brightness adjustment, white balance adjustment, play speed adjustment, etc.
- 5、Combine DMX512 signal with synchronous serial shift data signal (can not output simultaneously), flexible to meet types of requirements from customers.
- 6、Not supported online control; can select GPRS synchronization, AC synchronization, synchronous line synchronization or no synchronization.

规格参数表 Specification

序号/NO.	参数/Parameter
1	名称/Product Name LED智能控制器/LED intelligent master controller
2	型号/Item NO. SL-Y2100
3	外形尺寸/Dimension 153 (L) x 90 (W) x 31 (H) mm
4	电源/Driver AC 9V/DC 7.5V-24V/ DC 5V
5	额定功率/Rated power 15W
6	输出路数/Output ways 2路 DMX512 或2路SPI (不可同时使用) /2 ports for DMX512,2 ports for SPI (can not be selected simultaneously)
7	控制点数/Control points DMX 340像素 (SPI为1024像素) 并支持扩展 / 340 pixels for DMX(1024 pixels for SPI)support extension
8	驱动效果/Control effect 文字 动画 图案 视频 / words,animation,images,video
9	TF卡容量/ TF card volume 4GB
10	通讯接口/Communication interface 无通讯接口/Without cascade and communication interface
11	节目数量/Program quantity ≤80个 / ≤80 units
12	速度等级/Speed grade 100级 / 100 Grade
13	可调亮度等级/Brightness adjustment grade 100级 / 100 Grade
14	防护等级/Protection grade IP20
15	寻址方式/Addressing method 自动寻址，所有灯具地址可任意编辑 Automatic addressing(each luminaire can be addressed and located in sequence)
16	工作温度/Work temperature -40℃ ~ 50℃
17	固定孔间距/Fixed hole interval 无
18	适用场所/Application 户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL-D100 信号放大器 SL-D100 Signal Amplifier

产品简介 Product Introduction

SL-D100是一款具有信号隔离功能的DMX信号中继器。

外壳采用ABS材质,高强度,耐腐蚀;产品功耗小、屏蔽性能好、抗干扰强、稳定性强。防护等级IP65。

SL-D100 is a DMX signal amplifier with the function of signal isolation.

The housing adopts ABS material with high intensity and profound corrosion resistance; Own small power consumption, excellent shielding effectiveness, powerful anti-jamming capability, strong stability; Degree of protection IP65



规格参数表 Specification

序号/NO.	名称/Product Name	参数/Parameter
1	名称/Product Name	DMX信号隔离中继器 / DMX signal isolated amplifier
2	型号/Item NO.	SL-D100
3	外形尺寸/Dimension	122 (L) x55 (W) x38 (H) mm
4	电源/Driver	DC6 ~ 36V/AC100-240V
5	消耗功率/Power consumption	≤2W
6	隔离电压/Isolate voltage	1000V
7	通讯接口/Communication interface	DMX512
8	传输速率/Transmission speed	≤1Mbps
9	寻址方式/Addressing mode	支持自动寻址 / Support automatic addressing
10	防护等级/Protection grade	IP65
11	环境温度/Work temperature	-40℃ ~ 50℃
12	主控配置/Master control	SL-D8000、SL-D2000、SL-D3200或者DMX512控制台 SL-D8000、SL-D2000、SL-D3200 or DMX512Console
13	固定孔间距/Fixed hole interval	110mm
14	适用场所/Application	户外、室内LED亮化工程或者舞台灯光工程 Outdoor and indoor led lighting project or stage lighting project

Control System

SL-BT100 智能控制器 SL-BT100 intelligent controller

产品简介 Product Introduction

SL-BT100是一台集控制与写码功能一体的小型控制器,主要针对于CE3401/3402芯片的写码与控制,内置多种变化效果,可手动或自动变化。

SL-BT100 is a compact controller that integrates control and code writing functions. It is mainly aimed at the code writing and control of the CE3401/3402 chip. It has a variety of built-in effects and can be changed manually or automatically.



规格参数表 Specification

序号/NO.	名称/Product Name	参数/Parameter
1	名称/Product Name	LED智能控制器 / LED intelligent DMX controller
2	型号/Item NO.	SL-BT100
3	外形尺寸/Dimension	60(L)x25(W)x25(H)mm
4	电源/Driver	DC24V
5	消耗功率/Power consumption	5W
6	输出路数/Output ports	1路DMX512/1 port for DMX512
7	控制点数/Control pie	DMX 170像素/DMX 170pixels
8	控制效果/Control effect	内置/Internal
9	SD卡/SD Card	支持自动寻址 / Support automatic addressing
10	防护等级/Protective grade	IP20
11	环境温度/Work temperature	-40℃ ~ 50℃
12	固定孔距/Fixed hole	/
13	适用场所/Application	SHYLON色彩管理系统灯具/SHYLON colorful control management system

Control System

SL-KT-X0 控台

SL-KT-X0 Console

产品简介 Product Introduction

X0是自主研发的一款高性能灯光控制台。功能强大，体积小，是流动演出的首选。

X0 is a high-performance lighting console independently developed. It boasts powerful functions and a compact size, making it the top choice for mobile performances.



硬件/Hardware	软件/Software
Linux操作系统/Linux operating system	支持中英文两种语言/Supports both Chinese and English languages
4/1个DMX输出输入口/4/1 DMX input/output ports	Linux操作系统/Linux operating system
最高扩展可支持65536个通道参数/Maximum expansion supports 65,536 channel parameters	支持DMX512, Artnet, ACN协议/DMX512, Artnet, and ACN protocols
内置1个12.1英寸触摸屏 + 1个9英寸触摸屏/Built-in 12.1-inch touchscreen + 1 9-inch touchscreen	系统可通过U盘安装/The system can be installed via a USB flash drive
10个高精度电动推杆 (60mm) /10 high-precision electric faders (60mm)	节目数据可保存在硬盘或U盘/Program data can be saved on a hard disk or USB flash drive
2个AB场电动推杆 (100mm) /2 AB-scene electric faders (100mm)	支持多台联机备份/ multi-machine online backup
1个主控电动推杆/1 master control electric fader	支持手持式远程控制/ handheld remote control
5个耐磨编码器 (带PUSH功能) /5wear-resistant encoders (with PUSH function)	支持舞台3D效果模拟, 实时现场模拟/Supports stage 3D effect simulation and real-time live simulation
1个高灵敏轨迹球/1 high-sensitivity trackball	支持RDM管理/Supports RDM (Remote Device Management)
1个千兆以太网口/1 Gigabit Ethernet port	支持WYSIWYG连接/Supports WYSIWYG connection
4个USB2.0口/4 USB 2.0 ports	海量灯库支持/Massive light library support
独立橙色背光按键/Independent orange backlit keys	支持LTP和HTP/Supports LTP (Last Token Priority) and HTP (Highest Token Priority)
MIDI输入输出接口/MIDI input/output interface	强大的Layout管理/Powerful Layout management
LTC/SMPTE时间码/LTC/SMPTE timecode	支持MIDI时间码和内部时间码/ MIDI timecode and internal timecode
支持扩展推杆侧翼/Supports expandable fader wings	支持多用户操作, 并可设置各用户权限/Supports multi-user operation and allows setting user permissions
可外接一个DVI显示器/Can connect an external DVI monitor	颜色, 图案, 光束, 位置等各类型的素材, 每种类型可存1000个/Various types of materials such as color, pattern, beam, and position, with 1,000 storage slots for each type
1个LED鹅颈灯插口/1 LED gooseneck light socket	支持10000个编组, 支持10000个效果/ 10,000 groups and 10,000 effects
固态硬盘一个/One solid-state drive (SSD)	支持10000个程序, 每个程序可包含9999个场景/Supports 10,000 programs, with each program containing up to 9,999 scenes
支持RDM/Supports RDM	

Control System

SL-KT-X2 控台

SL-KT-X2 Console

产品简介 Product Introduction

适用于各种场合的灯光控制，支持各类电脑灯、数字灯、常规灯，稳定性坚若磐石，设计与控制快捷方便。

Suitable for lighting control in various occasions, supporting all kinds of moving head lights, digital lights, and conventional lights. It features rock-solid stability and offers fast and convenient design and control.



硬件/Hardware	软件/Software
Linux操作系统/Linux operating system	支持中英文两种语言/Supports both Chinese and English languages
6/1个DMX输出输入口/ 6/1 DMX input/output ports	Linux操作系统/Linux operating system
最高扩展可支持65536个通道参数/Maximum expansion supports 65,536 channel parameters	支持DMX512, Artnet, ACN协议/DMX512, Artnet, and ACN protocols
内置1个14.5英寸触摸屏 + 1个9英寸触摸屏/Built-in 14.5-inch touchscreen + 1 9-inch touchscreen	系统可通过U盘安装/The system can be installed via a USB flash drive
15个高精度电动推杆 (60mm) /15 high-precision electric faders (60mm)	节目数据可保存在硬盘或U盘/Program data can be saved on a hard disk or USB flash drive
AB场电动推杆 (100mm) /AB-scene electric faders (100mm)	支持多台联机备份/ multi-machine online backup
1个主控电动推杆/1 master control electric fader	支持手持式远程控制/ handheld remote control
6个耐磨编码器 (带PUSH功能) /6 wear-resistant encoders (with PUSH function)	支持舞台3D效果模拟, 实时现场模拟/Supports stage 3D effect simulation and real-time live simulation
1个高灵敏轨迹球/1 high-sensitivity trackball	支持RDM管理/Supports RDM (Remote Device Management)
2个千兆以太网口/2 Gigabit Ethernet port	支持WYSIWYG连接/Supports WYSIWYG connection
内置键盘抽屉 (2个) /Built-in keyboard drawers (2 pieces)	支持LTP和HTP/Supports LTP (Last Token Priority) and HTP (Highest Token Priority)
4个USB2.0口/4 USB 2.0 ports	支持MIDI时间码和内部时间码/ MIDI timecode and internal timecode
独立橙色背光按键/Independent orange backlit keys	强大的Layout管理/Powerful Layout management
MIDI输入输出接口/MIDI input/output interface	支持多用户操作, 并可设置各用户权限/Supports multi-user operation and allows setting user permissions
LTC/SMPTE时间码/LTC/SMPTE timecode	颜色, 图案, 光束, 位置等各类型的素材, 每种类型可存1000个/Various types of materials such as color, pattern, beam, and position, with 1,000 storage slots for each type
支持扩展推杆侧翼/Supports expandable fader wings	支持10000个编组, 支持10000个效果/ 10,000 groups and 10,000 effects
可外接一个DVI显示器/Can connect an external DVI monitor	支持10000个程序, 每个程序可包含9999个场景/Supports 10,000 programs, with each program containing up to 9,999 scenes
2个LED鹅颈灯插口/2 LED gooseneck light socket	
C 宽电压电源: 90-240 V, 50/60Hz/AC wide voltage power supply: 90-240 V, 50/60Hz	
内置不间断UPS电源/Built-in uninterruptible UPS power supply	
固态硬盘一个/One solid-state drive (SSD)	
支持RDM/Supports RDM	

Control System

SL-KT-X6 控台

SL-KT-X6 Console

产品简介 Product Introduction

X6 是自主研发的一款高性能灯光控制台。功能强大，坚若磐石。采用高品质的配件，适用于各种场合的灯光控制，支持各类电脑灯、数字灯常规灯，稳定性坚若磐石，设计与控制快捷方便。

X6 is a high-performance lighting console independently developed by us. It boasts powerful functions and rock-solid stability. Equipped with high-quality components, it is suitable for lighting control in various scenarios, supporting all types of moving head lights, digital lights, and conventional lights. With its rock-solid stability, it enables fast and convenient design and control.



硬件/Hardware	软件/Software
Linux操作系统/Linux operating system	支持中英文两种语言/Supports both Chinese and English languages
6/1个DMX输出输入口/4/1 DMX input/output ports	Linux操作系统/Linux operating system
最高扩展可支持65536个通道参数/Maximum expansion supports 65,536 channel parameters	支持DMX512, Artnet, ACN协议/DMX512, Artnet, and ACN protocols
内置1个15.4英寸触摸屏 + 1个9英寸触摸屏/Built-in 15.4-inch touchscreen + 1 9-inch touchscreen	系统可通过U盘安装/The system can be installed via a USB flash drive
30个高精度电动推杆 (60mm) /30 high-precision electric faders (60mm)	节目数据可保存在硬盘或U盘/Program data can be saved on a hard disk or USB flash drive
2个AB场电动推杆 (100mm) /2 AB-scene electric faders (100mm)	支持多台联机备份/ multi-machine online backup
1个主控电动推杆/1 master control electric fader	支持手持式远程控制/ handheld remote control
7个耐磨编码器 (带PUSH功能) /5 wear-resistant encoders (with PUSH)	支持舞台3D效果模拟, 实时现场模拟/Supports stage 3D effect simulation and real-time live simulation
1个高灵敏轨迹球/1 high-sensitivity trackball	支持RDM管理/Supports RDM (Remote Device Management)
2个千兆以太网口/1 Gigabit Ethernet port	支持WYSIWYG连接/Supports WYSIWYG connection
4个USB2.0口/4 USB 2.0 ports	海量灯库支持/Massive light library support
独立橙色背光按键/Independent orange backlit keys	支持LTP和HTP/Supports LTP (Last Token Priority) and HTP (Highest Token Priority)
内置键盘抽屉 (3个) /Built-in keyboard drawers (3 pieces)	支持MIDI时间码和内部时间码/ MIDI timecode and internal timecode
MIDI输入输出接口/MIDI input/output interface	强大的Layout管理/Powerful Layout management
LTC/SMPTE时间码/LTC/SMPTE timecode	支持多用户操作, 并可设置各用户权限/Supports multi-user operation and allows setting user permissions
支持扩展推杆侧翼/Supports expandable fader wings	颜色, 图案, 光束, 位置等各类型的素材, 每种类型可存1000个
可接两个DVI显示器/It can be externally connected to 2 DVI touch monitors.	/Various types of materials such as color, pattern, beam, and position, with 1,000 storage slots for each type
2个LED鹅颈灯插口/2 LED gooseneck light socket	支持10000个编组, 支持10000个效果/ 10,000 groups and 10,000 effects
AC 宽电压电源: 90-240 V, 50/60Hz/AC wide voltage power supply:	支持10000个程序, 每个程序可包含9999个场景/Supports 10,000 programs, with each program containing up to 9,999 scenes
90-240 V, 50/60Hz	
内置不间断UPS电源/Built-in uninterruptible UPS power supply	
固态硬盘一个/One solid-state drive (SSD)	
支持RDM/Supports RDM	

Control System

SL-M2220K 嵌入式核心主控器

SL-M2220K Embedded core master controller

产品简介 Product Introduction

为迎合智慧城市集控管理以及多元化的控制方式，自主设计和开发的新一代智能灯光管理系统，集成 BTS/GPS/BDS 授时器、内置全网通4G 路由、支持WiFi 通讯、RJ45 通讯、4G 通讯，采用TFT 10.1 寸全彩电容触摸屏，支持3.5mm 音频输出，支持HDMI 输出以及 RJ45 直接输出视频源，支持DMX/RDM 检测（远程设备管理），支持手动模式/自动模式/调试模式；高度集成一体化控制终端设备，颠覆了传统的控制方案。



This device is a new-generation intelligent lighting management system independently designed and developed to meet the centralized control management of smart cities and diversified control methods. It integrates BTS/GPS/BDS time servers, built-in global 4G routing, and supports WiFi communication, RJ45 communication, and 4G communication. Equipped with a 10.1-inch full-color capacitive TFT touchscreen, it supports 3.5mm audio output, HDMI output, and direct video source output via RJ45. It also supports DMX/RDM detection (remote device management) and offers manual mode, automatic mode, and debugging mode. As a highly integrated all-in-one control terminal device, it subverts traditional control solutions.

规格参数表 Specification

序号/NO.	名称 / Product name	参数/Parameter
1	名称 / Product name	嵌入式核心主控器 / Embeddeb core master controller
2	型号 / Item No.	SL-M22202K
3	尺寸 / Dimension	337.6 (L) x230 (W) x50 (H) mm
4	电源 / Driver	AC220V 50Hz
5	额定功率 / Rated power	60W
6	安装方式 / Installation method	固定孔位安装/Fixed hole spacing
7	授时机制 / Timing mechanism	GPS 、 BDS 、 BTS
8	通讯接口 / Communication interface	4G 、 GPRS 、 RJ45、 USB、 RS232
9	4G模块 / 4g module	内置4G 全网通通讯/Built-in 4G full-network communication
10	存储类型 / Storage type	内置32G SSD 固态硬盘\U 盘/Built-in 32G SSD solid-state drive/USB flash drive
11	输出类型 / Output type	2 路千兆RJ45 接口/2 gigabit RJ45 interfaces 1 路USB2.0/1 USB2.0 channel 3 路USB3.0/3 USB3.0 ports 1 路RS232/1 RS232 channel 1 路HDMI/1 HDMI channel 1 路3.5mm 音频接口/One 3.5mm audio interface
12	固定孔间距 / Fixed hole spacing	178mm,320mm
13	防护等级 / Protection grade	IP20
14	工作温度 / Work temperature	-40℃ ~ 50℃
15	适用场所 / Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

AN-BOX-A2 中控主机

AN-BOX-A2 Central control host

产品简介 Product Introduction

AN-BOX-A2是自主研发的一款高性能中控主机，功能强大，体积小，是投影控制系统的首选。

The AN-BOX-A2 is a high-performance central control host independently developed, with powerful functions and a large size. Compact and compact, it is the first choice for projection control systems.



主要性能特点 Main performance

1. 真实双向反馈状态，界面可显示串口及网口被控设备的状态，支持脚本代码程序，可用代码程序处理被控设备的反馈协议。
 2. 同时支持苹果IPAD平板电脑、华为鸿蒙系统、安卓平板电脑、射频触摸屏、windows电脑控制，一个设计器支持所有平台，并且IPAD平板、安卓平板、射频触摸屏及windows电脑的控制界面完全相同，方便用户使用。多种方式，可同时使用，互为备份。
 3. 主机配有10个串口、4个红外口、4-Relays 继电器口、4个IO口等控制口，不集成小矩阵等信号切换系统。
1. True bidirectional feedback status, the interface can display the status of the controlled device through the serial port and network port, supports script code programs, and the feedback protocol of the controlled device can be handled by code programs.
 2. It supports Apple IPAD tablet computer, Huawei HarmonyOS, Android tablet computer, radio frequency touch screen and windows computer control simultaneously. One designer supports all platforms, and the control interfaces of IPAD tablet computer, Android tablet computer, radio frequency touch screen and windows computer computer are exactly the same, which is convenient for users to use. Multiple methods can be used simultaneously and serve as backups for each other.
 3. The main unit is equipped with 10 serial ports, 4 infrared ports, 4 Relays relay ports, 4 IO ports and other control ports, and does not integrate small matrix and other signal switching systems

规格参数表 Specification

序号/NO.	名称/Parameter	参数/Parameter
1	名称 / Product name	中控主机/ Central control host
2	型号 / Item No.	AN-BOX-A2
3	尺寸 / Dimension	480mm (L) x 240mm (D) x 45mm (H)
4	电源 / Driver	100VAC~240VAC,50/60Hz
5	额定功率 / Rated power	60W
6	重量 / Weight	1.8kg
7	处理器/Processor	ARM32
8	通讯接口 / Communication interface	TCP/IP 10/100M自适应(self-adaption), TCP SERVER, UDP
9	红外口 /Infrared port	4
10	控制方式/Control mode	电脑、触摸屏、互联网远程编程/Remote programming via computer, touch screen and Internet
11	接口 / Interface	RS232、RS485/422、IO
12	存储容量/Storage capacity	256M
13	存储类型 / Storage type	FLASH、可扩展/ FLASH、Support for expansion
14	摄像跟踪 / Camera tracking	支持/Support
15	上拉电阻 / Upper resistor	支持/Support
16	电源输出 /Power output	5v
17	防护等级 / Protection grade	IP20
18	工作温度 / Work temperature	-40℃ ~ 50℃
19	适用场所 / Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Splicing processor

AN-BIT-MSE-103PRO 超高清拼接处理器

AN-BIT-MSE-103PRO Ultra-high-definition splicing processor

主要性能特点 Main performance

1. BIT-MSE-4K60-103PRO是专门针对多桌面运行与多通道投影融合需求开发的一款工业级高性能产品，采用HDMI/DP输入接口，HDMI输出接口
2. 超高分辨率，支持最高分辨率3x1920x1200@60Hz、1920x1200x3@60Hz，1进2出单口支,2*3840*2160@30Hz、3840*2160*2@30Hz，向下兼容低分辨率，出厂默认分辨率3072x768@60HZ
3. 采用45nm工艺高端可编程FPGA芯片，全硬件实时处理架构，超快处理速度绝不延迟。
4. 工业级设计，加厚6层PCB板材，16KV超强防静电能力，超强的产品稳定性。
5. 支持并联使用，保障大屏实时显示需求。
6. 低功耗节能环保设计，内部采用传导散热，不需任何外部散热措施，可靠性极高。



1. The BIT-MSE-4K60-103PRO is an industrial-grade high-performance product specifically developed for the requirements of multi-desktop operation and multi-channel projection fusion. It adopts HDMI/DP input interface and HDMI output interface.
2. Ultra high resolution, supports the highest resolution 3x1920x1200@60Hz, 1920x1200x3@60Hz, 1 in 2 out single port,2*3840*2160@30Hz, 3840*2160*2@30Hz, backward compatible with low resolution Factory default resolution 3072x768@60HZ.
3. It adopts a high-end programmable FPGA chip with a 45nm process, featuring a full hardware real-time processing architecture and ultra-fast processing speed with no delay at all.
4. Industrial-grade design, thickened 6-layer PCB board, 16KV super anti-static capability, and super product stability.
5. Supports parallel use to ensure real-time display requirements on large screens.
6. It features a low-power consumption, energy-saving and environmentally friendly design. The interior adopts conductive heat dissipation, eliminating the need for any external heat dissipation measures and ensuring extremely high reliability.

规格参数表 Specification

序号/NO.	名称/Parameter	参数/Parameter
1	名称 / Product name	超高清拼接处理器/ Ultra-high-definition splicing processor
2	型号 / Item No.	BIT-MSE-4K60-103PRO
3	输入接口最高视频像素频率/maximum video of the input	600MHz
4	输出接口最高视频像素频率/maximum video of the output	330MHz
5	支持最高分辨率/Support the highest resolution	3x1920x1200@60Hz 1920x1200x3@60Hz 2*3840*2160@30Hz、3840*2160*2@30Hz
6	输入接口类型/Input interface type	HDMI、DP
7	输入线长/Input line length	HDMI : 3m DP: 3m
8	输出接口类型/Output interface type	3xHDMI
9	输出线长/output line length	15m
10	电源/Power	12V@2A AC-DC

Splicing processor

AN-BIT-MSE-104PRO 超高清拼接处理器

AN-BIT-MSE-104PRO Ultra-high-definition splicing processor

主要性能特点 Main performance

- 1.BIT-MSE-4K60-104PRO创意超清处理器是专门针对多桌面运行与多通道投影融合需求开发的一款工业级高性能产品，采用HDMI/DP输入接口，DMI输出。
- 2.超高分辨率，输出最高支持分辨率4x1920x1200@60Hz/1920x1200x4@60Hz，向下兼容低分辨率。
- 3.支持1xN, Nx1, MxN以及旋转90° 等比拼接，不拉伸，不变形，视野更开阔。
- 4.采用45nm工艺高端可编程FPGA芯片，全硬件实时处理架构，超快处理速度不延迟。
- 5.工业级设计，加厚6层PCB板材，16KV超强防静电能力，超强的产品稳定性。
- 6.支持并联使用，保障大屏实时显示需求。
- 7.低功耗节能环保设计，内部采用传导散热，不需任何外部散热措施，可靠性极高



- 1.The BIT-MSE-4K60-104PRO Creative Ultra-clear processor is an industrial-grade high-performance product specifically developed for the requirements of multi-desktop operation and multi-channel projection fusion. It adopts HDMI/DP input interfaces and DMI output.
2. Ultra high resolution, output maximum supported resolution 4x1920x1200@60Hz/1920x1200x4@60Hz, backward compatible with low resolution.
3. It supports 1xN, Nx1, MxN and 90° rotation ratio splicing without stretching or deforming, providing a wider field of view.
4. It adopts a high-end programmable FPGA chip with a 45nm process, featuring a full hardware real-time processing architecture and ultra-fast processing speed without delay.
5. Industrial-grade design, thickened 6-layer PCB board, 16KV super anti-static capability, and super product stability.
6. Supports parallel use to ensure real-time display requirements on large screens.
7. It features a low-power consumption, energy-saving and environmentally friendly design. The interior adopts conductive heat dissipation, eliminating the need for any external heat dissipation measures and ensuring extremely high reliability

规格参数表 Specification

序号/NO.	名称/Parameter	参数/Parameter
1	名称 / Product name	超高清拼接处理器/ Ultra-high-definition splicing processor
2	型号 / Item No.	BIT-MSE-4K60-104PRO
3	输入接口最高视频像素频率/maximum video of the input	600MHz
4	输出接口最高视频像素频率/maximum video of the input	330MHz
5	输入接口类型/Input interface type	HDMI, DP
6	输出接口类型/output interface type	4xHDMI
7	2屏支持分辨率/2 screens support resolution	2x3840x2160@30Hz 3840x2160x2@30Hz
8	3屏支持分辨率/3 screens support resolution	3x1920x1200@60Hz 3x1920x1080@60Hz 1920x1200x3@60Hz 1920x1080x3@60Hz
9	4屏支持分辨率/4 screens support resolution	4x1920x1200@60Hz 4x1920x1080@60Hz 1920x1200x4@60Hz 1920x1080x4@60Hz
10	出厂默认分辨率/Default resolution	3840x2160@60Hz
11	2x2最高支持分辨率/2x2Maximum resolution	3840x2400@60Hz
12	2x1/1x2最高支持分辨率/2x1 1x2 Maximum resolution	7680x2160@30Hz/3840x4320@30Hz
13	3x1/1x3最高支持分辨率/3x1 1x3 Maximum resolution	1920x3600@60Hz/5760x1200@60Hz
14	4x1/1x4最高支持分辨率/4x1 1x4 Maximum resolution	1920x4800@60Hz/7680x1200@60Hz
15	输入线长/Input line length	≤3m
16	输出线长/output line length	≤15m
17	电源/Power	12V@2A AC-DC

AN-BIT-Ex-KVM 高清视频光纤延长器

AN-BIT-Ex-KVM high-definition video fiber extender

主要性能特点 Main performance

- 1.BIT-Ex-Fib-KVM 是一款零延时无压缩的远距离传输器，工业化外观设计兼具质感与坚固的内部保护，并且方便安装。
- 2.选用行业内最先进视频处理芯片，功能强大、画面还原度高、传输距离远且功耗低。
- 3.光纤最远的传输距离可支持到30千米，HDMI接口输入输出，传输无延时、无压缩画面无伪影。
- 4.输出端支持常规视频分辨率自定义设定，匹配不同的显示设备，最高支持分辨率达到3840x2160@30Hz，向下兼容低分辨率。
- 5.采用纯硬件设计架构，无需任何软件驱动，即插即用。
- 6.支持双向RS232通讯功能。
- 7.支持USB-KVM功能，双USB接口连接鼠标和键盘。
- 8.学习EDID,读到显示器EDID方便使用。




- 1.BIT-Ex-Fib-KVM is a zero-delay and uncompressed long-distance transmitter. Its industrial appearance design combines texture and sturdy internal protection, and it is convenient to install.
2. The most advanced video processing chips in the industry are selected, featuring powerful functions, high picture fidelity, long transmission distance and low power consumption.
- 3.The maximum transmission distance of optical fiber can be supported up to 30 kilometers. It features HDMI interface input and output, ensuring no transmission delay, no compression and no artifacts in the picture.
4. Output supports custom setting of regular video resolution to match different display devices, with the maximum supported resolution reaching 3840x2160@30Hz, and backward compatible with low resolution.
5. It adopts a pure hardware design architecture, requiring no software drivers and is plug-and-play.
6. Support two-way RS232 communication function.
7. Supports USB-KVM function, with dual USB interfaces for connecting the mouse and keyboard.
8. Learn EDID and read the display EDID for convenient use.

规格参数表 Specification

序号/NO.	名称/Parameter	参数/Parameter
1	名称 / Product name	高清视频光纤延长器/ High-definition video optical fiber extender
2	型号 / Item No.	AN-BIT-Ex-KVM
3	支持协议/Support agreement	HDMI 1.4; HDCP 1.4
4	最大时钟频率/Maximum clock frequency	297MHz
5	最大支持分辨率/Maximum supported resolution	3840x2160@30Hz
6	输入线长/Input line length	<5m
7	接口类型/Interface type	LC-LC单模光纤(Single-mode optical fiber)\交换机(Switch)\RS232\HDMI
8	光纤传输距离/Optical fiber transmission distance	10KM
9	尺寸/Size	136*85*26mm
10	功率/Power	6W
11	电源/Power Supply	DC 12V/2.0A
12	工作温度/Working temperature	0℃~+70℃

连接示意图 Connection schematic diagram

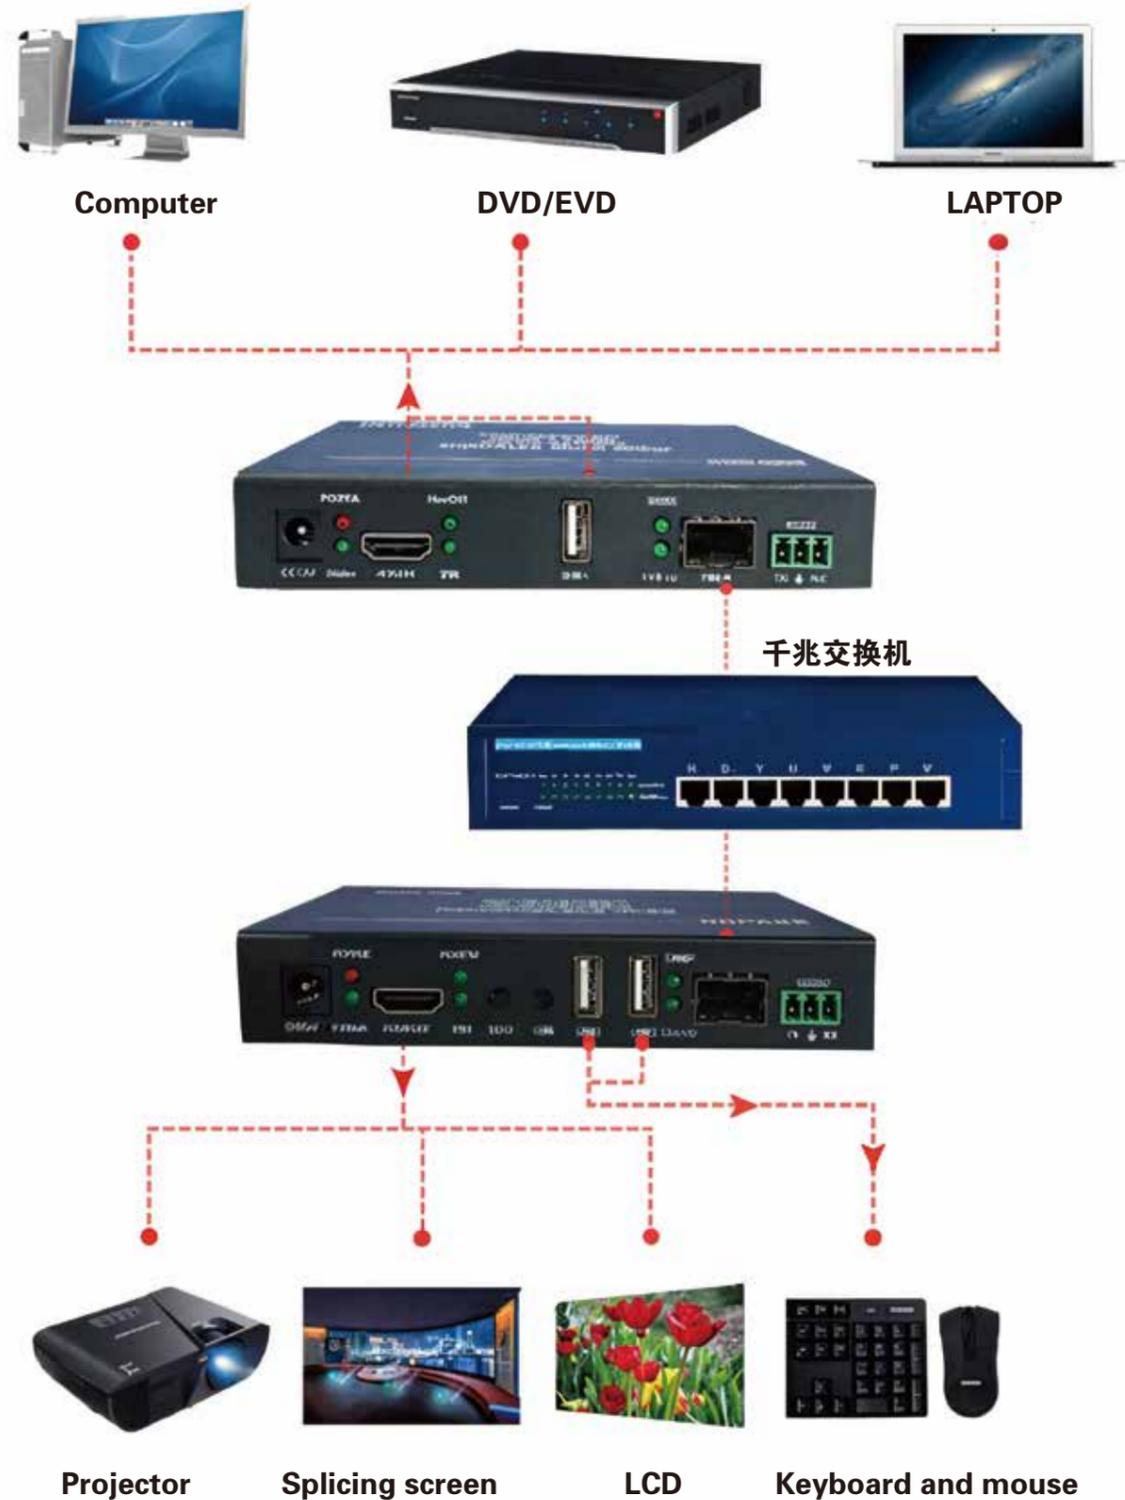

AN-BIT-Ex-100 高清视频光纤延长器 AN-BIT-Ex-100 high-definition video fiber extender

主要性能特点 Main performance

1. 支持全高清/超高清视频信号：1080P 3D和4Kx2K分辨率。
2. 单根CAT5e电缆传输分辨率为1080P的HDMI信号最大距离为100米，CAT6E传输分辨率为4Kx2K的HDMI信号最大距离为100米。
3. 采用标准HD-BaseT传输协议，传输距离长，速度快，视频信号无压缩，画质清晰流畅，性能可靠，稳定性强，故障率低，采用无风扇低功耗设计能有效降低施工难度以及售后成本。
4. HDBaseT标准支持网线供电POE，只需给单台（TX/RX）设备供12V 2A电源。
5. 采用纯硬件设计架构，即插即用，无需任何软件驱动。
6. 支持CEC/IR/RS232透传
7. 支持双向RS232通讯功能
8. 支持双向IR控制功能



1. Support full HD/Ultra HD video signals: 1080P 3D and 4Kx2K resolutions.
2. The maximum distance for a single CAT5e cable to transmit an HDMI signal with a resolution of 1080P is 100 meters, and the maximum distance for a CAT6E cable to transmit an HDMI signal with a resolution of 4Kx2K is also 100 meters.
3. It adopts the standard HD-BaseT transmission protocol, featuring long transmission distance, high speed, uncompressed video signal, clear and smooth picture quality, reliable performance, strong stability, low failure rate. The fanless and low-power consumption design can effectively reduce the construction difficulty and after-sales cost.
4. The HDBaseT standard supports POE power supply via network cables, requiring only a 12V 2A power supply to a single (TX/RX) device.
5. It adopts a pure hardware design architecture, is plug-and-play, and does not require any software drivers.
6. Supports CEC/IR/RS232 transparent transmission
7. Support two-way RS232 communication function
8. Support bidirectional IR control function

规格参数表 Specification

序号/NO.	名称 / Product name	参数/Parameter
1	名称 / Product name	高清视频光纤延长器 / High-definition video optical fiber extender
2	型号 / Item No.	AN-BIT-Ex-100
3	支持协议 / Support agreement	HDMI2.0/HDCP2.2
4	最大时钟频率 / Maximum clock frequency	297MHz
5	最大支持分辨率 / Maximum supported resolution	4k*2k@30Hz
6	输入线长 / Input line length	<5m
7	接口类型 / Interface type	LC-LC单模光纤 (Single-mode optical fiber) \ 交换机 (Switch) \ RS232 \ HDMI \ RJ45
8	光纤传输距离 / Optical fiber transmission distance	10KM
9	尺寸 / Size	136*85*26mm
10	功率 / Power	12W
11	电源 / Power Supply	DC 12V/2.0A
12	工作温度	0°C~+70°C

Shanghai SHYLON Optoelectronics Technology Co., Ltd.

Shanghai: Room 120, No. 1, Lane 2, Suide Rd, Putuo District, Shanghai CHINA 200331

Kunshan: (SHYLON Industrial Park)No.1186-1, Pengqing Rd, Huaqiao, Kunshan, Jiangsu, CHINA 215332

Tel: +86-512-50339960 50339961 50339962 50339963 50339969

FAX: +86-512-50339972

Web: www.shylon.com

Mail: info@shylon.com

上海芯龙光电科技股份有限公司

上海: 上海市普陀区绥德路2弄1号 120室

昆山: 江苏省昆山市花桥镇蓬青路1186-1号(芯龙光电产业园)

电话: +86-512-50339960 50339961 50339962 50339963 50339969

传真: +86-512-50339972

官网: www.shylon.com

邮箱: info@shylon.com

