

Belanko™ S



S I M P L I C I T Y

M E E T S S T Y L E


STRONG OFFERINGS



White



3 gang switch

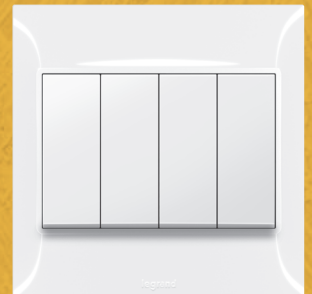

4 gang switch



BS socket outlet with USB A-Type and C-Type charger



BS socket outlet with USB A-Type charger




Shaver socket



Indicator for corridor



Key card switch

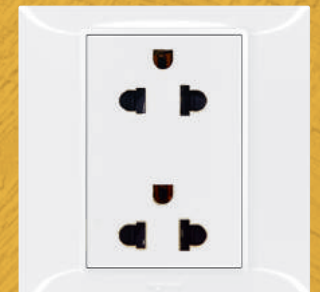

Euro/Us socket outlet

1: Available on request

STYLISH DESIGN



Anthracite



Ivory



6 176 01



6 176 05



6 176 07



6 176 11



6 176 16

Conform to BS EN 60669-1
 Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Single pole switches 10 AX - 250 V~
10	6 176 00	1 gang - 1-way switch ○ White ● Anthracite ● Ivory
10	6 177 00	
10	6 178 00	
10	6 176 01	1 gang - 2-way switch ○ White ● Anthracite ● Ivory
10	6 177 01	
10	6 178 01	
10	6 176 02	2 gang - 1-way switch ○ White ● Anthracite ● Ivory
10	6 177 02	
10	6 178 02	
10	6 176 03	2 gang - 2-way switch ○ White ● Anthracite ● Ivory
10	6 177 03	
10	6 178 03	
10	6 176 09	Intermediate switch ○ White ● Anthracite ● Ivory
10	6 177 09	
10	6 178 09	
10	6 176 04	3 gang - 1-way switch ○ White ● Anthracite ● Ivory
10	6 177 04	
10	6 178 04	
10	6 176 05	3 gang - 2-way switch ○ White ● Anthracite ● Ivory
10	6 177 05	
10	6 178 05	
10	6 176 06	4 gang - 1-way switch ○ White ● Anthracite ● Ivory
10	6 177 06	
10	6 178 06	
10	6 176 07	4 gang - 2-way switch ○ White ● Anthracite ● Ivory
10	6 177 07	
10	6 178 07	

Pack	Cat.Nos	Single pole switches 20 AX - 250 V~
10	6 176 20	1 gang - 1-way switch ○ White ● Anthracite ● Ivory
10	6 177 20	
10	6 178 20	
10	6 176 21	1 gang - 2-way switch ○ White ● Anthracite ● Ivory
10	6 177 21	
10	6 178 21	
10	6 176 22	2 gang - 1-way switch ○ White ● Anthracite ● Ivory
10	6 177 22	
10	6 178 22	
10	6 176 23	2 gang - 2-way switch ○ White ● Anthracite ● Ivory
10	6 177 23	
10	6 178 23	
10	6 176 24	3 gang - 1-way switch ○ White ● Anthracite ● Ivory
10	6 177 24	
10	6 178 24	
10	6 176 25	3 gang - 2-way switch ○ White ● Anthracite ● Ivory
10	6 177 25	
10	6 178 25	
10	6 176 10	1 gang ○ White ● Anthracite ● Ivory
10	6 177 10	
10	6 178 10	
10	6 176 15	2 gang ○ White ● Anthracite ● Ivory
10	6 177 15	
10	6 178 15	
10	6 176 11	Bell push ○ White ● Anthracite ● Ivory
10	6 177 11	
10	6 178 11	
10	6 176 16	2 gang for shutters ○ White ● Anthracite ● Ivory
10	6 177 16	
10	6 178 16	

Belanko™ S

double pole switches and cooker control unit



Belanko™ S

dimmers and ventilation control



6 176 72



6 176 76



6 176 35



6 176 33

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
 Supplied with 2 screws M3.5 for BS boxes

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Double pole switches 20 A - 250 V~
10	6 176 73	1 gang - 1-way switch ○ White ● Anthracite ○ Ivory
10	6 177 73	
10	6 178 73	
10	6 176 70	1 gang - 1-way switch + red neon indicator ○ White ● Anthracite ○ Ivory
10	6 177 70	
10	6 178 70	
10	6 176 71	1 gang - 1-way switch + red neon indicator + earth connection ○ White ● Anthracite ○ Ivory
10	6 177 71	
10	6 178 71	
10	6 176 72	1 gang - 1-way switch + red neon indicator + earth connection with "Water Heater" marking ○ White ● Anthracite ○ Ivory
10	6 177 72	
10	6 178 72	
5	6 176 75	Double pole switches 45 A - 250 V~ 1 gang - 1-way switch ○ White ● Anthracite ○ Ivory
5	6 177 75	
5	6 178 75	
5	6 176 76	1 gang - 1-way switch + red neon indicator ○ White ● Anthracite ○ Ivory
5	6 177 76	
5	6 178 76	
5	6 176 77	2 gang - 1-way vertical switch + red neon indicator ○ White ● Anthracite ○ Ivory
5	6 177 77	
5	6 178 77	
5	6 176 78	Cooker control unit - 250 V 45 A double pole switch + red neon and 13 A BS switched socket outlet + red neon ○ White ● Anthracite ○ Ivory
5	6 177 78	
5	6 178 78	

Pack	Cat.Nos	Dimmers
1	6 176 31	500 W RL dimmer Push on/off and rotary dimmer - 50/60 Hz 1 gang - 2-way : - 60-500 W (127 V) for incandescent and halogen lamps - 60-600 VA (230 V) / 60-300 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour - 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers Slider at the back to select 230 V or 127 V ○ White ● Anthracite ○ Ivory
1	6 177 31	
1	6 178 31	
1	6 176 35	300 W RLC+LED dimmer For all types of lamps: - dimmable LEDs: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - fluorescent tube - ballast: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - halogen and incandescent 240 VA: 5 W to 300 W / 5 W to 150 W (127 V) When switched on, gradually (2 seconds) lights up at the level set before last switch-off ○ White ● Anthracite ○ Ivory
1	6 177 35	
1	6 178 35	
1	0 401 49	Active Power Compensator Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption 0.4 W
1	6 176 33	Ventilation control Conform to BS EN 60669-1 Fan control 250 V~ - 50 Hz ○ White ● Anthracite ○ Ivory
1	6 177 33	
1	6 178 33	



6 176 27 6 176 91 6 176 34

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Television sockets
10	6 176 27	Single TV socket, female <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 27	
10	6 178 27	
10	6 176 26	Single TV socket, "F" type <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 26	
10	6 178 26	
10	6 176 38	Double TV socket, female + "F" type <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 38	
10	6 178 38	
10	6 176 30	TV-R socket <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 30	
10	6 178 30	

Pack	Cat.Nos	Telephone sockets
10	6 176 97	Telephone connection block RJ 11 socket <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 97	
10	6 178 97	
10	6 176 98	Double RJ 11 socket <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 98	
10	6 178 98	

Pack	Cat.Nos	Data sockets
10	6 176 91	RJ 45 Cat.6 UTP <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 91	
10	6 178 91	
10	6 176 92	Double RJ 45 Cat.6 UTP <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 92	
10	6 178 92	
10	6 176 17	1 gang - single Keystone adaptor <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 17	
10	6 178 17	
10	6 176 34	1 gang - double Keystone adaptor <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 34	
10	6 178 34	



6 176 82 6 176 85

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Fused connection units 13 A
10	6 176 80	Conform to BS 1363-4 Unswitched + cord outlet <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 80	
10	6 178 80	
10	6 176 81	Switched + cord outlet <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 81	
10	6 178 81	
10	6 176 60	Unswitched + neon + cord outlet <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 60	
10	6 178 60	
10	6 176 82	Switched + neon + cord outlet <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 82	
10	6 178 82	

Pack	Cat.Nos	Cable outlets
10	6 176 85	Conform to BS 5733 20 A - 250 V~ <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 85	
10	6 178 85	
10	6 176 86	45 A - 250 V~ <ul style="list-style-type: none"> ○ White ● Anthracite ○ Ivory
10	6 177 86	
10	6 178 86	

Belanko™ S

hotel equipment



6 176 12



6 176 08

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Key card switch
1	6 176 12	16 A - 230 V~ - 50/60 Hz Time delay of approx. 30 s after card removal Use card with width max. 54 mm
1	6 177 12	○ White
1	6 178 12	● Anthracite ○ Ivory

Pack	Cat.Nos	Hotel bedrooms call indicators
10	6 176 13	2 settings : - Do not disturb - Please clean the room
10	6 177 13	Indicator for corridor Installed in the corridor, displays calls
10	6 178 13	○ White ● Anthracite ○ Ivory
10	6 176 14	Internal control unit Installed in the room, allows the user to select the desired setting
10	6 177 14	○ White
10	6 178 14	● Anthracite ○ Ivory

Pack	Cat.Nos	Shaver sockets
1	6 176 08	Conform to BS 61558. 115/230 V - 20 VA - 50/60 Hz Surface or flush-mounting, back box to be min. 47 mm deep. Spacer delivered to fit in standard box, deep 35 mm
1	6 177 08	2 gang
1	6 178 08	○ White ● Anthracite ○ Ivory


Pack	Cat.Nos	Security switch
1	6 176 19	1 A resistive - 250 V~
1	6 177 19	Panic button
1	6 178 19	○ White ● Anthracite ○ Ivory

Pack	Cat.Nos	Arteor adaptor
20	6 176 37	Allows the integration of 2 modules Arteor mechanisms such as R.C.B.O., automatic switch, skirting lights, USB charger, etc
20	6 177 37	1 gang
20	6 178 37	○ White ● Anthracite ○ Ivory

Belanko™ S

hotel equipment

Guest Room Management System

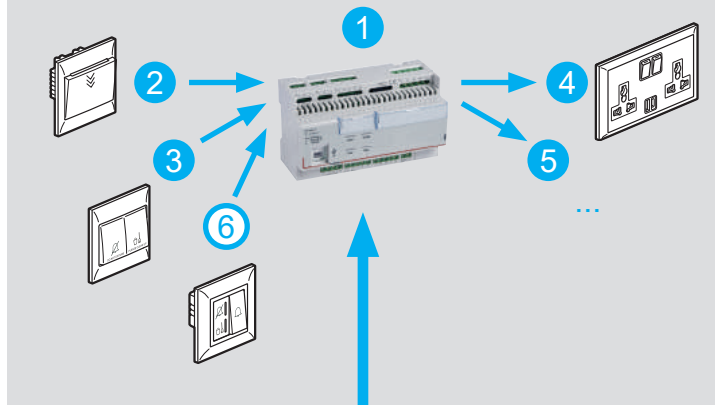

The Room Controller Unit, Cat.No 048408 or 048412, associated with mechanical Belanko™ S functions can manage the lights, sockets outlet, ventilation and curtains independently in each room. It can be integrated with the Building Management System (BMS) and the Property Management System (PMS) in order to enable a global management of the building and the hotel's operations.

For complementary information on the Room controller, please contact us



Belanko™ S

socket outlets (continued)



6 176 64



6 176 55

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack Cat.Nos Euro/US socket outlets - 16 A - 250 V~ / 15 A - 127 V~

Pack	Cat.Nos	1 gang - 2 x 2P
10	6 176 62	○ White
10	6 177 62	● Anthracite
10	6 178 62	○ Ivory
1 gang - 2 x 2P switched		
10	6 176 90	○ White
10	6 177 90	● Anthracite
10	6 178 90	○ Ivory
1 gang - 2 x 2P+E		
10	6 176 64	○ White
10	6 177 64	● Anthracite
10	6 178 64	○ Ivory

German Standard socket outlet 16 A - 250 V~

Pack	Cat.Nos	1 gang - 2P+E with shutters for child protection
10	6 176 56	○ White
10	6 177 56	● Anthracite
10	6 178 56	○ Ivory

Multistandard switched socket outlet

Pack	Cat.Nos	1 gang
10	6 176 67	○ White
10	6 177 67	● Anthracite
10	6 178 67	○ Ivory
2 gang		
4	6 176 69	○ White
4	6 177 69	● Anthracite
4	6 178 69	○ Ivory

Multistandard switched socket outlets 16 A 250 V~ / 15 A - 127 V~ with USB charger

Shuttered for child safety
 USB charger conform to IEC 60950-1

Pack	Cat.Nos	1 gang - 2P+E
1	6 176 59	○ White
1	6 177 59	● Anthracite
1	6 178 59	○ Ivory
2 gang - 2 x 2P+E		
1	6 176 55	○ White
1	6 177 55	● Anthracite
1	6 178 55	○ Ivory

USB A-Type 2.4 A - 5 V_{DC} - 12 W
 Consumption in passive mode < 0.08 W

USB A-Type + C-Type 3 A - 5 V_{DC} - 15 W
 Consumption in passive mode < 0.08 W

Belanko™ S

blanking plates and accessories



6 176 37 + 5 720 72



6 176 36



6 133 50

Pack Cat.Nos Blanking plates

Conform to BS 5733

Pack	Cat.Nos	1 gang
10	6 176 28	○ White
10	6 177 28	● Anthracite
10	6 178 28	○ Ivory
2 gang		
5	6 176 39	○ White
5	6 177 39	● Anthracite
5	6 178 39	○ Ivory

Arteor adaptor

Allows the integration of 2 modules Arteor mechanisms such as R.C.B.O., automatic switch, skirting lights, USB charger, etc

Pack	Cat.Nos	1 gang
20	6 176 37	○ White
20	6 177 37	● Anthracite
20	6 178 37	○ Ivory

Pack Cat.Nos Fixing accessories

Splash-proof cover
 Mainly for socket protection IP 55 with or without plug engaged
 Space inside : 86 x 86 mm

Pack	Cat.Nos	1 gang
2	6 176 36	● Mist grey

Surface-mounting boxes

Conform to BS 5733
 Depth 35 mm

Pack	Cat.Nos	1 gang
8	6 133 50	○ White
2 gang		
4	6 133 51	○ White



For integration of 250 Arteor functions, see Arteor offer



WEBSITE: <https://legrand.vn/>

EMAIL: info@legrand.vn