


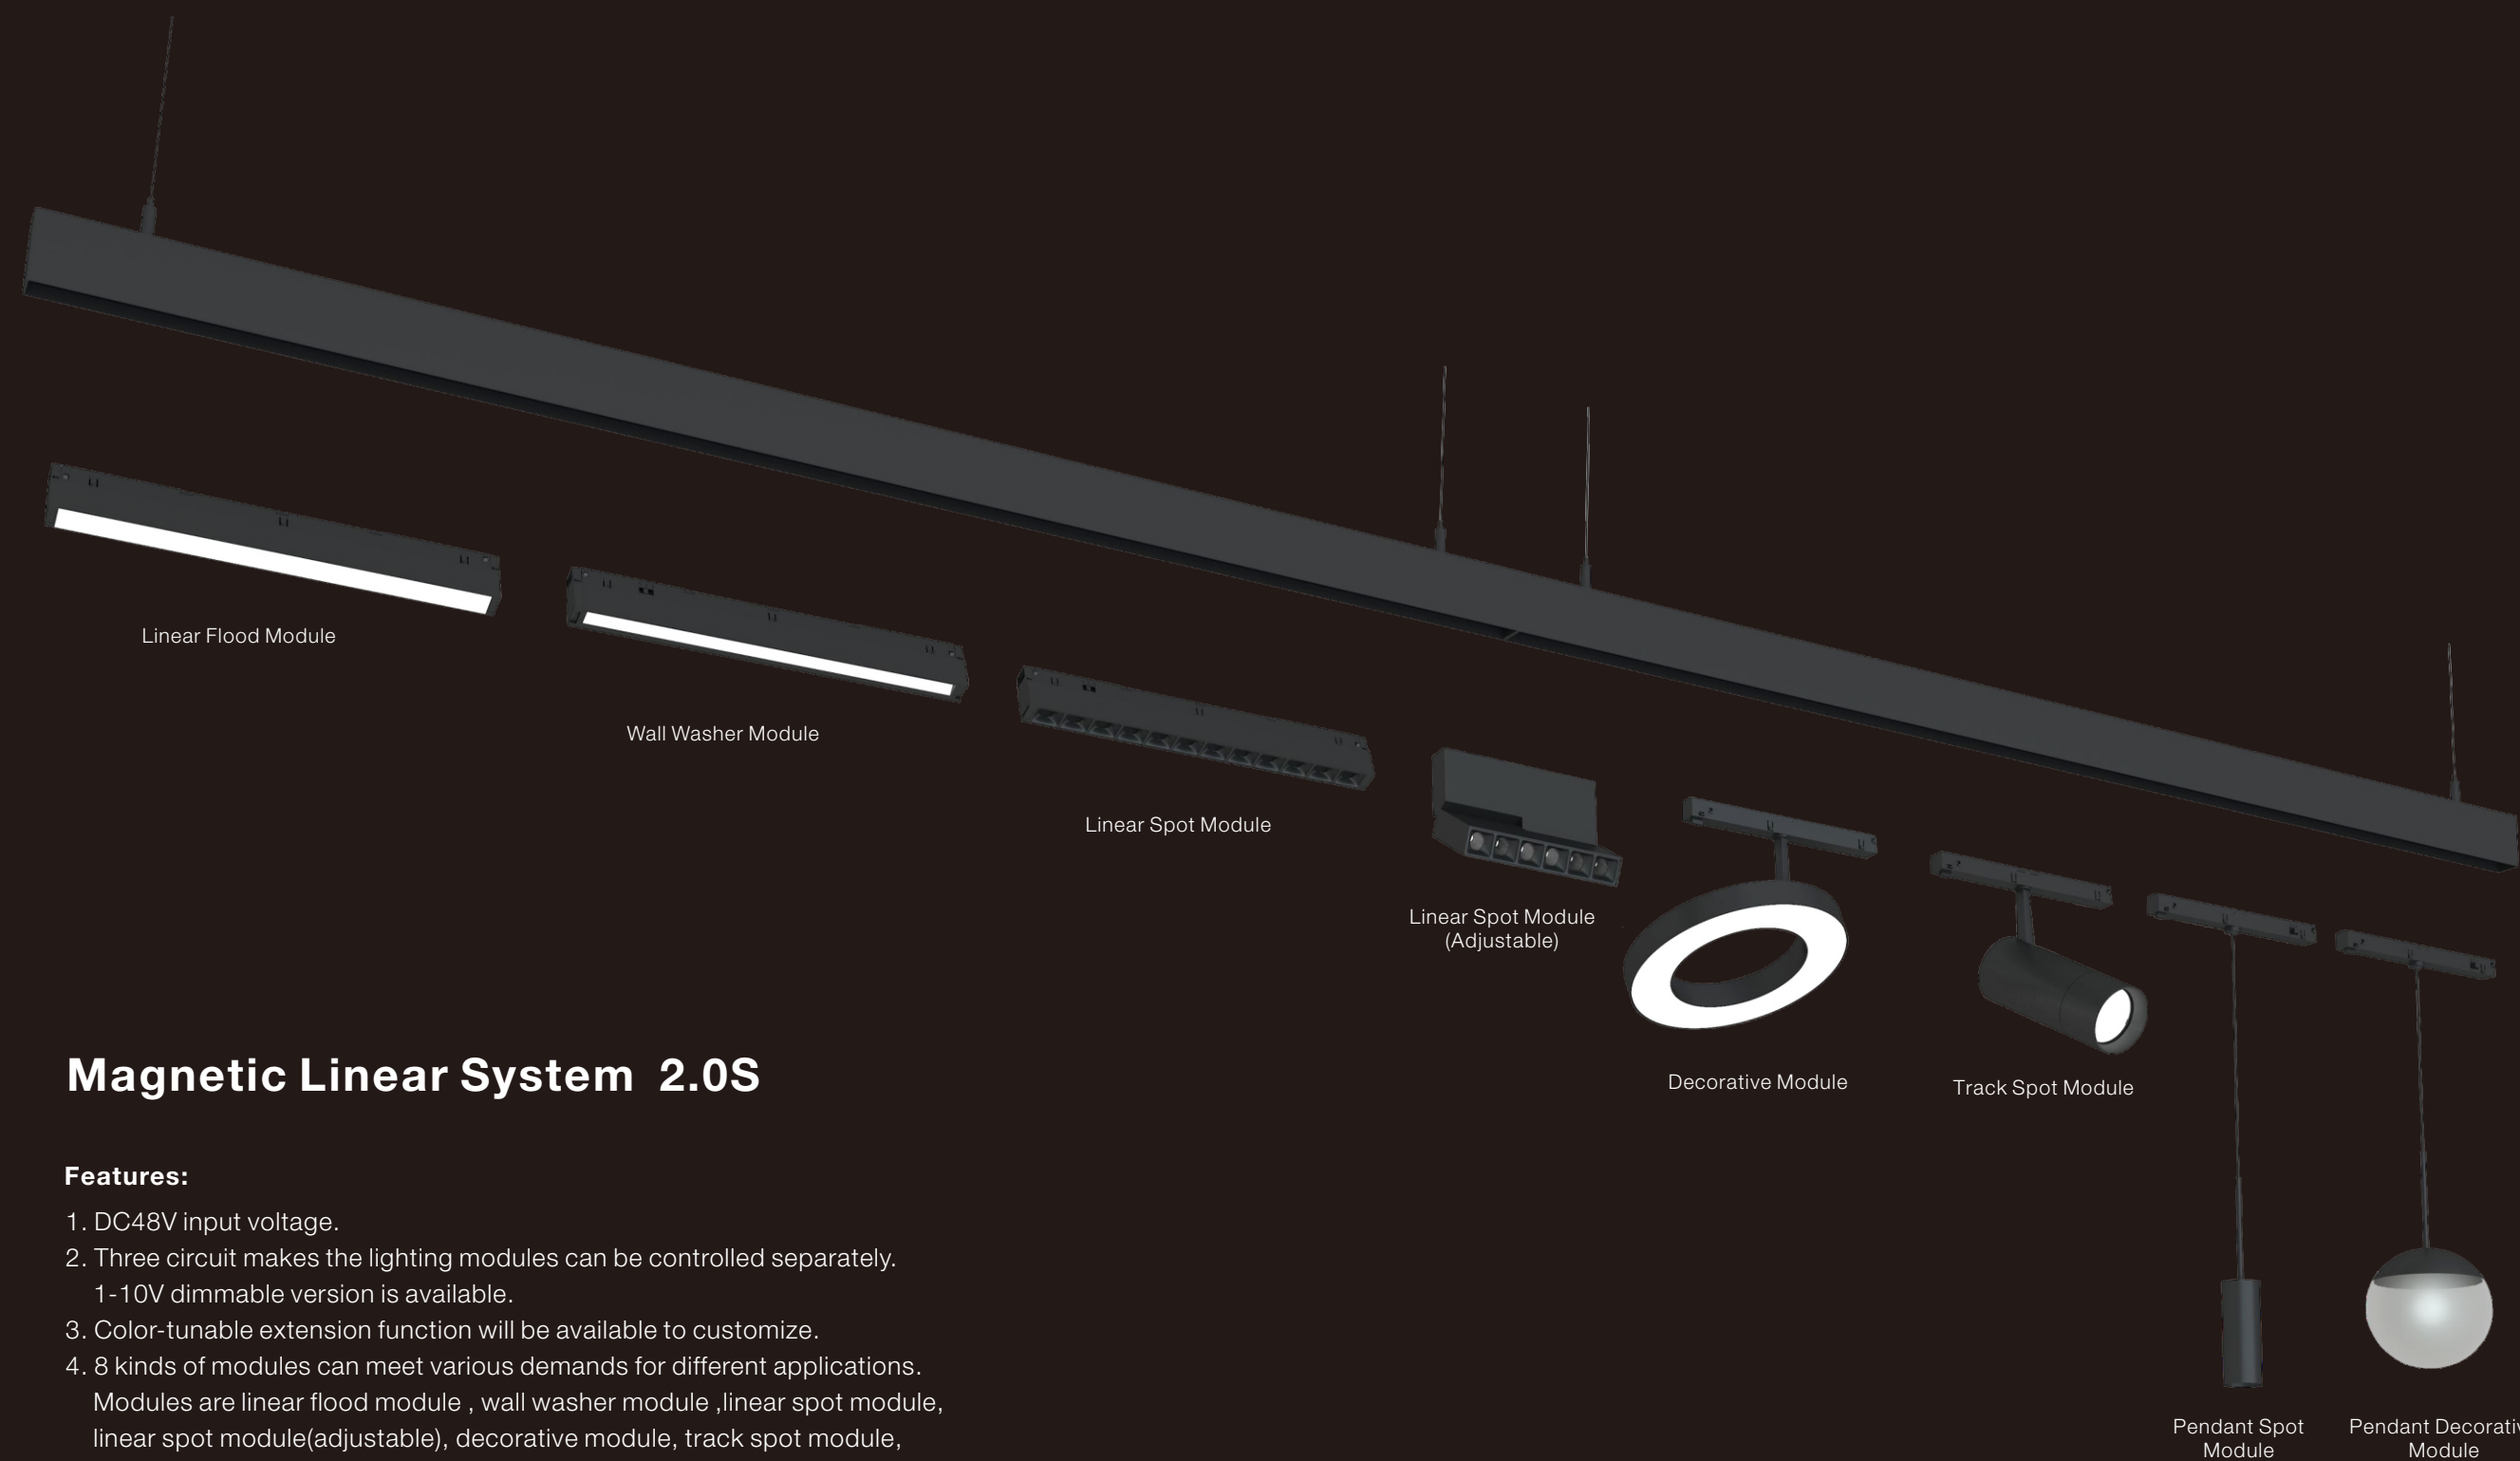

Magnetic Linear System 2.0S

Features:

1. DC48V input voltage.
2. Three circuit makes the lighting modules can be controlled separately.
1-10V dimmable version is available.
3. Color-tunable extension function will be available to customize.
4. 8 kinds of modules can meet various demands for different applications.
Modules are linear flood module , wall washer module ,linear spot module, linear spot module(adjustable), decorative module, track spot module, pendant spot module, pendant decorative module.

Four kinds of installation

Recessed(Trimless)

Recessed(Narrow trim)








Surface-mounted

Surface-mounted

Pendant




Magnetic Linear System 2.0S (Coming soon)

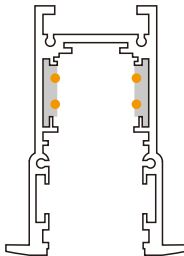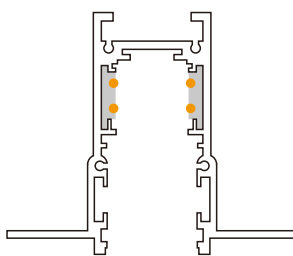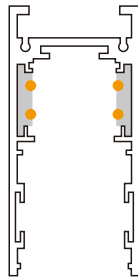Profile		 Recessed(Narrow trim) CXL25		 Recessed(Trimless) CXL25W		 Surface-mounted plus/Pendant CXL25M		 Surface-mounted basic/Pendant CXL25MJ	
LED Module	Options	Linear Flood Module  CXL25B02 CXL25B03 CXL25B09 CXL25B06 CXL25B12	Wall Washer Module  CXL35S03 CXL35S06	Linear Spot Module  CXL25S02	Linear Spot Module (Adjustable)  CXL25S02A CXL25S03A	Track Spot Module  CXL25L	Pendant Spot Module  CXL25D	Pendant Decorative Module  CXL25E	Decorative Module  CXL25R
	LED								
	CRI & CCT	Ra ≥ 90 2700K/3000K/3500K/4000K							
	Beam	110°	Wall washing	12°/34°/48°		12°/24°/36°		180°	110°
	Wattage &Lumen	5W / 350lm 14W / 1000lm 28W / 2000lm	7W / 500lm 21W / 1500lm	10W / 500lm 20W / 1000lm 40W / 2000lm	10W / 500lm 20W / 1000lm	7W / 420lm 9W / 550lm 15W / 900lm 30W / 1800lm	7W / 420lm 9W / 550lm 15W / 900lm	7W / 420lm 9W / 550lm	
Power Supply	Constant Voltage Driver	 CVD/100/48 DC48V 100W 220-240VAC IP 20				 CVD/200/48 DC48V 200W 220-240VAC IP 20			
Installation Accessories	/		/		 Surface mounted kit CXL25M-XDB		 Pendant kit CXL25M-DXB		

Features

Self-locking safety design

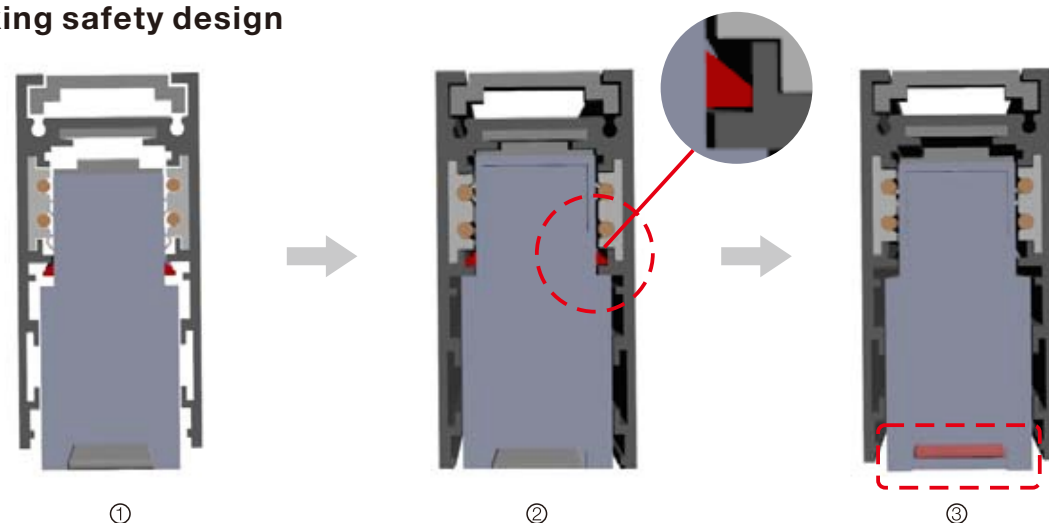


- ① The light module can be installed easily just by pushing it into the track profile
- ② When pushing the light module into the profile, the clips will pop up to fix the light module at proper position to avoid falling down because of demagnetization when the temperature becomes very high.
- ③ To remove the light module, just need to press the red buttons at the two ends. When pressing the buttons, the clips inside will pinch in, the light module will be easily pulled out.

Drivers integrated with profile design




Our special designed constant voltage driver can be put into the track profile. This design makes the installation and maintenance become very easy because installers no need to find a remote place to install the driver separately. In case of a driver failed, the replacement is so easy just by taking out the failed driver from the track and put a new one in.


Easy maintainance

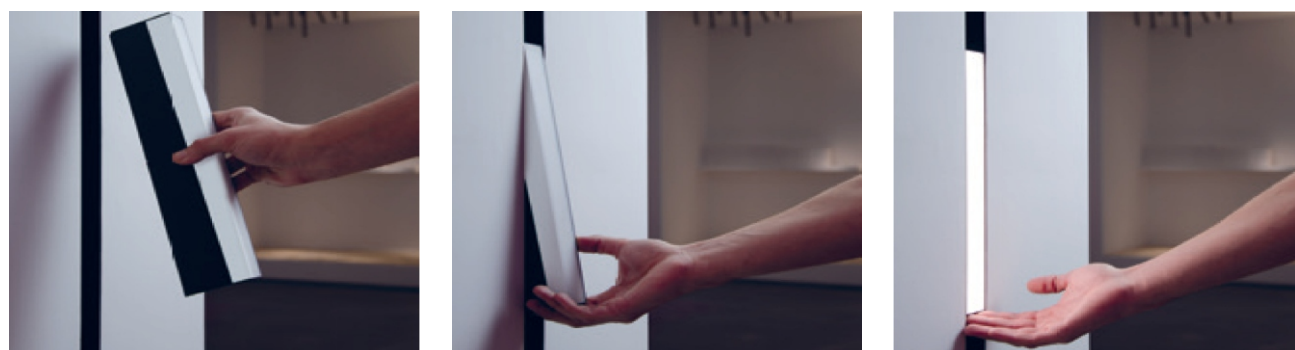

Magnetic fixing design gives more convenience to installation and more flexibility to end users to use lighting. End users can put different light modules at any position they want according to various lighting effects needed.


3 phase track gives flexibility to end user to control each light individually and generate different lighting environment.

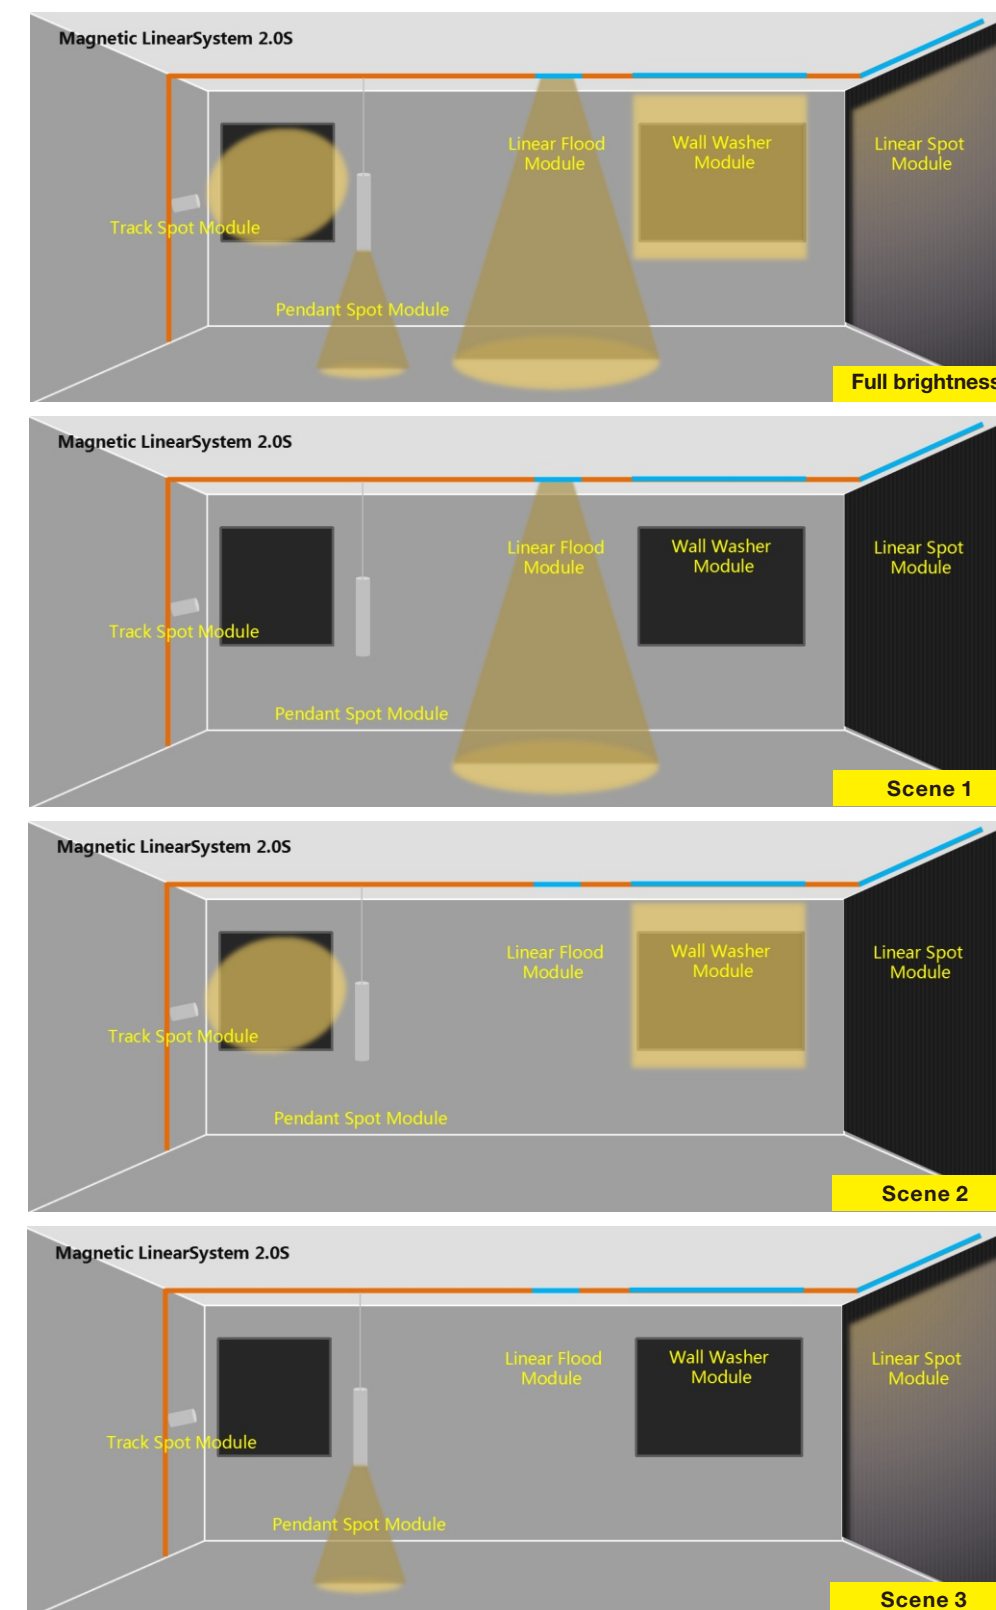

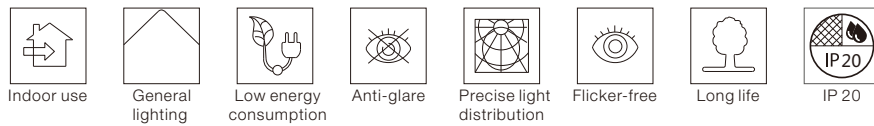

Features

1. Installation way including surface-mounted, suspended, narrow trim recessed, trimless recessed, to satisfy different decoration styles.
2. This system is wired to mains supply from one end of the track profile. Also, self-locking latch function greatly improve the safety factor.
3. The "I" shape conductive connector perfectly solves the connecting problem after cutting profile.
4. Module design makes lighting combination can be easily done by end users.

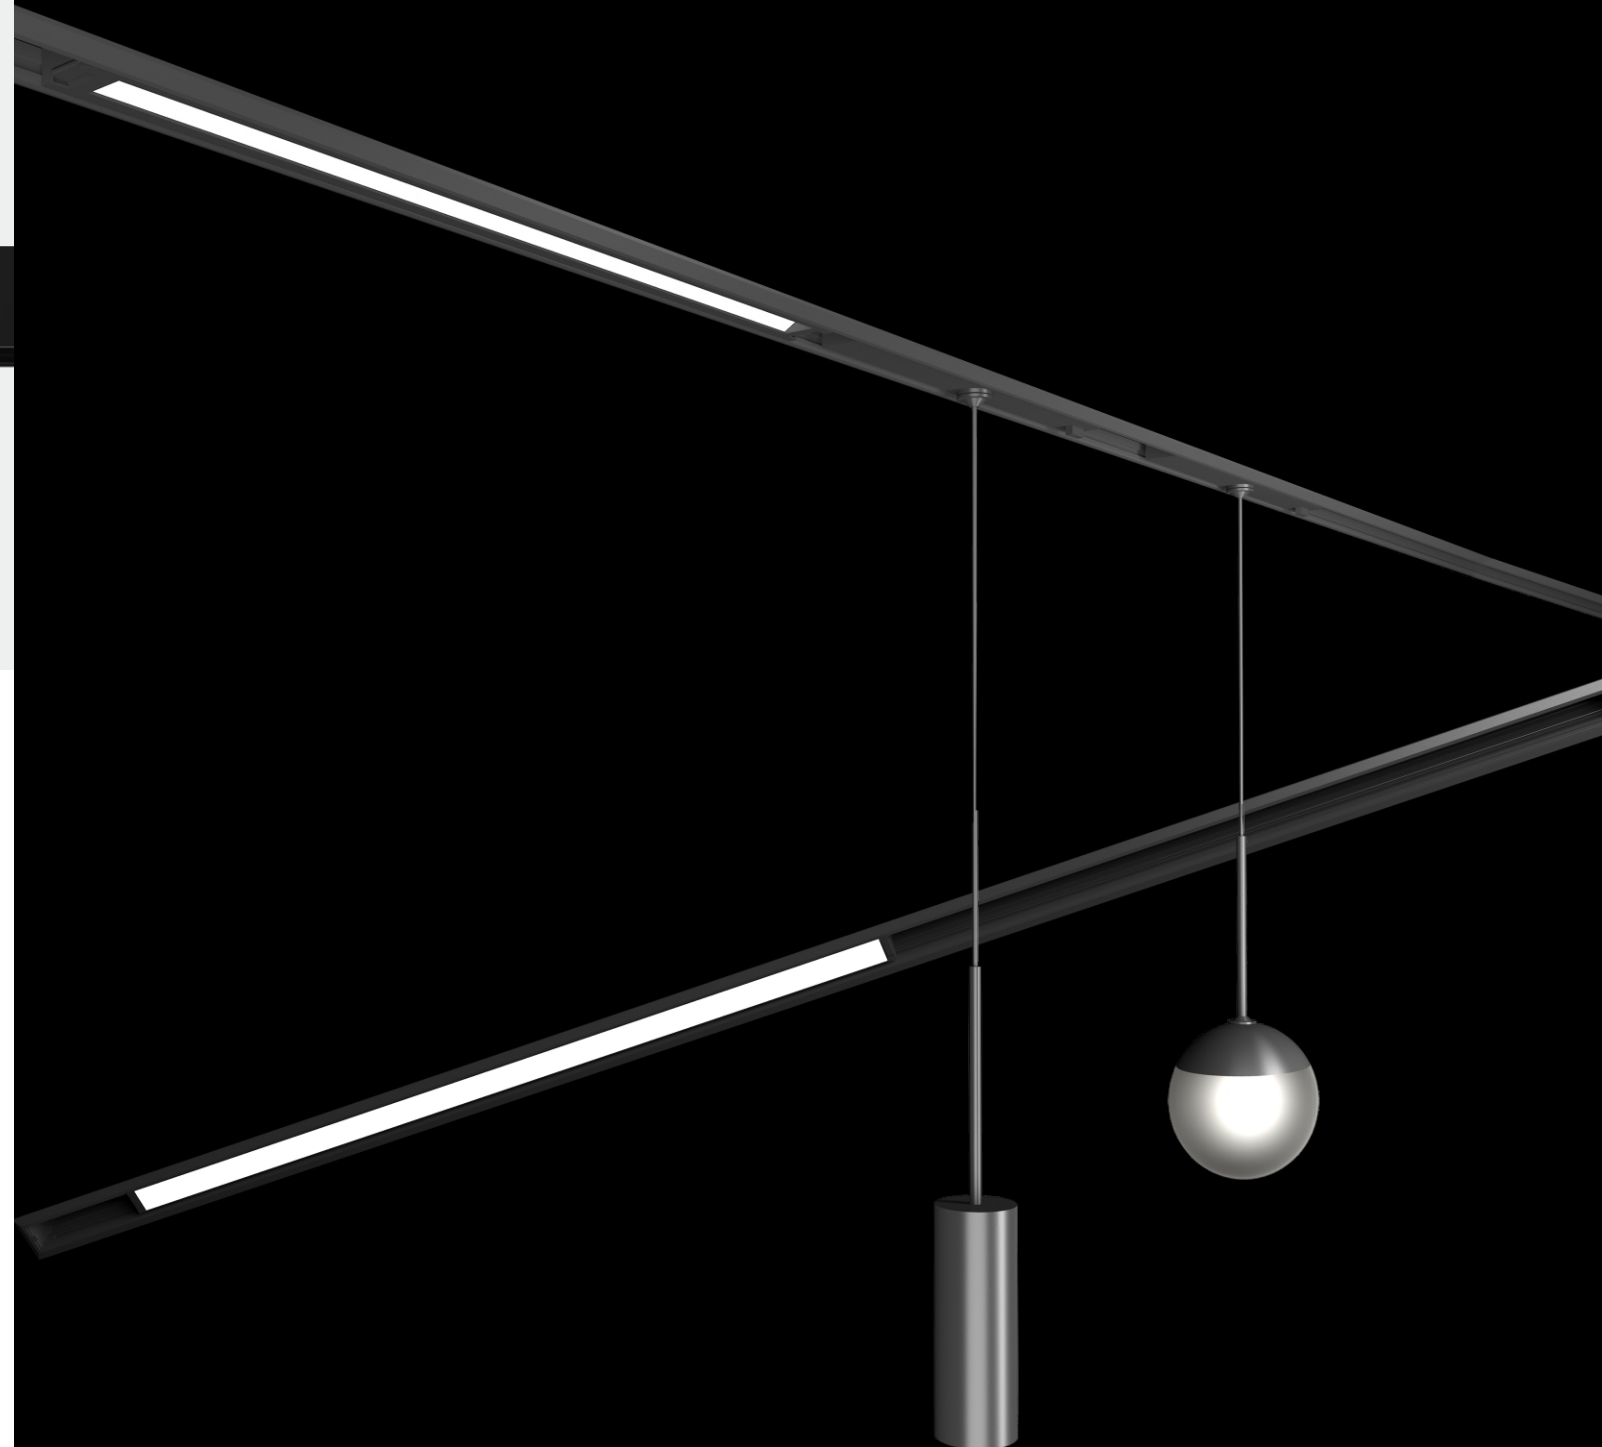





CXL25-05/CXL25-10/CXL25-20

- Cut-out** : 34mm(width)
Input Voltage : DC 48V
Dimension : W40xH55.5mm
Length : 500mm/1000mm/2000mm
Finish : Matte black
Material : Extruded aluminum
Remarks : Linear track only, excluding driver or LED module


Recessed(Narrow trim)

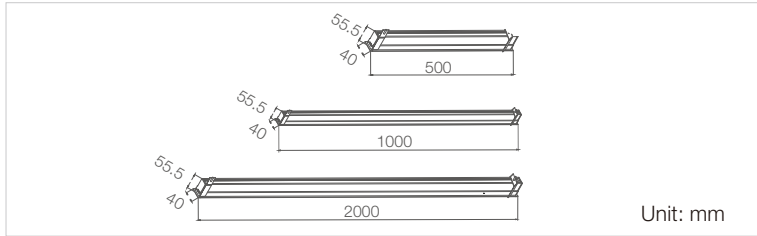


Accessories for connection(to be ordered separately)



74*74*39mm



74*74*39mm




50*50*54mm


Inward 90°connector
CXL25-L90N

Outward 90°connector
CXL25-L90W

Sideward 90°connector
CXL25-L90



“I” shape
magnetic connector
CXL25-IJ



“L” shape
magnetic connector
CXL25-RJ

Driver (to be ordered separately)




CVD/100/48
DC48V
100W




CVD/200/48
DC48V
200W

Two kinds of profiles

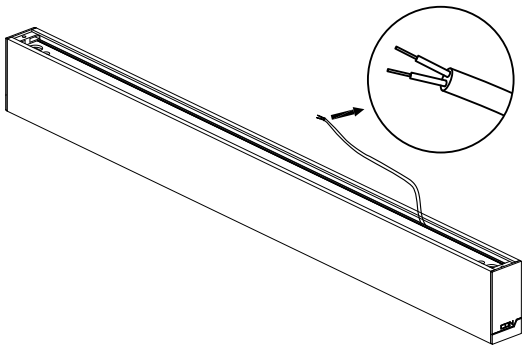

Independent profile
(Profile with input cable & end caps)

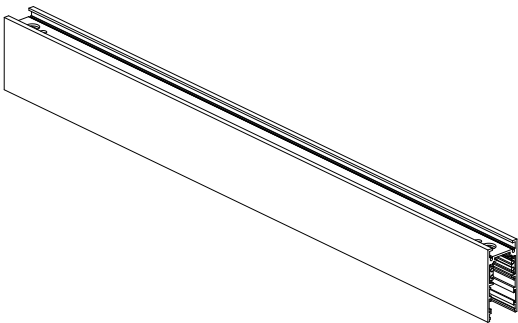

Linkable profile
(Profile without input cable & end caps)

ORDERING INFORMATION:

Example: CXL25/05/Y/A/LF/L90


Model	Length	Connection type or not	Installation	Module options	Accessories for connection
CXL25	05	Y	A	LF	L90
CXL25	05 500mm 10 1000mm 20 2000mm	Y Connection type N Non-connection type	A Recessed(Narrow trim) B Recessed(Trimless) C Surface-mounted plus/Pendant D Surface-mounted basic/Pendant	LF Linear Flood Module WW Wall Washer Module LS Linear Spot Module LSA Linear Spot Module(Adjustable) TS Track Spot Module PS Pendant Spot Module PD Pendant Decorative Module DM Decorative Module	L90 Conner connector 90 ° L90N Inner 90 ° L90W Exterior 90 ° IJ “I” shape connector RJ “L” shape connector




CXL25W-05/CXL25W-10/CXL25W-20

- Cut-out** : 34mm(width)
Input Voltage : DC 48V
Dimension : W66.4xH55.5mm
Length : 500mm/1000mm/2000mm
Finish : Matte black
Material : Extruded aluminum
Remarks : Linear track only, excluding driver or LED module


Recessed(Trimless)

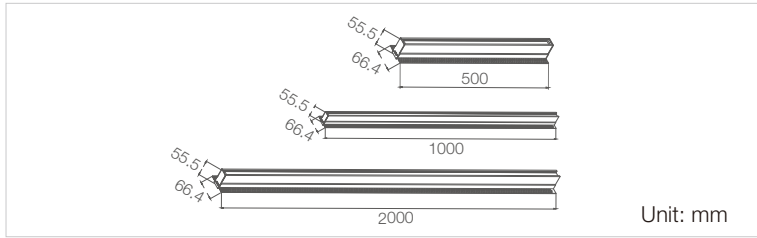

Two kinds of profiles

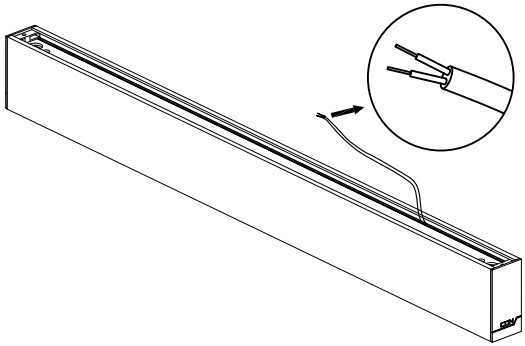


Independent profile
(Profile with input cable & end caps)

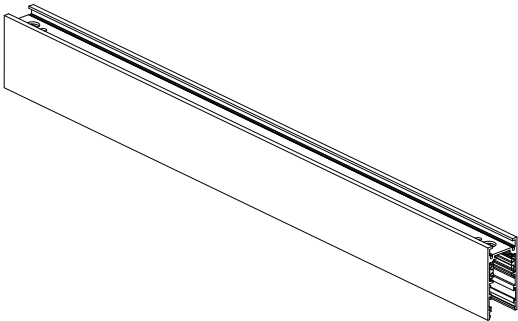


Linkable profile
(Profile without input cable & end caps)

Accessories for connection(to be ordered separately)




Inward 90°connector
CXL25W-L90N

74*74*66mm




Outward 90°connector
CXL25W-L90W

74*74*66mm




Sideward 90°connector
CXL25W-L90

70*70*54mm



“I” shape
magnetic connector
CXL25-IJ



“L” shape
magnetic connector
CXL25-RJ

Driver (to be ordered separately)



CVD/100/48
DC48V
100W




CVD/200/48
DC48V
200W

ORDERING INFORMATION:

Example: CXL25W/05/Y/B/LF/L90


Model	Length	Connection type or not	Installation	Module options	Accessories for connection
CXL25W	05	Y	B	LF	L90
CXL25W	05 500mm 10 1000mm 20 2000mm	Y Connection type N Non-connection type	A Recessed(Narrow trim) B Recessed(Trimless) C Surface-mounted plus/Pendant D Surface-mounted basic/Pendant	LF Linear Flood Module WW Wall Washer Module LS Linear Spot Module LSA Linear Spot Module(Adjustable) TS Track Spot Module PS Pendant Spot Module PD Pendant Decorative Module DM Decorative Module	L90 Conner connector 90 ° L90N Inner 90 ° L90W Exterior 90 ° IJ “I” shape connector RJ “L” shape connector

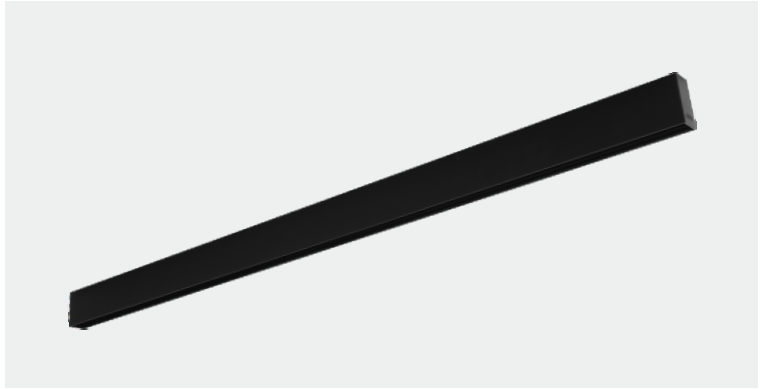


CXL25M-05/CXL25M-10/CXL25M-20

- Cut-out** : 34mm(width)
Input Voltage : DC 48V
Dimension : W26.4xH54mm
Length : 500mm/1000mm/2000mm
Finish : Matte black
Material : Extruded aluminum
Remarks : Linear track only, excluding driver or LED module


Surface-mounted plus/Pendant

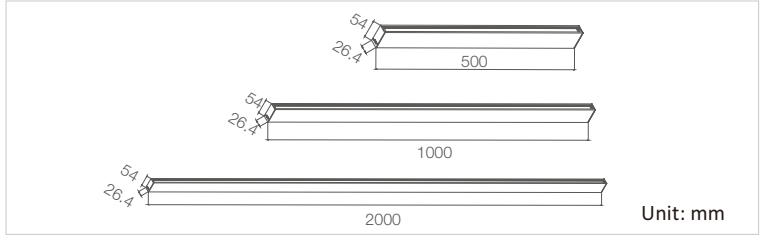

Two kinds of profiles

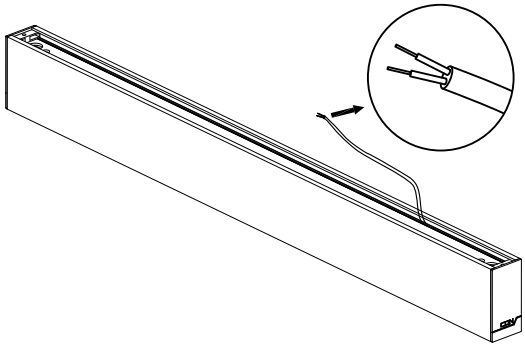


Independent profile
(Profile with input cable & end caps)

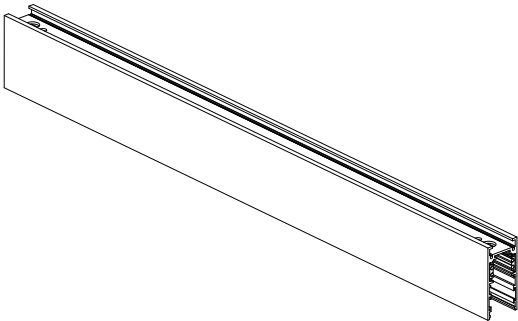


Linkable profile
(Profile without input cable & end caps)

Accessories for connection(to be ordered separately)




74*74*26mm

Inward 90°connector
CXL25M-L90N




74*74*26mm

Outward 90°connector
CXL25M-L90W




50*50*54mm

Sideward 90°connector
CXL25M-L90



"I" shape
magnetic connector
CXL25-IJ



"L" shape
magnetic connector
CXL25-RJ



Pendant kits
CXL25M-DXB

Driver (to be ordered separately)



Surface-mounted kits
CXL25M-XDB



CVD/100/48
DC48V
100W



CVD/200/48
DC48V
200W

ORDERING INFORMATION:

Example: CXL25M/05/Y/C/LF/L90


Model	Length	Connection type or not	Installation	Module options	Accessories for connection
CXL25M	05	Y	C	LF	L90
CXL25M	05 500mm 10 1000mm 20 2000mm	Y Connection type N Non-connection type	A Recessed(Narrow trim) B Recessed(Trimless) C Surface-mounted plus/Pendant D Surface-mounted basic/Pendant	LF Linear Flood Module WW Wall Washer Module LS Linear Spot Module LSA Linear Spot Module(Adjustable) TS Track Spot Module PS Pendant Spot Module PD Pendant Decorative Module DM Decorative Module	L90 Conner connector 90 ° L90N Inner 90 ° L90W Exterior 90 ° IJ "I" shape connector RJ "L" shape connector PK Pendant kit




CXL25MJ-05/CXL25MJ-10/CXL25MJ-20

- Cut-out** : 34mm(width)
Input Voltage : DC 48V
Dimension : W26.4xH54mm
Length : 500mm/1000mm/2000mm
Finish : Matte black
Material : Extruded aluminum
Remarks : Linear track only, excluding driver or LED module


Surface-mounted basic/Pendant

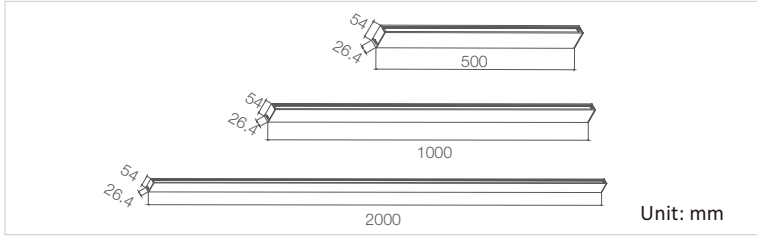

Two kinds of profiles

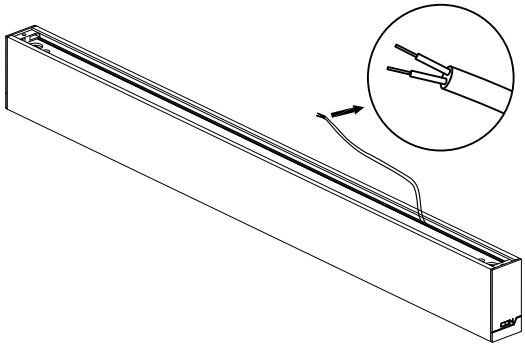


Independent profile
(Profile with input cable & end caps)

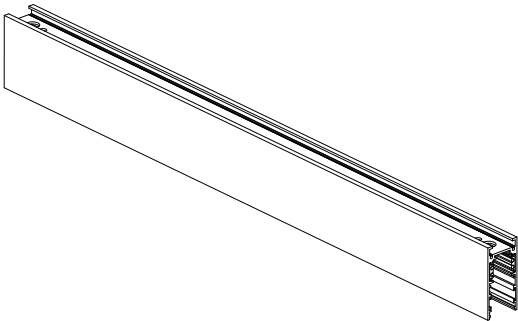


Linkable profile
(Profile without input cable & end caps)

Accessories for connection(to be ordered separately)



"I" shape
magnetic connector
CXL25-IJ



"L" shape
magnetic connector
CXL25-RJ



Pendant kit
CXL25M-DXB



Surface-mounted kits
CXL25M-XDB

Driver (to be ordered separately)



CVD/100/48
DC48V
100W



CVD/200/48
DC48V
200W



ORDERING INFORMATION:

Example: CXL25MJ/05/Y/D/LF/L90


Model	Length	Connection type or not	Installation	Module options	Accessories for connection
CXL25MJ	05	Y	D	LF	L90
CXL25MJ	05 500mm 10 1000mm 20 2000mm	Y Connection type N Non-connection type	A Recessed(Narrow trim) B Recessed(Trimless) C Surface-mounted plus/Pendant D Surface-mounted basic/Pendant	LF Linear Flood Module WW Wall Washer Module LS Linear Spot Module LSA Linear Spot Module(Adjustable) TS Track Spot Module PS Pendant Spot Module PD Pendant Decorative Module DM Decorative Module	L90 Conner connector 90 ° L90N Inner 90 ° L90W Exterior 90 ° IJ "I" shape connector RJ "L" shape connector PK Pendant kit




Linear Flood Module

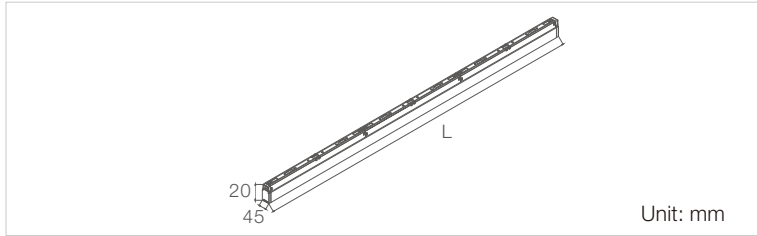


Profile options(to be ordered separately)




Recessed(Narrow trim)
CXL25



Recessed(Trimless)
CXL25W



Surface-mounted plus/
Pendant
CXL25M



Surface-mounted basic/
Pendant
CXL25MJ

Constant voltage driver options (to be ordered separately)



CVD/100/48
DC48V
100W



CVD/200/48
DC48V
200W

CXL25B

- Wattage** : 5W/7W/14W/21W/28W
- CRI** : Ra ≥ 90
- CCT** : 2700K/3000K/4000K
- Beam** : 110°
- Finish** : Matte Black
- Material** : Extruded aluminum body and PC diffuser
- Remarks** : LED module only, excluding driver or linear track; there is no driver in this module, but a built-in convertor in the box to convert constant voltage to constant current.

Technical parameters

Model	CXL25B02	CXL25B03	CXL25B06	CXL25B09	CXL25B12
Wattage	5W	7W	14W	21W	28W
CRI	Ra ≥ 90				
CCT	2700K/3000K/4000K				
Beam	110°				
Lumen	350lm	500lm	1000lm	1500lm	2000lm
Input Voltage	DC 48V				
Length	200mm	300mm	600mm	900mm	1200mm
Finish	Matte black				
Material	Extruded aluminum body and PC diffuser				



ORDERING INFORMATION:

Example: CXL25B/02/5W/927/ND


Model	Length	Wattage	CRI & CCT	Dimming
CXL25B	02	5W	927	ND
CXL25B	02	200mm	5W	927 Ra≥90 2700K
	03	300mm	7W	930 Ra≥90 3000K
	06	600mm	14W	940 Ra≥90 4000K
	09	900mm	21W	
	12	1200mm	28W	
				ND Non Dim
				VD 0-10V Dim(to customize)



Wall Washer Module

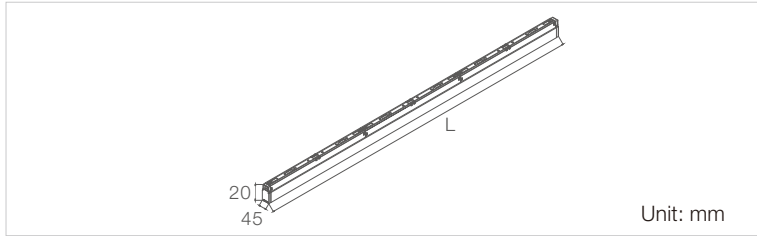

Profile options(to be ordered separately)

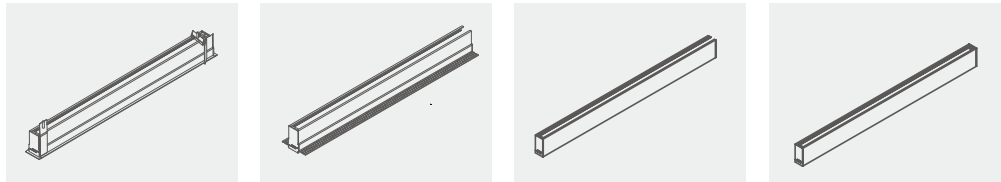

Recessed(Narrow trim) CXL25 Recessed(Trimless) CXL25W Surface-mounted plus/ Pendant CXL25M Surface-mounted basic/ Pendant CXL25MJ

Constant voltage driver options (to be ordered separately)



CVD/100/48 DC48V 100W CVD/200/48 DC48V 200W

CXL25Q

- Wattage** : 5W/7W/14W/21W/28W
- CRI** : Ra ≥ 90
- CCT** : 2700K/3000K/4000K
- Beam** : Wall washing
- Finish** : Matte Black
- Material** : Extruded aluminum body and PC diffuser
- Remarks** : LED module only, excluding driver or linear track; there is no driver in this module, but a built-in convertor in the box to convert constant voltage to constant current.

Technical parameters

Model	CXL25Q02	CXL25Q03	CXL25Q06	CXL25Q09	CXL25Q12
Wattage	5W	7W	14W	21W	28W
CRI	Ra ≥ 90				
CCT	2700K/3000K/4000K				
Beam	Wall washing				
Lumen	350lm	500lm	1000lm	1500lm	2000lm
Input Voltage	DC 48V				
Length	200mm	300mm	600mm	900mm	1200mm
Finish	Matte black				
Material	Extruded aluminum body and PC diffuser				


ORDERING INFORMATION:

Example: CXL25Q/02/5W/927/ND


Model	Length	Wattage	CRI & CCT	Dimming
CXL25Q	02	5W	927	ND
CXL25Q	02	5W	927	ND
	03	7W	930	VD
	06	14W	940	
	09	21W		
	12	28W		



Linear Spot Module

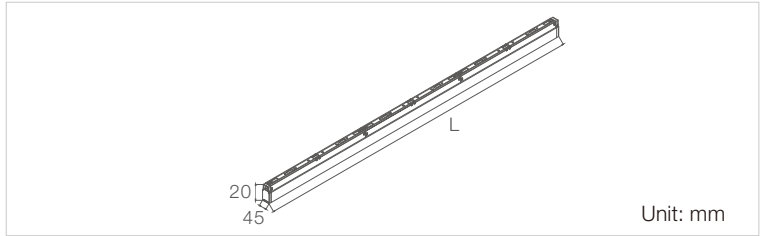

Profile options(to be ordered separately)

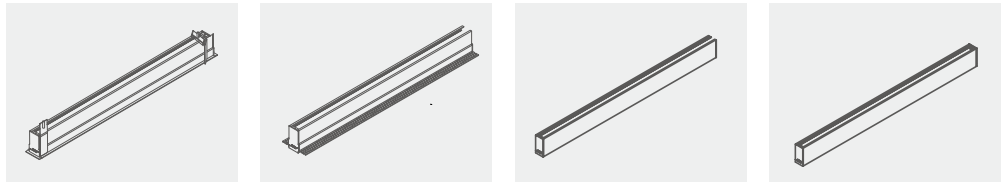

Recessed(Narrow trim) CXL25 Recessed(Trimless) CXL25W Surface-mounted plus/Pendant CXL25M Surface-mounted basic/Pendant CXL25MJ

Constant voltage driver options (to be ordered separately)



CVD/100/48 DC48V 100W CVD/200/48 DC48V 200W

CXL25S

Wattage : 10W/20W/40W
CRI : Ra ≥ 90
CCT : 2700K/3000K/4000K
Beam : 12°/34°/48°
Finish : Matte Black
Material : Extruded aluminum body and PC
Remarks : LED module only, excluding driver or linear track; there is no driver in this module, but a built-in convertor in the box to convert constant voltage to constant current.


Technical parameters

Model	CXL25S02	CXL25S03	CXL25S06
Wattage	10W	20W	40W
CRI	Ra ≥ 90		
CCT	2700K/3000K/4000K		
Beam	12°/34°/48°		
Lumen	500lm	1500lm	3000lm
Input Voltage	DC 48V		
Length	200mm	300mm	600mm
Finish	Matte black		
Material	Extruded aluminum body and PC		


ORDERING INFORMATION:

Example: CXL25S/02/10W/927/ND


Model	Length	Structure	Wattage	CRI & CCT	Dimming
CXL25S	02	/	10W	927	ND
CXL25S	02 200mm 03 300mm	Blank Fixed	10W 20W	927 Ra≥90 2700K 930 Ra≥90 3000K 940 Ra≥90 4000K	ND Non Dim VD 0-10V Dim(to customize)

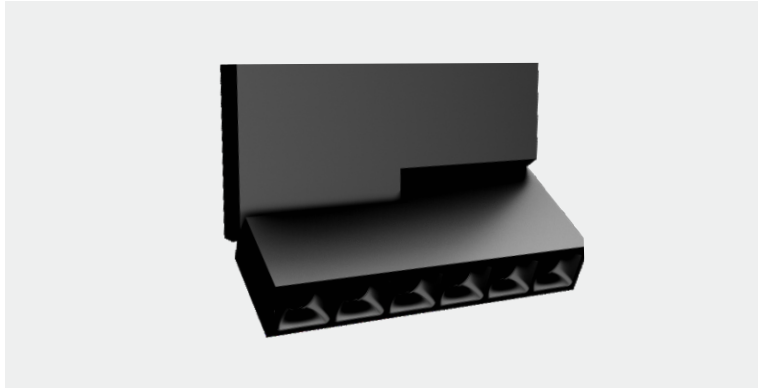

Linear Spot Module(Adjustable)

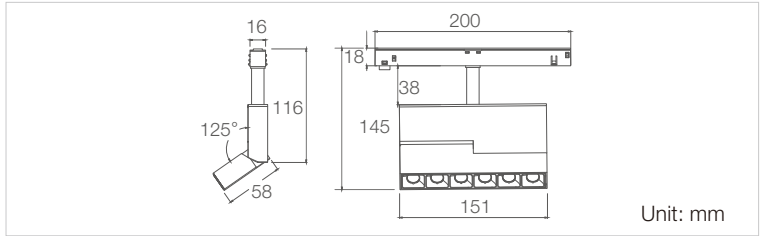

Profile options(to be ordered separately)

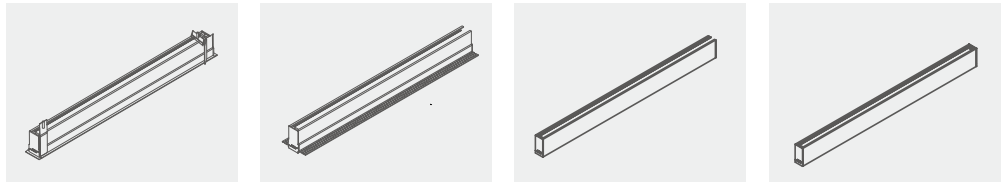

Recessed(Narrow trim) CXL25 Recessed(Trimless) CXL25W Surface-mounted plus/ Pendant CXL25M Surface-mounted basic/ Pendant CXL25MJ

Constant voltage driver options (to be ordered separately)



CVD/100/48 DC48V 100W CVD/200/48 DC48V 200W

CXL25SA

- Wattage** : 10W/20W
- CRI** : Ra ≥ 90
- CCT** : 2700K/3000K/4000K
- Beam** : 12°/34°/48°
- Finish** : Matte Black
- Material** : Extruded aluminum body and PC
- Remarks** : LED module only, excluding driver or linear track; there is no driver in this module, but a built-in convertor in the box to convert constant voltage to constant current.


Technical parameters

Model	CXL25S02A	CXL25S03A
Wattage	10W	20W
CRI	Ra ≥ 90	
CCT	2700K/3000K/4000K	
Beam	12°/34°/48°	
Lumen	500lm	1000lm
Input Voltage	DC 48V	
Length	200mm	300mm
Finish	Matte black	
Material	Extruded aluminum body and PC	

ORDERING INFORMATION:

Example: CXL25S/02/A/10W/927/ND



Model	Length	Structure	Wattage	CRI & CCT	Dimming
CXL25S	02	A	10W	927	ND
CXL25S	02 200mm 03 300mm	A Adjustable	10W 20W	927 Ra≥90 2700K 930 Ra≥90 3000K 940 Ra≥90 4000K	ND Non Dim VD 0-10V Dim(to customize)

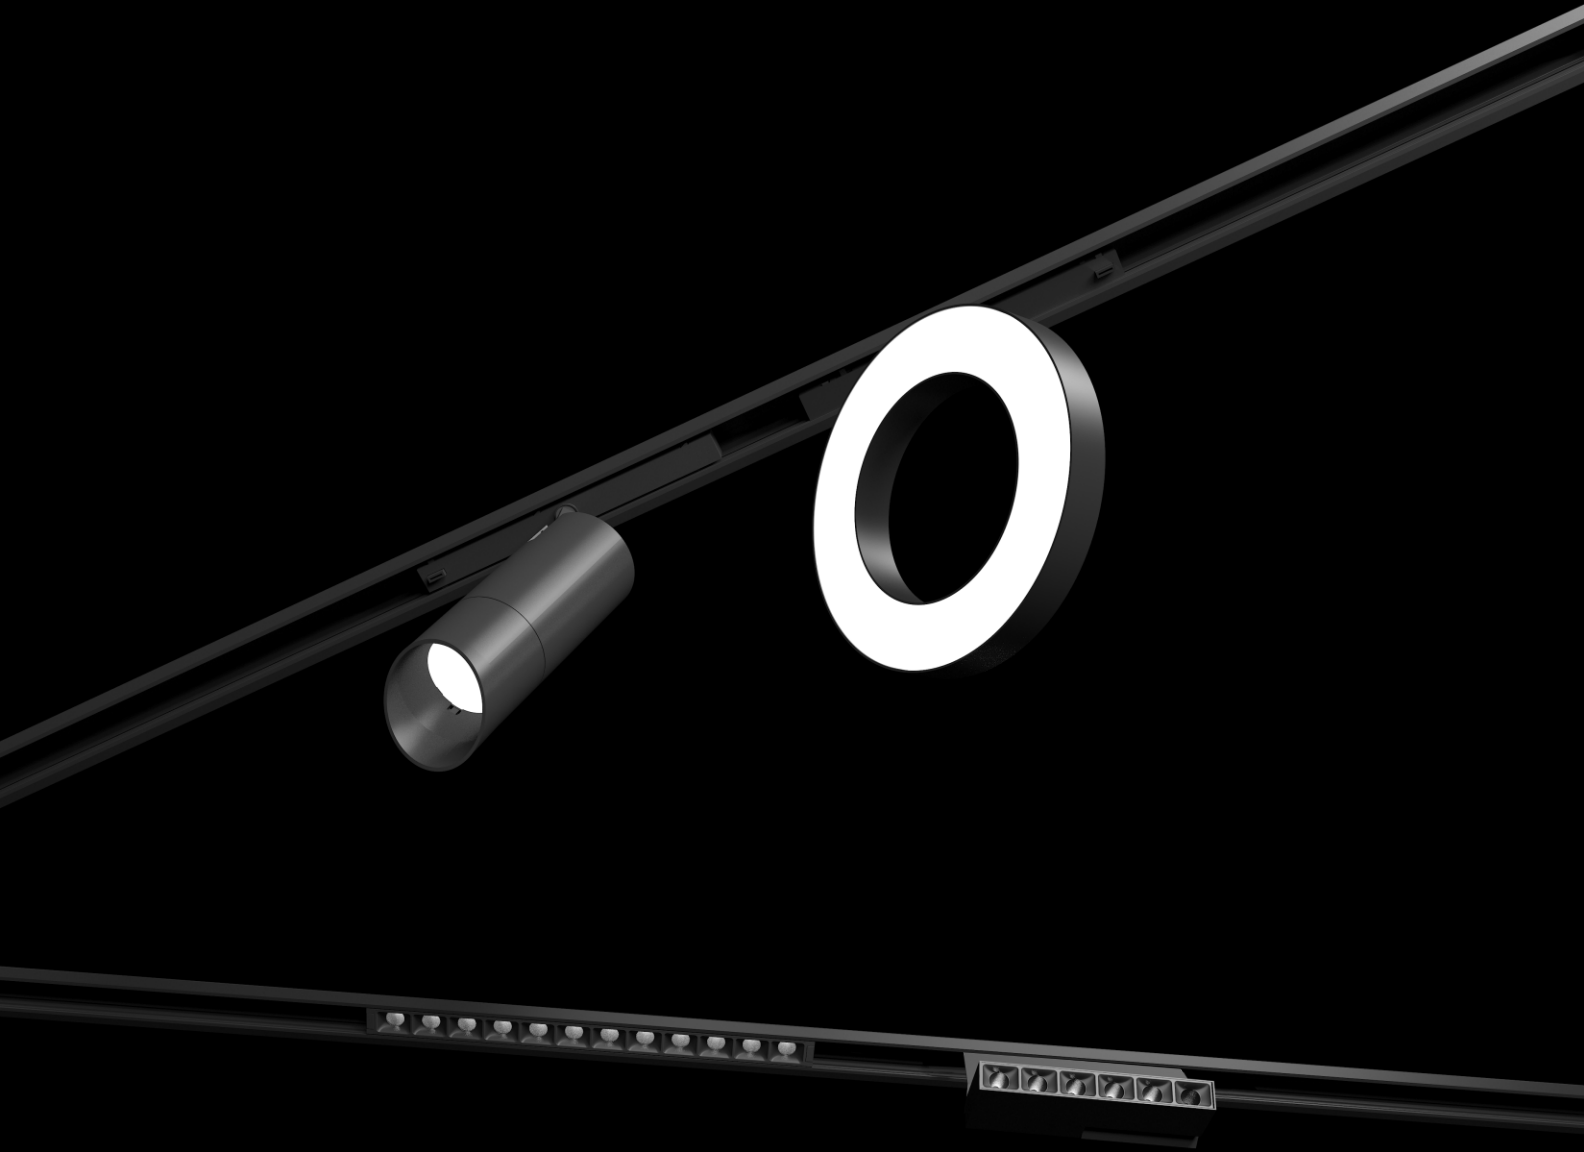


CXL25L

- Wattage** : 7W/9W/15W/30W
CRI : Ra ≥ 90
CCT : 2700K/3000K/4000K
Beam : 12°/24°/36°
Lumen : 420lm/550lm/900lm/1800lm
Finish : Matte Black
Material : Extruded aluminum body and PC
Remarks : LED module only, excluding driver or linear track; there is no driver in this module, but a built-in convertor in the box to convert constant voltage to constant current.


Track Spot Module

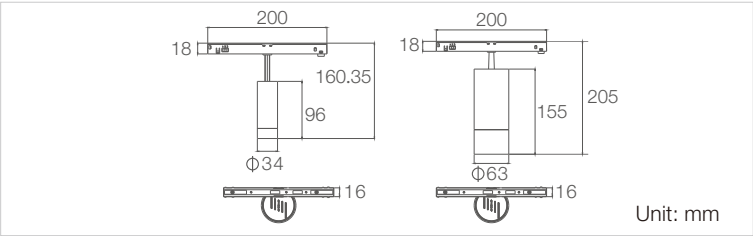


Profile options(to be ordered separately)




Recessed(Narrow trim)
CXL25



Recessed(Trimless)
CXL25W



Surface-mounted plus/
Pendant
CXL25M



Surface-mounted basic/
Pendant
CXL25MJ

Constant voltage driver options (to be ordered separately)



CVD/100/48
DC48V
100W



CVD/200/48
DC48V
200W

ORDERING INFORMATION:

Example: CXL25L/7W/927/ND


Model	Wattage	CRI & CCT	Dimming
CXL25L	7W	927	ND
CXL25L	7W 9W 15W 30W	927 Ra≥90 2700K 930 Ra≥90 3000K 940 Ra≥90 4000K	ND Non Dim VD 0-10V Dim(to customize)




CXL25D

- Wattage** : 7W/9W/15W
CRI : Ra ≥ 90
CCT : 2700K/3000K/4000K
Beam : 12°/24°/36°
Lumen : 420lm/550lm/900lm
Finish : Matte Black
Material : Extruded aluminum body and PC
Remarks : LED module only, excluding driver or linear track; there is no driver in this module, but a built-in convertor in the box to convert constant voltage to constant current.


Pendant Spot Module

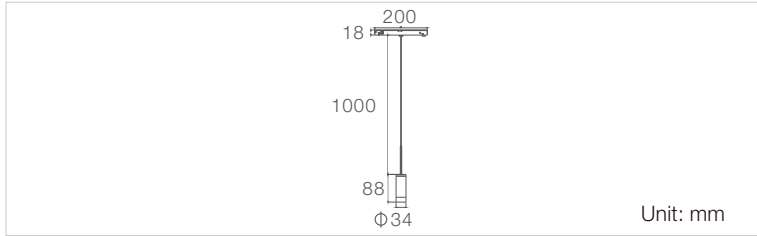


Profile options(to be ordered separately)




Recessed(Narrow trim)
CXL25



Recessed(Trimless)
CXL25W



Surface-mounted plus/
Pendant
CXL25M



Surface-mounted
basic/ Pendant
CXL25MJ

Constant voltage driver options (to be ordered separately)



CVD/100/48
DC48V
100W



CVD/200/48
DC48V
200W

ORDERING INFORMATION:

Example: CXL25D/7W/927/ND



Model	Wattage	CRI & CCT	Dimming
CXL25D	7W	927	ND
CXL25D	7W	927 Ra≥90 2700K	ND Non Dim
	9W	930 Ra≥90 3000K	VD 0-10V Dim(to customize)
	15W	940 Ra≥90 4000K	




CXL25E

- Wattage** : 7W/9W
CRI : Ra ≥ 90
CCT : 2700K/3000K/4000K
Beam : 180°
Lumen : 420lm/550lm
Finish : Matte Black
Material : Die-casting aluminum body and PMMA
Remarks : LED module only, excluding driver or linear track; there is no driver in this module, but a built-in convertor in the box to convert constant voltage to constant current.


Decorative Pendant light

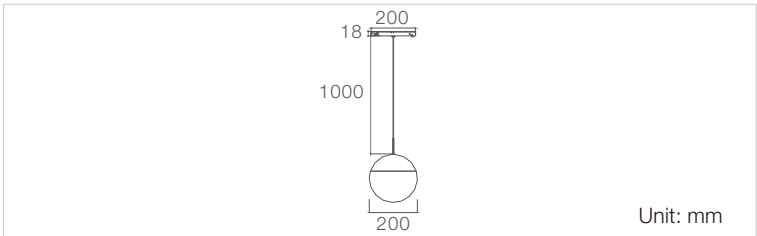


Profile options(to be ordered separately)




Recessed(Narrow trim)
CXL25



Recessed(Trimless)
CXL25W



Surface-mounted plus/
Pendant
CXL25M



Surface-mounted basic/
Pendant
CXL25MJ

Constant voltage driver options (to be ordered separately)



CVD/100/48
DC48V
100W



CVD/200/48
DC48V
200W


ORDERING INFORMATION:

Example: CXL25E/7W/927/ND


Model	Wattage	CRI & CCT	Dimming
CXL25E	7W	927	ND
CXL25E	7W	927 Ra≥90 2700K	ND Non Dim
	9W	930 Ra≥90 3000K	VD 0-10V Dim(to customize)
		940 Ra≥90 4000K	



Decorative Module

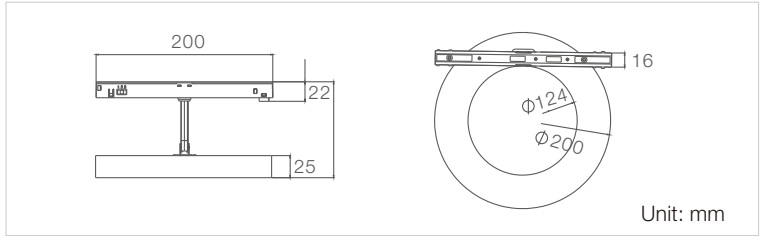

Profile options(to be ordered separately)

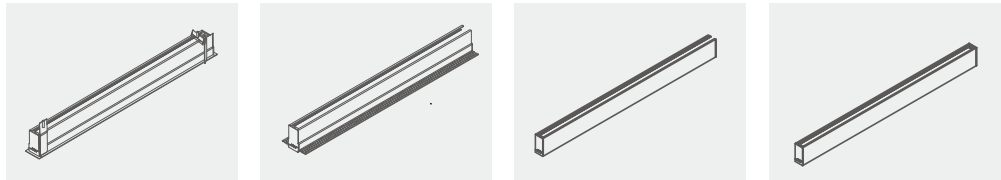

Recessed(Narrow trim) CXL25 Recessed(Trimless) CXL25W Surface-mounted plus/ Pendant CXL25M Surface-mounted basic/ Pendant CXL25MJ

Constant voltage driver options (to be ordered separately)



CVD/100/48
DC48V
100W CVD/200/48
DC48V
200W

ORDERING INFORMATION:

Example: CXL25R/7W/927/ND

Model	Wattage	CRI & CCT	Dimming
CXL25R	7W	927	ND
CXL25R	7W 9W	927 Ra≥90 2700K 930 Ra≥90 3000K 940 Ra≥90 4000K	ND Non Dim VD 0-10V Dim(to customize)

Notes: The modules can be used for narrow trim recessed profile, trimless profile, surface-mounted plus or pendant profile, surface-mounted basic or pendant profile, according to the site request.



