

SHYLON®

2025

SHYLON®

2025

www.shylon.com

SHYLON
芯 龙 光 电

光和影 让世界更美好



Shanghai Shylon Optoelectronics
Technology CO., LTD.
Shylon Industrial Park
No. 1186-1, Pengqing Rd
Huaqiao
Kunshan
Jiangsu
China

June 14, 2022

Dear Sir or Madam,

On behalf of the Director General of the World Intellectual Property Organization (WIPO), I have the pleasure to invite you to participate at the *Ceremony of Global Awards* during the Sixty-Third Series of Meetings of the Member States of WIPO, to be held on July 19, 2022.

The Ceremony will take place in the WIPO Conference Hall.

As one the five winners of the Global Awards Program for SMEs you are also kindly invited to participate at the *Clinic on IP for commercialization for SMEs* that will take place on July 18 and 19, 2022.

My colleagues will revert in due time on the event setting, including the travel and accommodation practical arrangements.

Should you need further information, please contact my colleague Ms. Lucija Ljubic (email: lucija.ljubic@wipo.int).

I very much look forward to your participation at the ceremony of awards and the clinic for the winners.

Yours sincerely,

Marcelo Di Pietro
Director
WIPO Awards


WIPO
www.wipo.int



世界知识产权组织总干事 邓鸿森先生
Daren Tang, WIPO Director General



世界知识产权组织副总干事 王彬颖女士
Wang Binying, WIPO Deputy Director General

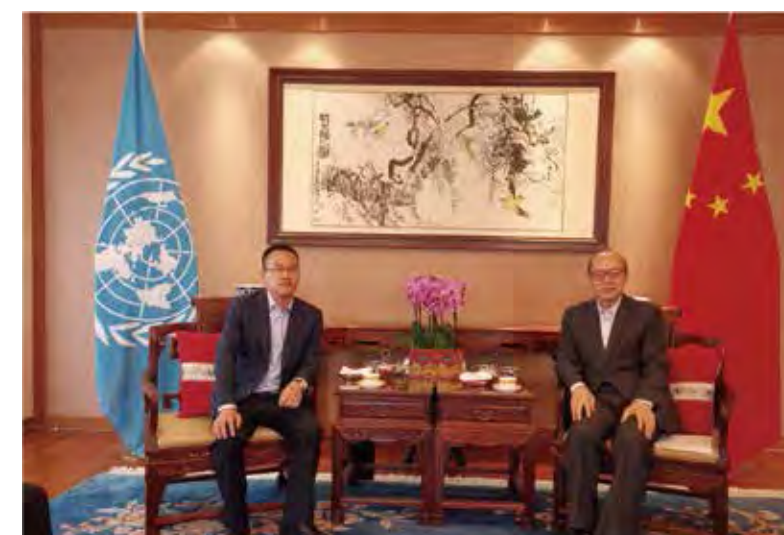

中华人民共和国驻联合国日内瓦
办事处和瑞士其他国际组织特命全权大使、常驻代表 陈旭大使

Shanghai SHYLON Optoelectronics Technology Co., Ltd.

Architectural+Landscape Lighting·Smart City+ Innovative Sight Experiences

Based on the European original design and Shanghai smart manufacturing, SHYLON condenses the strategic advantages of "One Brand, Global Market, Superhigh Optical Architecture, Zoomneo Color Algorithm, Anecast laser projection ".

SHYLON Provides professional and comprehensive solutions for you. The Anecast, a brand committed to the inspired exceptional sight experiences, create a new category of outdoor projection.

SERVICE NETWORK

With locations in countries around the world, SHYLON provide you local services. See our office locations across all regions.

Global: USA·Germany·UAE·Korea·Hong Kong·Thailand·Malaysia

China: Shanghai·Beijing·Shenzhen·Chengdu·Guangzhou·Xian

SMART FACTORY

• Location: 1186-1 Pengqing Road, Huaqiao, Kunshan, Jiangsu, China

• Area: 33,000 square meters

• Investment: 160 million yuan

• Workshop: 9 workshops with 86.25% automated production

• Capacity: 8000-10000 sets per day

PARTNERS & CLIENTS

SHYLON maintains strong strategic partnership with numerous famous design institutes, project contractors, and 16 overseas lighting brands.

SHYLON participated in 126 domestic/foreign influential projects in 2021:

•12 lighting projects of historical building for Celebrating the 100th anniversary of the founding of the Communist Party

•Shanghai EXPO Cultural Park

•Shanghai Yu Garden

•Westlake University

•Alibaba Cloud Yungu Park

•10 Pavilions in Dubai Expo 2020

•Multiple sub-projects in FIFA World Cup Qatar 2022

•Central Business District at the New Administrative Capital of Egypt, which project with the largest supply quantity of lighting products from China so far.

QUALIFICATION

•National High-Tech Enterprise

•Technologically Advanced Small and Medium-sized Enterprises of 2021" by Ministry of Industry and Information Technology

•Shanghai Patent Pilot Enterprise;

•Innovation “Little Giant” Enterprise in Putuo District of Shanghai;

•AAA-level Quality Service Credit Enterprise;

•AAA Level Credit Enterprise;

INTERNATIONAL AWARDS

SHYLON won 7 Red Dot design awards and 1 IF Design Award from 2020 to 2021, breaking the award record of Chinese lighting enterprises in the field of outdoor landscape lighting and architectural lighting, and set the three “most” in Chinese lighting industry:

•The professional lighting brand with the most Red Dot Awards in the world in 2021 ;

•The Chinese outdoor lighting brand with the most Red Dot Awards since the establishment of the Award.

•The professional lighting brand with the most red dot awards for outdoor linear lamps in the world.

In July, 2022, SHYLON Won the First-Ever WIPO Global Awards from among 272 submissions from 62 Countries Worldwide.

上海芯龙光电科技股份有限公司

SHYLON专业建筑·景观·智慧城市服务品牌

秉承欧洲原创设计理念+上海智造的双重优势，沉淀形成了“一个品牌，全球市场，Superhigh光学架构，Zoomneo色彩算法，Anecast激光影像”的战略优势；坚持为客户提供专业，一体化的综合解决方案。

旗下品牌Anecast安影，致力于城市光影艺术复兴，开创户外影像新物种。

服务网络 | Service Network

SHYLON服务网络广泛分布在美国、欧洲、中东、韩国、香港、泰国、马来西亚等地；同时在上海设有全球营销中心，在北京、深圳、成都、西安均有服务办公室。

智造工厂 | Factory

SHYLON工厂位于昆山花桥蓬青路1186-1号，占地面积50亩，总投资1.6亿元。

• 拥有9个自动化率达86.25%的生产车间；

• 照明及投影产品日产8000套~10000套/天；

• 复旦大学信息学院光源与照明工程系产学研合作基地。

合作客户 | Partners

SHYLON 与国内名设计院所、工程服务商以及16家国外照明品牌保持着良好的战略合作关系。

2021年先后参与了多个国内、外知名项目，例如: 建党100年之际，深度参与了12个历史红色名建的整体夜景亮化：中共二大会址、中共四大纪念馆上海茂名路毛泽东故居、嘉兴火车站等，以及上海世博文化公园北园整体亮化工程、上海豫园二期夜景提升、西湖大学夜景亮化阿里云谷夜景亮化工程等126个工程项目。

在海外市场上芯龙光电助力2021年迪拜世博会十个展馆光影秀场，同时正在供货卡塔尔世界杯多个分项目，以及正在服务的埃及新首都CBD项目, 该项目是中国照明品牌出海国外市场，迄今为止供货数量最多的一个项目。

资质荣誉 | Qualification & Honor

• 国家高新技术企业

• 2021国家工信部专精特新“小巨人”企业

• 上海市专利试点企业

• 普陀区科技创新型“小巨人”企业

• 质量服务信誉AAA级诚信企业

• AAA级信用企业

• 3·15诚信服务会员单位等多项荣誉

资质荣誉 | Qualification & Honor

2020~2021两年荣获7个红点奖 和一个IF 奖，打破了中国照明企业在户外景观、建筑照明领域的获奖记录，创下三个行业之“最”：

• 2021年全球获红点奖最多的专业照明品牌

• 红点奖开设以来获奖最多的中国户外照明品牌

• 户外线条形类灯具获红点奖最多的全球专业照明品牌

2022年，SHYLON 从全球62个国家的272家公司中脱颖而出，荣获首届WIPO全球奖。



SHYLON 芯龙光电
延青路1186-1号



中共二大纪念馆

Memorial Hall of the second National Congress of the Communist Party of China



上海世博文化公园
Shanghai World Expo Cultural Park



上海豫园
Shanghai Yu Garden





إكسبو 2020
دبي، الإمارات العربية المتحدة
DUBAI, UNITED ARAB EMIRATES

产品应用多达10个展馆

芯龙光电为本届世博会提供了2647套照明产品及系统，其中包括芯龙自主研发的SL2169LED地埋灯及今年荣获红点奖的SL1301H大功率洗墙灯，用一流的品质，彰显科技风采，在全球舞台上打造中国名片！



阿里巴巴云谷园区
Alibaba cloud Valley Park





芯龙光电 通过"上海品牌"认证 SHYLON喜获“上品”标志

上海是中国近现代重要的民族工业发祥地、民族品牌发源地和集聚地，上海的品牌建设有基础、有优势。早在20世纪30年代，上海手表、正广和、冠生园等一批家喻户晓的民族品牌即崛起于浦江之滨。进入21世纪后，上海在大飞机、新能源汽车、生物医药、机器人等先进制造和战略新兴产业方面，逐渐形成独有的品质特点和品牌特色。

上海通过“上海品牌”认证打造先进标准体系，利用国内领先、国际先进的标准倒逼企业不断提升产品和服务的品质，大力弘扬创新精神、诚信精神、企业家精神和工匠精神，通过品牌经济的发展传承和发扬“海纳百川、追求卓越、开明睿智、大气谦和”的上海城市精神。



光学先驱
墨子



墨子，中国古代思想家、教育家、科学家，也是世界光学第一人。



















墨子详细探讨了光和影的关系，细致观察了运动物体影像的变化规律。墨子的光学成就还包括对光的直线传播进行了科学描述、小孔成像实验、以及对平面镜、凹面镜、凸面镜成像的研究。

芯龙光电，传承墨子勇于探索、敢为人先的开创精神，深耕光学与影像领域，以领先的技术创新，致力于发展成为“国内一流、国际知名”的户外照明和影像品牌。

光和影的故事仍在继续，您、我携手一起向未来!

Contents

投射灯系列
Flood light series
P001-P222

					
SL1329	SL1309	SL1307	SL1327	SL1306	SL1304
					
SL1305	SL1301	SL1302	SL1303	SL1323	SL1321
					
SL1360	SL1361	SL1362	SL1130F	SL1131F	SL1132F
					
SL1135O	SL1136O	SL1137O	SL1139O	SL1128O	SL1129O
					
SL1151F	SL1150F	SL1140F	SL1143F	SL1145F	SL1146F
					
SL1147F	SL1148F	SL1155	SL1156	SL1157	SL1158
					
SL1159	SL1160	SL1102U	SL1103U	SL1104U	SL1105U
					
SL1125F	SL1126F	SL1127F	SL1269U	SL1272U	SL1271U
					
SL1278U	SL1281U	SL1232F	SL1235F	SL1236F	SL1239F



SL1240U SL1245U SL1246U SL1247U SL1258U SL1260U



SL1262U SL1318 SL1319 SL1311 SL1310 SL1312



SL1315

照树灯系列
LED Tree Light series
P223-P236



SL1132T SL1135T SL1136T SL1137T


地埋灯系列
Inground light series
P237-P304




SL2311 SL2312 SL1307P SL2306 SL2307 SL2308




SL2309 SL2304 SL2305 SL2270 SL2269 SL2264

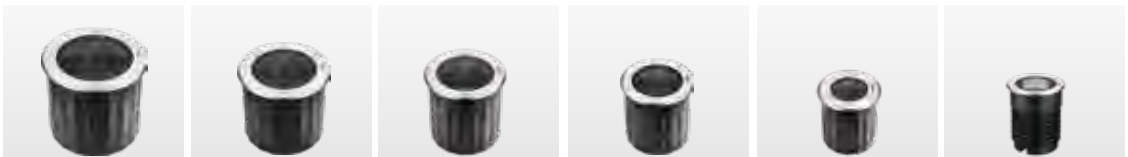

SL2169C SL2166C SL2164C SL2162C SL2161C SL2160C

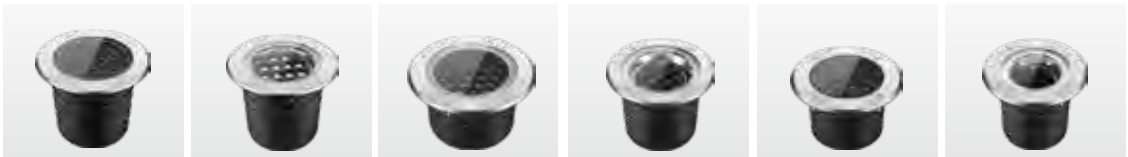

SL2152C SL2150C SL2130C SL2128C SL2112C SL2110C

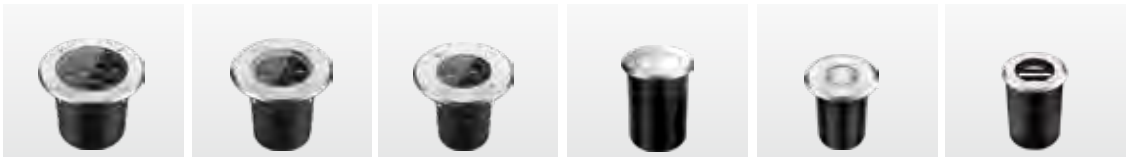

SL2109C SL2106C SL2103C SL2102 SL2101 SL21006


轮廓灯系列
Outline light series
P305-P337



SL21005 SL21003 SL2108 SL2104



SL3315 SL3316 SL3317L SL3321 SL3322 SL3312

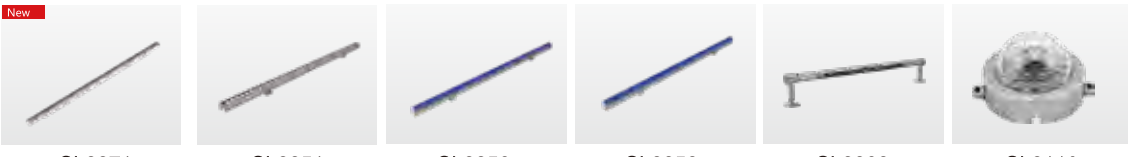

SL3371 SL3351 SL3352 SL3353 SL3323 SL3110




SL3121 SL3122 SL3123 SL3361 SL3362 SL3106




SL3210 SL3240 SL3230 SL3220

水下灯系列
Underwater light series
P338-P342

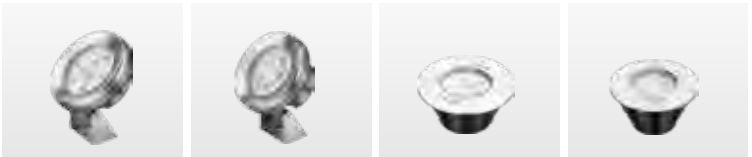

SL5109 SL5106 SL5119 SL5116

壁灯系列
Wall light series
P343-P354

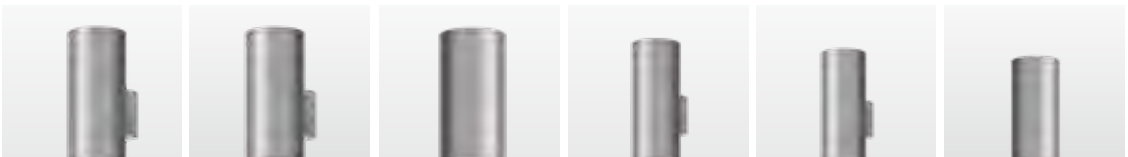

SL6165 SL6166 SL6167 SL6132 SL6133 SL6135



SL6155 SL6156 SL6157 SL6122 SL6123 SL6125

路灯系列
Road light series
P355-P364



SL7500 SL7501 SL7502 SL7503

高天棚灯系列
LED Highbay light series
P365–P376



控制系统
Control system
P377–P386



产品命名规则：举例SL1135FE–16

Product naming rules：for example SL1135FE–16


SL	1	1	35	F	E	16
公司代号 Company code	灯具系列 lamps series	产品外形 Product shape	产品编号 Product code	安装方式 Installation mode	LED型号 LED mode	LED总颗数 LED Number
SHYLON简写 SHYLON shorthand	1.投射灯 Flood light	1.圆形 Round	按产品 系列编排 By product Series layout	投光灯F:法兰底座 Floodlight F: flange base	A:350mA XP–E2	1
DSL:订制 DSL: Custom made	2.地埋灯 Inground light	2.方形 square	无具体规则 No specific rules	投光灯O:一体压铸+相变液冷 Floodlight O: integrated die casting phase change liquid cooling	B:500mA/600mA XP–E2	2
SV:太阳能 sv: solar energy	3.轮廓灯 Outline light	3.线形 linear	35E01: 35为 产品编号,E01 为扩展版本名	投光灯U:U形支架 Floodlight U: U–shaped bracket	C:700mA XP–E2	3
	5.水下灯 Underwater light	5.道路 road		投光灯M:Φ 48灯杆安装件 Floodlight M: Φ 48 pole mounting part	D:1050mA XP–G2	
	6.壁灯 Wall light	6.景观与艺术 Landscape and art		投光灯S:地插或斜罩 Floodlight s: ground plug or inclined cover	E:1400mA XP–L、XP–G3	C: COB
	7.路灯 Road light	7.智慧路灯 Smart street lamp		投光灯L:杆装螺丝固定件 Floodlight L: pole mounted screw Fixed parts	F:350mA/700mA XM–L RGBW 4in1 OSRAR PRO 10W 3535 10W单颗	Road M: LUXEON 5050
	8.太阳能路灯 Solar street lamp			投光灯H:抱树支架 Floodlight H: tree bracket	G:1000mA/2400mA X 4 OSRAM OSTAR RGBW 4IN1	Road C: XT–E
	0.高天棚灯 Highbay lamp			投光灯P:U型的升级款相变液冷 Floodlight P: U–shaped upgraded phase change liquid cooling	H:130mA CREE CLQ6A 4IN1	Road HE: 高光效 Road HE: High efficiency
				投光灯Z:杆装抱箍 Floodlight z: pole mounted hoop	I:XHP35 700mA 12V	Flood KP: 恒功率 Flood KP: Keepower
				投光灯T:照树灯 Floodlight T: tree light	J:350mA SORAM RGBW 4IN1	路灯数字代表功率 Street lamp digital power
				投光灯G:U形支架加凸罩 Floodlight G: U–shaped bracket Convex cap	K:XHP50 1050mA 12V	
				投光灯X:法兰底座加凸罩 Floodlight X: flange base Convex cap	L:5050 RGBW 15W单颗	
				投光灯R:实景测试灯 Floodlight R: real scene measurement Pilot lamp	M:OSRAR PRO 10W	
				工矿灯U:无罩 Highbay light U: uncovered	N:RGBWCLA 7in1	
				工矿灯C:带铝罩 Highbay light U: with aluminum cover	P:RGBWCL 6in1	
				地埋灯C:圆面板 Inground light C: Circular panel	Q:40W RGBW 4in1	
				地埋灯S:方面板 Inground light S: square panel	R:LUXEON 7070	
				条灯U:平罩 Linear Light (U): Flat Cover	Z:变焦、动态电流 Z:Zoom、dynamic current	
				条灯C:弧形罩 Linear Light (C):Cambered cover		
				条灯L:水晶罩 Linear Light (L): Crystal Cover		
				条灯S:方形罩 Linear Light (S): Square Cover		

注：SL1318/SL1319/SL1310A.B.C.D.E.F.G作为型号区分

配件图例:
Accessories legend

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

zoomneo 色彩算法色域对比
zoomneo Color algorithm gamut contrast

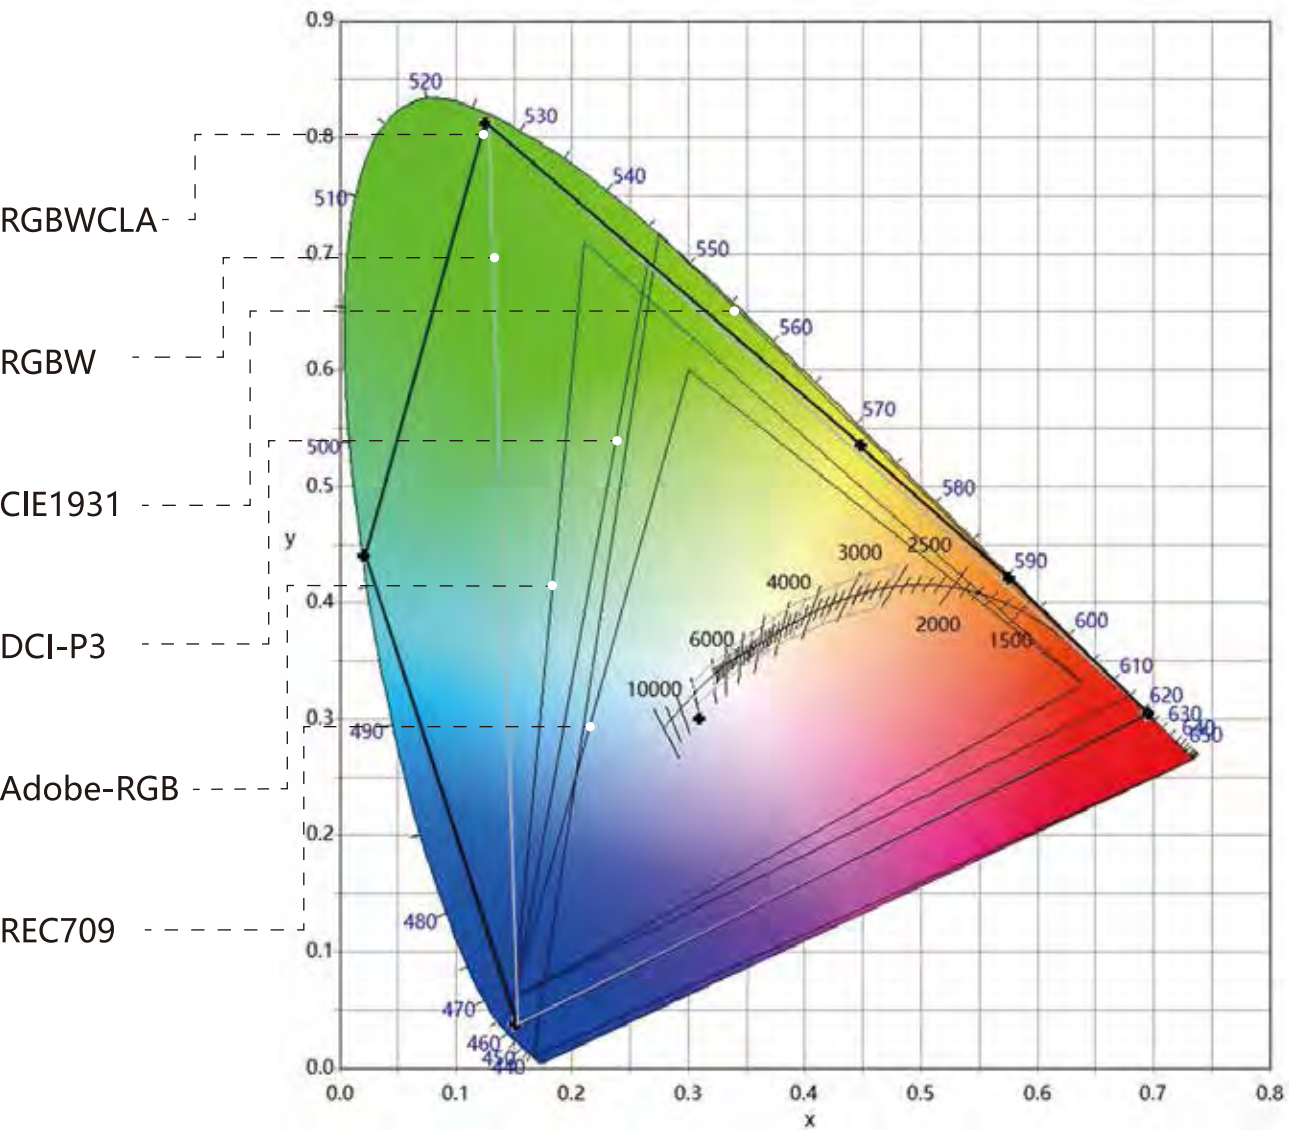

Flood Light Series


SL1329

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

CO₂↓50%

原生1度角

K值>500

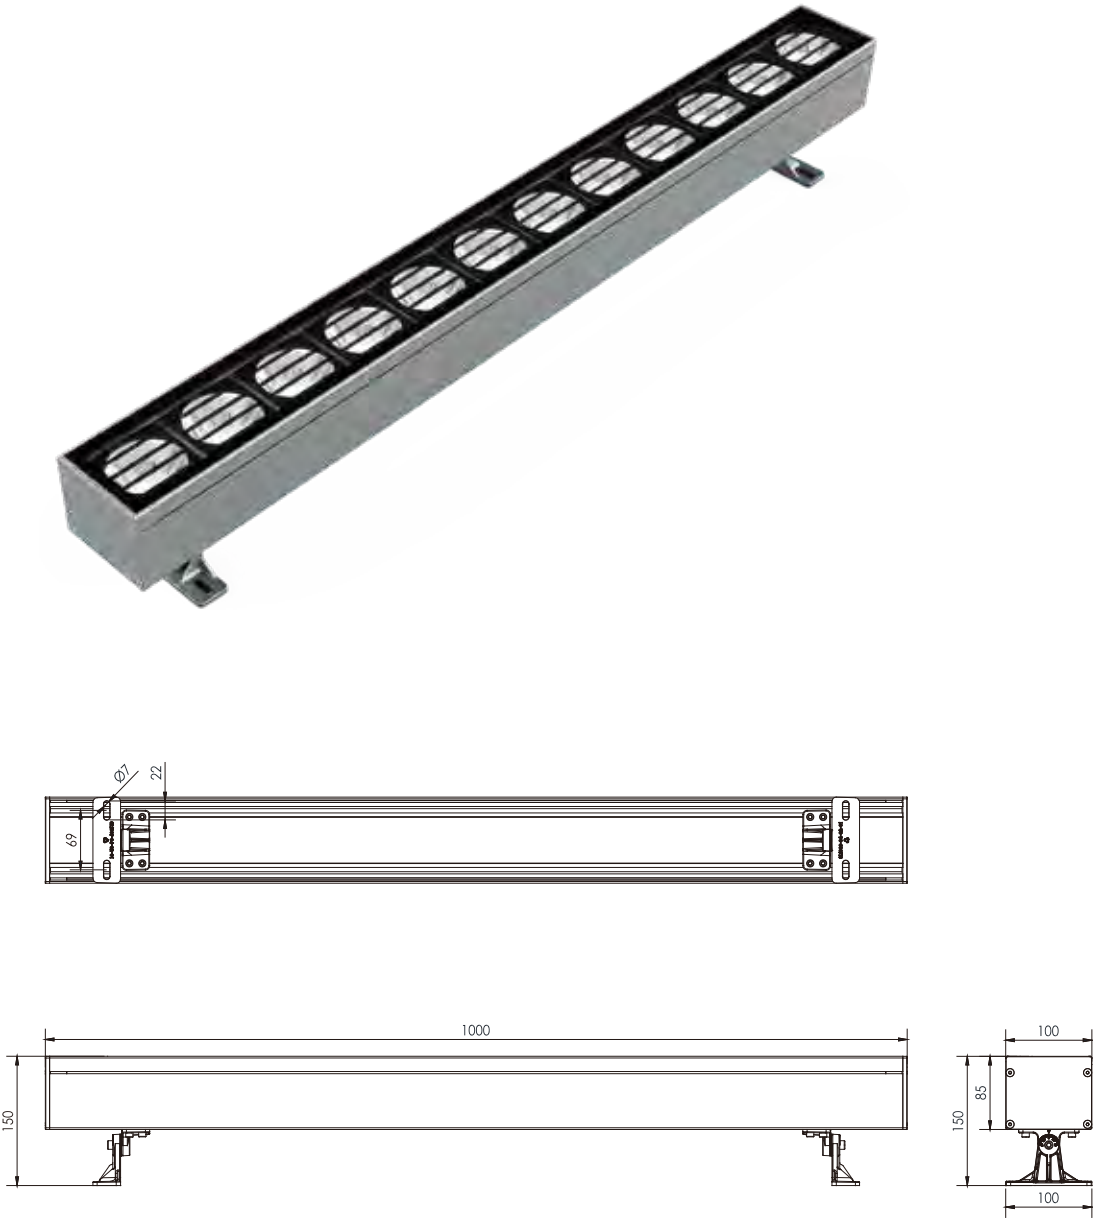

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1329M-12	SL1329M-6(0.5m)	SL1329M-3(0.3m)	SL1329F-12
Led品牌/ Led Brand	CREE	CREE	CREE	CREE RGBW 4in1/晶元 4in1
Led数量/ Led Quantity	12pcs	6pcs	3pcs	12pcs
额定功率/ Rated Power	100W	50W	20W	160W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW
发光角度/ Beam Angle	1.5° 1.5x40°			4°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1329F-6(0.5m)	SL1329F-3(0.3m)		
Led品牌/ Led Brand	CREE RGBW 4in1/晶元 RGBW 4in1	CREE RGBW 4in1/晶元 RGBW 4in1		
Led数量/ Led Quantity	6pcs	3pcs		
额定功率/ Rated Power	80W	40W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	RGBW		
发光角度/ Beam Angle	4°	4°		
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		

Flood Light Series

SL1309

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

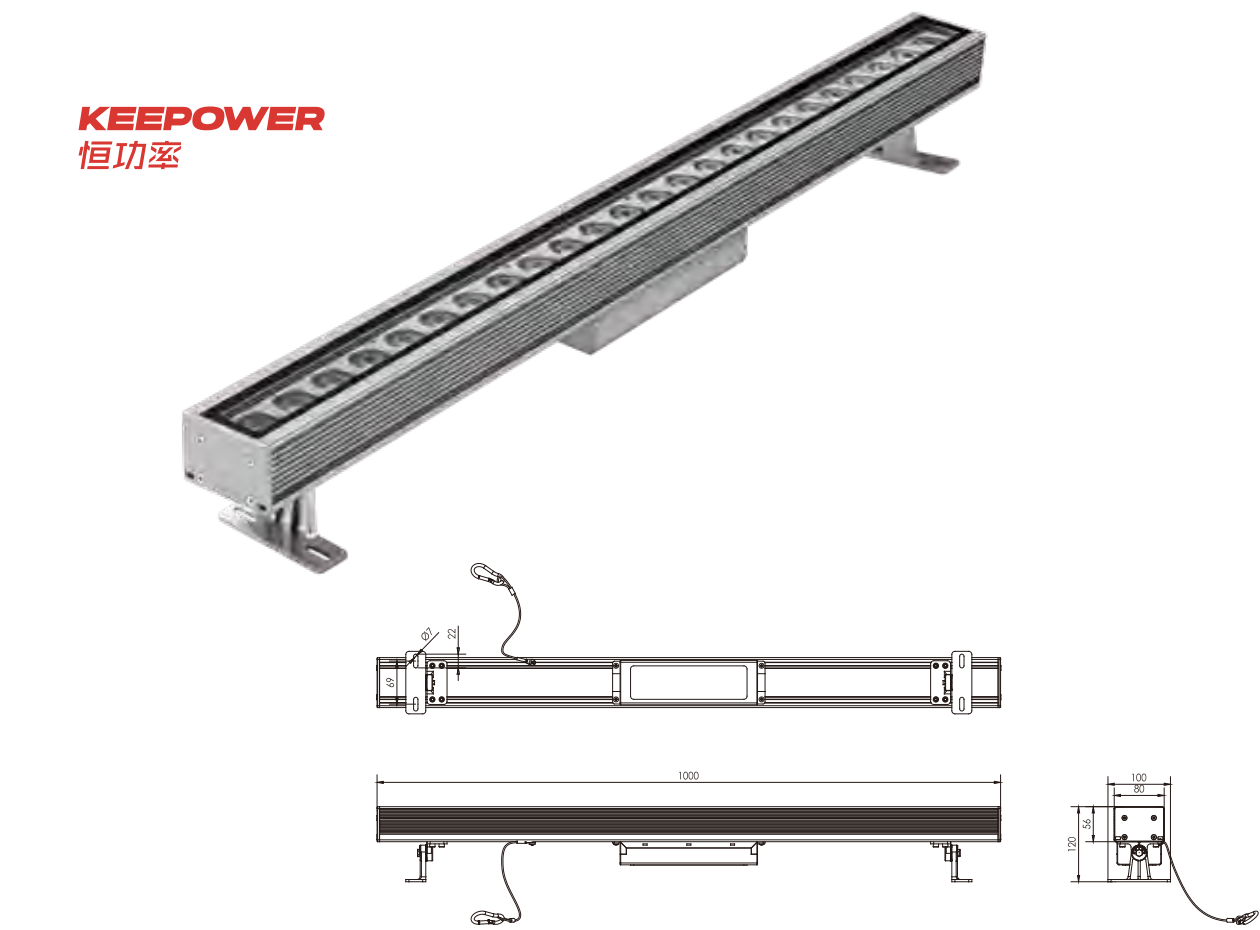

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐摩擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1309M-24	SL1309E-24	SL1309E-12(0.5m)	SL1309E-8(0.3m)
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L/OSRAM P9	CREE XP-L/OSRAM P9	CREE XP-L/OSRAM P9
Led数量/ Led Quantity	24pcs	24pcs	12pcs	8pcs
额定功率/ Rated Power	200W	200W	100W	60W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	Single
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x70° 5x20°		
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10%-90%	10%-90%	10%-90%	10%-90%
串联数量/ In series(max)	6pcs	6pcs	12pcs	20pcs
产品型号/ Product Code	SL1309N-24KP	SL1309Q-24KP	SL1309F-24	
Led品牌/ Led Brand	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	OSRAM RGBW 4in1	
Led数量/ Led Quantity	24pcs	24pcs	24pcs	
额定功率/ Rated Power	200W	200W	200W	
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBWCLA	RGBW	RGBW	
发光角度/ Beam Angle	15° 20° 30° 45° 15X60°	9° 15° 20° 30° 45° 15X60°	9° 15° 20° 30° 45° 15X60°	
控制方式/ Control Mode	DMX512	DMX512/RDM	DMX512/RDM	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	
环境湿度/ Ambient Humidity	10%-90%	10%-90%	10%-90%	
串联数量/ In series(max)	12pcs	6pcs	6pcs	
产品型号/ Product Code	SL1309F-12(0.5m)	SL1309F-8(0.3m)		
Led品牌/ Led Brand	OSRAM RGBW 4in1	OSRAM RGBW 4in1		
Led数量/ Led Quantity	12pcs	8pcs		
额定功率/ Rated Power	100W	60W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	RGBW		
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15X60°			
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃		
环境湿度/ Ambient Humidity	10%-90%	10%-90%		
串联数量/ In series(max)	12pcs	20pcs		

Flood Light Series

SL1309P

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

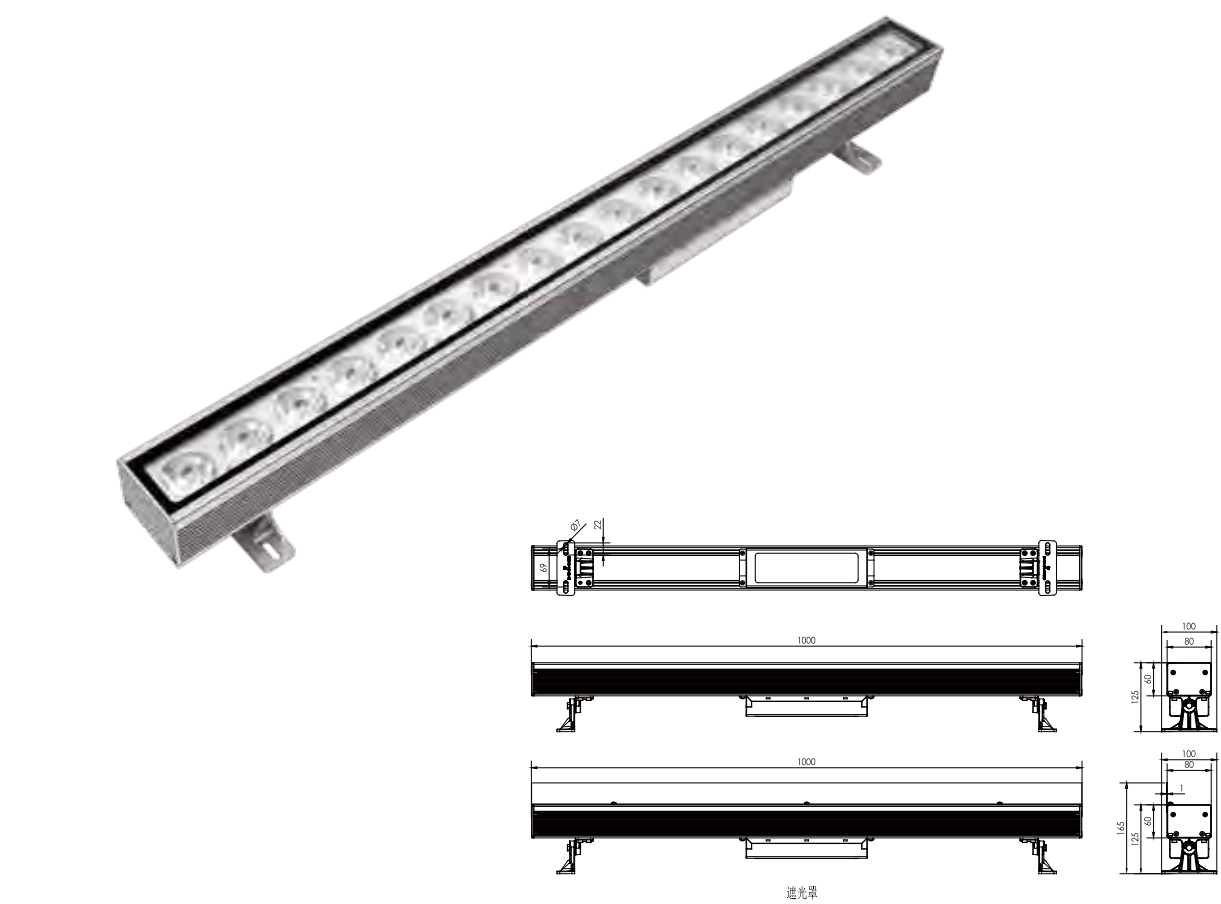

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1309PM-20	SL1309PM-10(0.5m)	SL1309PM-6(0.3m)	SL1309PF-20
Led品牌/ Led Brand	CREE	CREE	CREE	CREE
Led数量/ Led Quantity	20pcs	10pcs	6pcs	24pcs
额定功率/ Rated Power	180W	90W	60W	200W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW
发光角度/ Beam Angle	2° 2x40°			6° 6x40°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10%-90%	10%-90%	10%-90%	10%-90%
串联数量/ In series(max)	6pcs	6pcs	12pcs	12pcs
产品型号/ Product Code	SL1309PF-10(0.5m)	SL1309PF-6(0.3m)		
Led品牌/ Led Brand	CREE	CREE		
Led数量/ Led Quantity	12pcs	6pcs		
额定功率/ Rated Power	100W	60W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	RGBW		
发光角度/ Beam Angle	6° 6x40°			
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃		
环境湿度/ Ambient Humidity	10%-90%	10%-90%		
串联数量/ In series(max)	6pcs	6pcs		

Flood Light Series



SL1307

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



reddot winner 2021

KEEPOWER
恒功率

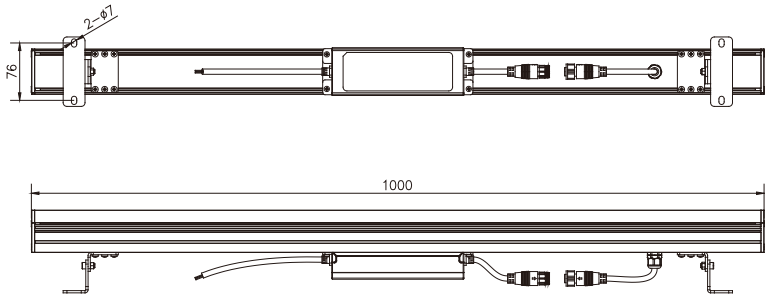

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification



产品型号/ Product Code	SL1307M-20	SL1307E-20	SL1307E-10(0.5m)	SL1307E-6(0.3m)
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/ Led Quantity	20pcs	20pcs	10pcs	6pcs
额定功率/ Rated Power	95W	95W	48W	30W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	Single
发光角度/ Beam Angle	2.5°	6° 12° 20°	30° 60° 10x70° 5x20°	
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	6pcs	6pcs	12pcs	20pcs
产品型号/ Product Code	SL1307N-20KP	SL1307Q-20KP	SL1307F-20	SL1307F-10(0.5m)
Led品牌/ Led Brand	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	OSRAM RGBW 4in1	OSRAM RGBW 4in1
Led数量/ Led Quantity	20pcs	20pcs	20pcs	10pcs
额定功率/ Rated Power	100W	100W	100W	50W
输入电压/ Input Voltage	DC24V	DC24V/AC100-305V	DC24V/AC100-305V	DC24V/AC100-305V
频率/ Frequency Range	/	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBWCLA	RGBW	RGBW	RGBW
发光角度/ Beam Angle	15° 20° 30° 15x60°		9° 15° 20° 30° 45° 15x60°	
控制方式/ Control Mode	DMX512	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	40pcs	40pcs	12pcs	25pcs
产品型号/ Product Code	SL1307F-6(0.3m)	SL1307R-20		
Led品牌/ Led Brand	OSRAM RGBW 4in1	LUXEON 7070		
Led数量/ Led Quantity	6pcs	20pcs		
额定功率/ Rated Power	30W	95W		
输入电压/ Input Voltage	DC24V/AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single		
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15X60°	30° Tilt.60°		
控制方式/ Control Mode	DMX512/RDM	CC/DALI/0-10V		
使用寿命/ Life	50000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	12pcs	6pcs		

Flood Light Series

SL1327

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

KEEPOWER
恒功率

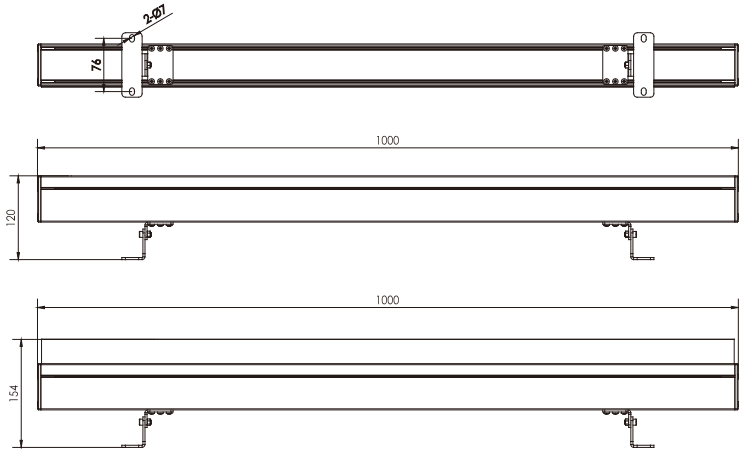

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1327M-20	SL1327E-20	SL1327E-10(0.5m)	SL1327E-6(0.3m)
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/ Led Quantity	20pcs	20pcs	10pcs	6pcs
额定功率/ Rated Power	100W	100W	50W	30W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 60° 10x70° 5x20°		
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10%-90%	10%-90%	10%-90%	10%-90%
产品型号/ Product Code	SL1327N-20KP	SL1327Q-20KP	SL1327F-20	SL1327F-10(0.5m)
Led品牌/ Led Brand	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	OSRAM RGBW 4in1	OSRAM RGBW 4in1
Led数量/ Led Quantity	20pcs	20pcs	20pcs	10pcs
额定功率/ Rated Power	100W	100W	100W	50W
输入电压/ Input Voltage	DC24V/AC100-305V	DC24V/AC100-305V	DC24V/AC100-305V	DC24V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBWCLA	RGBW	RGBW	RGBW
发光角度/ Beam Angle	15° 20° 30° 10x60°	9° 15° 20° 30° 45° 15x60°		
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10%-90%	10%-90%	10%-90%	10%-90%
产品型号/ Product Code	SL1327F-6(0.3m)	SL1327R-20		
Led品牌/ Led Brand	OSRAM RGBW 4in1	LUXEON 7070		
Led数量/ Led Quantity	6pcs	20pcs		
额定功率/ Rated Power	30W	100W		
输入电压/ Input Voltage	DC24V/AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single		
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15x60°	30° Tilt.60°		
控制方式/ Control Mode	DMX512/RDM	CC/DALI/0-10V		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃		
环境湿度/ Ambient Humidity	10%-90%	10%-90%		



Flood Light Series

SL1306

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

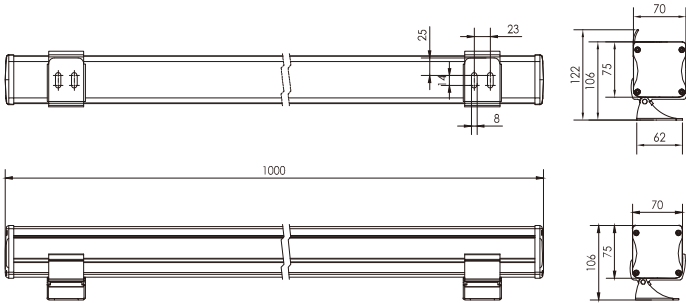







产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
 - 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
 - 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。
- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
 - 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
 - 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL1306B-54	SL1306A-54	SL1306B-27(0.5m)	SL1306A-27(0.5m)
LED品牌/LED Brand	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
LED数量/LED Quantity	54pcs	54pcs	27pcs	27pcs
额定功率/Rated Power	108W	60W	54W	30W
输入电压/Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V	DC36V/AC100-240V	DC36V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 60° 15x30° 15x60°			
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66	IP66
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	1/20(pcs)	2/20(pcs)	2/24(pcs)	4/44(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)

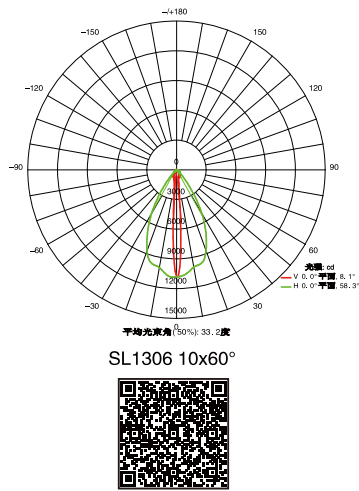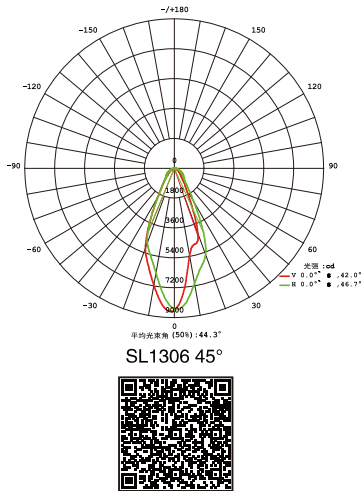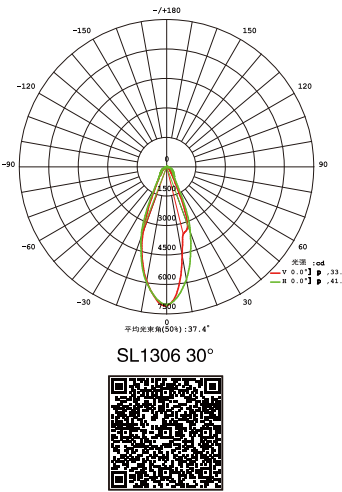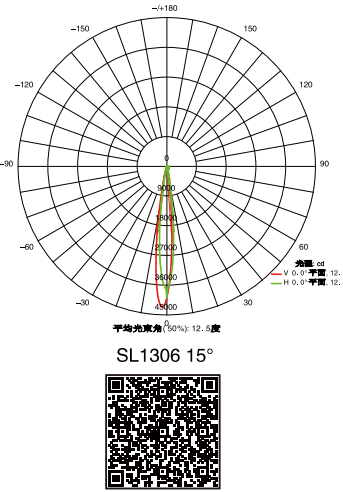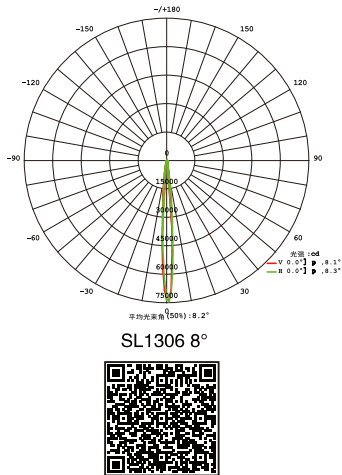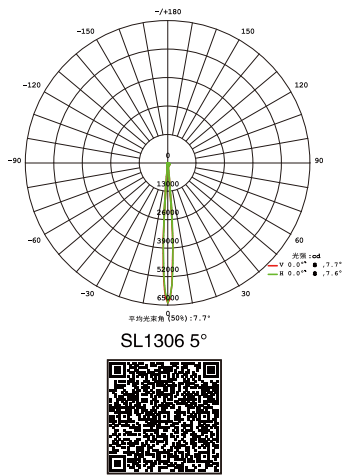

Flood Light Series

SL1304

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

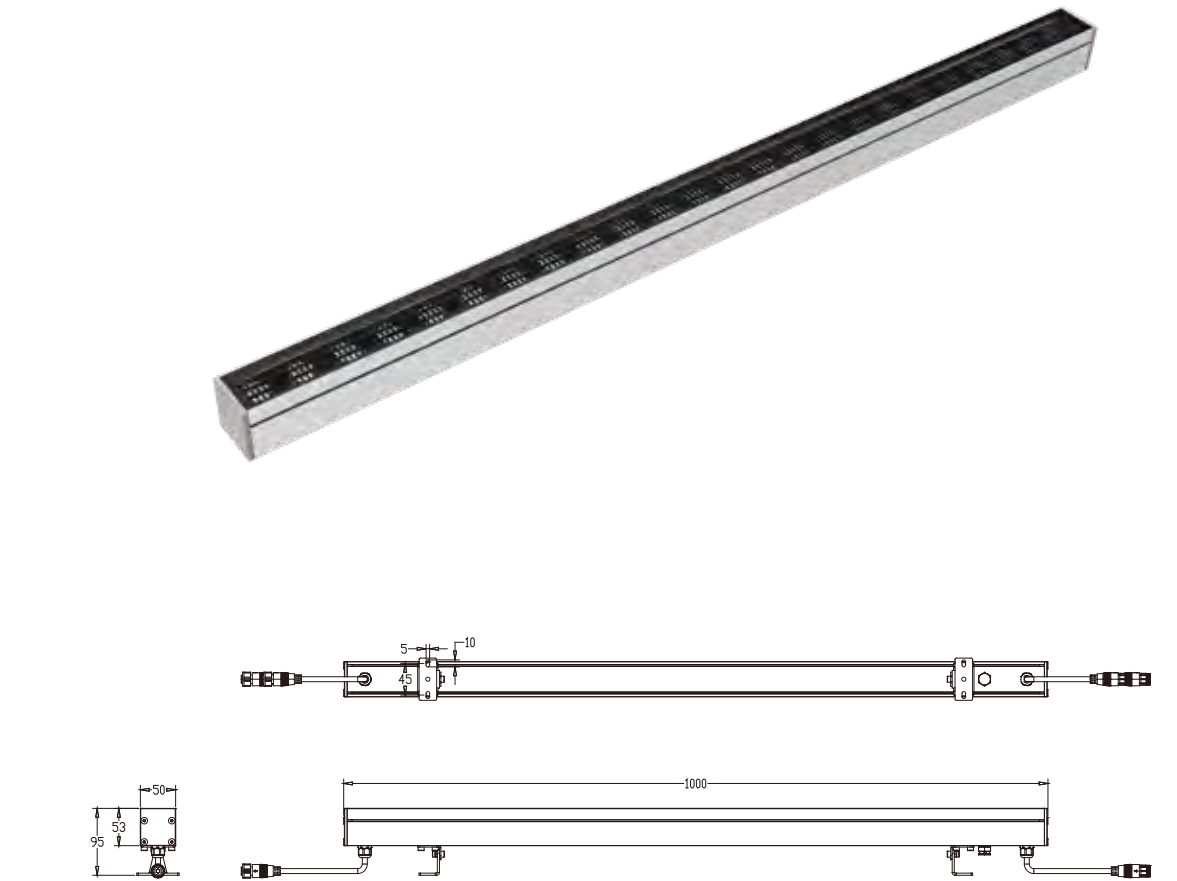

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源, 内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1304P-24	SL1304H-24	SL1304H-18	SL1304A-36	SL1304A-24	SL1304A-18
Led品牌/ Led Brand	RGBWCL 6in1	CREE/OSRAM RGBW 4IN1		LUMILEDS	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	24pcs	24pcs	18pcs	36pcs	24pcs	18pcs
额定功率/ Rated Power	48W	48W	36W	36W	24W	18W
输入电压/ Input Voltage	AC110-305V	AC110-305V	AC110-305V	AC110-305V	AC110-305V	AC110-305V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	RGBWCL	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Rangle	30° 45° 60° 30x60°	20° 45° 60° 15x60° 15x25°		8° 15° 20° 30° 60° 15x30° 15x60°		
控制方式/ Control Mode	DMX512	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	5pcs	5pcs	6pcs	6/60(pcs)	10/90(pcs)	12/120(pcs)
产品型号/ Product Code	SL1304H-12(0.5)	SL1304H-9(0.5)	SL1304H-6(0.3)	SL1304A-18(0.5)	SL1304A-12(0.5)	SL1304A-9(0.5)
Led品牌/ Led Brand	CREE/OSRAM RGBW 4in1			LUMILEDS	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	12pcs	9pcs	6pcs	18pcs	12pcs	9pcs
额定功率/ Rated Power	24W	18W	12W	18W	12W	9W
输入电压/ Input Voltage	AC110-305V	AC110-305V	AC110-305V	AC110-305V	AC110-305V	AC110-305V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	RGB/Single	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Rangle	20° 45° 60° 15x60°			15° 20° 30° 60° 15x30° 15x60°		
控制方式/ Control Mode	DMX512/CC	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	10/90(pcs)	12pcs	20pcs	12pcs	20pcs	26pcs
产品型号/ Product Code	SL1304A-8(0.3)					
Led品牌/ Led Brand	LUMILEDS					
Led数量/ Led Quantity	8pcs					
额定功率/ Rated Power	8W					
输入电压/ Input Voltage	AC110-305V					
频率/ Frequency Range	/					
颜色 / Color	RGB/Single					
发光角度/ Beam Rangle	15° 20° 30° 60° 15x30° 15x60°					
控制方式/ Control Mode	DMX512/CC					
使用寿命/ Life	50000H					
防护等级/ Protection Grade	IP66					
环境温度/ Ambient Temperature	-25℃-50℃					
环境温度/ Ambient Humidity	10% ~ 90%					
串联数量/ In series(max)	30pcs					

Flood Light Series

SL1305

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

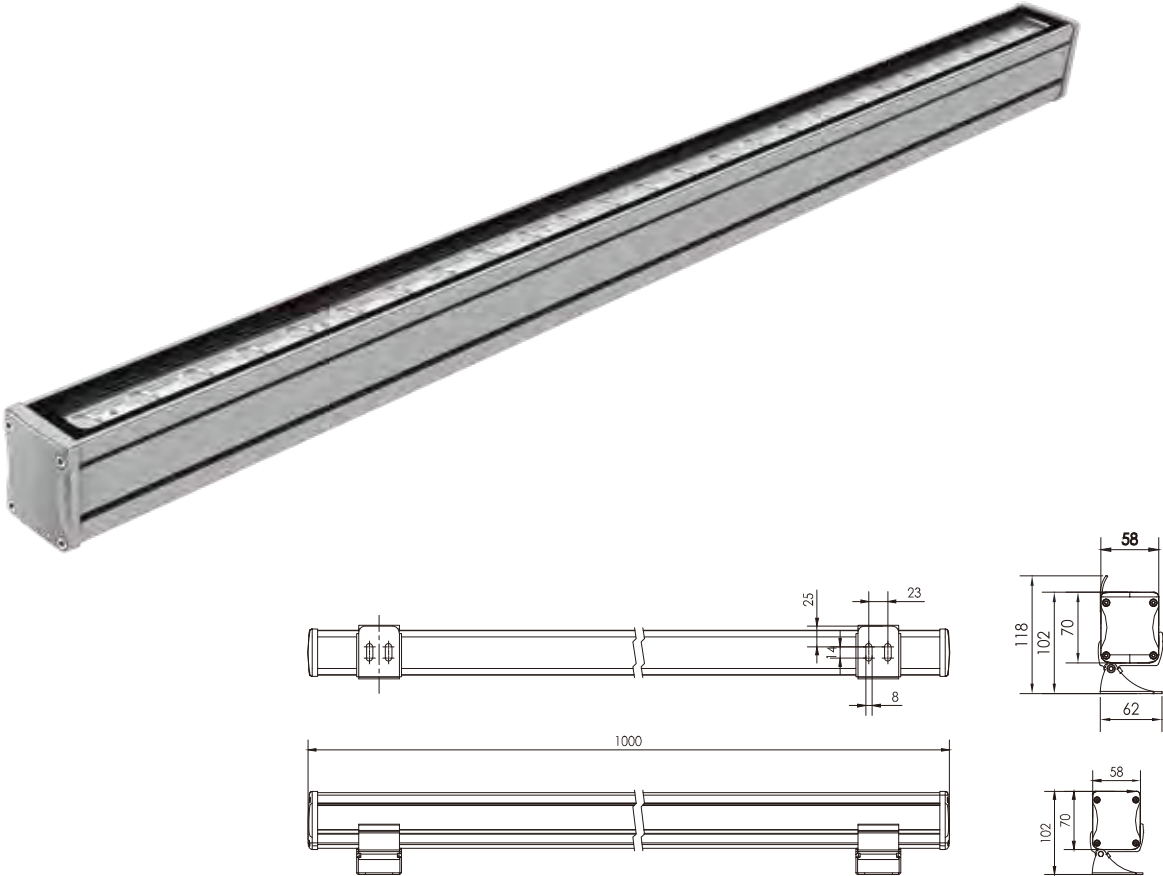

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。

二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。

三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。

四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。
- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.

2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.





3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.



4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL1305F-18	SL1305A-36	SL1305A-24	SL1305A-18	SL1305A-12	SL1305A-9(0.5m)
Led品牌/Led Brand	CREE RGBW 4 in 1	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/Led Quantity	18pcs	36pcs	24pcs	18pcs	12pcs	9pcs
额定功率/Rated Power	72W	42W	28W	22W	14W	11W
输入电压/Input Voltage	DC36V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	/	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGBW	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 15x60°				
控制方式/Control Mode	DMX512	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3pcs	3/30(pcs)	5/46(pcs)	6/60(pcs)	10/94(pcs)	13/120(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

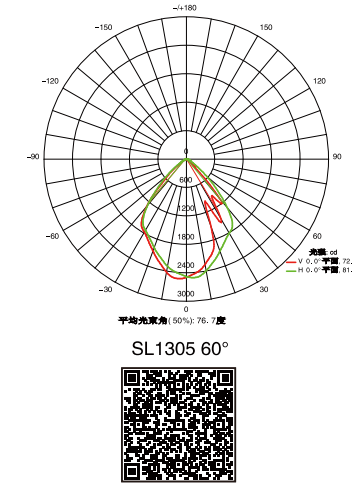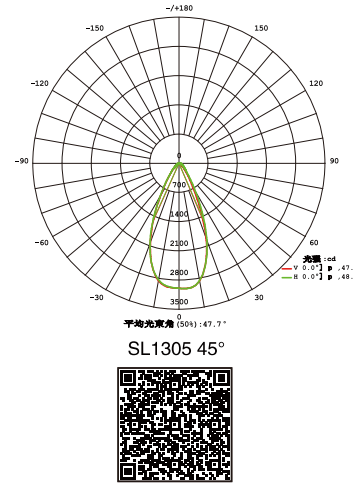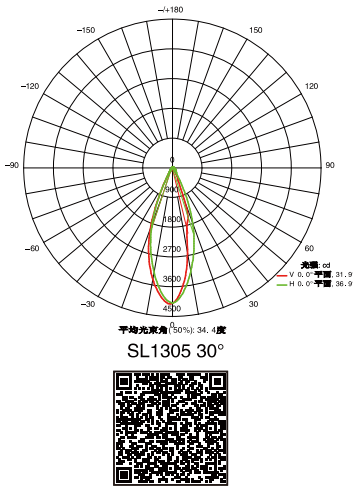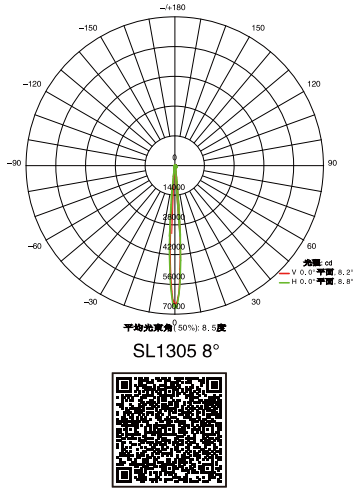

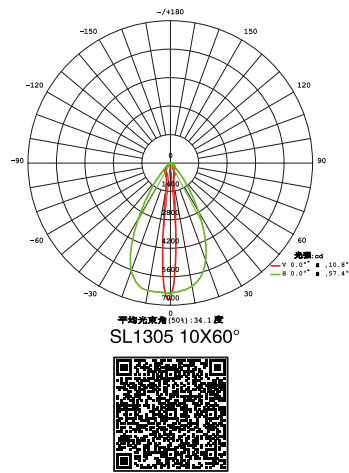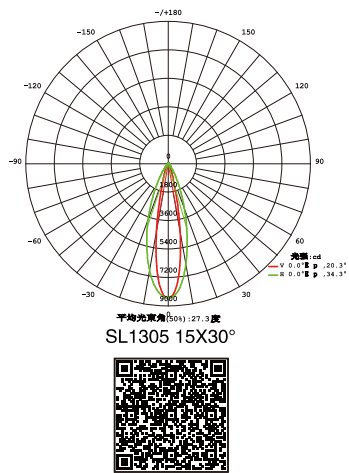




Flood Light Series

SL1301

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



reddot winner 2021

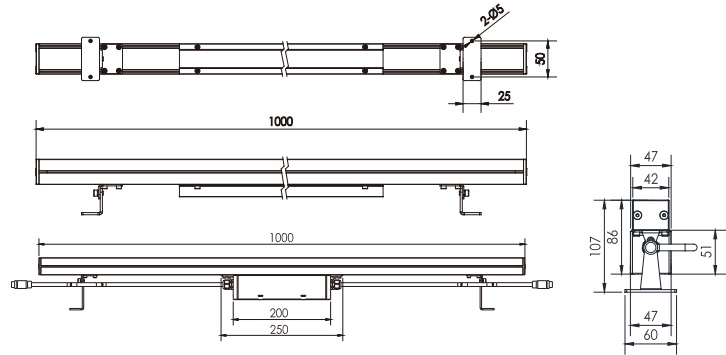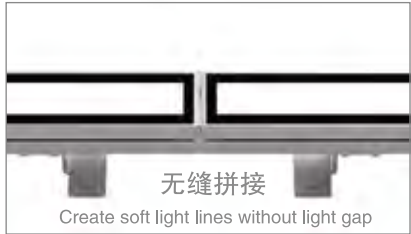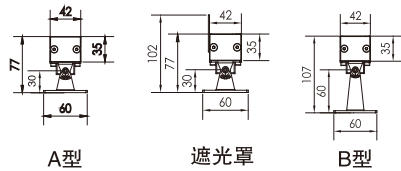


产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
 - 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
 - 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。
- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
 - 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
 - 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1301P-24	SL1301H-24	SL1301H-18	SL1301A-36	SL1301A-24	SL1301A-18
Led品牌/ Led Brand	RGBWCL 6in1	CREE/OSRAM RGBW 4IN1		LUMILEDS	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	24pcs	24pcs	18pcs	36pcs	24pcs	18pcs
额定功率/ Rated Power	48W	48W	36W	36W	24W	18W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	RGBWCL	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Rangle	30° 45° 60° 30x60°	20° 45° 60° 15x60° 15x25°		8° 15° 20° 30° 60° 15x30° 15x60°		
控制方式/ Control Mode	DMX512	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	5pcs	5pcs	6pcs	6pcs	10pcs	12pcs
产品型号/ Product Code	SL1301H-12(0.5)	SL1301H-9(0.5)	SL1301H-6(0.3)	SL1301A-18(0.5)	SL1301A-12(0.5)	SL1301A-9(0.5)
Led品牌/ Led Brand	CREE/OSRAM RGBW 4IN1			LUMILEDS	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	12pcs	9pcs	6pcs	18pcs	12pcs	9pcs
额定功率/ Rated Power	24W	18W	12W	18W	12W	9W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	RGB/Single	RGBW	RGBW	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Rangle	20° 45° 60° 15x60°			15° 20° 30° 60° 15x30° 15x60°		
控制方式/ Control Mode	DMX512/CC	DMX512	DMX512	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	10pcs	12pcs	20pcs	12pcs	20pcs	26pcs
产品型号/ Product Code	SL1301A-8(0.3)					
Led品牌/ Led Brand	LUMILEDS					
Led数量/ Led Quantity	8pcs					
额定功率/ Rated Power	8W					
输入电压/ Input Voltage	DC24V					
频率/ Frequency Range	/					
颜色 / Color	RGB/Single					
发光角度/ Beam Rangle	15° 20° 30° 60° 15x30° 10x60°					
控制方式/ Control Mode	DMX512/CC					
使用寿命/ Life	50000H					
防护等级/ Protection Grade	IP66					
环境温度/ Ambient Temperature	-25℃~50℃					
环境温度/ Ambient Humidity	10%~90%					
串联数量/ In series(max)	30pcs					


配光曲线 (半角) Distribution Curve Flux (SBC Case)

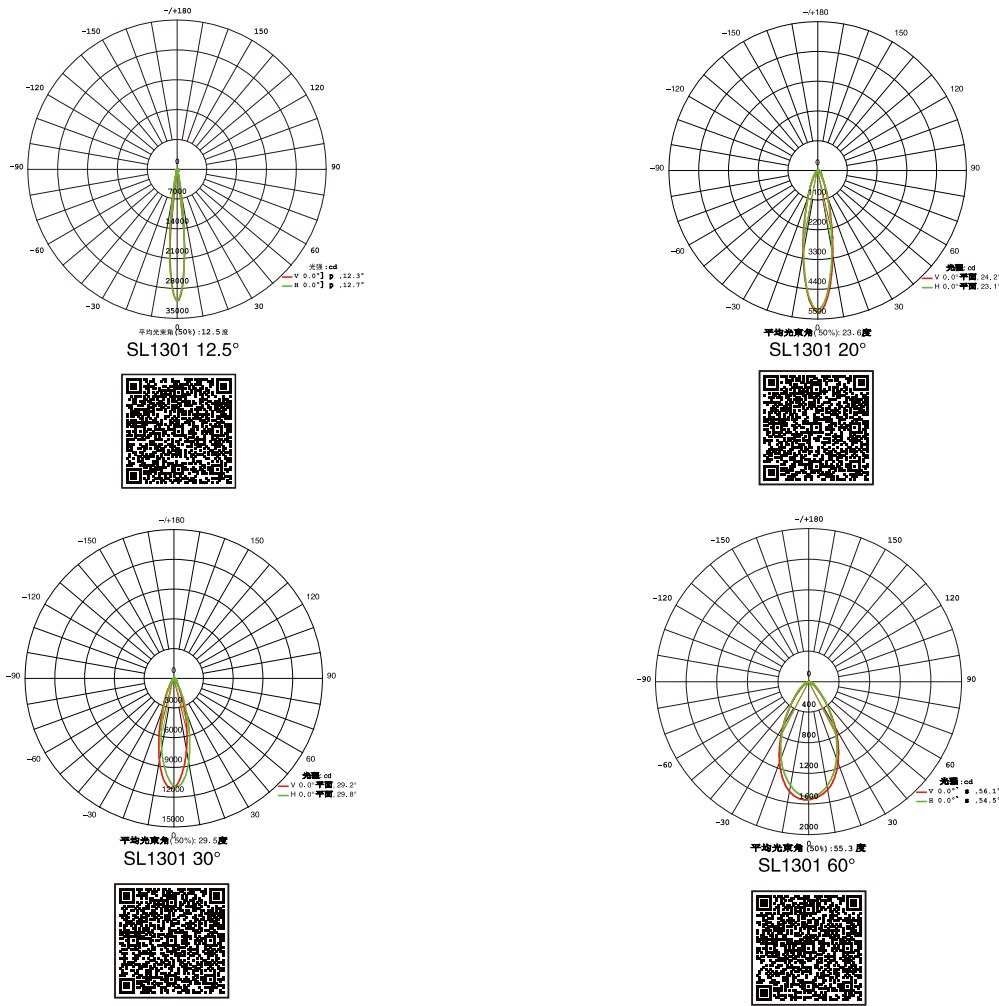

Flood Light Series

SL1302

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

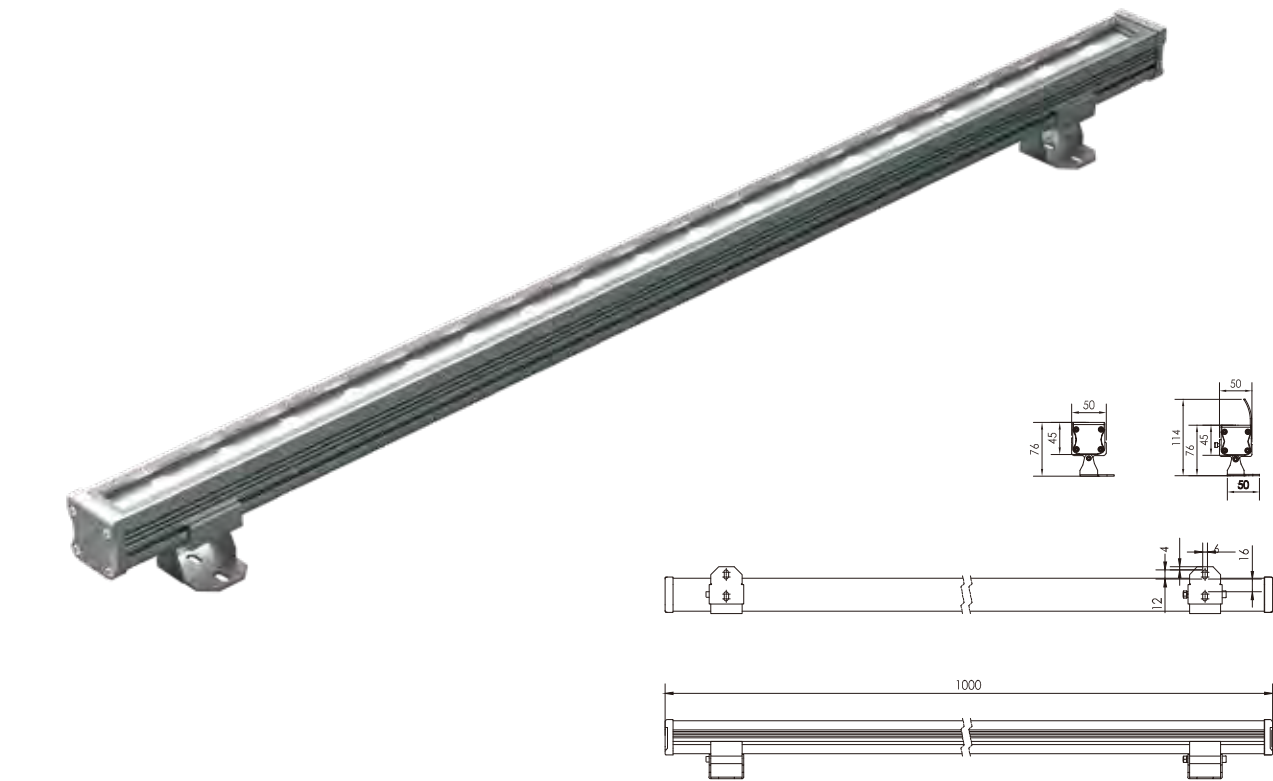

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。

二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。

三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。

四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。
- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.

2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.





3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.

4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL1302A–36	SL1302A–24	SL1302A–18	SL1302A–12	SL1302A–9(0.5m)	SL1302A–6(0.3m)
LED品牌/LED Brand	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
LED数量/LED Quantity	36pcs	24pcs	18pcs	12pcs	9pcs	6pcs
额定功率/Rated Power	40W	26W	20W	13W	10W	7W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	RGB/Single	RGB/Single	RGB/Single	Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 60° 15x30° 15x60°					
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series	3pcs	4pcs	6pcs	10pcs	14pcs	20pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

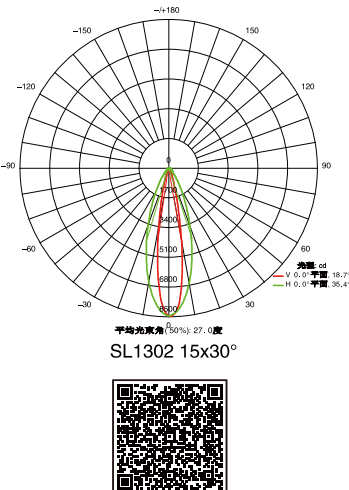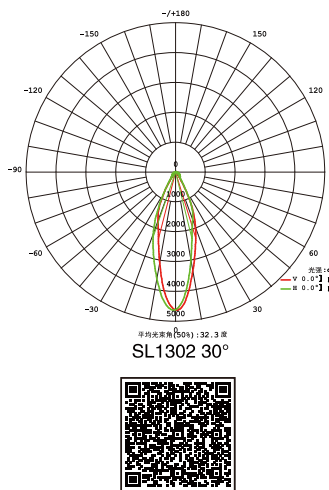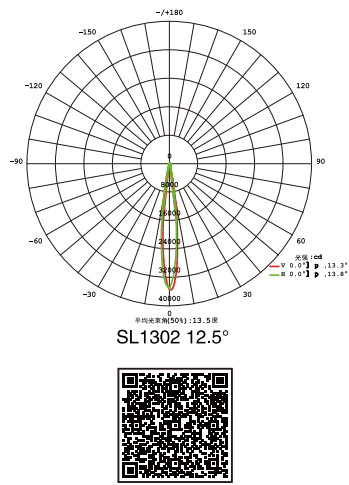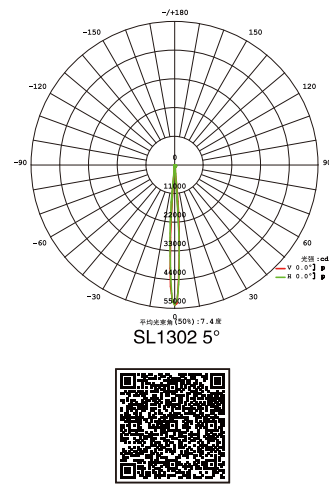

Flood Light Series

SL1303

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

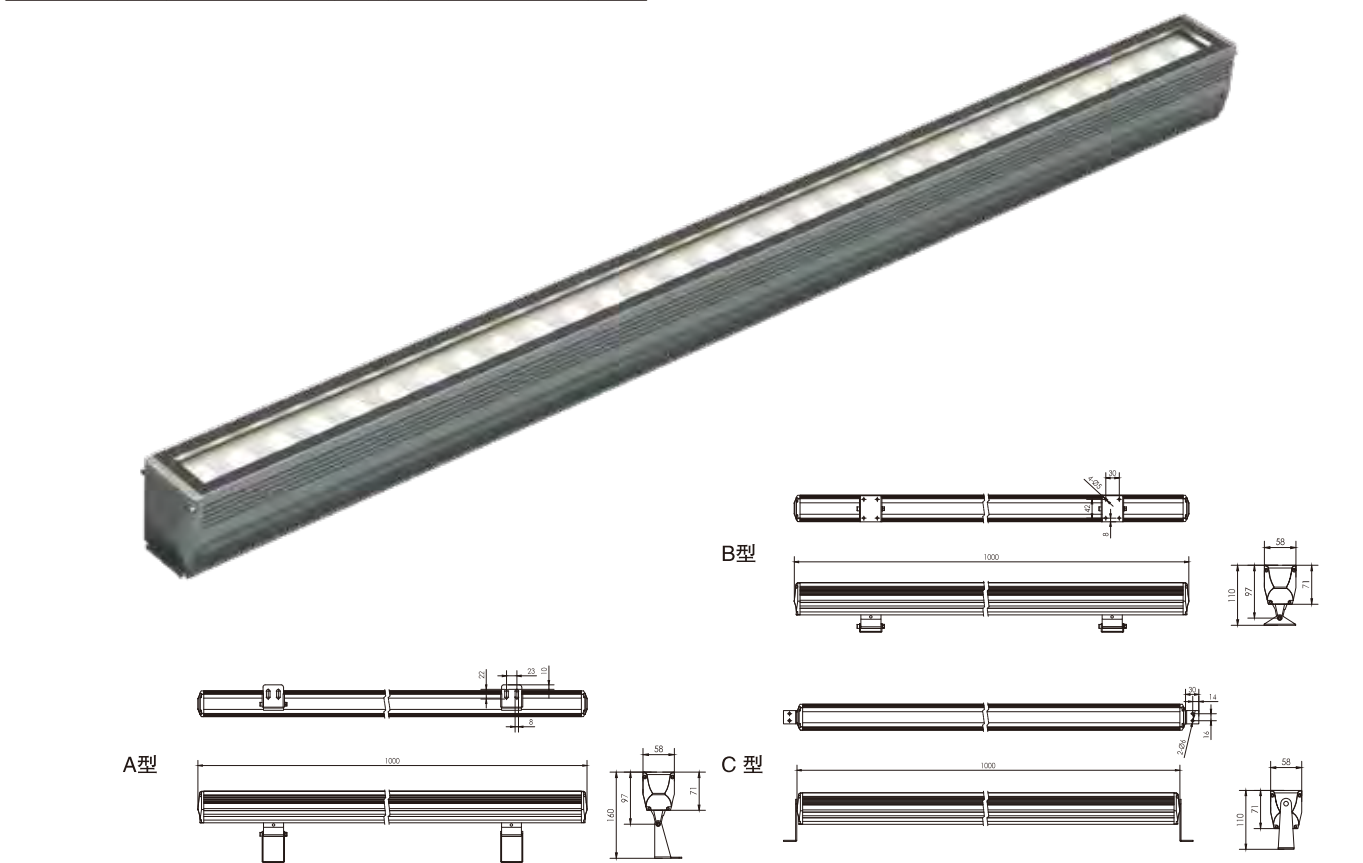

产品简介 Product Introduction




- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可选择三种支架安装方式，满足多种场合的户外工程应用。
- 三、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Three rack mounting ways available can meet the various occasions demands for outdoor projects.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1303F-18	SL1303A-36	SL1303A-30	SL1303A-27	SL1303A-18	SL1303A-9(0.5m)
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/ Led Quantity	18pcs	36pcs	30pcs	27pcs	18pcs	9pcs
额定功率/ Rated Power	72W	42W	36W	32W	22W	11W
输入电压/ Input Voltage	DC36V	DC24V/AC100-240V	DC36V/AC100-240V	DC36V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/ Frequency Range	/	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Angle	20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 15x60°				
控制方式/ Control Mode	DMX512	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3pcs	3/30(pcs)	6/36(pcs)	6/40(pcs)	6/60(pcs)	12/120(pcs)


配光曲线 (半角) Distribution Curve Flux (SBC Case)

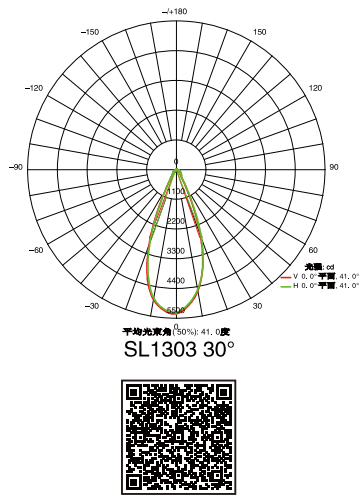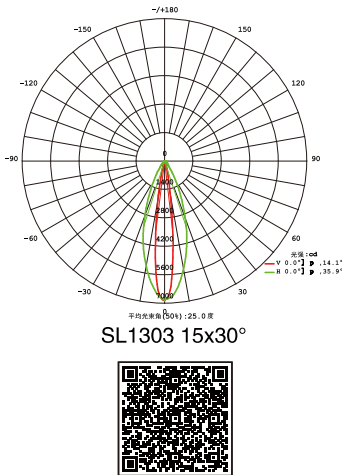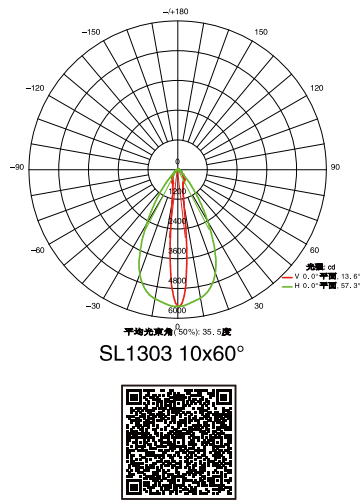

Flood Light Series

SL1323

防眩遮光罩 Anti-glare shield		zoomneo 2.5° 三次光学 zoomneo 2,5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3,5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



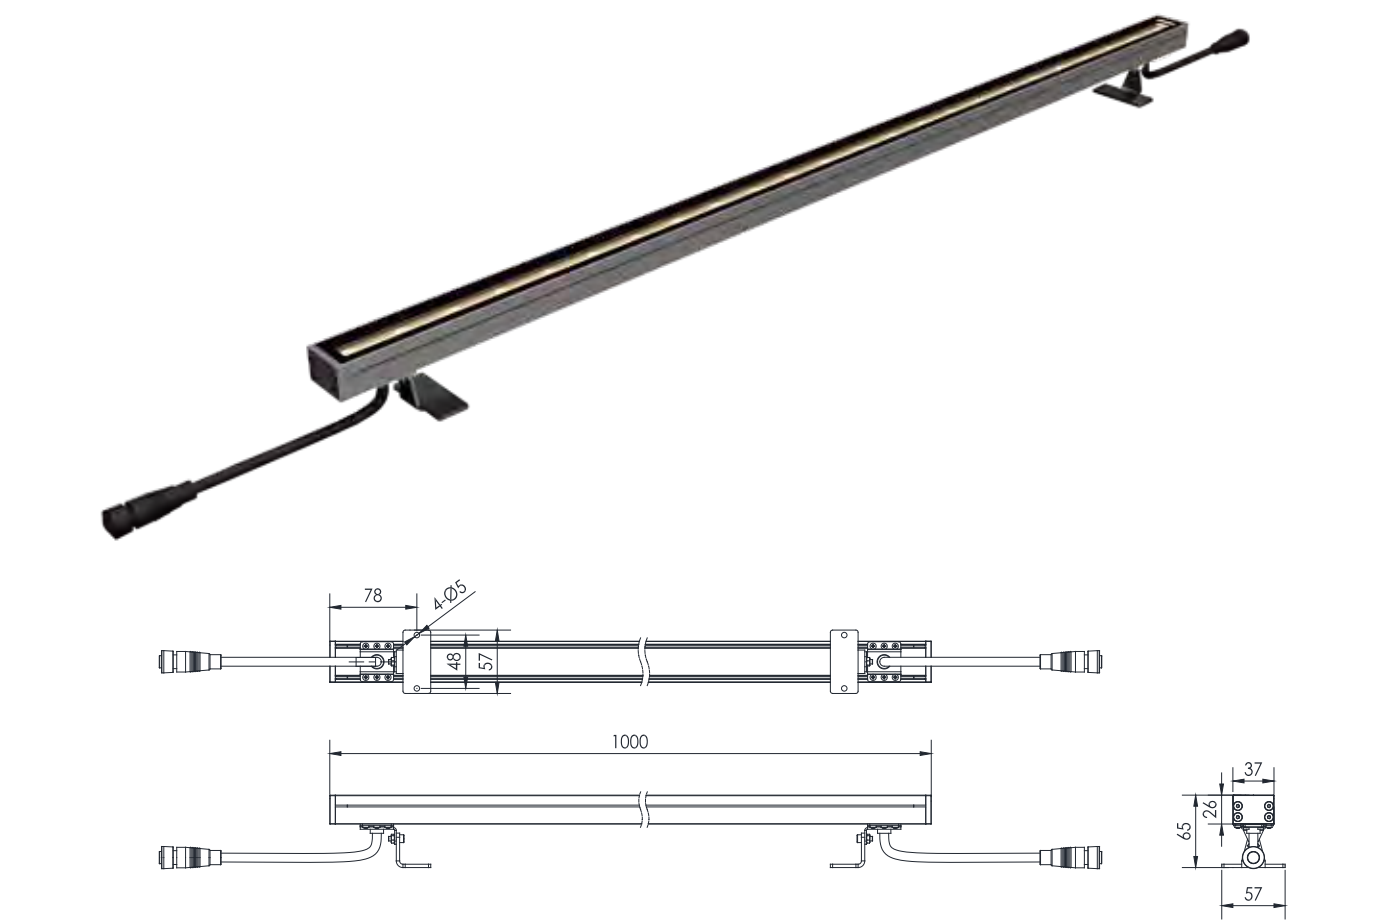


产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

配光曲线 (半角) Distribution Curve Flux (SBC Case)

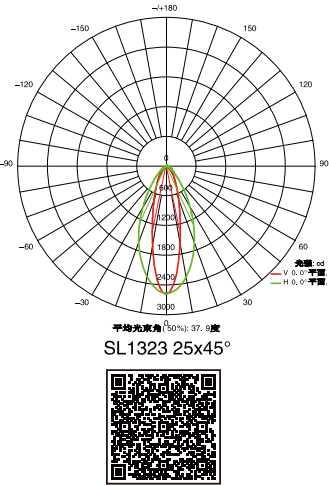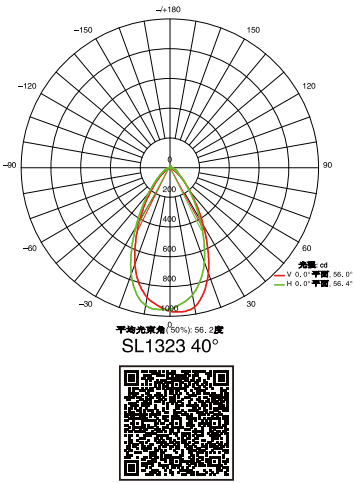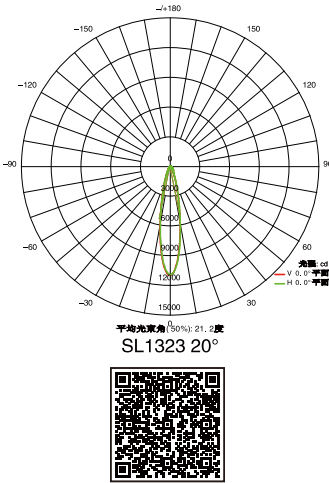


技术参数 Specification


产品型号/ Product Code	SL1323A–24	SL1323A–18	SL1323A–12(0.5)	SL1323A–9(0.5)	SL1323A–6(0.3)
Led品牌/ Led Brand	LUMILEDS/OSRAM	LUMILEDS/OSRAM	LUMILEDS/OSRAM	LUMILEDS/OSRAM	LUMILEDS/OSRAM
Led数量/ Led Quantity	24pcs	18pcs	12pcs	9pcs	6pcs
额定功率/ Rated Power	24W	18W	12W	9W	6W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/
颜色 / Color	Single/RGBW 4IN1	Single/RGBW 4IN1	Single/RGBW 4IN1	Single/RGBW 4IN1	Single/RGBW 4IN1
发光角度/ Beam Angle	20° 30° 45° 60° 25x45°				
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	6pcs	8pcs	12pcs	16pcs	24pcs

接线示意图 Wiring Diagram


RGB A 型

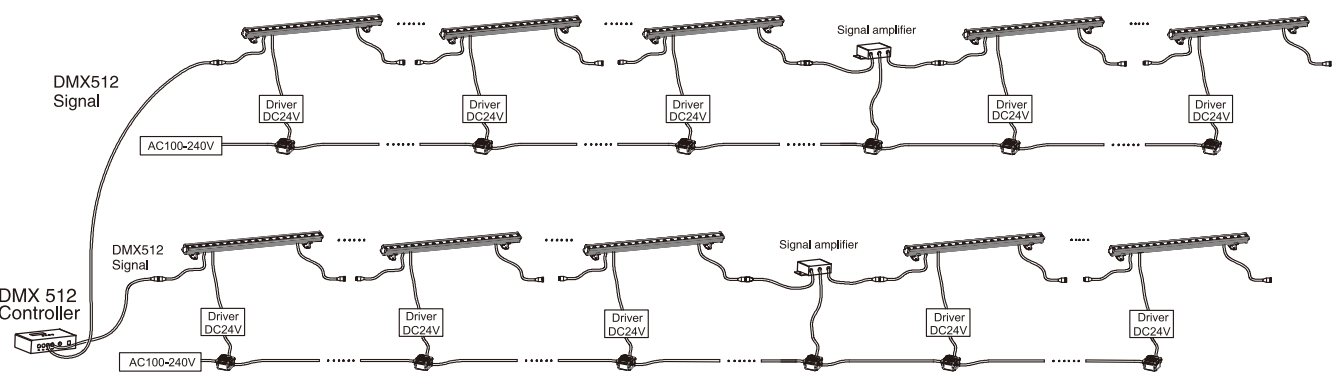

RGB B 型

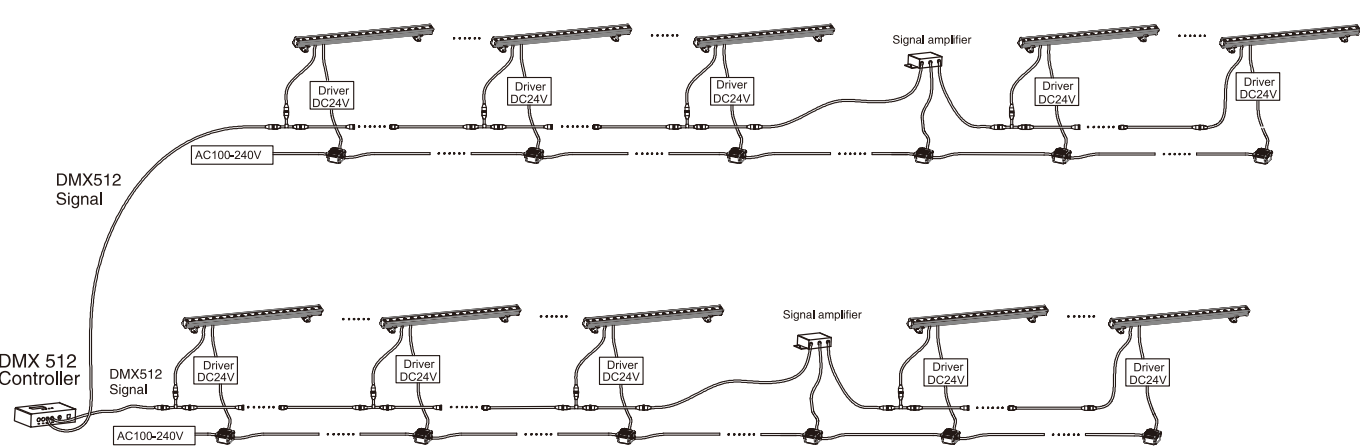


单色 (Single Color)

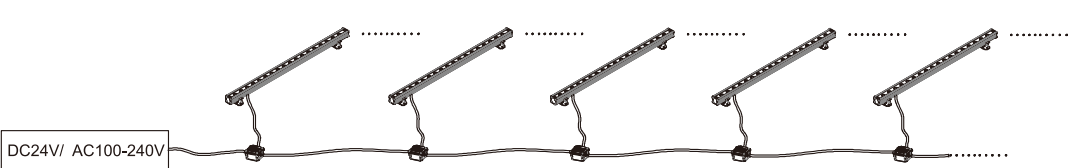

Flood Light Series


SL1321

防眩遮光罩 Anti-glare shield		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

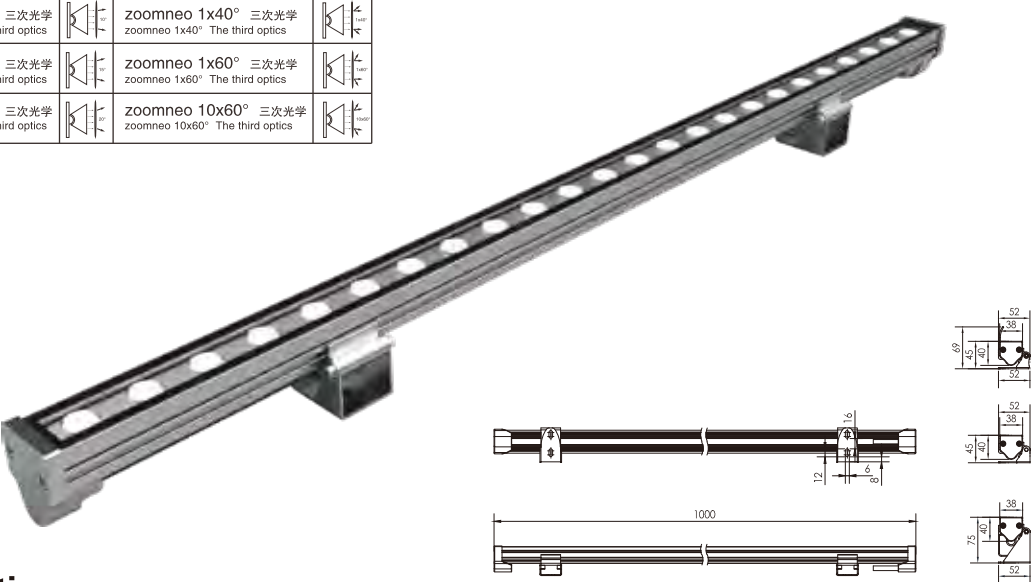

技术参数 Specification


产品型号/Product Code	SL1321A-36	SL1321A-24	SL1321A-18	SL1321A-12	SL1321A-12(0.5m)	SL1321A-9(0.5m)
LED品牌 LED Brand	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE	LUMILEDS/CREE
LED数量 LED Quantity	36pcs	24pcs	18pcs	12pcs	12pcs	9pcs
额定功率 Rated Power	36W	24W	18W	12W	12W	9W
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率 Frequency Range	/	/	/	/	/	/
颜色 Color	Single	Single	Single	Single	Single	Single
发光角度 Beam Angle	20 ° 30° 55° 25x45°					
控制方式 Control Mode	CC	CC	CC	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
产品型号/ Product Code		SL1321A-6(0.3m)				
LED品牌/ LED Brand		LUMILEDS/CREE				
LED数量/ LED Quantity		6pcs				
额定功率/ Rated Power		6W				
输入电压/ Input Voltage		DC24V				
频率/ Frequency Range		/				
颜色 / Color		Single				
发光角度/ Beam Angle		12° 30° 55° 25x45°				
控制方式/ Control Mode		CC				
使用寿命/ Life		50000H				
防护等级/ Protection Grade		IP66				
环境温度/ Ambient Temperature		-25℃~50℃				
环境湿度/ Ambient Humidity		10%~90%				

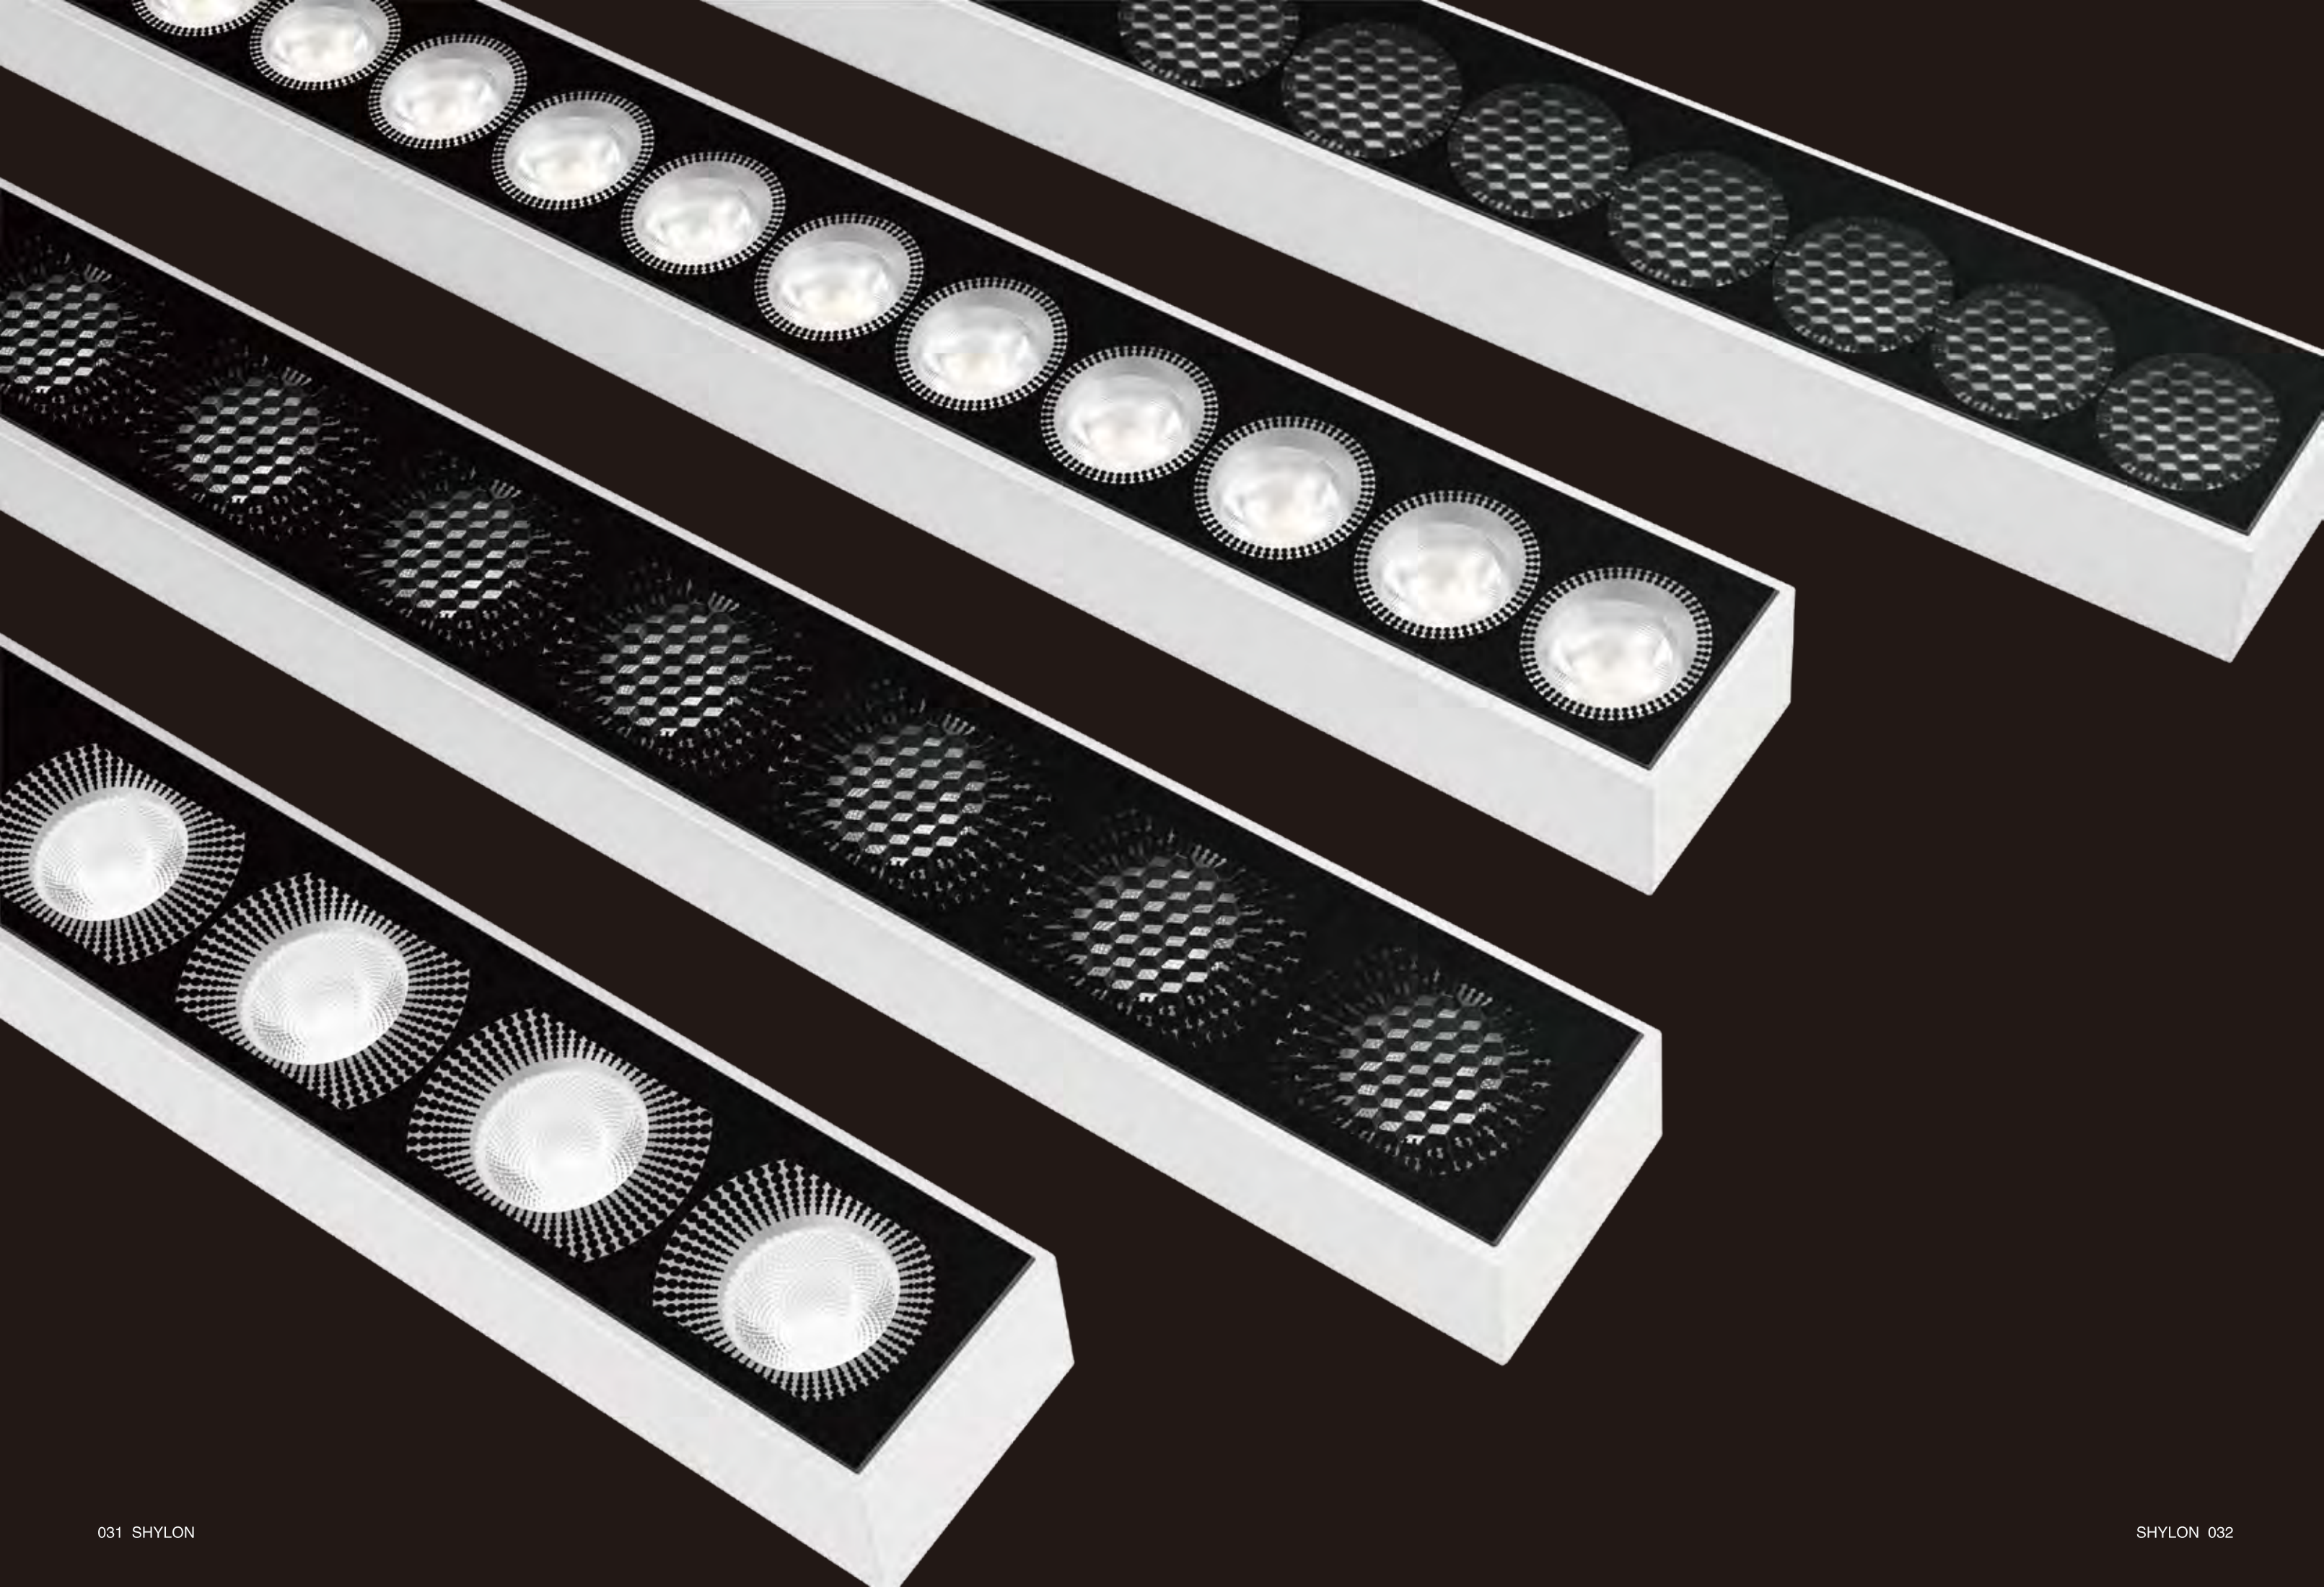



Flood Light Series

SL1360

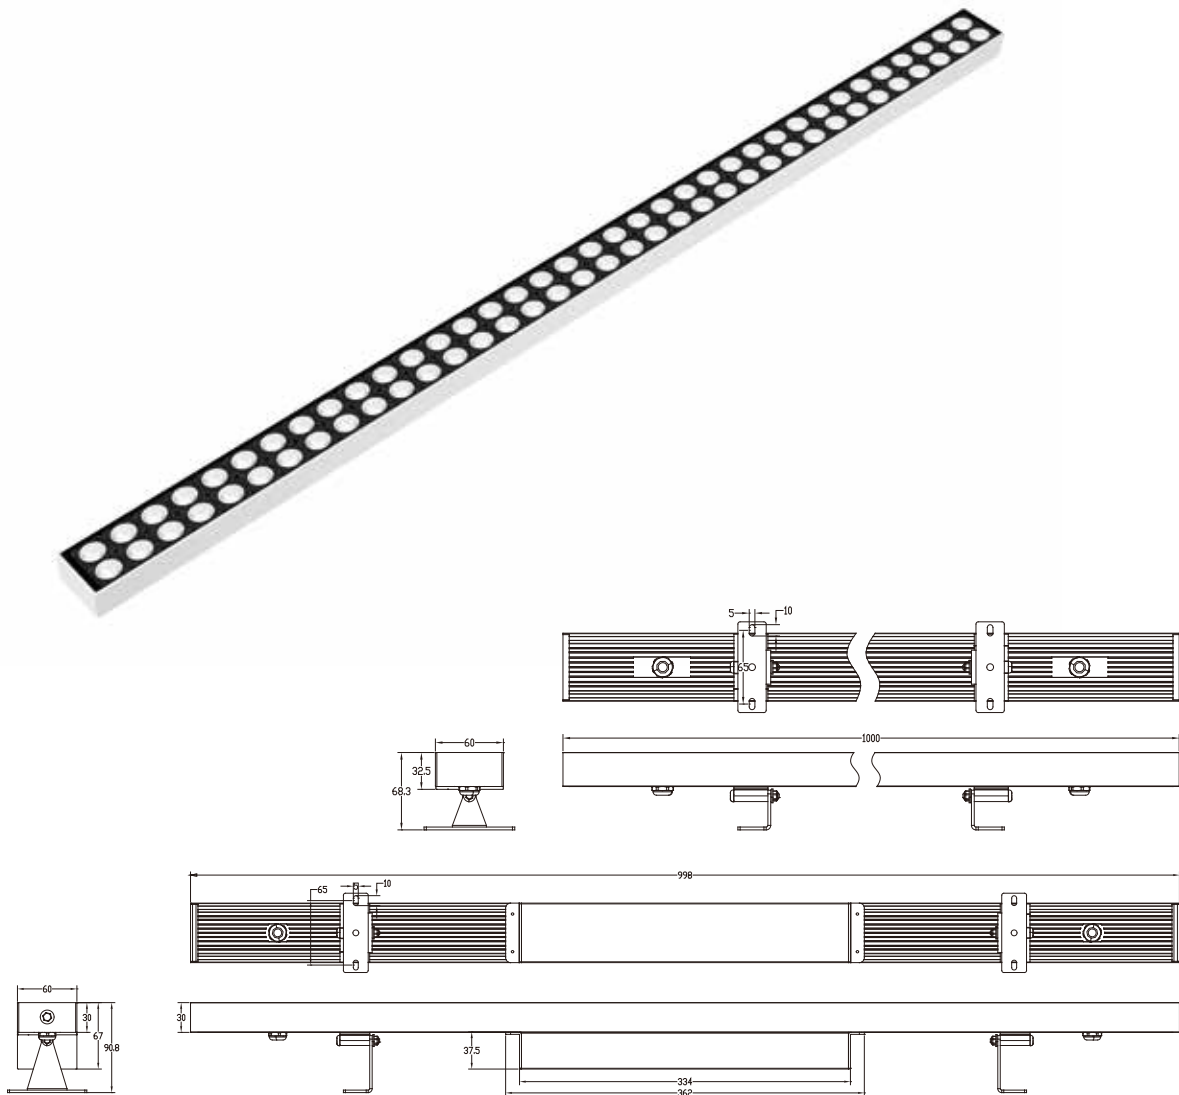


技术参数 Specification

产品型号/ Product Code	SL1360AB-72	SL1360AB-36(0.5m)	SL1360AB-24(0.3m)	SL1360BB-72	SL1360BB-36(0.5m)	SL1360BB-24(0.3m)
Led品牌/ Led Brand	LUMILEDS/OSRAM		LUMILEDS/OSRAM	OSRAM RGBW 4in1		OSRAM RGBW 4in1
Led数量/ Led Quantity	72pcs	36pcs	24pcs	72pcs	36pcs	24pcs
额定功率/ Rated Power	100W	50W	32W	100W	50W	32W
输入电压/ Input Voltage	DC24V/AC100-305V		DC24V/AC100-305V			
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/ Beam Angle	20° 30° 45° 60° 20x40° 18x50°		15° 20° 30° 45° 60° 25x45°			
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	1/12Pcs	2/24pcs	3/40pcs	1/12pcs	2/24pcs	3/40pcs

Flood Light Series


SL1361A

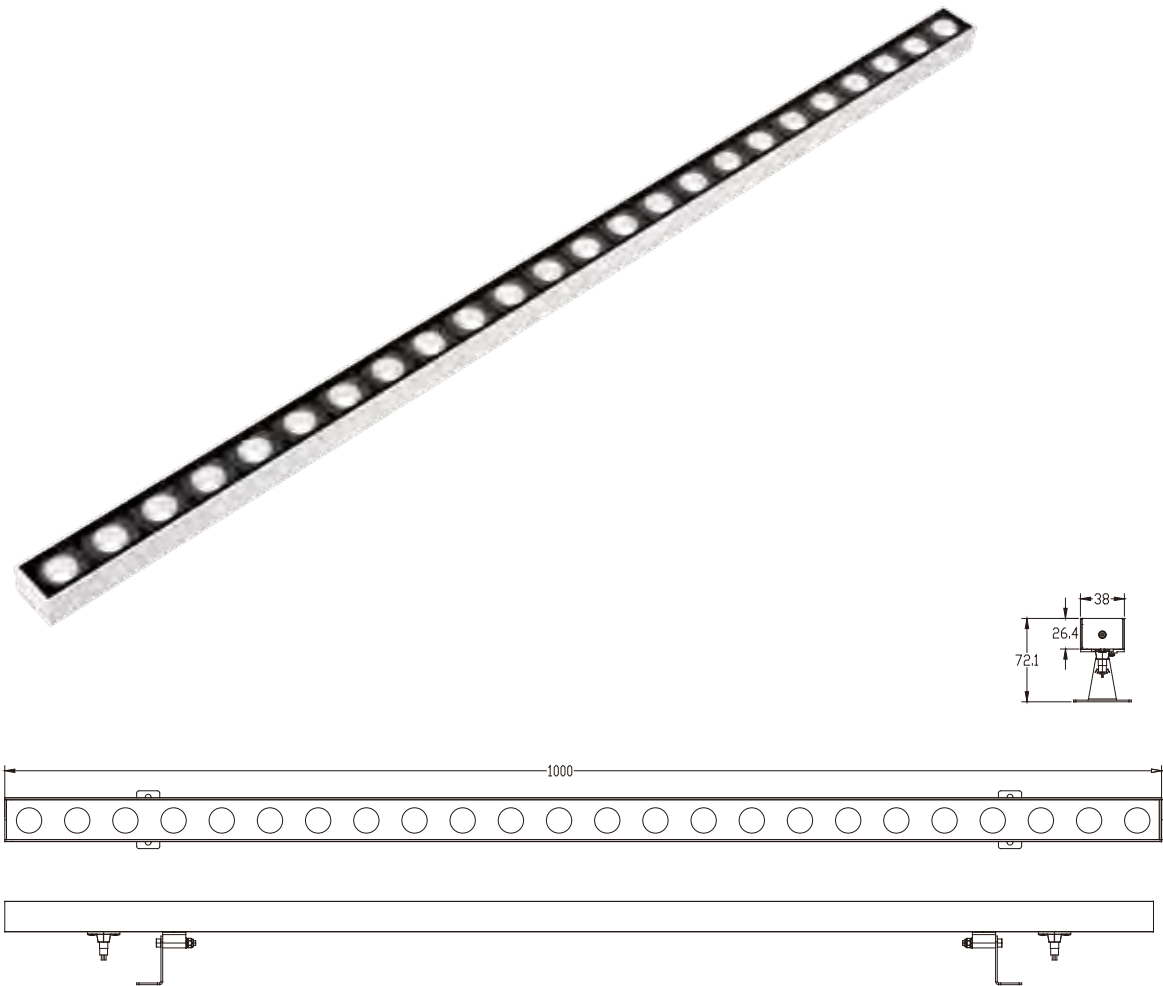

技术参数 Specification

产品型号/Product Code	SL1361AB-36	SL1361AA-36	SL1361AB-18(0.5m)	SL1361AA-18(0.5)	SL1361AB-9 (0.3m)	SL1361AA-9 (0.3m)
LED品牌 LED Brand	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030	LUMILEDS 2835
LED数量 LED Quantity	36pcs	36pcs	18pcs	18pcs	9pcs	9pcs
额定功率 Rated Power	48W	36W	24W	18W	15W	12W
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率 Frequency Range	/	/	/	/	/	/
颜色 Color	Single	Single	Single	Single	Single	Single
发光角度 Beam Angle	20° 30° 45° 60° 20x40° 18x50°					
控制方式 Control Mode	CC	CC	CC	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%


Flood Light Series
SL1361B

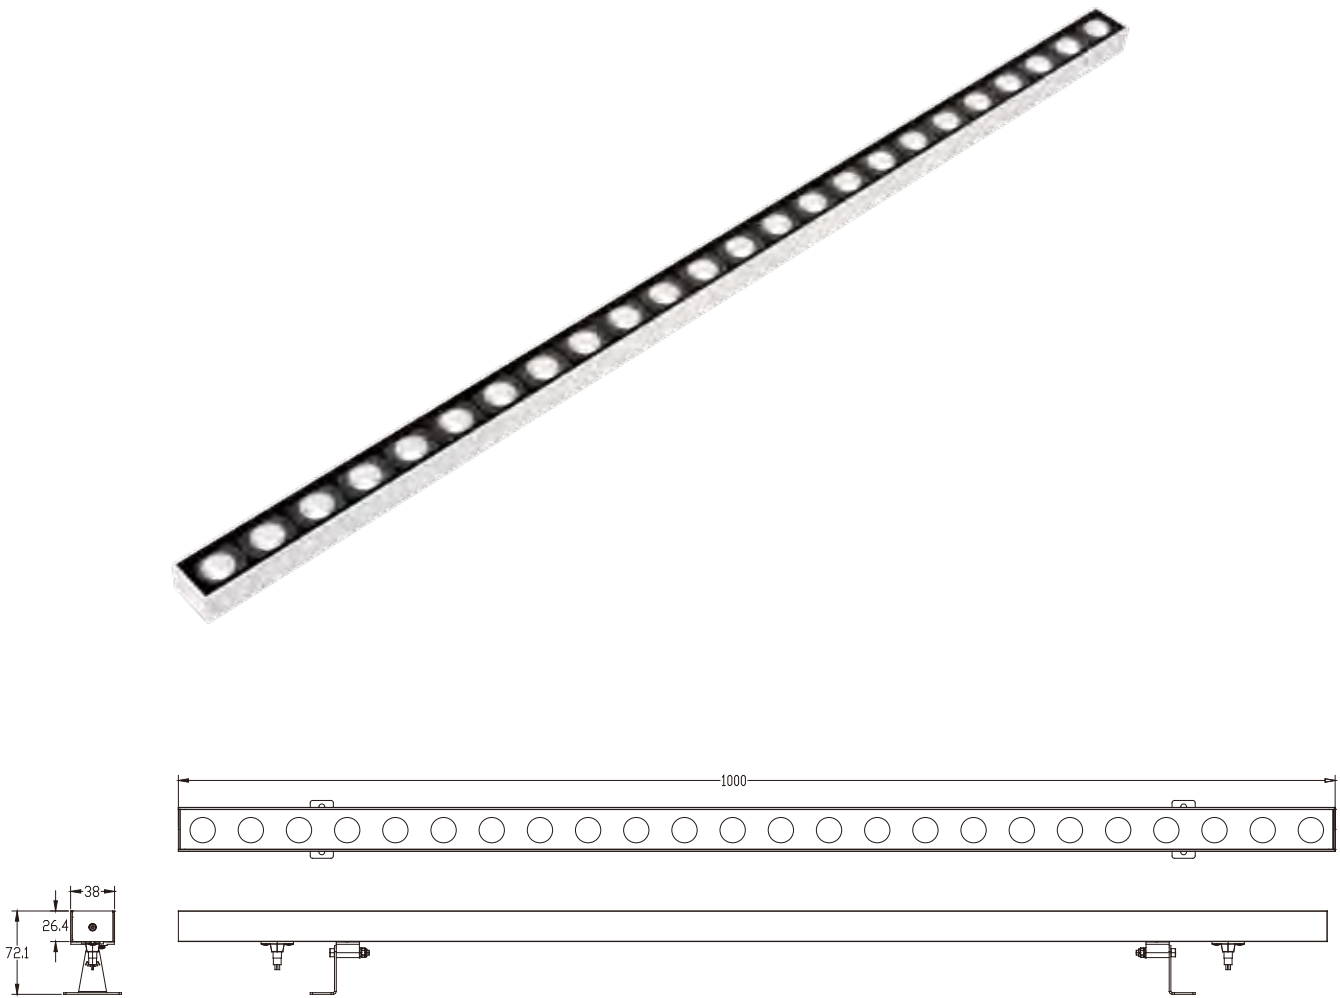

技术参数 Specification

产品型号/Product Code	SL1361BB-24	SL1361BB-18	SL1361BB-12(0.5m)	SL1361BB-9(0.5m)	SL1361BB-6(0.3m)	
LED品牌 LED Brand	OSRAM	OSRAM	OSRAM	LUMILEDS 2835	LUMILEDS 3030	
LED数量 LED Quantity	24pcs	18pcs	12pcs	18pcs	6pcs	
额定功率 Rated Power	48W	36W	24W	18W	12W	
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	
频率 Frequency Range	/	/	/	/	/	
颜色 Color	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	
发光角度 Beam Angle	15° 20° 30° 45° 60° 25x45°					
控制方式 Control Mode	DMX512	DMX512	DMX512	DMX512	DMX512	
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	


Flood Light Series
SL1362A

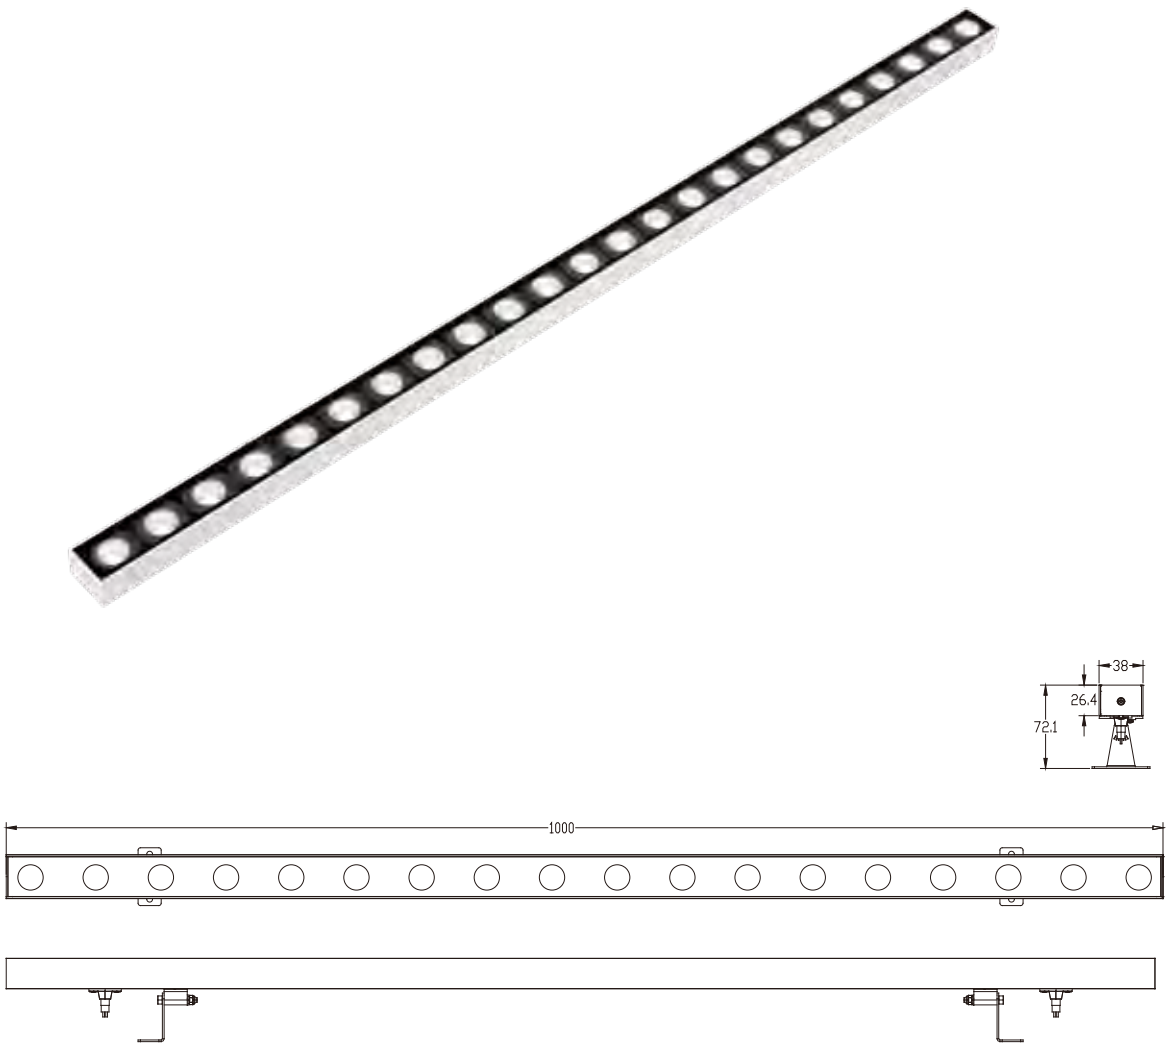

技术参数 Specification

产品型号/Product Code	SL1362AA-24	SL1362AA-18	SL1362AA-12(0.5m)	SL1362AA-9(0.5m)	SL1362AB-6(0.3m)	
LED品牌 LED Brand	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030	LUMILEDS 2835	LUMILEDS 3030	
LED数量 LED Quantity	24pcs	18pcs	12pcs	9pcs	6pcs	
额定功率 Rated Power	24W	18W	12W	9W	6W	
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	
频率 Frequency Range	/	/	/	/	/	
颜色 Color	Single	Single	Single	Single	Single	
发光角度 Beam Angle	20° 30° 40° 60° 20x40° 18x50°					
控制方式 Control Mode	CC	CC	CC	CC	CC	
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	


Flood Light Series
SL1362B

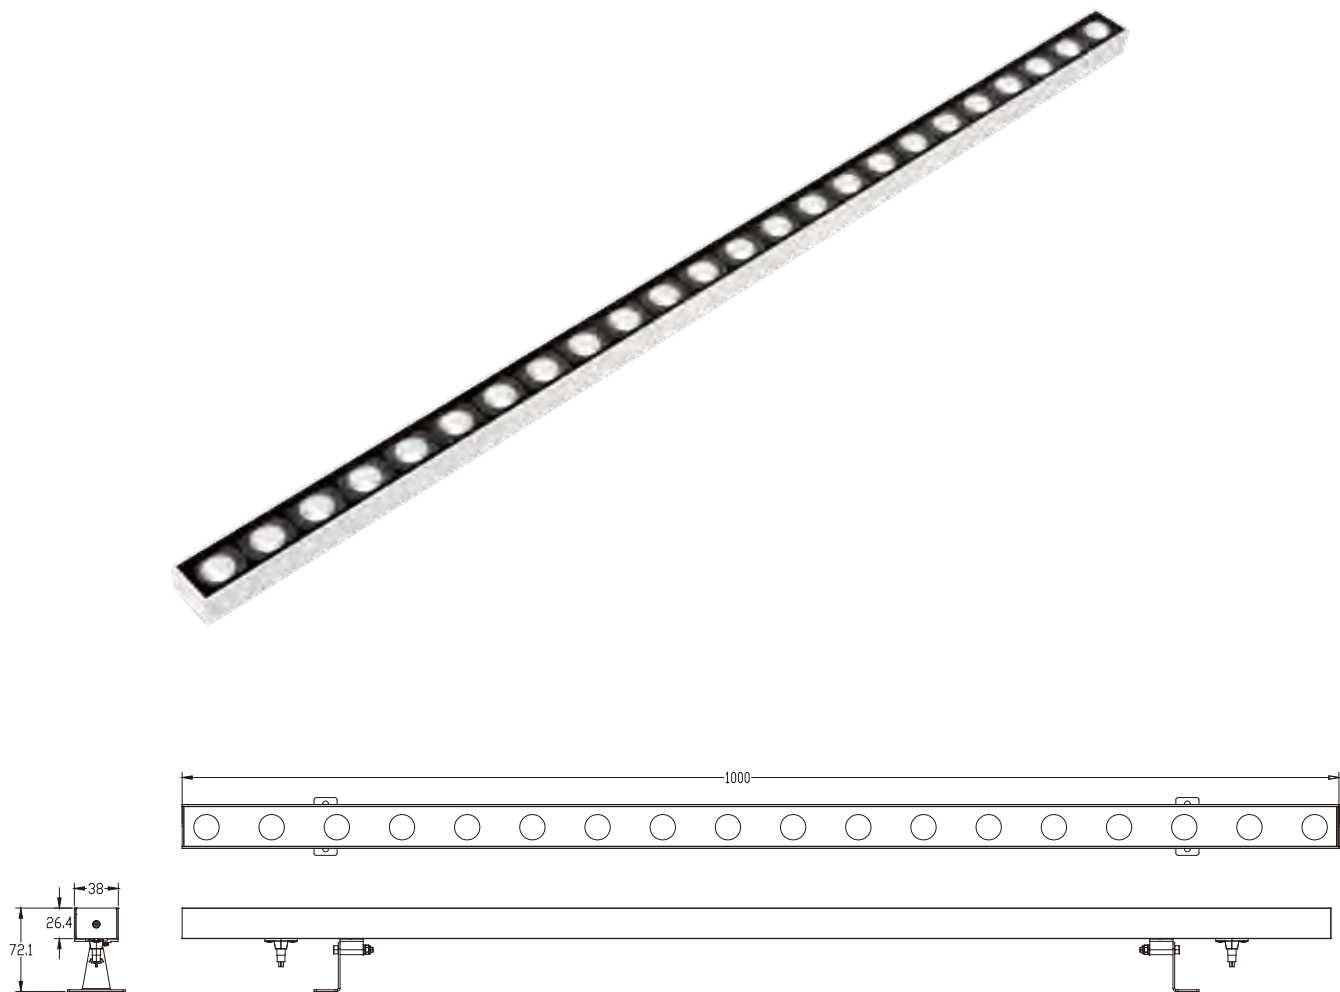

技术参数 Specification

产品型号/Product Code	SL1362BB-18	SL1362BB-12	SL1362BB-9(0.5m)	SL1362BB-6(0.5m)	SL1362BB-6(0.3m)	
LED品牌 LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	
LED数量 LED Quantity	18pcs	12pcs	9pcs	6pcs	6pcs	
额定功率 Rated Power	24W	18W	12W	9W	8W	
输入电压 Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	
频率 Frequency Range	/	/	/	/	/	
颜色 Color	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	RGBW 4IN1	
发光角度 Beam Angle	20° 30° 45° 60° 25x45°					
控制方式 Control Mode	DMX512	DMX512	DMX512	DMX512	DMX512	
使用寿命 Life	50000H	50000H	50000H	50000H	50000H	
防护等级 Protection Grade	IP66	IP66	IP66	IP66	IP66	
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	

配光曲线 (半角) Distribution Curve Flux (SBC Case)

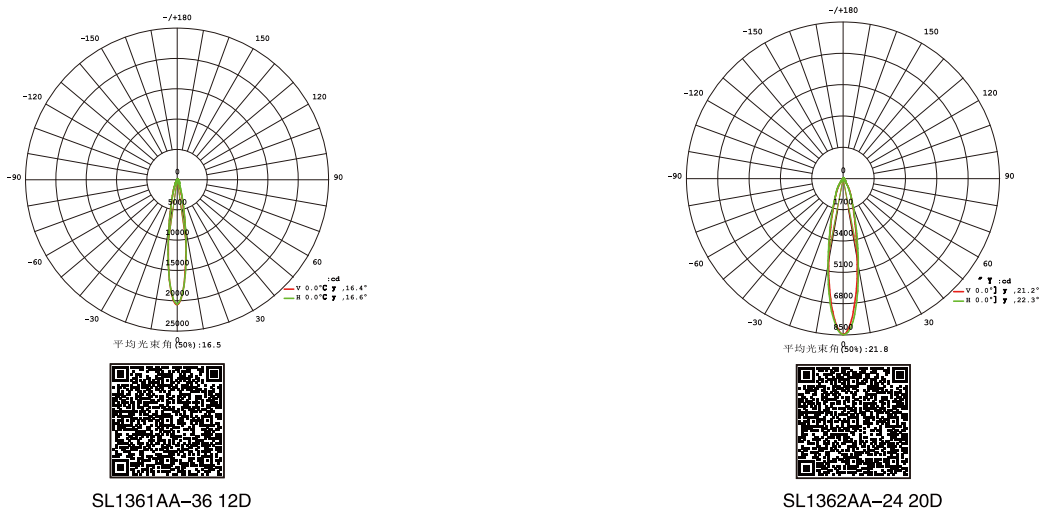

Flood Light Series

SL1130F

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窩玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

CO₂↓50%

原生1度角

K值>500

产品简介 Product Introductuon

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1130FM-36	SL1130FE-36	SL1130FK-36	SL1130FN-36KP
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	CREE XHP50	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	36pcs	36pcs	36pcs	36pcs
额定功率/ Rated Power	320W	360W	450W	360W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	RGBWCLA
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°		10° 15° 20° 30° 15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3pcs	3pcs	2pcs	3pcs
产品型号/ Product Code	SL1130FQ-36KP	SL1130FF-36	SL1130FC-144	SL1130FM-19
Led品牌/ Led Brand	RGBW 4in1 Keepower	CREE RGBW 4in1	CREE	CREE/OSRAM
Led数量/ Led Quantity	36pcs	36pcs	144pcs	19pcs
额定功率/ Rated Power	450W	450W(CREE)/360W(OSRAM)		170W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	RGBW	Single/RGBW	Single/RGBW
发光角度/ Beam Angle	6° 10° 15° 20° 30° 15x60°	6° 8° 15° 20° 30° 15x60°	8° 15° 20° 30° 15x60°	1.5°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DMX512/RDM	CC/DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3pcs	3pcs	3pcs	5pcs

LED 恒功率全色域染色灯



Flood Light Series

SL1131F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

CO₂ ↓ 50%

原生1度角

K值>500

LED 恒功率全色域染色灯



产品简介 Product Introduction

一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。

二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。

三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦。

四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。

五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.

2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.

3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.

4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.

5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1131FM-24	SL1131FE-24	SL1131FK-24	SL1131FN-24KP
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	CREE XHP50	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	24pcs	24pcs	24pcs	24pcs
额定功率/ Rated Power	210W	240W	300W	240W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	RGBWCLA
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45°	60° 10x70° 5x20°	10° 15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	8pcs	5pcs	5pcs	5pcs
产品型号/ Product Code	SL1131FQ-24	SL1131FF-24	SL1131FC-96	SL1131FM-12
Led品牌/ Led Brand	RGBW 4in1 Keepower	CREE RGBW 4in1	CREE	CREE/OSRAM
Led数量/ Led Quantity	24pcs	24pcs	96pcs	12pcs
额定功率/ Rated Power	300W	300W(CREE)/240W(OSRAM)		110W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	RGBW	Single/RGBW	Single/RGBW
发光角度/ Beam Angle	4° 10° 15° 20° 30° 15X60°	6° 8° 15° 20° 30° 15x60°	5° 8° 12.5° 30° 15x60°	1.5°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DMX512/RDM	CC/DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	5pcs	5pcs	5pcs	10pcs

Flood Light Series


SL1132O

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窩玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯




一体压铸 相变液冷
Integrated die casting&phase change liquid cooling

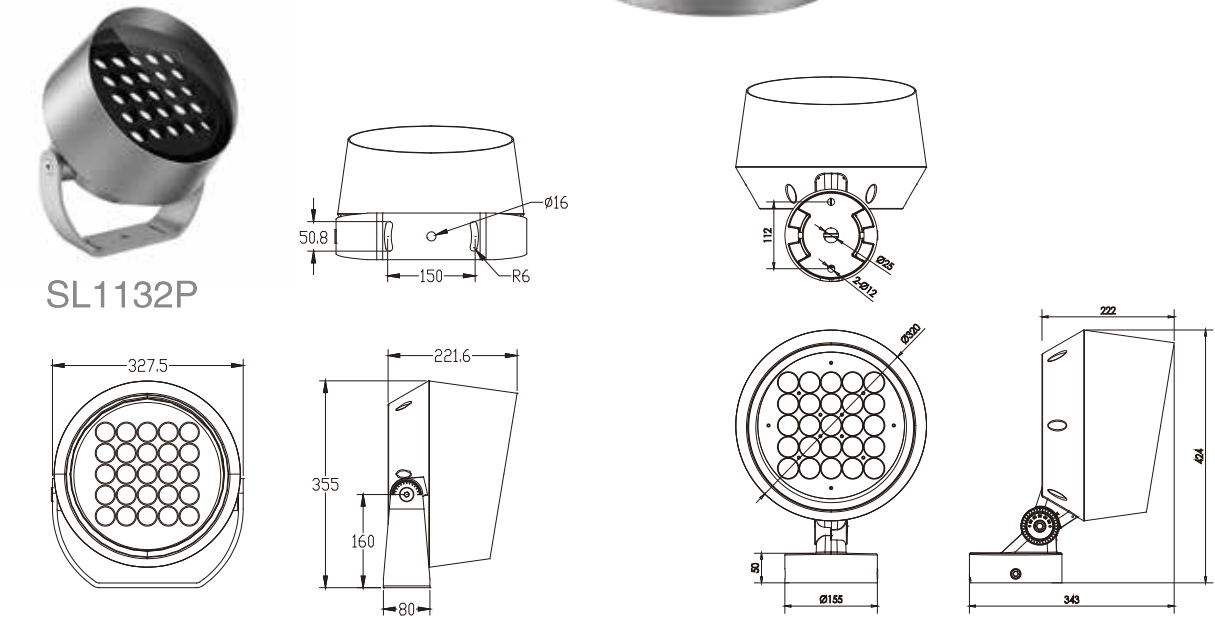


技术参数 Specification

产品型号/ Product Code	SL1132OM-25	SL1132OE-25	SL1132ON-24KP	SL1132OQ-24KP
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L/OSRAM	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	25pcs	25pcs	24pcs	24pcs
额定功率/ Rated Power	160W	160W	180W/200W	180W/200W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30 45° 15x60°	9° 15° 20° 30 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1132OF-24	SL1132OC-72		
Led品牌/ Led Brand	CREE RGBW 4in1	CREE		
Led数量/ Led Quantity	24pcs	72pcs		
额定功率/ Rated Power	180W/200W	160W(single)/180W(RGBW)		
输入电压/ Input Voltage	DC36V/AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single/RGB/RGBW		
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 15x60°		
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		

配光曲线 (半角) Distribution Curve Flux (SBC Case)

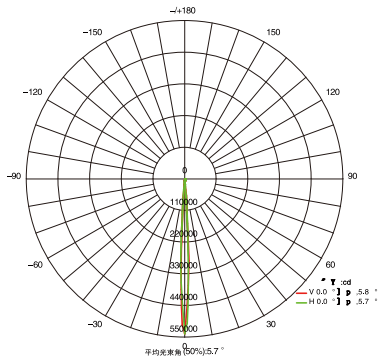

SL1132 6°

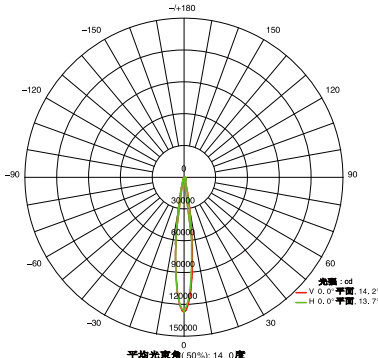

SL1132 15°



Flood Light Series

SL1132F

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窩玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

CO₂↓50%

原生1度角

K值>500





产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1132FM-25	SL1132FE-25	SL1132FN-24KP	SL1132FF-24
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L	RGBWCLA 7in1 Keepower	CREE RGBW 4in1
Led数量/ Led Quantity	25pcs	25pcs	24pcs	24pcs
额定功率/ Rated Power	120W(single)/150W(RGBW)	120W	150W	150W/200W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1132FC-72	SL1132FM-7		
Led品牌/ Led Brand	CREE XP-E2	CREE/OSRAM		
Led数量/ Led Quantity	72pcs	7pcs		
额定功率/ Rated Power	120W(single)/150W(RGBW)	65W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single/RGB/RGBW	Single		
发光角度/ Beam Angle	8° 12.5° 30° 10x60°	1.5°		
控制方式/ Control Mode	DMX512/RDM	CC/DALI/0-10V		
使用寿命/ Life	80000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		

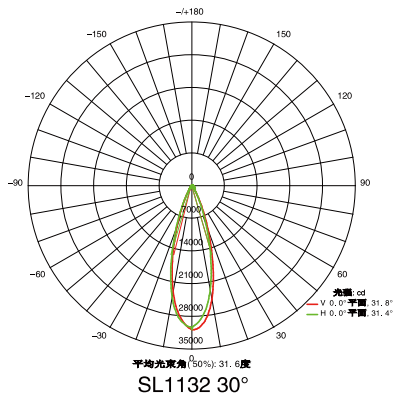

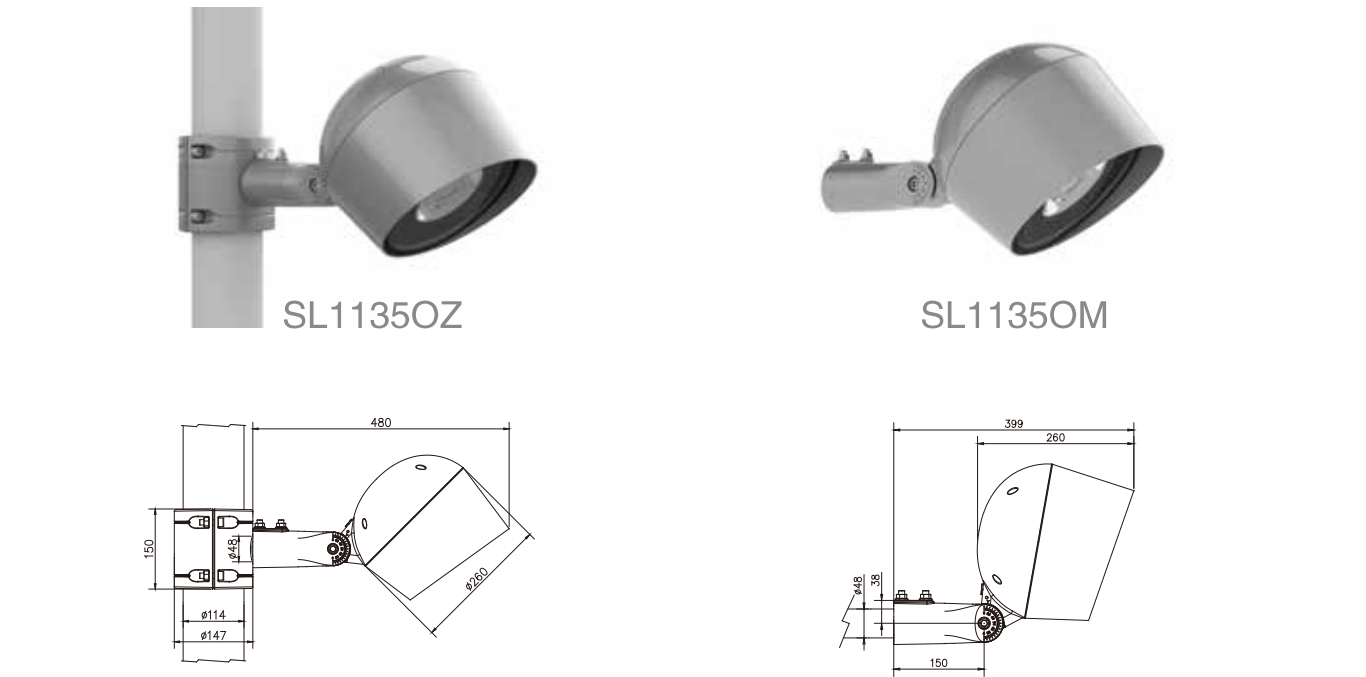

技术参数 Specification

产品型号/ Product Code	SL1135OM-16	SL1135OE-16	SL1135ON-16KP	SL1135OQ-16KP
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L/OSRAM	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	16pcs	16pcs	16pcs	16pcs
额定功率/ Rated Power	100W(single)/120W(RGBW)	100W	150W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	12pcs	10pcs	8pcs	8pcs
产品型号/ Product Code	SL1135OF-16	SL1135OC-48	SL1135O-C100	SL1135OR-16
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE XP-E2	CREE COB	LUXEON 7070
Led数量/ Led Quantity	16pcs	48pcs	1pcs	16pcs
额定功率/ Rated Power	150W	100W(single)/150W(RGBW)	100W	100W
输入电压/ Input Voltage	DC36V/AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single/RGB/RGBW	Single	Single
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15x60°	5° 8° 12.5° 30° 10x60°	15° 24° 36° 60°	30° Tilt.60°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	1/8pcs	1/8pcs	10pcs	10pcs

Flood Light Series

SL1135F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

CO₂↓50%

原生1度角

K值>500







SL1135FZ




SL1135FM

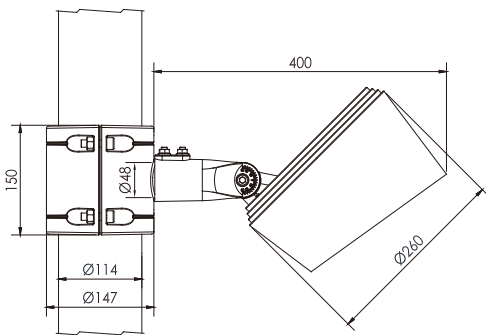


SL1135FL



SL1135FH



适配杆径(67–325)mm T≥4
AVL Dia of pole(67–325)mm T≥4



适配树杆尺寸(168–268)mm
AVL Dia of pole(168–268)mm

产品简介 Product Introduction





- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design,could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1135FM-16	SL1135FE-16	SL1135FD-16	SL1135FN-16KP
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L	CREE XP-G3	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	16pcs	16pcs	16pcs	16pcs
额定功率/ Rated Power	75W(single)/100W(RGBW)	75W	60W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	RGBWCLA
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	16pcs	16pcs	20pcs	12pcs
产品型号/ Product Code	SL1135FF-16	SL1135FC-48	SL1135FM-4	SL1135FF-4
Led品牌/ Led Brand	CREE RGBW 4 in1	CREE XP-E2	CREE/OSRAM	CREE RGBW 4 in 1
Led数量/ Led Quantity	16pcs	48pcs	4pcs	4pcs
额定功率/ Rated Power	100W	100W	40W	60W
输入电压/ Input Voltage	DC36V / AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single/RGB/RGBW	Single	RGBW
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15x60°	5° 8° 12.5° 30° 10x60°	1.5°	4°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	2/12(pcs)	2/12(pcs)	30pcs	30pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

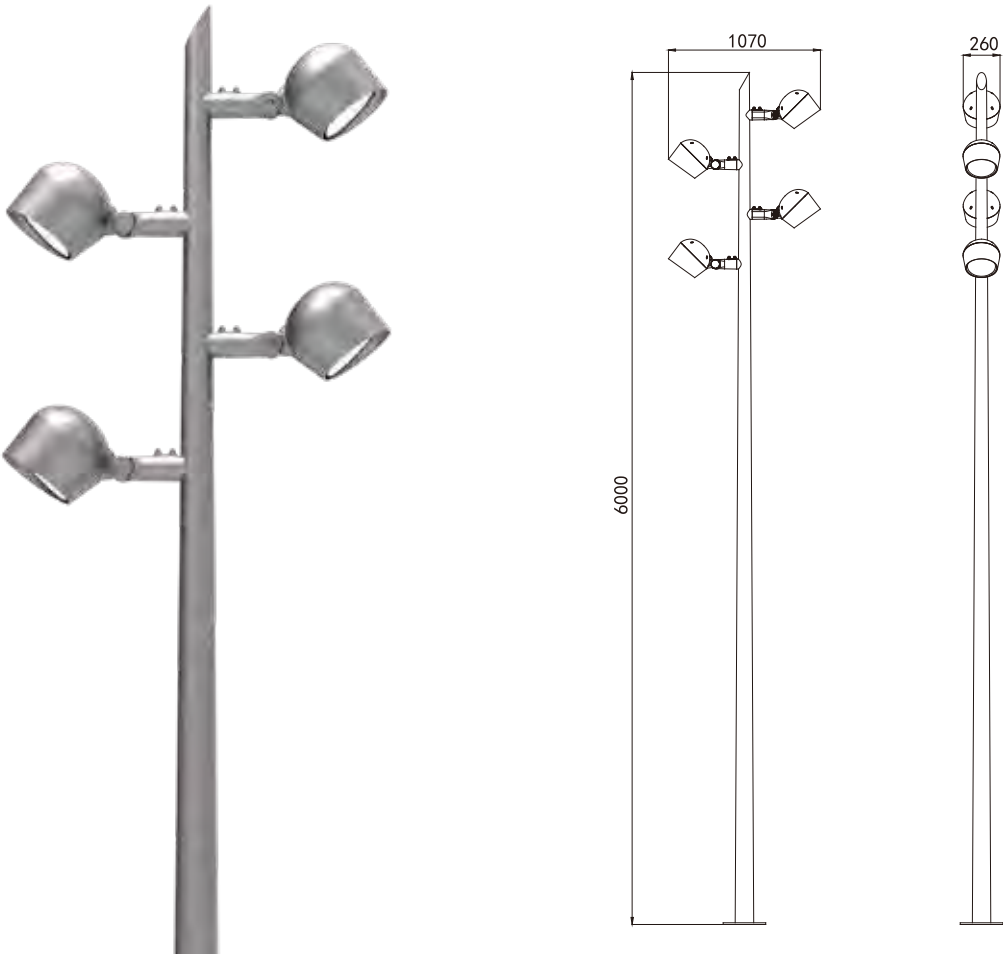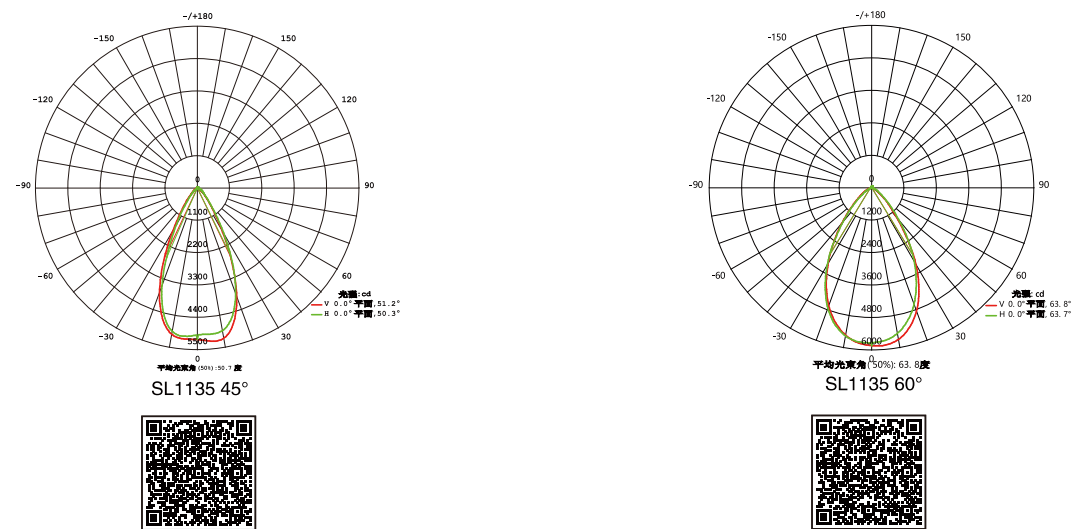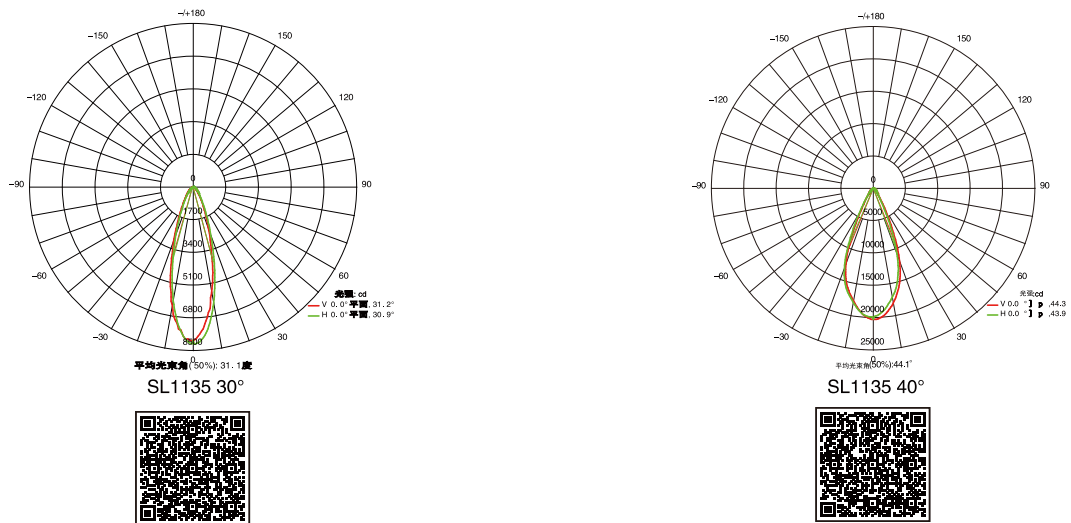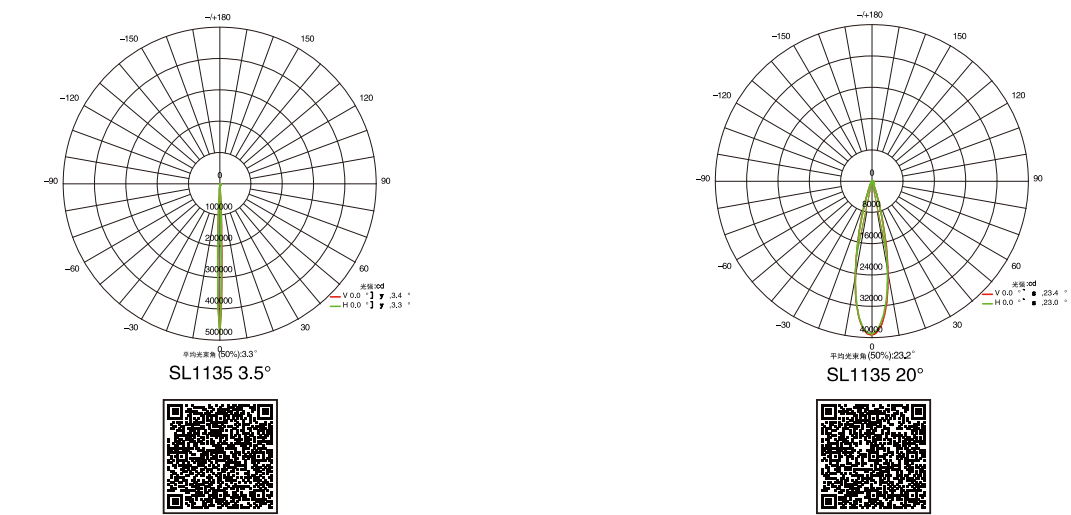


SL1135OM-26-06-04




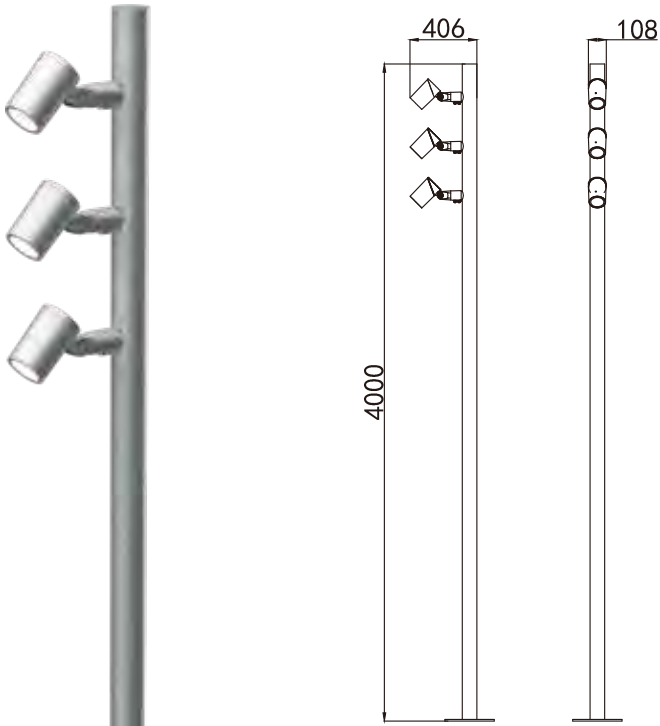


SL1140M-26-04-03

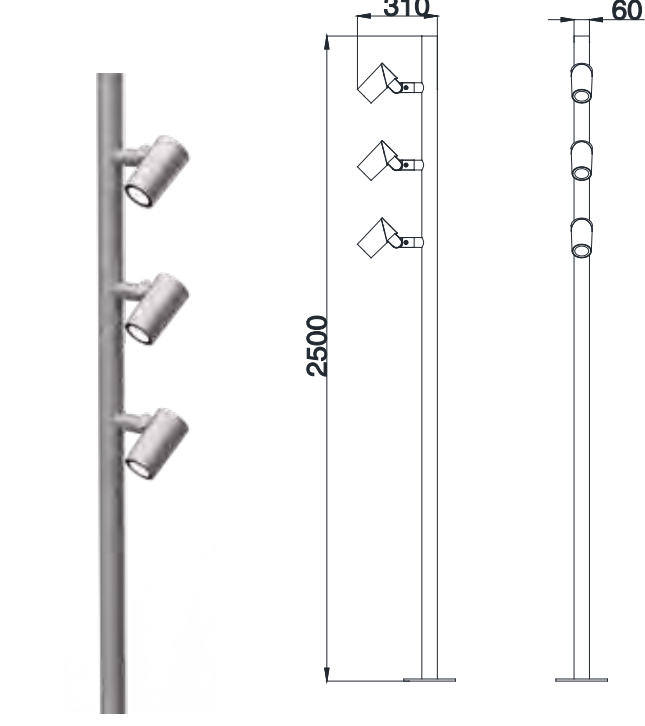

SL1145M-26-02-03

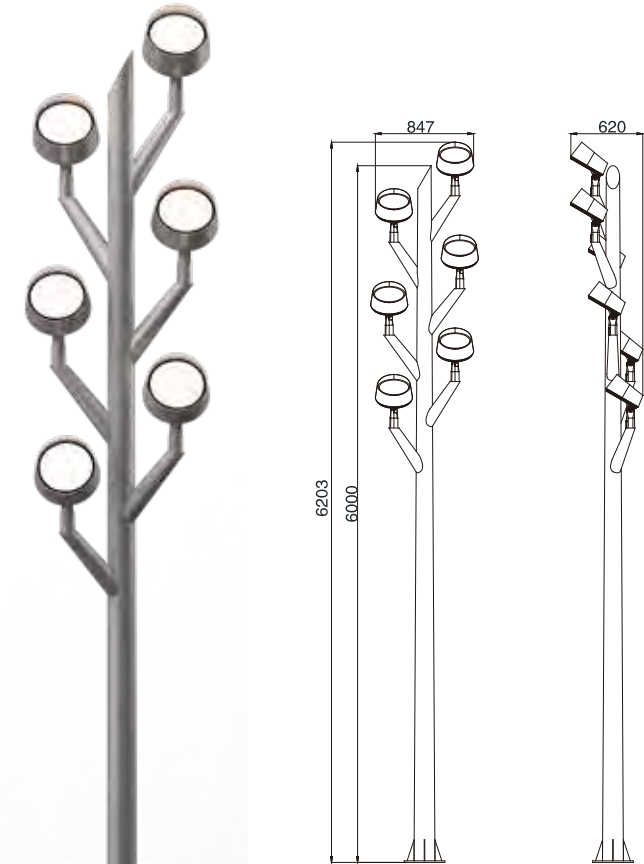

SL1132F-26-06-06

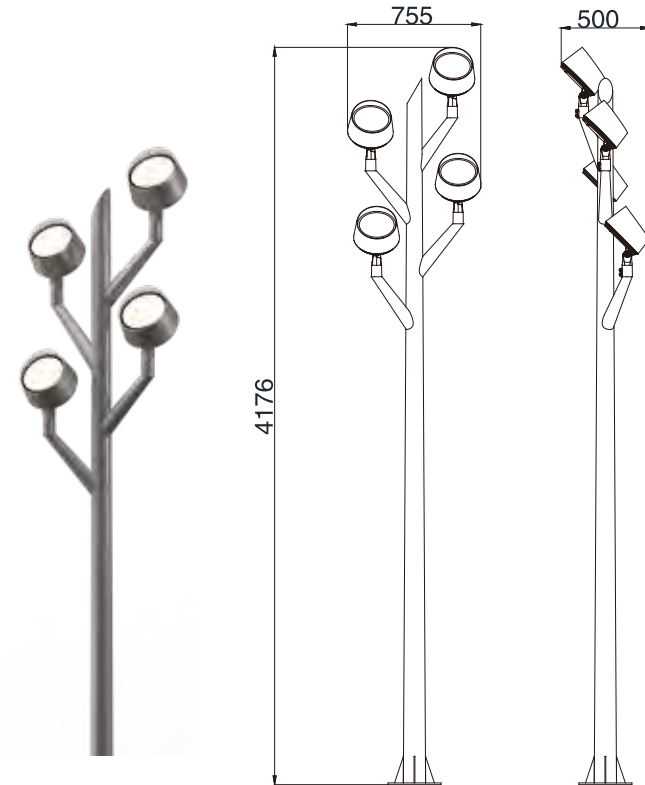

SL1135F-26-04-04



Flood Light Series
SL1136O

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯




一体压铸 相变液冷
Integrated die casting&phase change liquid cooling

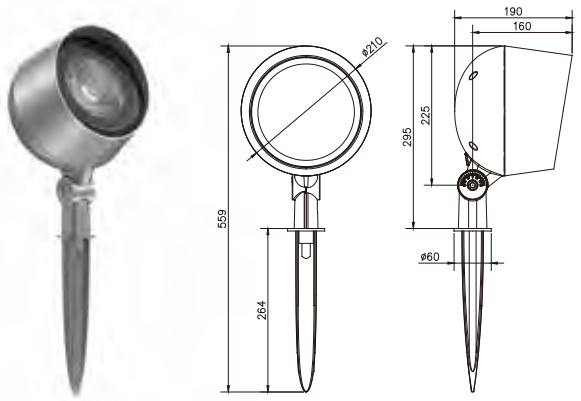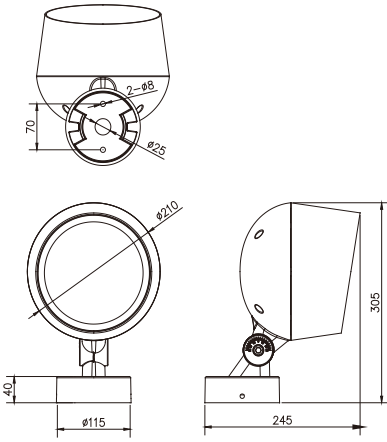

SL1136OS




SL1136P

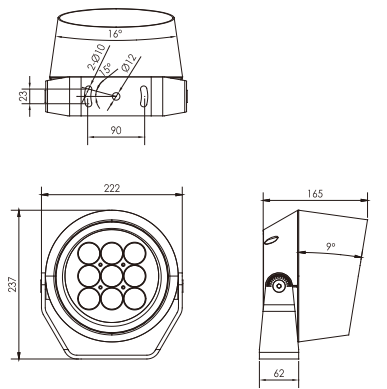





SL1136OZ

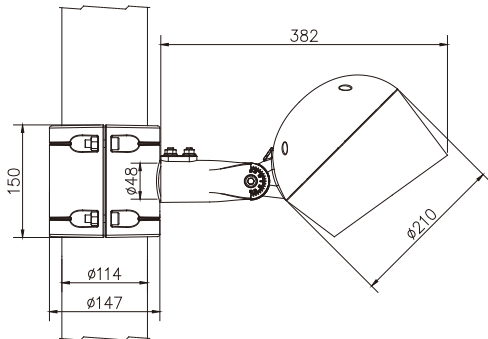

SL1136OM

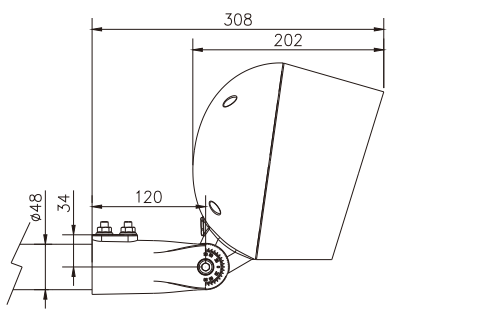

SL1136OH

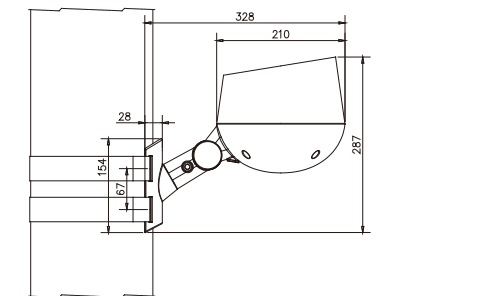


适配树杆尺寸(168–268)mm

AVL Dia of pole(168–268)mm



SL1136OL

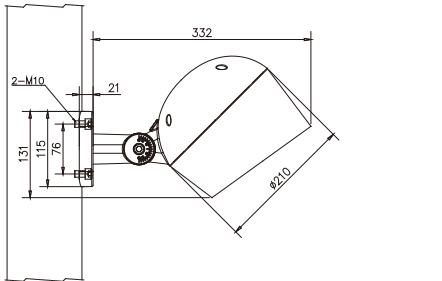

适配杆径(67–325)mm T≥4

AVL Dia of pole(67–325)mm T≥4

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1136OM-9	SL1136OE-9	SL1136ON-9KP	SL1136OQ-9KP
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L/OSRAM	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rated Power	60W(single)/80W(RGBW)	70W	100W	100W (CREE)/80W(OSRAM)
输入电压/ Input Voltage	AC100-264V	AC100-264V	AC00-305V	DC36V/AC00-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	20pcs	16pcs	16pcs	2/16pcs
产品型号/ Product Code	SL1136OF-9	SL1136OC-27	SL1136O-C70	SL1136OR-9
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE XP-G3	CREE COB	LUXEON 7070
Led数量/ Led Quantity	9pcs	27pcs	1pcs	9pcs
额定功率/ Rated Power	100W(CREE)/80W(OSRAM)	70W(single)/100W(RGBW)	70W	70W
输入电压/ Input Voltage	DC36V/AC00-305V	AC100-305V	AC100-305V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single/RGB/RGBW	Single	Single
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°	15° 24° 36° 60°	30° Tilt.60°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	2/16pcs	2/16pcs	16pcs	16pcs

Flood Light Series


SL1136F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

CO₂↓50%

原生1度角


K值>500




SL1136FS




SL1136U

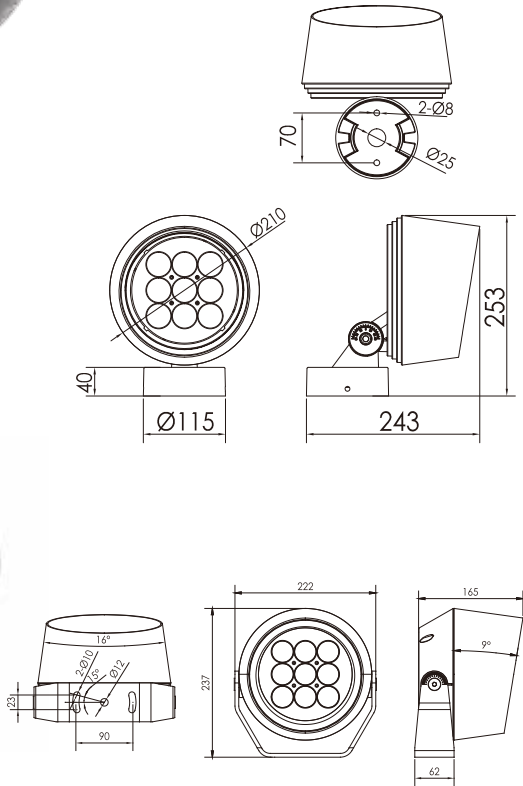


SL1136FZ

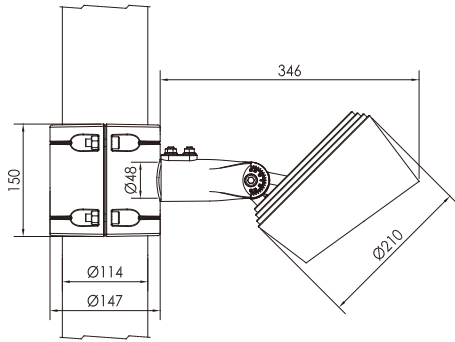

SL1136FM

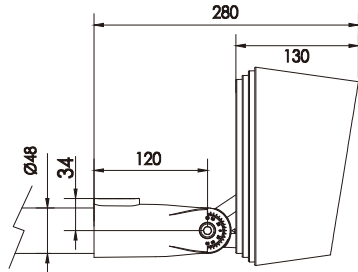


SL1136FL



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4



SL1136FH









适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm


技术参数 Specification

产品型号/ Product Code	SL1136FM-9	SL1136FE-9	SL1136FD-9	SL1136FN-9KP
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L	CREE XP-G3	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rated Power	45W	45W	35W	60W
输入电压/ Input Voltage	AC100-264V	AC100-264V	AC100-264V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	RGBWCLA
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45°	60° 10x70° 5x20°	15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	30pcs	30pcs	37pcs	3/20pcs
产品型号/ Product Code	SL1136FF-9	SL1136FC-27	SL1136FM-3	SL1136FF-3
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE XP-E2	CREE/OSRAM	CREE RGBW 4 in 1
Led数量/ Led Quantity	9pcs	27pcs	3pcs	3pcs
额定功率/ Rated Power	60W	45W(single)/60W(RGBW)	30W	40W
输入电压/ Input Voltage	DC36V/AC100-305V	AC100-305V	AC100-264V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single/RGB/RGBW	Single	RGBW
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°	1.5°	4°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3/20pcs	3/20pcs	42pcs	40pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

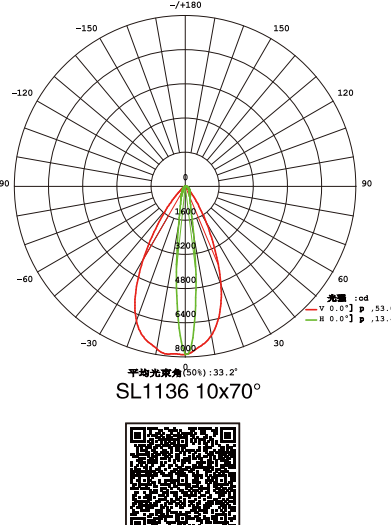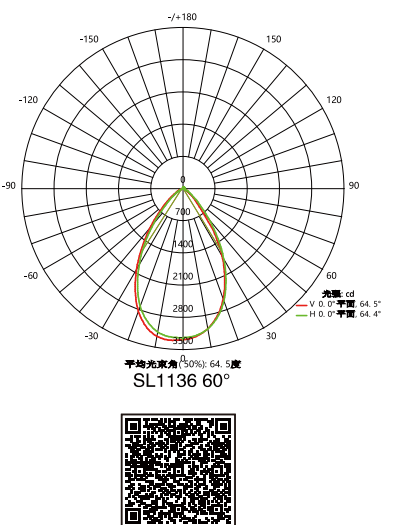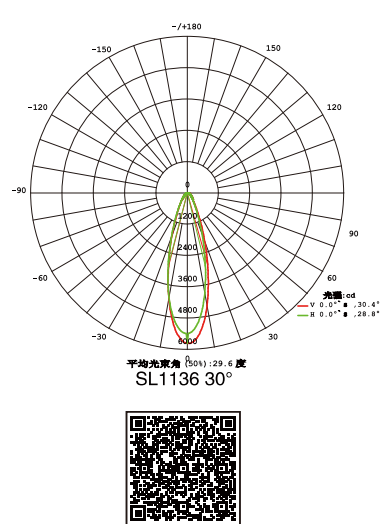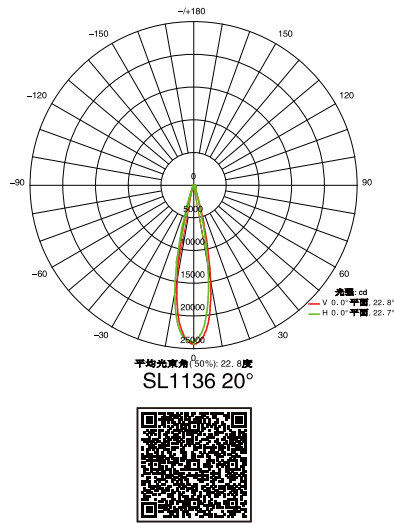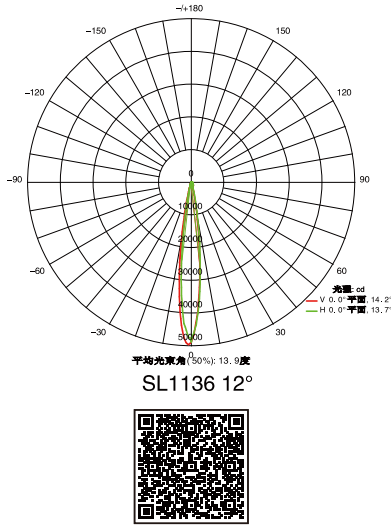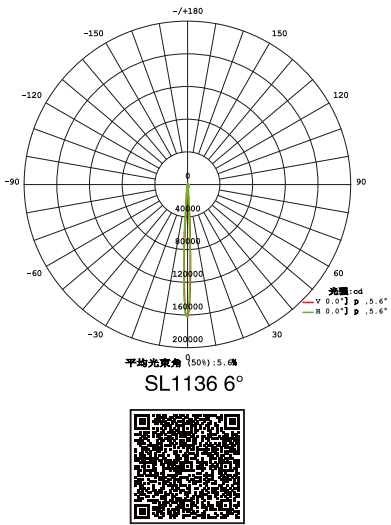

SL1130/SL1131/SL1132/SL1135 /SL1136 /SL1137/SL1139

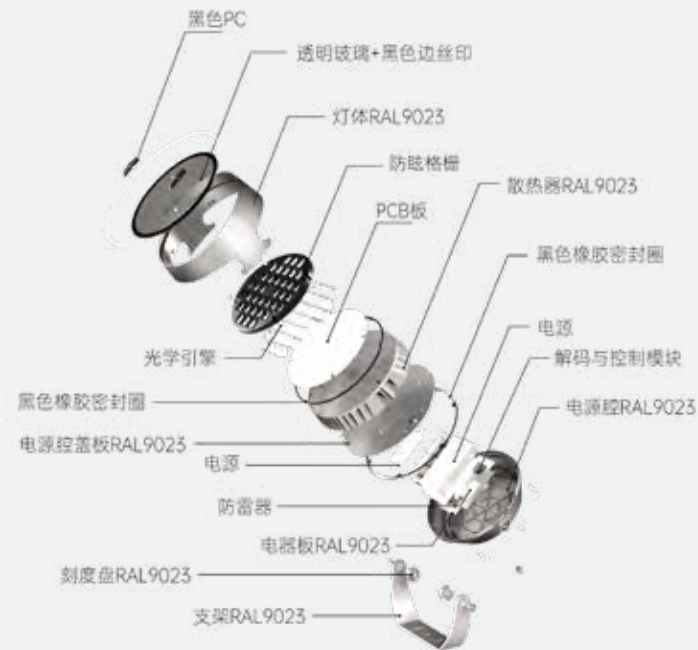








Flood Light Series

SL11370

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



LED 恒功率全色域染色灯

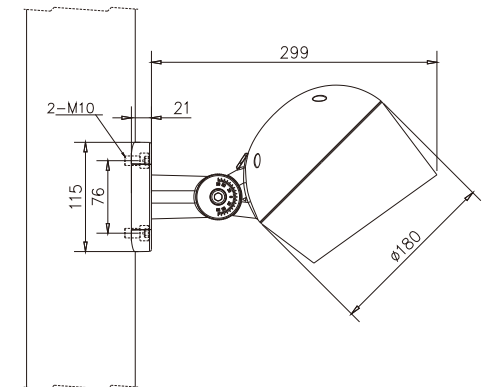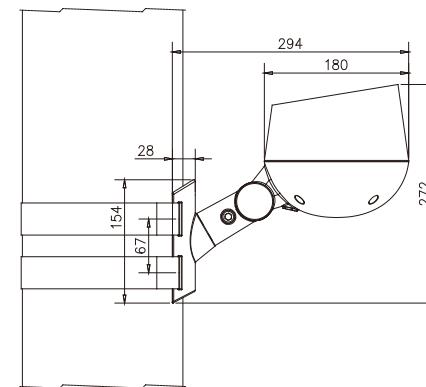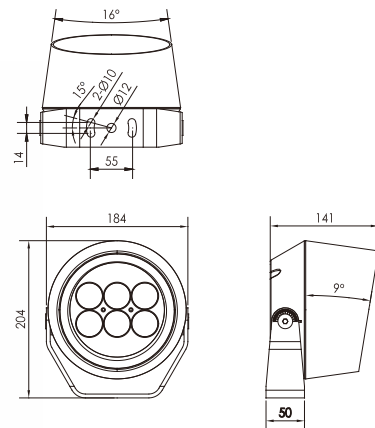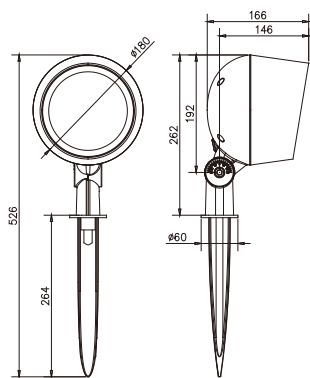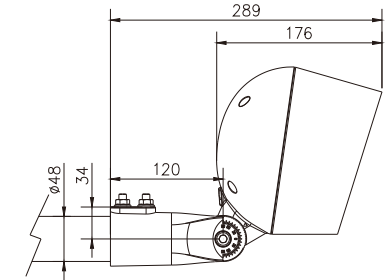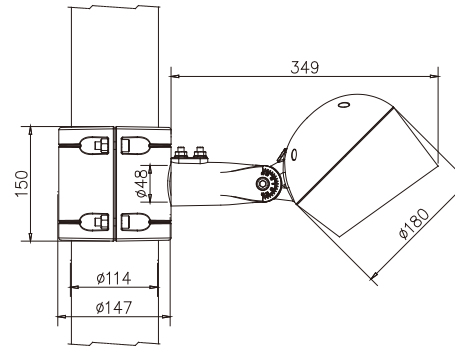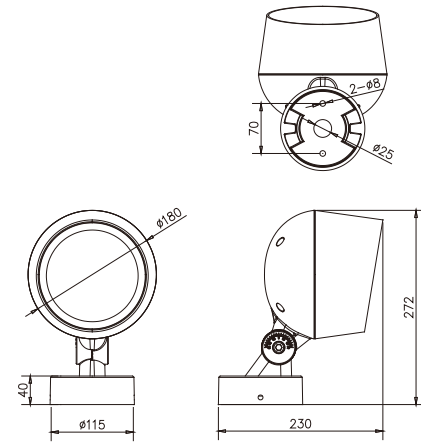

适配树杆尺寸(168-268)mm

AVL Dia of pole(168–268)mm

适配杆径(67-325)mm $T \geq 4$

AVL Dia of pole(67-325)mm $T \geq 4$

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1137OM-6	SL1137OE-6	SL1137OF-6	SL1137OC-18
LED品牌/ LED Brand	CREE	XP-L/OSRAM	CREE RGBW 4 in 1	CREE XP-E
LED数量/ LED Quantity	6pcs	6pcs	6pcs	18pcs
额定功率/ Rated Power	50W	50W/45W	60W	50W(single)/60W(CREE RGBW)
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC24V/AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	33pcs	26pcs	3/26(pcs)	3/26(pcs)
产品型号/ Product Code	SL1137O-C50	SL1137OR-6		
LED品牌/ LED Brand	CREE XP-E	LUXEON 7070		
LED数量/ LED Quantity	18pcs	6pcs		
额定功率/ Rated Power	50W	50W		
输入电压/ Input Voltage	DC24V/AC100-264V	AC100-264V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single	Single		
发光角度/ Beam Angle	15° 24° 36° 60°	30° Tilt.60°		
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		
使用寿命/ Life	50000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	3/26pcs	3/26pcs		

Flood Light Series

SL1137F

圆孔格栅 Round-meshed grll		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	







SL1137FZ





SL1137FM

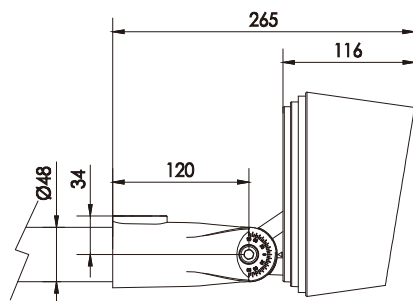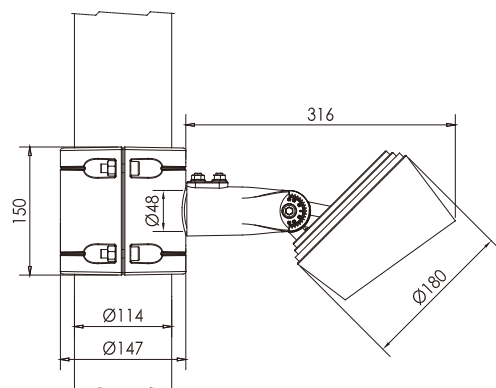

SL1137FL



SL1137FH







适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4

适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm

技术参数 Specification

产品型号/ Product Code	SL1137FM-6	SL1137FE-6	SL1137FD-6	SL1137FF-6	SL1137FC-18
LED品牌/ LED Brand	CREE	CREE XP-L	CREE XP-G3	CREE RGBW 4in1	CREE XP-E
LED数量/ LED Quantity	6pcs	6pcs	6pcs	6pcs	18pcs
额定功率/ Rated Power	30W	30W	22W	30W	36W
输入电压/ Input Voltage	AC100-264V	AC100-264V	AC100-264V	DC24V/AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	42pcs	42pcs	60pcs	4/42(pcs)	4/42(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

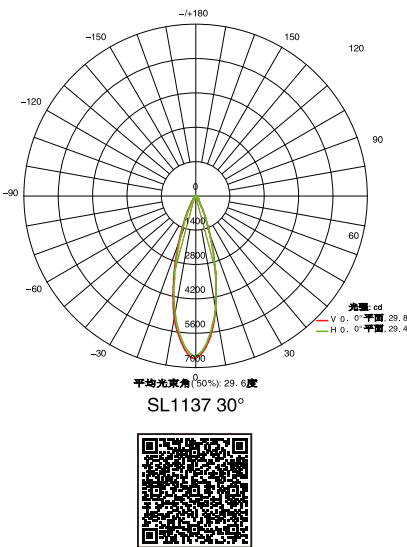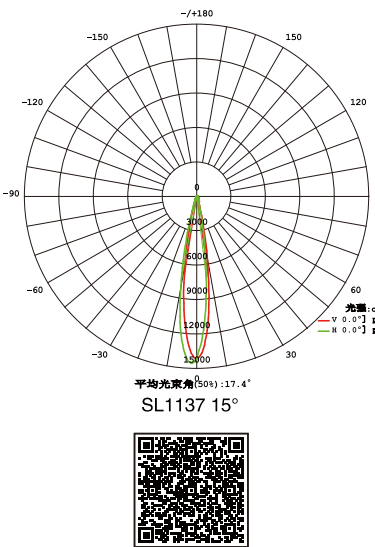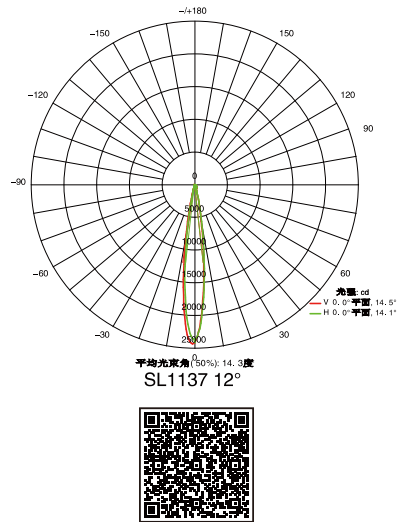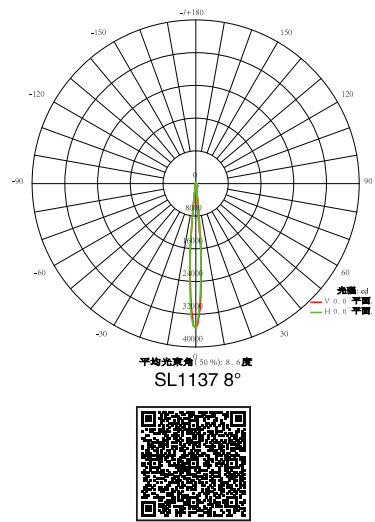

Flood Light Series

SL1139O




圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



SL1139OZ



SL1139OM

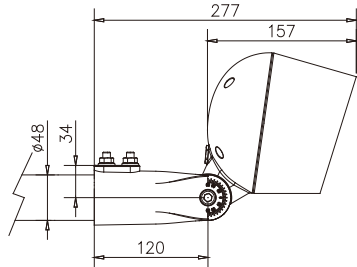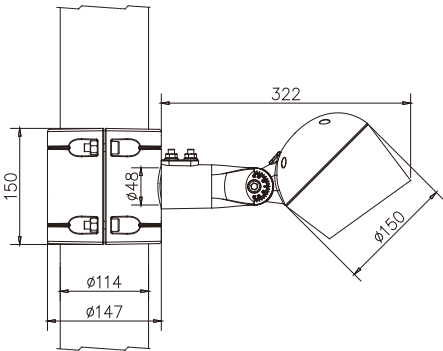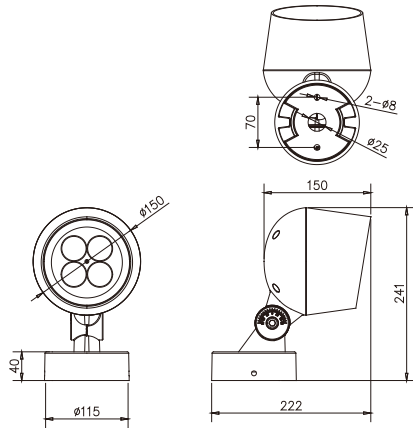

SL1139OH




SL1139OL



一体压铸 相变液冷
Integrated die casting&phase change liquid cooling




SL1139OS

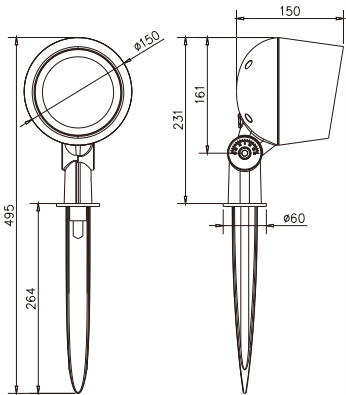

SL1139P

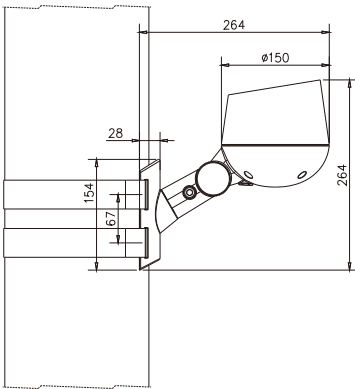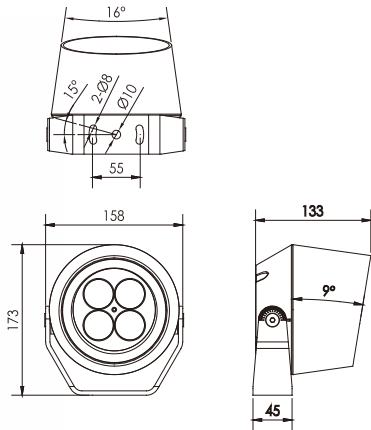

适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm

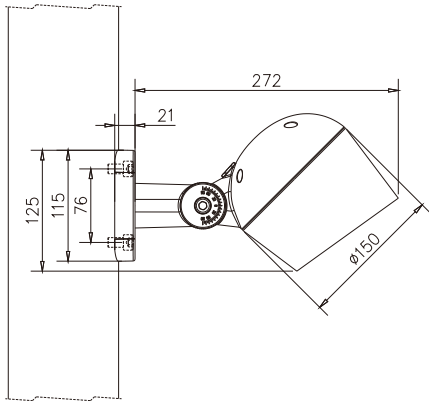

适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1139OM-4	SL1139OE-4	SL1139OF-4	SL1139OC-8
Led品牌/ Led Brand	CREE	CREE XP-L/OSRAM	CREE RGBW 4 in 1	CREE XP-G3
Led数量/ Led Quantity	4pcs	4pcs	4pcs	8pcs
额定功率/ Rated Power	30W	35W	40W	30W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC24V/AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	60pcs	42pcs	4/42pcs	4pcs
产品型号/ Product Code	SL1139O-C30	SL1139OR-4		
Led品牌/ Led Brand	CREE COB	LUXEON 7070		
Led数量/ Led Quantity	1pcs	4pcs		
额定功率/ Rated Power	30W	35W		
输入电压/ Input Voltage	AC100-264V	AC100-264V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single	Single		
发光角度/ Beam Angle	15° 24° 36° 60°	30° Tilt.60°		
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		
使用寿命/ Life	50000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	42pcs	42pcs		

Flood Light Series

SL1139F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	







SL1139FZ





SL1139FM

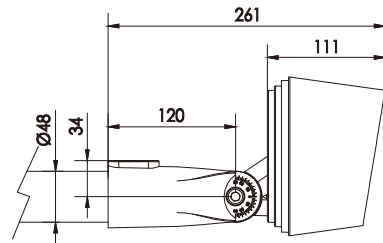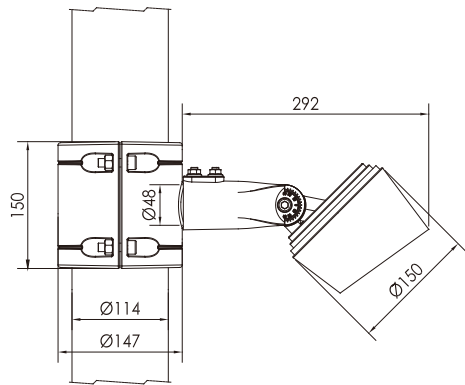

SL1139FL



SL1139FH




适配杆径(67–325)mm T≥4
AVL Dia of pole(67–325)mm T≥4

适配树杆尺寸(168–268)mm
AVL Dia of pole(168–268)mm


技术参数 Specification

产品型号/ Product Code	SL1139FM-4	SL1139FE-4	SL1139FD-4	SL1139FF-4	SL1139FM-1
Led品牌/ Led Brand	CREE	CREE XP-L	CREE XP-G3	CREE RGBW 4 in1	CREE/OSRAM
Led数量/ Led Quantity	4pcs	4pcs	4pcs	4pcs	1pcs
额定功率/ Rated Power	20W	20W	15W	20W	10W
输入电压/ Input Voltage	AC100–264V	AC100–264V	AC100–264V	DC24V	AC100–264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	1.5°
控制方式/ Control Mode	CC/DALI/0–10V	CC/DALI/0–10V	CC/DALI/0–10V	DMX512	CC/DALI/0–10V
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	120pcs	60pcs	60pcs	88pcs	7pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

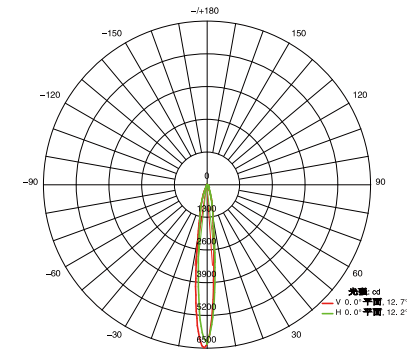


平均光束角(50%): 12.4°
SL1139 12.5°

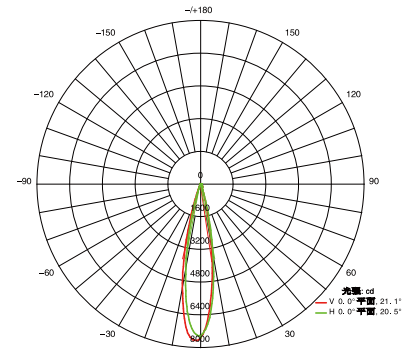

平均光束角(50%): 20.8°
SL1139 20°

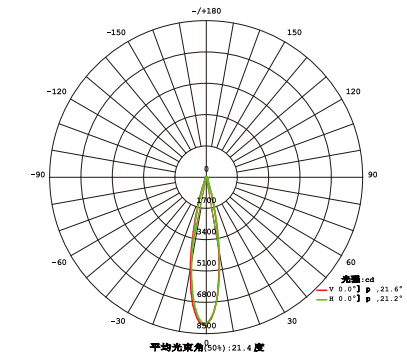

平均光束角(50%): 21.4°
SL1139 22.5°

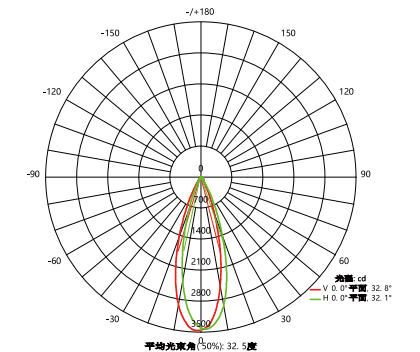

平均光束角(50%): 32.5°
SL1139 30°



Flood Light Series

SL1128O



圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



SL1128OH



SL1128OL



技术参数 Specification

产品型号/ Product Code	SL1128OM-2	SL1128OE-2	SL1128OF-2	SL1128OC-6
Led品牌/ Led Brand	CREE	CREE XP-L/OSRAM	CREE RGBW 4 in 1	CREE XP-G3
Led数量/ Led Quantity	2pcs	2pcs	2pcs	6pcs
额定功率/ Rated Power	20W	20W	30W/20W(OSRAM)	25W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC24V/AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	/	50/60Hz
颜色 / Color	Single	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	88pcs	60pcs	7pcs	60pcs
产品型号/ Product Code	SL1128O-C20	SL1128O-CS20		
Led品牌/ Led Brand	CREE COB	SunLike COB CRI>97		
Led数量/ Led Quantity	1pcs	1pcs		
额定功率/ Rated Power	20W	20W		
输入电压/ Input Voltage	AC100-264V	AC100-264V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single	Single		
发光角度/ Beam Angle	15° 24° 36° 60°	15° 24° 36° 60°		
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		
使用寿命/ Life	50000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	60pcs	60pcs		







一体压铸 相变液冷

Integrated die casting phase change liquid cooling




SL1128OS

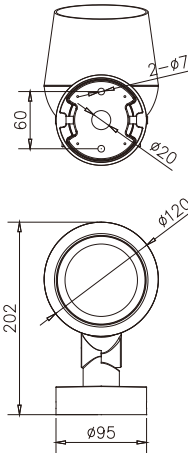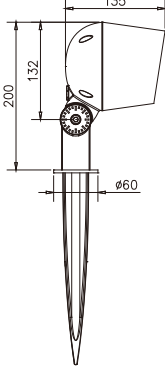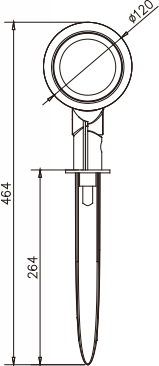

SL11290


圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

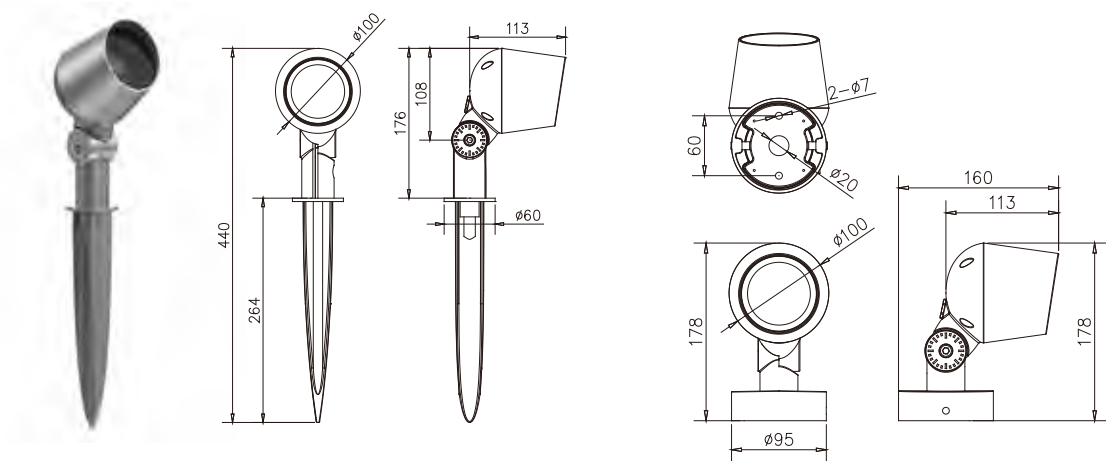


SL1129OS



SL11290H



SL1129OL



技术参数 Specification

产品型号/ Product Code	SL1129OM-1	SL1129OE-1	SL1129OF-1	SL1129OC-3
Led品牌/ Led Brand	CREE	CREE XP-L/OSRAM	CREE RGBW 4 in 1	CREE XP-G3
Led数量/ Led Quantity	1pcs	1pcs	1pcs	3pcs
额定功率/ Rated Power	10W	10W	15W/10W(OSRAM)	15W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC12V/DC24V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	/	50/60Hz
颜色 / Color	Single	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	200pcs	120pcs	120pcs	7/14pcs
产品型号/ Product Code	SL1129O-C12	SL1129O-CS12		
Led品牌/ Led Brand	CREE COB	SunLike COB CRI>97		
Led数量/ Led Quantity	1pcs	1pcs		
额定功率/ Rated Power	12W	12W		
输入电压/ Input Voltage	AC100-264V	AC100-264V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single	Single		
发光角度/ Beam Angle	15° 24° 36° 60°	15° 24° 36° 60°		
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		
使用寿命/ Life	50000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	120pcs	120pcs		

Flood Light Series

SL1151F

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窩玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯




产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1151FM-8	SL1151FE-8	SL1151FK-8	SL1151FD-18
Led品牌/ Led Brand	CREE	CREE XP-L	CREE XHP50	CREE
Led数量/ Led Quantity	8pcs	8pcs	8pcs	18pcs
额定功率/ Rated Power	75W	75W	100W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	8° 12° 20° 30° 45° 60° 10x70° 5x20	8° 12.5° 20° 30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1151FN-8KP	SL1151FQ-8KP	SL1151FF-8	SL1151F-C100
Led品牌/ Led Brand	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	CREE RGBW 4 in1	CREE COB
Led数量/ Led Quantity	8pcs	8pcs	8pcs	1pcs
额定功率/ Rated Power	120W	120W	120W/80W(OSRAM)	100W
输入电压/ Input Voltage	DC24V/AC00-305V	DC36V/AC00-305V	DC36V/AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBWCLA	RGBW	RGBW	Single
发光角度/ Beam Angle	15° 20° 30° 15x60°	9° 15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°	15° 24° 36° 60°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%

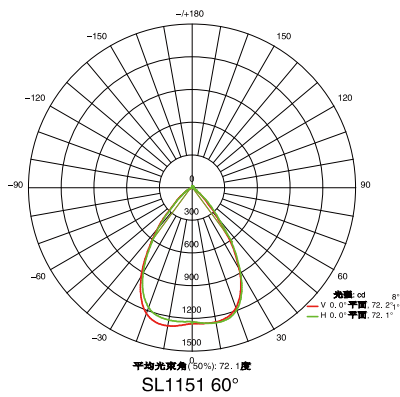

Flood Light Series

SL1150F




圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



一体压铸 相变液冷
Integrated die casting&phase change liquid cooling




SL1150S

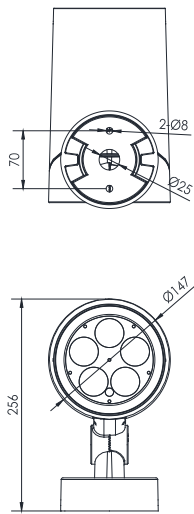




SL1150U

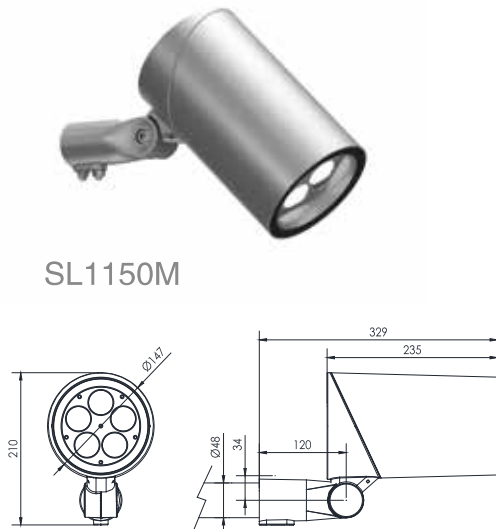

SL1150M




SL1150Z

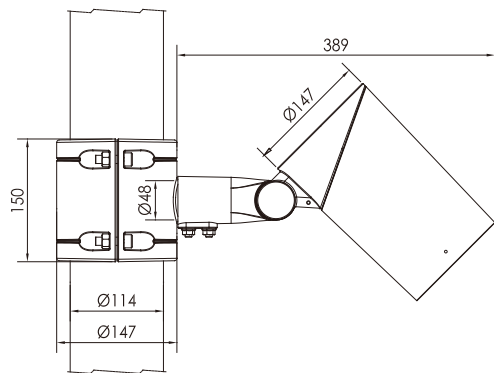


SL1150H



SL1150L



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4

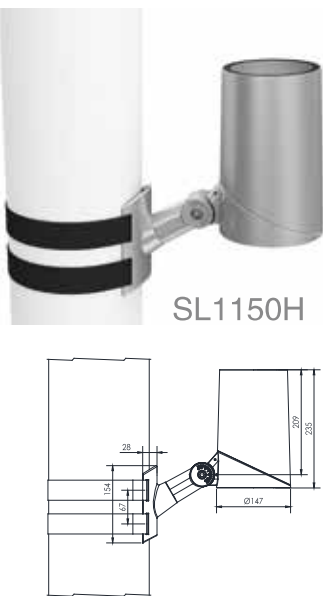

适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm



产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1150FM-5	SL1150FI-5	SL1150FD-15	SL1150FF-5	SL1150F-C50
Led品牌/ Led Brand	CREE	CREE XHP35	OSRAM P9	CREE RGBW 4 in1	CREE COB
Led数量/ Led Quantity	5pcs	5pcs	15pcs	5pcs	1pcs
额定功率/ Rated Power	45W	60W/45W	60W	60W/50W(OSRAM)	50W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC24V / AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	8° 12.5° 20° 30° 10x60°	9° 15° 20° 30° 45° 15x60°	12° 24° 38°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	28pcs	28pcs	26pcs	24/26pcs	26pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

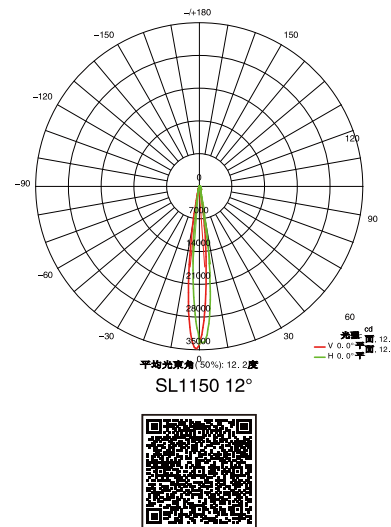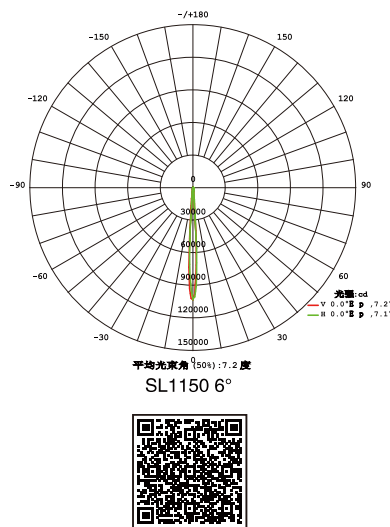

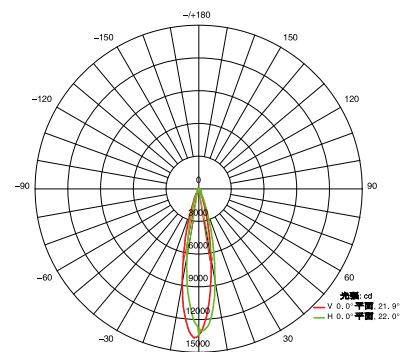


平均光東角⁰(50%): 21.9度
SL 1150 20°

同德隆洋行

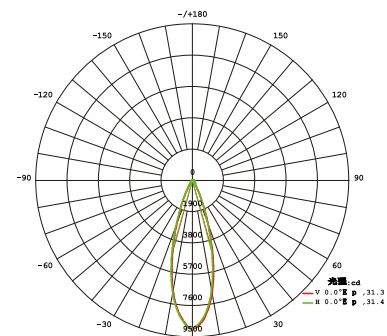


平均光束角(50%): 31.3°
SL 1150.30°

15-00000-0000

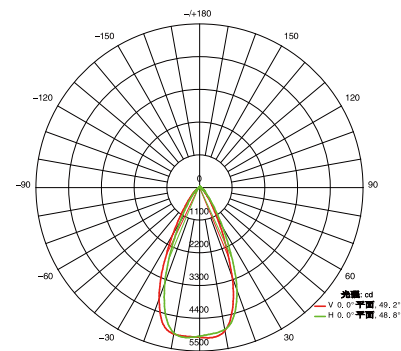

平均光東角⁰(50%): 49.0度

SL1150 45°

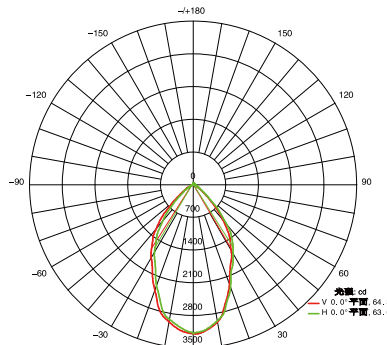

平均光束角(50%): 63.9°
01.150.00

SL1150 60



Flood Light Series


SL1140F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



一体压铸 相变液冷


Integrated die casting & phase change liquid cooling

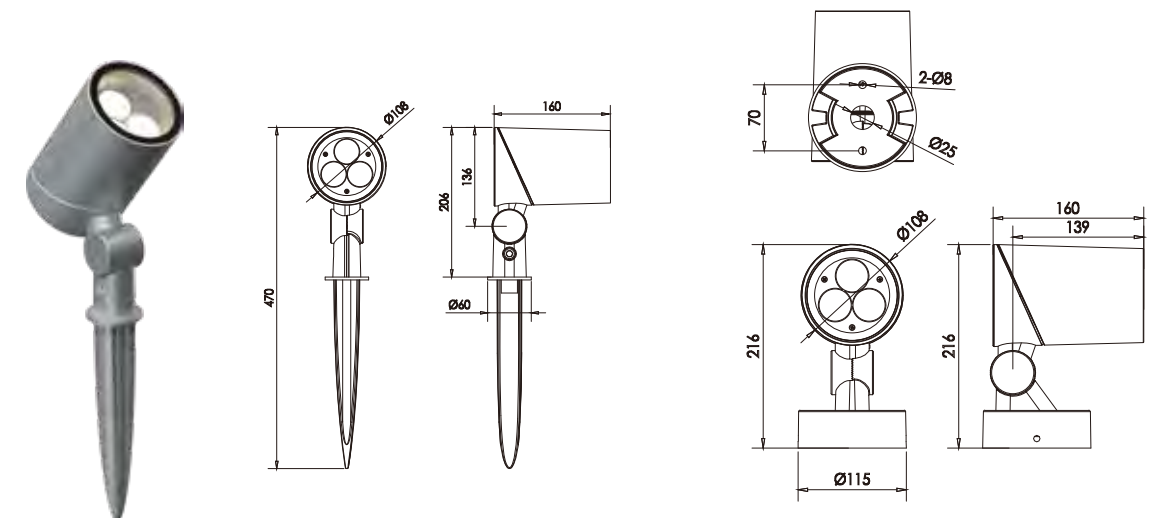


SL1140S




SL1140U

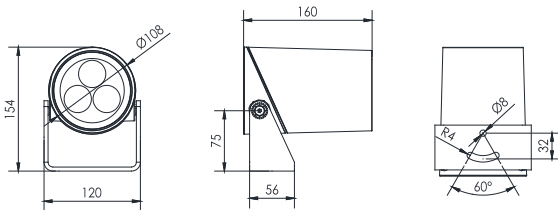


SL1140M

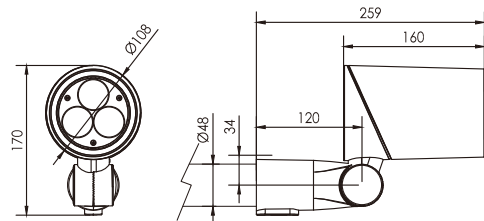

SL1140Z

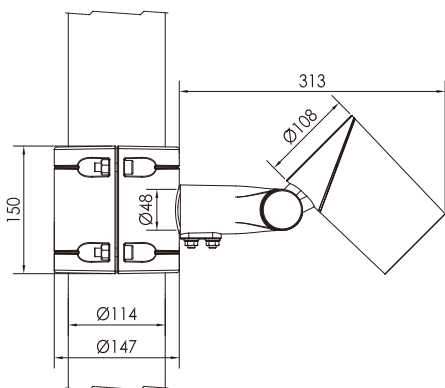


SL1140L



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4



SL1140H





适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm

技术参数 Specification

产品型号/ Product Code	SL1140FM-3	SL1140FI-3	SL1140FE-3	SL1140FF-3	SL1140F-C30	SL1140F-C20
Led品牌/ Led Brand	CREE	CREE XHP35	CREE XP-L	CREE RGBW 4in1	CREE COB	CREE COB
Led数量/ Led Quantity	3pcs	3pcs	3pcs	3pcs	1pcs	1pcs
额定功率/ Rated Power	30W	30W	30W	40W/30W(OSRAM)	30W	20W
输入电压/ Input Voltage	AC100-264V	AC100-264V	AC100-264V	DC24V	AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	/	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	Single	Single
发光角度/ Beam Rangle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	12° 24° 38° 45° 60°		
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	88pcs	88pcs	88pcs	88pcs	88pcs	88pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

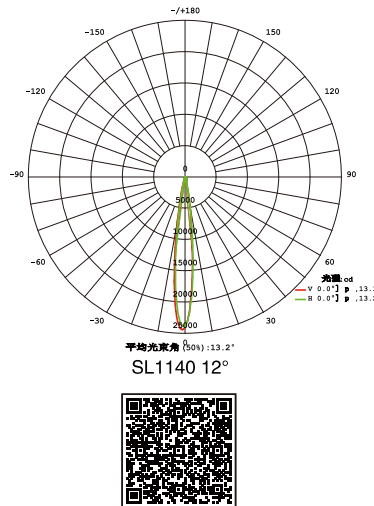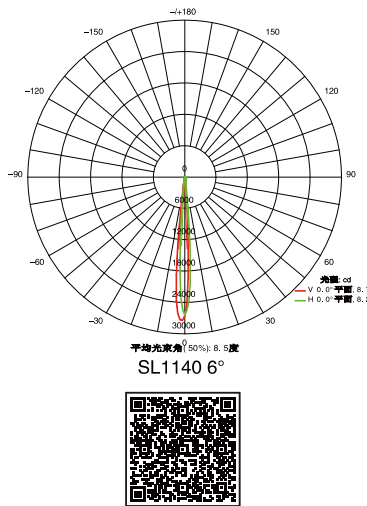




Flood Light Series

SL1143F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




背部角度调节旋钮
Back angle adjustment knob

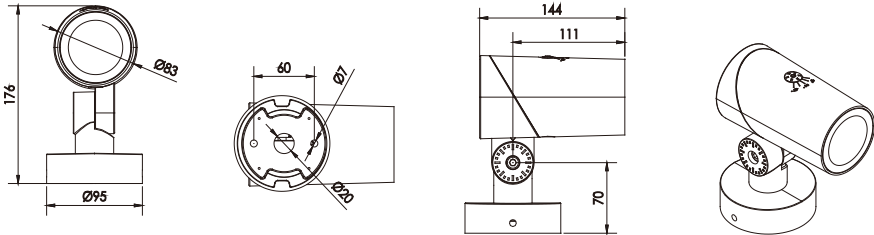


技术参数 Specification


产品型号/ Product Code	SL1143F-C16	SL1143F-C12
Led品牌/ Led Brand	CREE COB	CREE COB
Led数量/ Led Quantity	1pcs	1pcs
额定功率/ Rated Power	16W	12W
输入电压/ Input Voltage	AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Angle	20~50°	15~50°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%

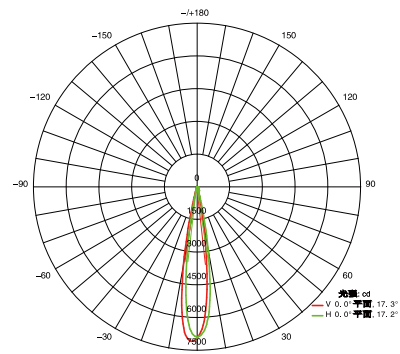

SL1140 20°

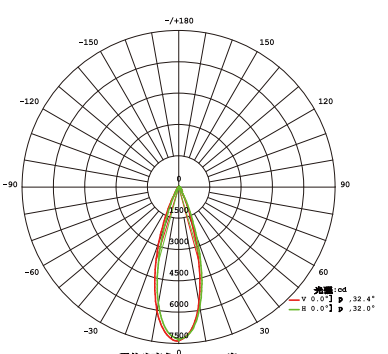

SL1140 30°

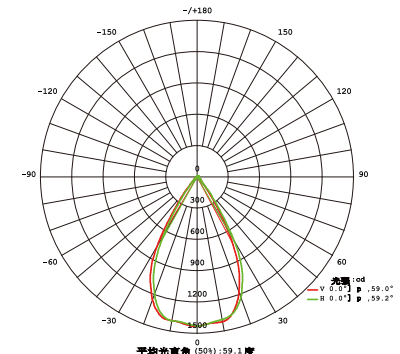


SL1140 60°



Flood Light Series

SL1145F


蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

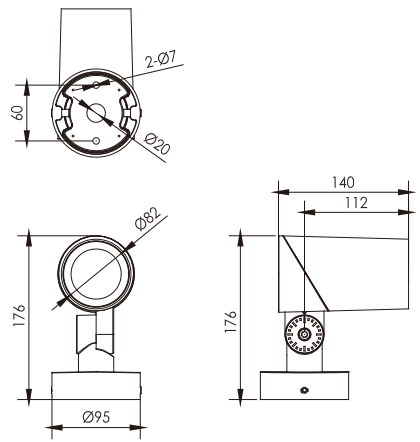


一体压铸 相变液冷
Integrated die casting phase change liquid cooling



SL1145U

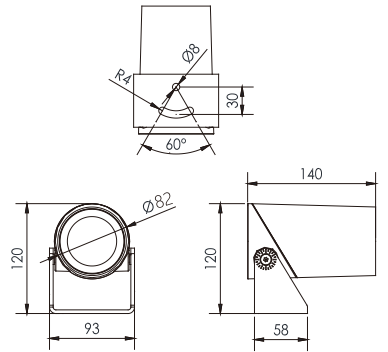


SL1145S

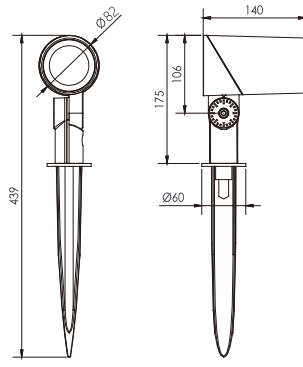



SL1145L






适配杆径(67–325)mm T≥4
AVL Dia of pole(67–325)mm T≥4

技术参数 Specification


产品型号/ Product Code	SL1145FE-1	SL1145FF-1	SL1145F-C16	SL1145F-C12	
Led品牌/ Led Brand	CREE XHP35	CREE RGBW 4IN1	CREE COB	CREE COB	
Led数量/ Led Quantity	1pcs	1pcs	1pcs	1pcs	
额定功率/ Rated Power	10W	12W/10W(OSRAM)	16W	12W	
输入电压/ Input Voltage	AC100–264V	DC12V/DC24V	AC100–264V	AC100–264V	
频率/ Frequency Range	50/60Hz	/	50/60Hz	50/60Hz	
颜色 / Color	Single	RGBW	Single	Single	
发光角度/ Beam Rangle	8° 12° 20° 30° 45° 60° 10X45°	8° 25° 10x45°	15° 24° 36° 50°	12° 24° 38°	
控制方式/ Control Mode	CC	DMX512	CC	CC	
使用寿命/ Life	50000H	50000H	50000H	50000H	
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	
串联数量/ In series(max)	130pcs	9/18(pcs)	100(pcs)	110(pcs)	

配光曲线 (半角) Distribution Curve Flux (SBC Case)

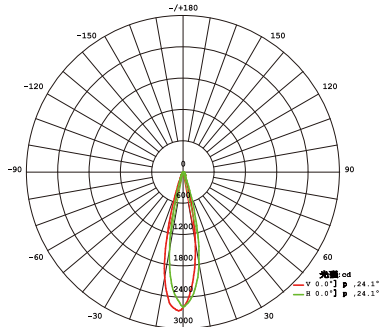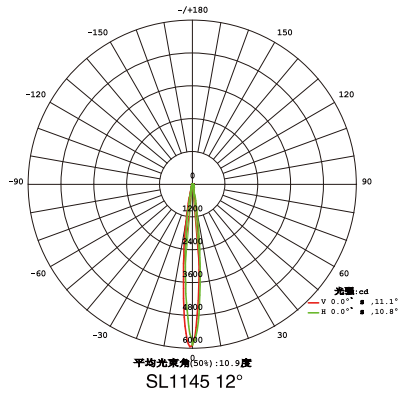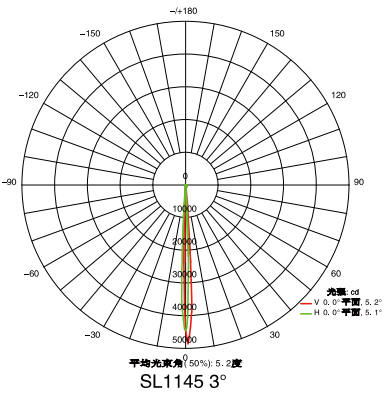


平均光束角(50%): 24.1 度

SL1145 24°

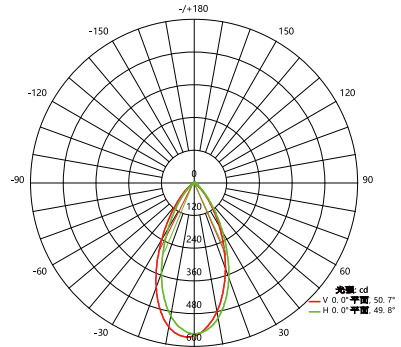

平均光束角(50%): 50.2 度


SL1145 60°

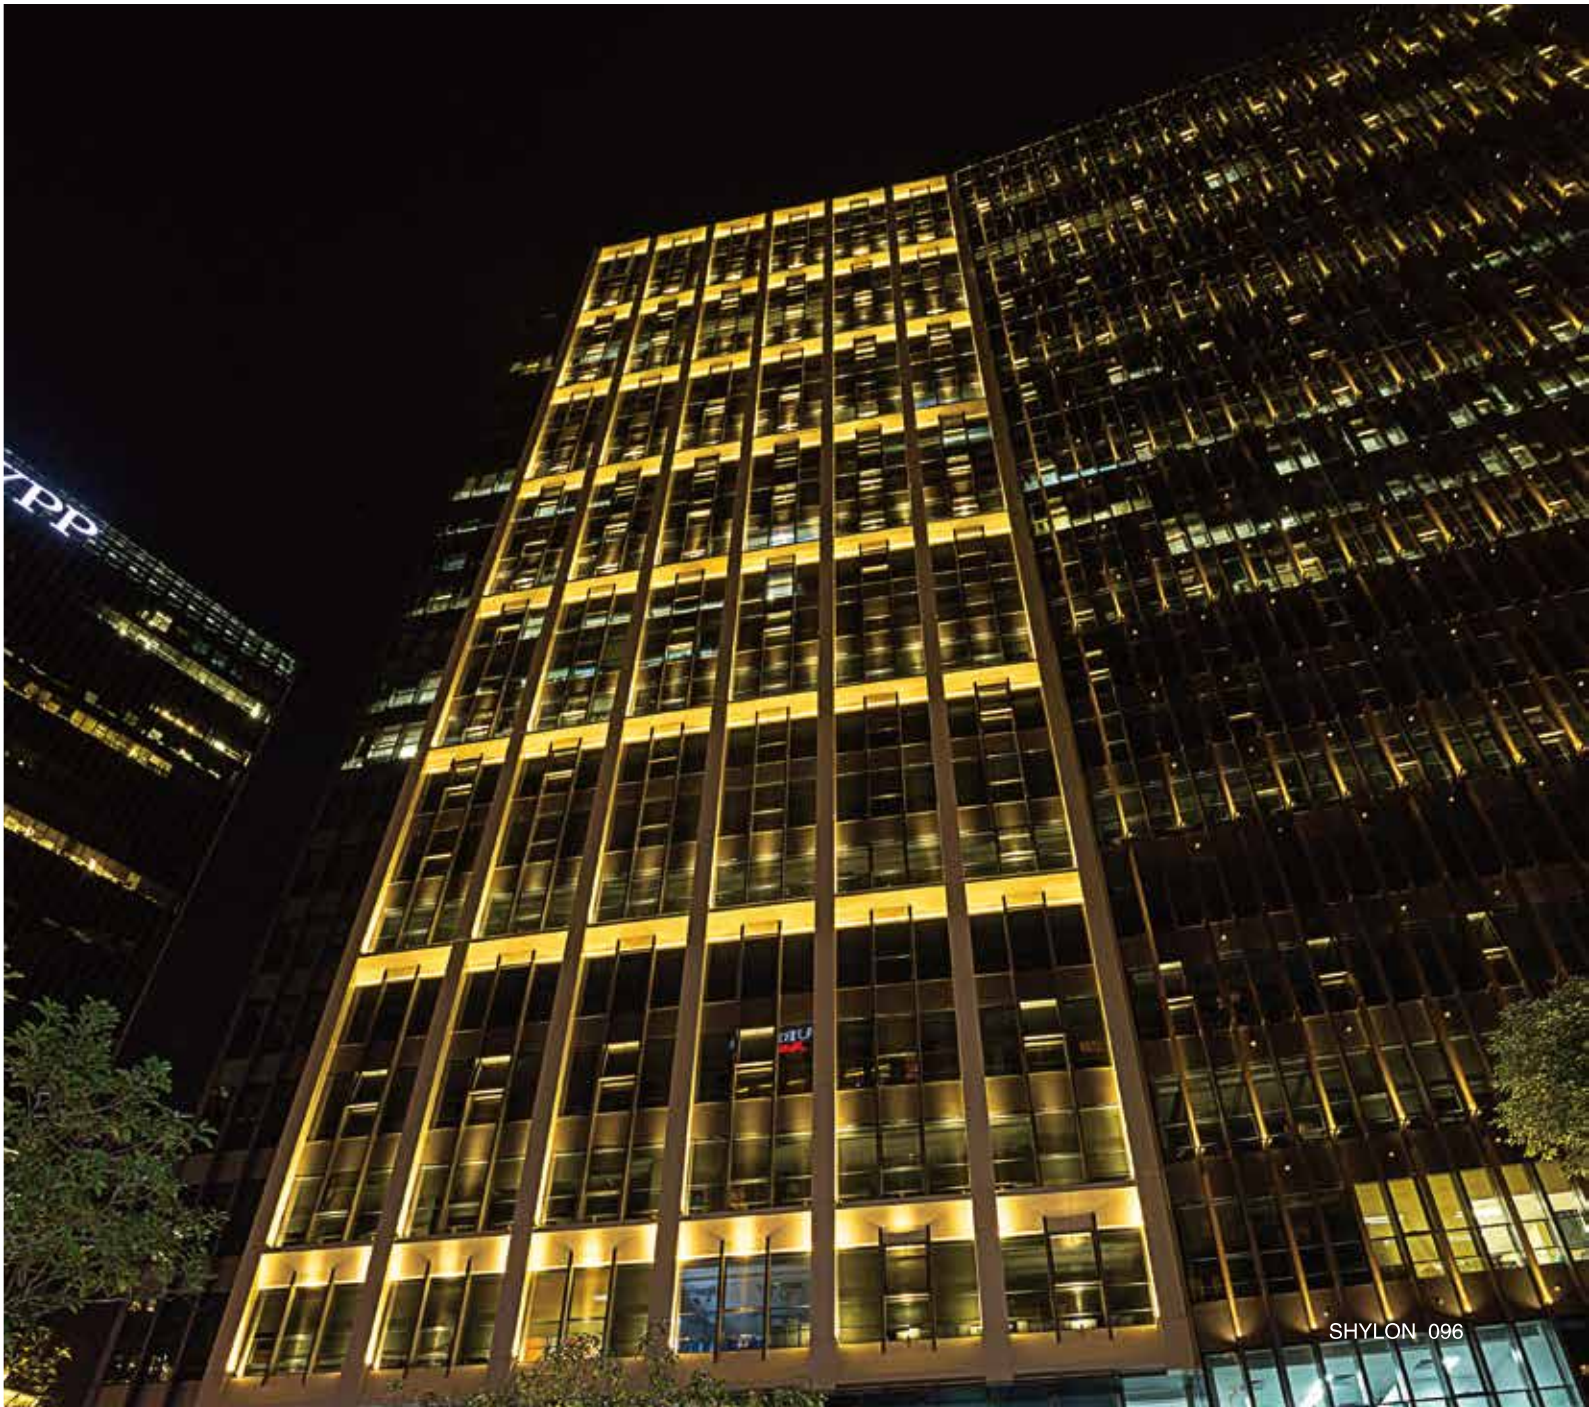


Flood Light Series

SL1146F

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窩玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

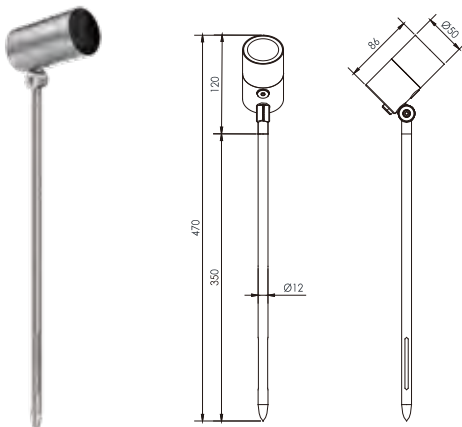

SL1146S

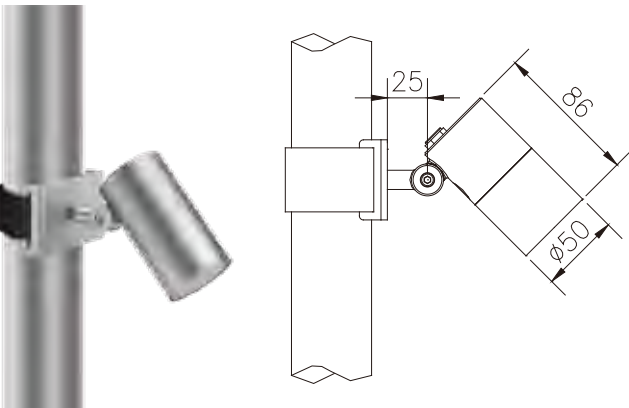

SL1146H
适配树杆尺寸(60-200)MM

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1146FM-1	SL1146FE-1	SL1146FF-1
Led品牌/ Led Brand	CREE	CREE XP-L	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	10W	10W	10W
输入电压/ Input Voltage	AC100-264V/DC12V/DC24V	AC100-264V/DC12V/DC24V	DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC	CC	DMX512
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	120pcs/12pcs	64pcs	64pcs




Flood Light Series

SL1147F

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窩玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

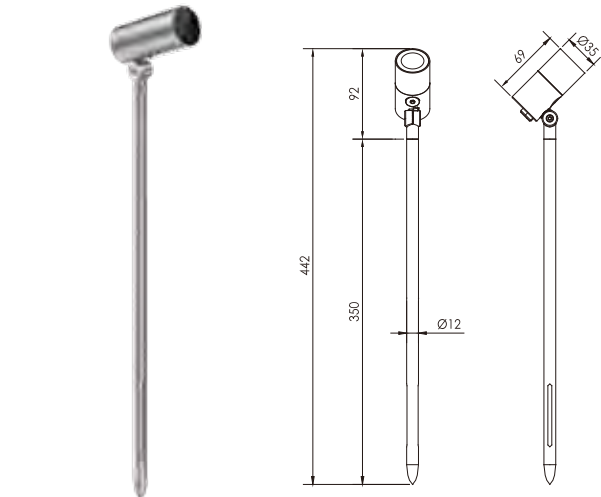

SL1147S

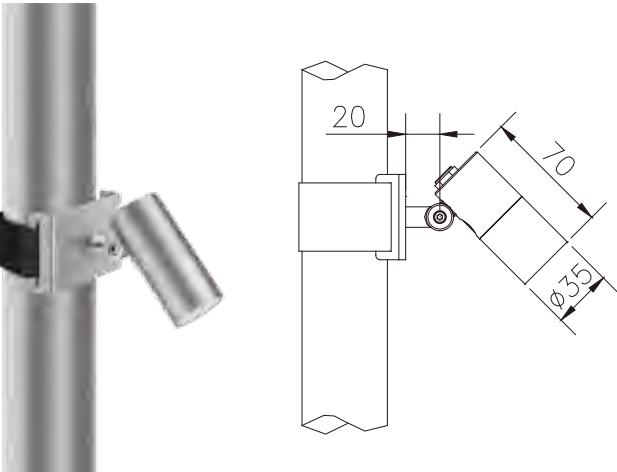

SL1147H
适配树杆尺寸(60–200)MM

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1147FM-1	SL1147FE-1	SL1147FF-1
Led品牌/ Led Brand	CREE	CREE	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	6W	6W	6W
输入电压/ Input Voltage	AC100–264V防水防雷阻气线 / DC12V/DC24V		DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	6°	12.5° 20° 30° 60° 15x30° 10x60°	20° 45° 60° 15x60° 15x25°
控制方式/ Control Mode	CC	CC	DMX512
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	120pcs/12pcs	120pcs/12pcs	64pcs



Flood Light Series

SL1148F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

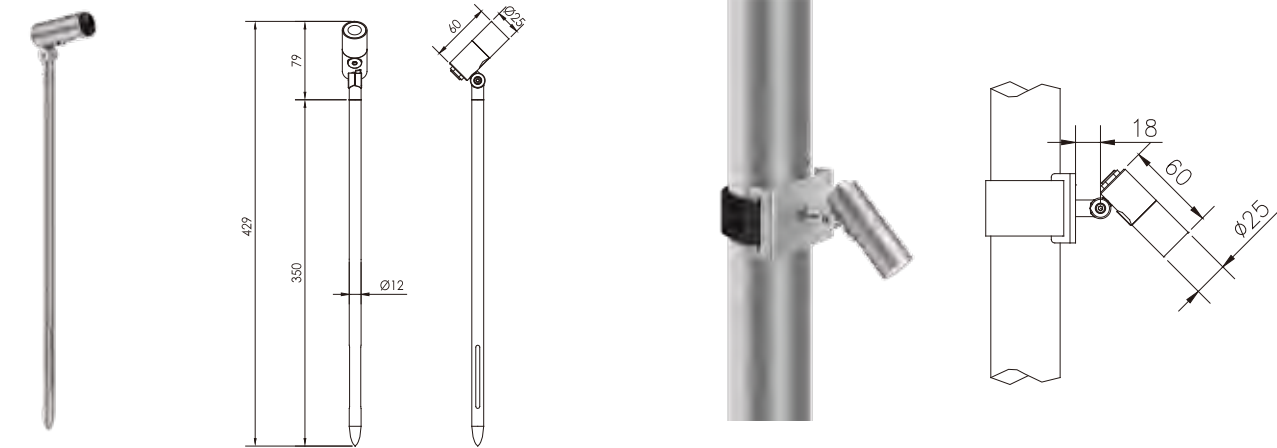

SL1148S

SL1148H
适配树杆尺寸(60-200)MM

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1148FE-1	
Led品牌/ Led Brand	CREE XP-E	
Led数量/ Led Quantity	1pcs	
额定功率/ Rated Power	3W	
输入电压/ Input Voltage	DC12V/DC24V	
频率/ Frequency Range	50/60Hz	
颜色 / Color	Single	
发光角度/ Beam Angle	20° 30° 45° 60° 25x45°	
控制方式/ Control Mode	CC	
使用寿命/ Life	50000H	
防护等级/ Protection Grade	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	
串联数量/ In series(max)	220pcs/22pcs	







Flood Light Series

SL1155

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯

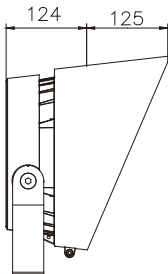


遮光罩/Visor

技术参数 Specification

产品型号/ Product Code	SL1155M-36	SL1155E-36	SL1155N-36KP	SL1155Q-36KP	SL1155F-36
Led品牌/ Led Brand	CREE	LUMILEDS	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	RGBW 4in1
Led数量/ Led Quantity	36pcs	36pcs	36pcs	36pcs	36pcs
额定功率/ Rated Power	150W(single)/200W(RGBW)	150W	200W	200W	200W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber/RGBW	Single	RGBWCLA	RGBW	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	10° 15° 20° 30° 15x60°	5° 10° 15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%




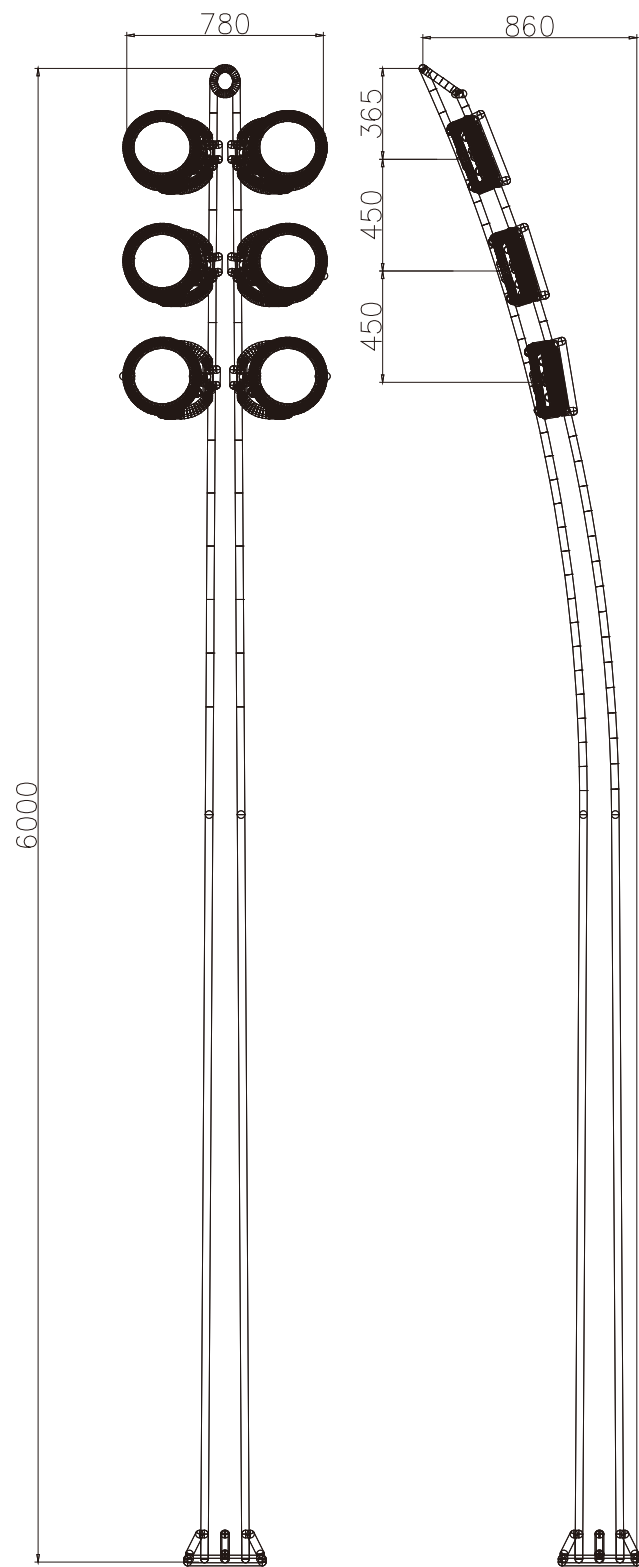


SL1155-26-06-06



SL1155-26-04-04

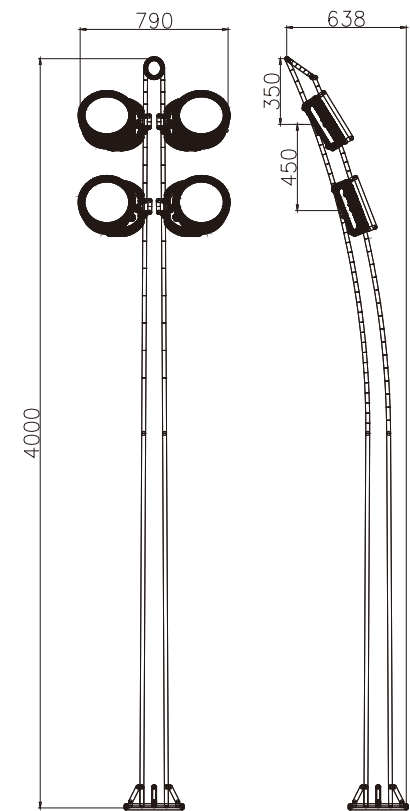

SL1155-26-05-04




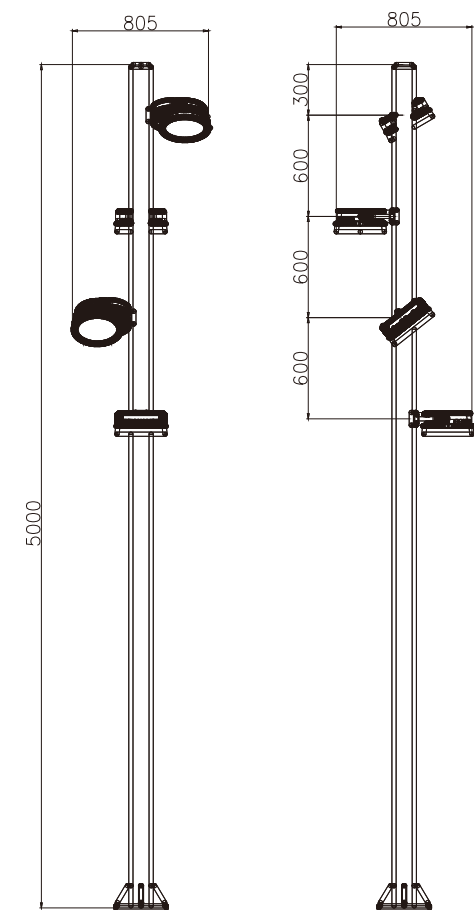


Flood Light Series

SL1156

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯

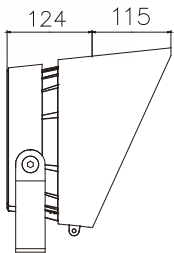

遮光罩/Visor

技术参数 Specification





产品型号/ Product Code	SL1156M-24	SL1156E-24	SL1156N-24KP	SL1156Q-24KP	SL1156F-24
Led品牌/ Led Brand	CREE	LUMILEDS	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	RGBW 4in1
Led数量/ Led Quantity	24pcs	24pcs	24pcs	24pcs	24pcs
额定功率/ Rated Power	100W(single)/150W(RGBW)	100W	150W	150W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	RGBWCLA	RGBW	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	10° 15° 20° 30° 15x60°	5° 10° 15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

Flood Light Series

SL1157

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯

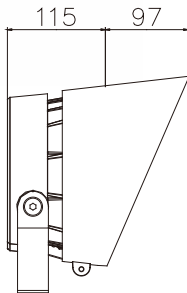

遮光罩/Visor


技术参数 Specification

产品型号/ Product Code	SL1157M-18	SL1157E-18	SL1157N-18KP	SL1157Q-18KP	SL1157F-18
Led品牌/ Led Brand	CREE	LUMILEDS	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	RGBW 4in1
Led数量/ Led Quantity	18pcs	18pcs	18pcs	18pcs	18pcs
额定功率/ Rated Power	75W(single)/100W(RGBW)	75W	100W	100W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	RGBWCLA	RGBW	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	10° 15° 20° 30° 15x60°	5° 10° 15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%

Flood Light Series

SL1158

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2,5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3,5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窩玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

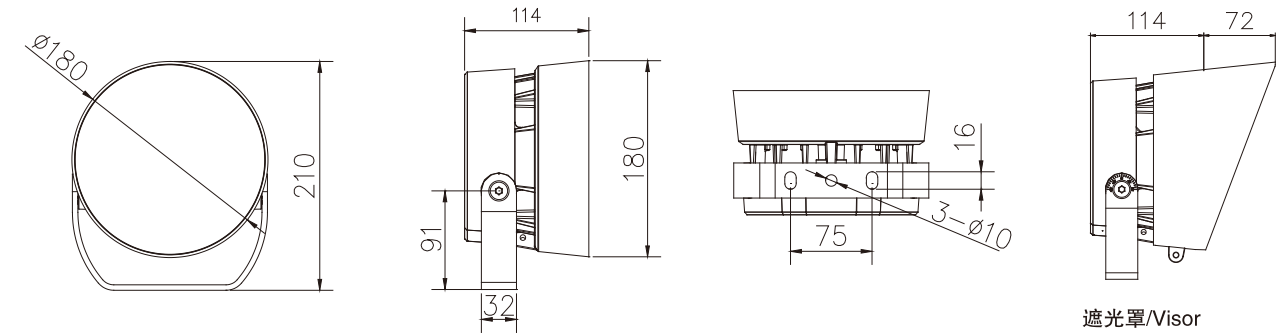

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1158M-12	SL1158E-12	SL1158F-12	SL1158M-9	SL1158E-9
Led品牌/ Led Brand	CREE	LUMILEDS	RGBW 4in1	CREE	LUMILEDS
Led数量/ Led Quantity	12pcs	12pcs	12pcs	9pcs	9pcs
额定功率/ Rated Power	50W	50W	75W	36W	36W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber	Single	RGBW	Single	Single
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	9° 15° 20° 30° 45° 15x60°	2.5°	8° 12° 20° 30° 45° 60° 15X60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1158F-9				
Led品牌/ Led Brand	RGBW 4in1				
Led数量/ Led Quantity	9pcs				
额定功率/ Rated Power	60W				
输入电压/ Input Voltage	AC100-305V				
频率/ Frequency Range	50/60Hz				
颜色 / Color	RGBW				
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15X60°				
控制方式/ Control Mode	DMX512/RDM				
使用寿命/ Life	80000H				
防护等级/ Protection Grade	IP66				
环境温度/ Ambient Temperature	-25℃~50℃				
环境湿度/ Ambient Humidity	10%~90%				

Flood Light Series

SL1159

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

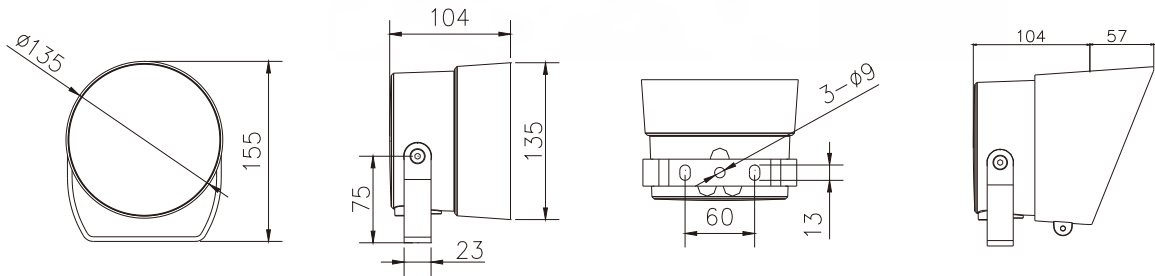


技术参数 Specification

产品型号/ Product Code	SL1159M-6	SL1159E-6	SL1159F-6		
Led品牌/ Led Brand	CREE	LUMILEDS	RGBW 4in1		
Led数量/ Led Quantity	6pcs	6pcs	6pcs		
额定功率/ Rated Power	25W	25W	36W		
输入电压/ Input Voltage	DC24/AC100-305V	AC100-305V	DC24/AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz		
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber	Single	RGBW		
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	9° 15° 20° 30° 45° 15x60°		
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM		
使用寿命/ Life	80000H	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%		

Flood Light Series

SL1160

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

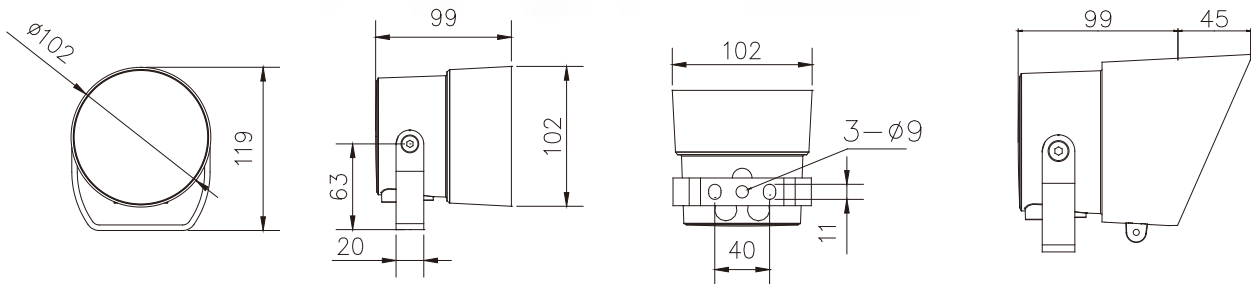

技术参数 Specification

产品型号/ Product Code	SL1160M-3	SL1160E-3	SL1160F-3		
Led品牌/ Led Brand	CREE	LUMILEDS	RGBW 4in1		
Led数量/ Led Quantity	3pcs	3pcs	3pcs		
额定功率/ Rated Power	15W	20W	20W		
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC24/AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz		
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber	Single	RGBW		
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x60°	9° 15° 20° 30° 45° 15x60°		
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM		
使用寿命/ Life	80000H	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%		

Flood Light Series

SL1102U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



产品简介 Product Introduction



- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1102UD-36	SL1102UC-36	SL1102UB-36	SL1102UC-24
Led品牌/ Led Brand	CREE XP-G3	CREE	CREE	CREE
Led数量/ Led Quantity	36pcs	36pcs	36pcs	24pcs
额定功率/ Rated Power	105W	86W	60W	50W
输入电压/ Input Voltage	AC100-240V	DC24V/AC100-240V		DC36V/AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	RGB/Single	RGB/Single	RGB/Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°			
控制方式/ Control Mode	CC	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	12pcs	1/15(pcs)	2/22(pcs)	4/26(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

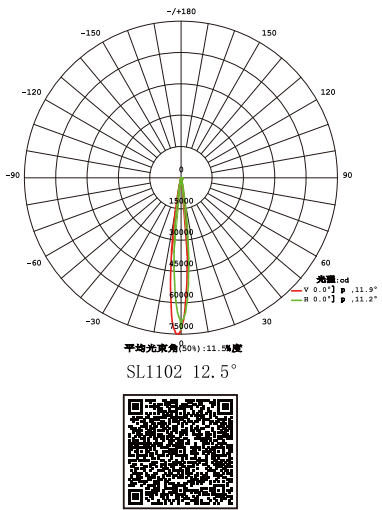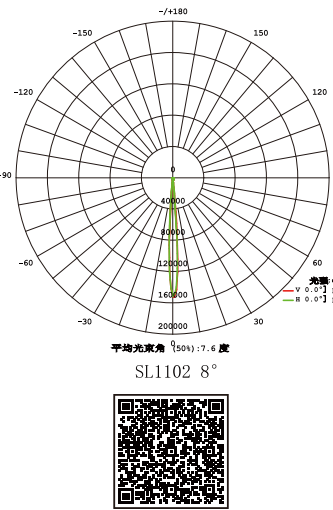

SL1102F



产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.



技术参数 Specification

产品型号/ Product Code	SL1102FD-36	SL1102FC-36	SL1102FB-36	SL1102FC-24
Led品牌/ Led Brand	CREE	CREE	CREE	CREE
Led数量/ Led Quantity	36pcs	36pcs	36pcs	24pcs
额定功率/ Rated Power	105W	86W	60W	50W
输入电压/ Input Voltage	AC100-240V	AC100-240V		AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°			
控制方式/ Control Mode	CC	CC	CC	CC
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	12pcs	15pcs	22pcs	26pcs


Flood Light Series

SL1103U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

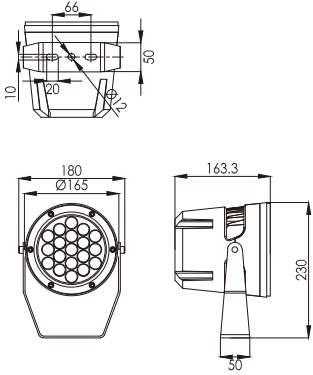

SL1103G

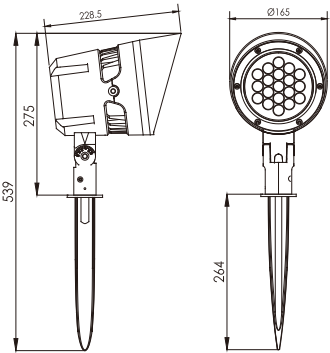

SL1103S

产品简介 Product Introduction






- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL1103UC-18	SL1103UB-18	SL1103UA-18
LED品牌 LED Brand	CREE XP-G3	CREE	CREE
LED数量 LED Quantity	18pcs	18pcs	18pcs
额定功率 Rated Power	45W	30W	21W
输入电压 Input Voltage	AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	RGB/Single	RGB/Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°		
控制方式 Control Mode	CC	DMX512/CC	DMX512/CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%
串联数量/ In series(max)	28pcs	4/44(pcs)	7/60(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

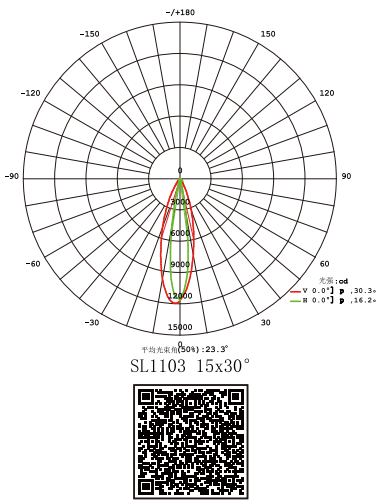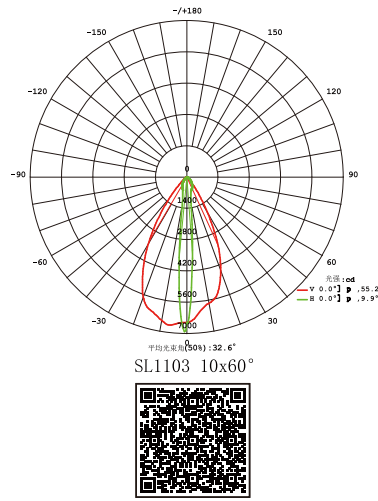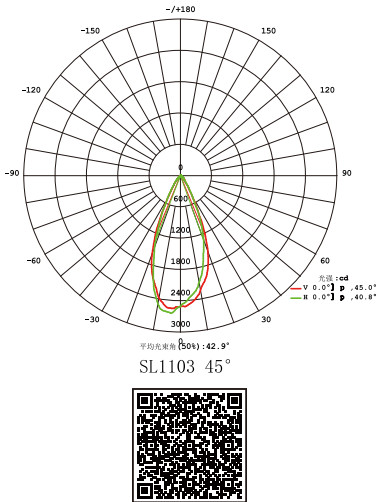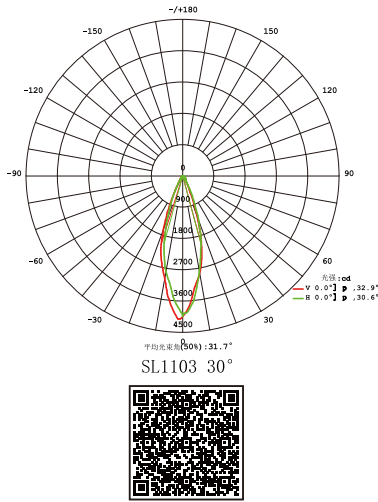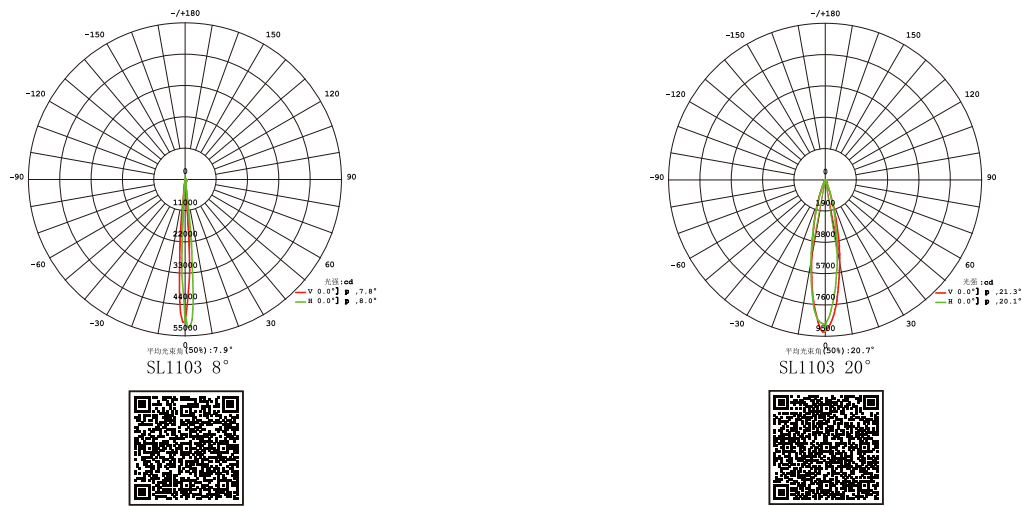


Flood Light Series

SL1103F


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



SL1103M

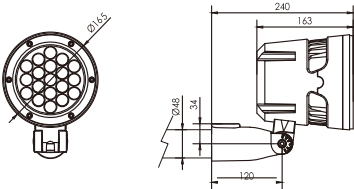

SL1103X

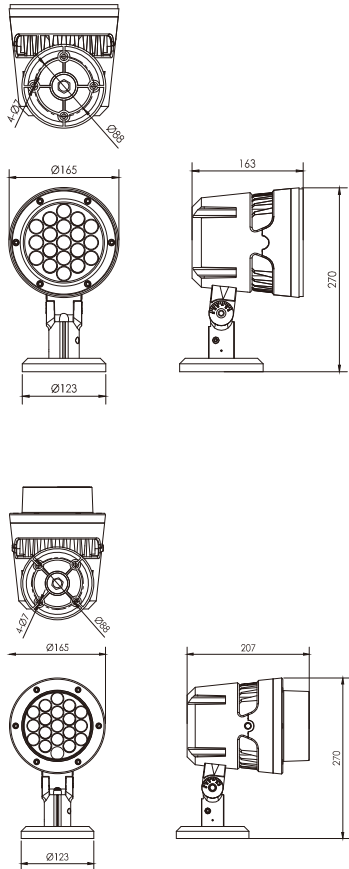

技术参数 Specification

产品型号/Product Code	SL1103FC-18	SL1103FB-18	SL1103FA-18
LED品牌 LED Brand	CREE XP-G3	CREE	CREE
LED数量 LED Quantity	18pcs	18pcs	18pcs
额定功率 Rated Power	45W	30W	21W
输入电压 Input Voltage	AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	RGB/Single	RGB/Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°		
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%
串联数量/ In series(max)	28pcs	4/44pcs	7/60pcs



Flood Light Series

SL1104U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。


- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/Product Code	SL1104UB-9	SL1104UA-9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	20W	11W
输入电压/Input Voltage	DC12V/AC100-240V	DC12V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP66	IP66
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/66(pcs)	6/120(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

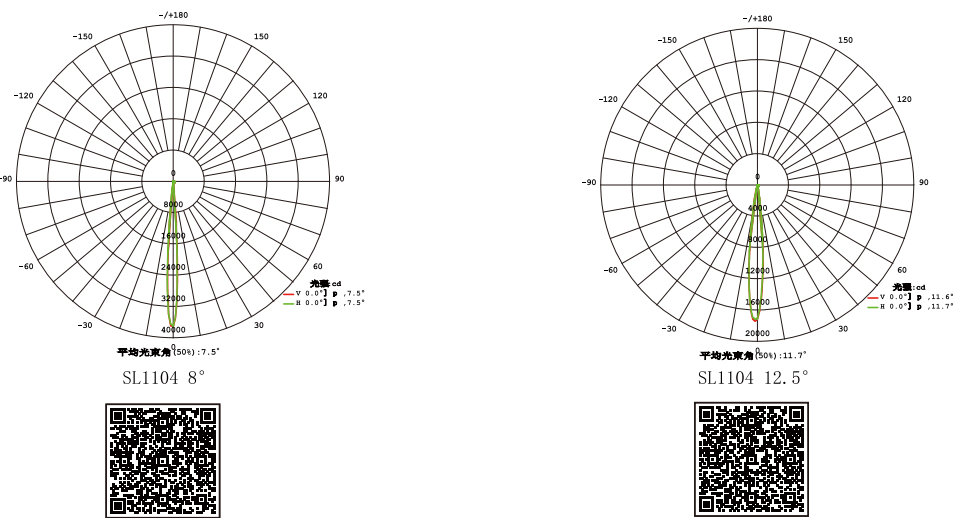


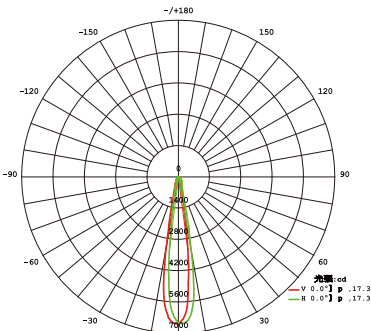


SL1104 15°

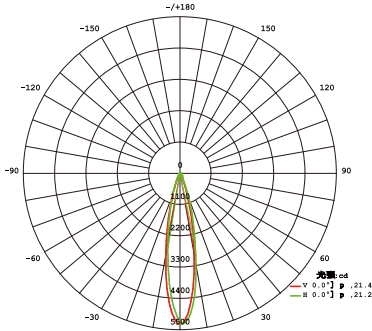


SL1104 20°

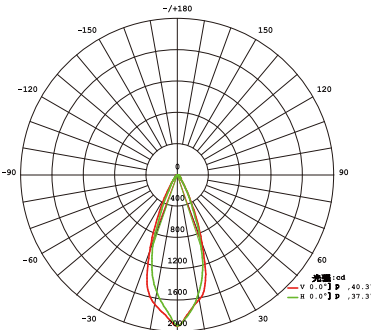


SL1104 30°

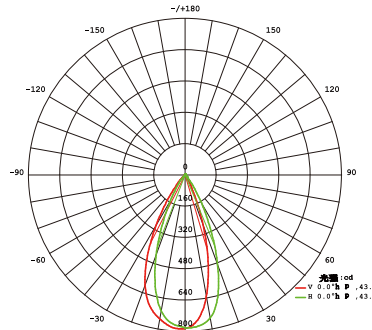

SL1104 45°

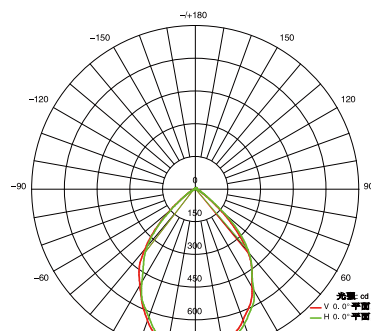

SL1104 60°

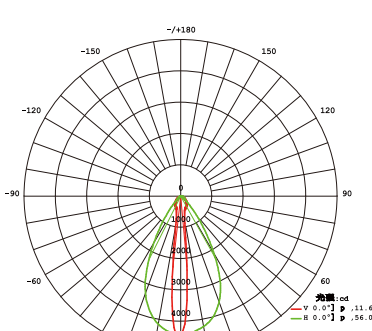

SL1104 10x60°




Flood Light Series

SL1104F


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



SL1104M

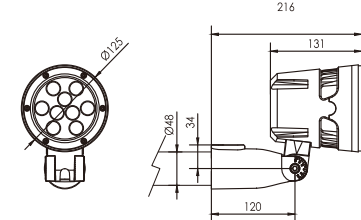



SL1104X

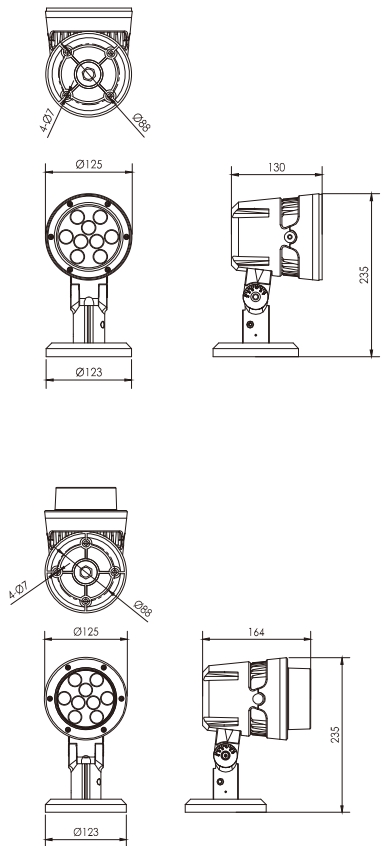

技术参数 Specification

产品型号/Product Code	SL1104FB-9	SL1104FA-9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	20W	11W
输入电压/Input Voltage	AC100-240V	AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	Single	Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式/Control Mode	CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP66	IP66
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	61pcs	110pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

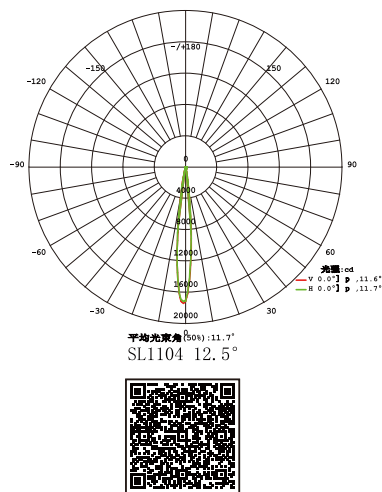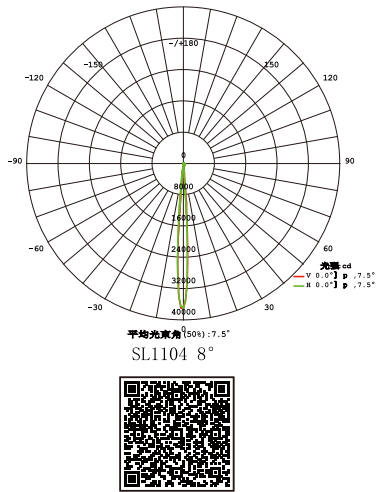



Flood Light Series

SL1105U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



SL1105S

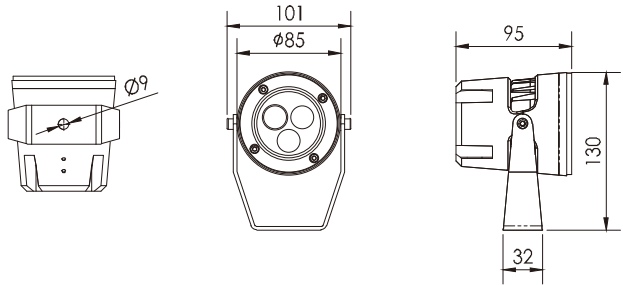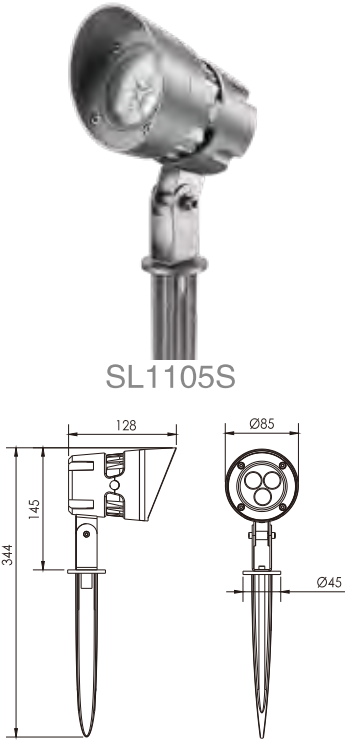

产品简介 Product Introduction



- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号Product Code	SL1105UC-3	SL1105UB-3	SL1105UA-3	SL1105U-C10
LED品牌LED Brand	CREE	CREE	CREE	CREE COB
LED数量LED Quantity	3pcs	3pcs	3pcs	1pc
额定功率Rated Power	8W	6W	3.5W	10W
输入电压Input Voltage	DC12V/AC100-240V	DC12V/AC100-240V	DC12V/AC100-240V	DC12V/AC100-240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色Color	RGB/Single	RGB/Single	RGB/Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°			25°
控制方式Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)

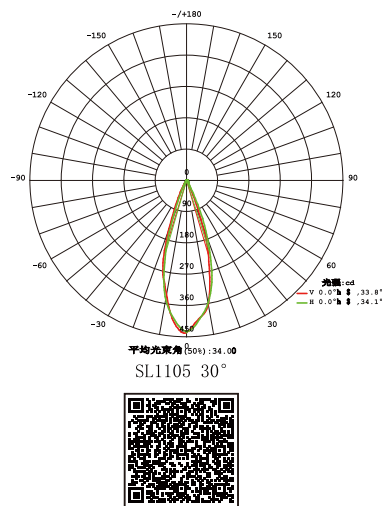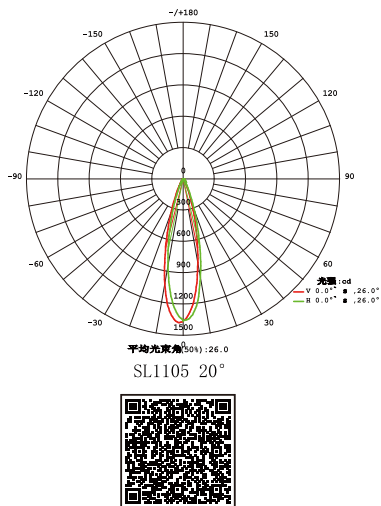

Flood Light Series

SL1105F

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



产品简介 Product Introduction



- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号Product Code	SL1105FC-3	SL1105FB-3	SL1105FA-3	SL1105F-C10
LED品牌LED Brand	CREE	CREE	CREE	CREE COB
LED数量LED Quantity	3pcs	3pcs	3pcs	1pc
额定功率Rated Power	8W	6W	3.5W	10W
输入电压Input Voltage	AC100-240V	AC100-240V	AC100-240V	AC100-240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色Color	Single	Single	Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°			25°
控制方式Control Mode	CC	CC	CC	CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)

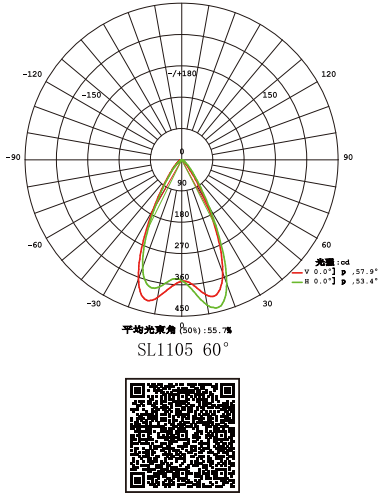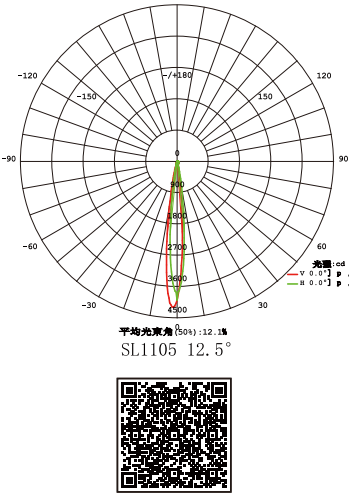


接线示意图 Wiring Diagram


RGB A 型

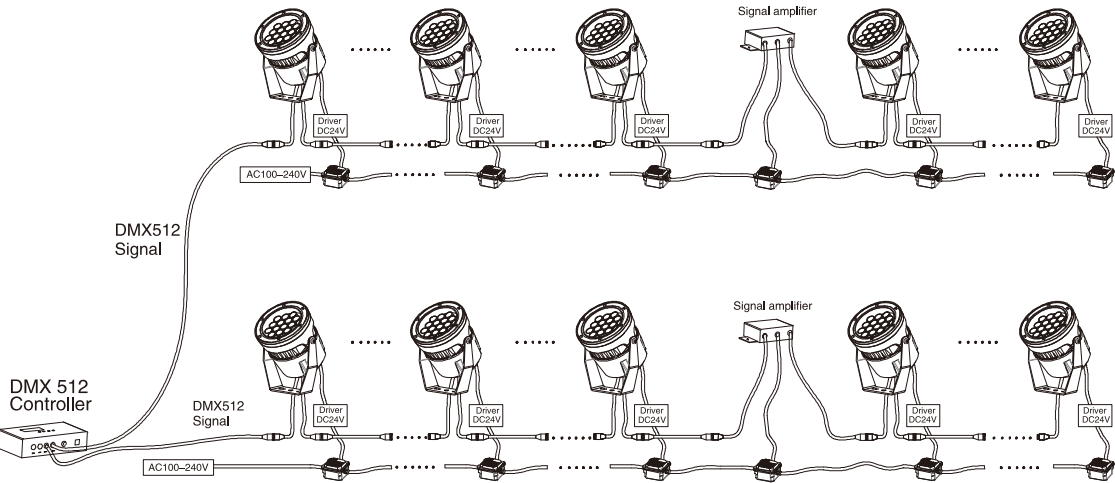

RGB B 型

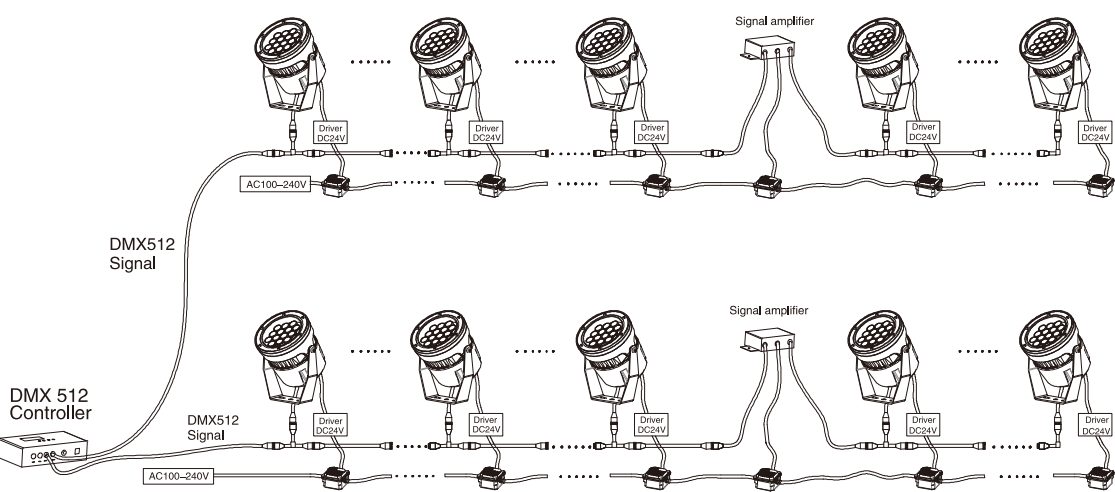

单色 (Single Color)

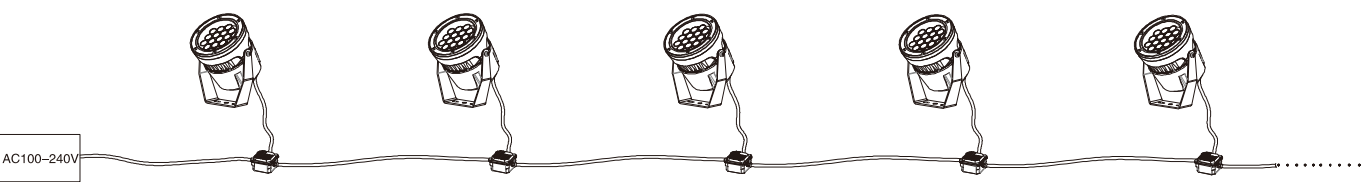

Flood Light Series

SL1125F





蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2,5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3,5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



技术参数 Specification

产品型号Product Code	SL1125FC-7	SL1125FB-6	SL1125FA-6	SL1125F-C12
LED品牌LED Brand	CREE	CREE	CREE	CREE COB
LED数量LED Quantity	7pcs	6pcs	6pcs	1pc
额定功率Rated Power	16W	11W	7W	12W
输入电压Input Voltage	AC100-240V	AC100-240V	AC100-240V	AC100-240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色Color	Single	Single	Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°			15°
控制方式Control Mode	CC	CC	CC	CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

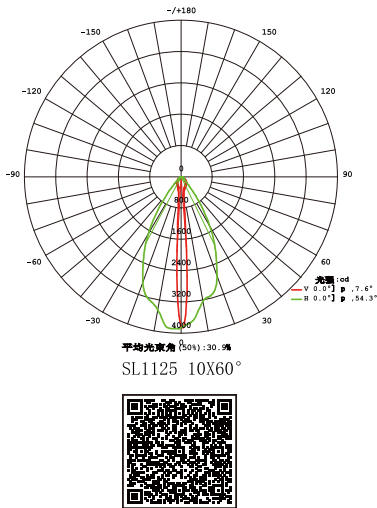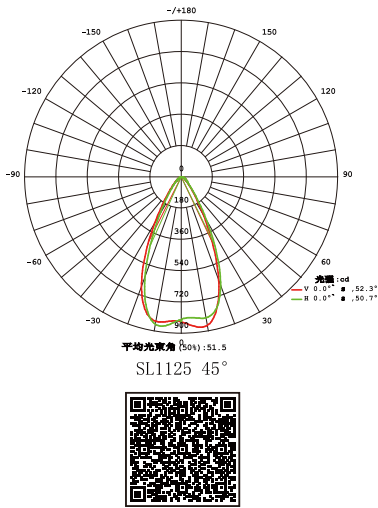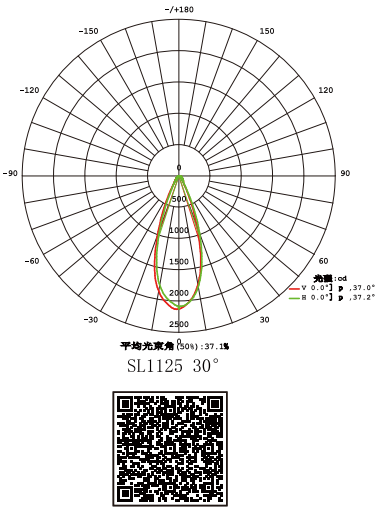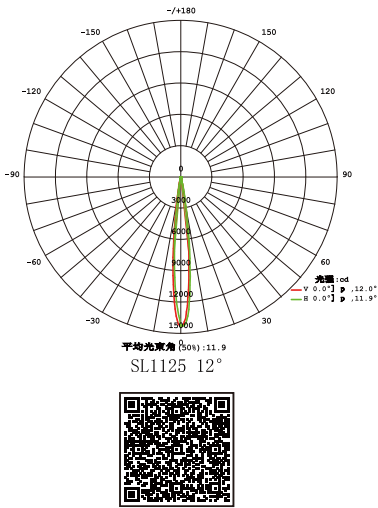

Flood Light Series

SL1126F






蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2,5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3,5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




技术参数 Specification

产品型号Product Code	SL1126FB-3	SL1126FA-3	SL1126F-C6
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量LED Quantity	3pcs	3pcs	1pc
额定功率Rated Power	6W	3.5W	6W
输入电压Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色Color	Single	Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°		20°
控制方式Control Mode	CC	CC	CC
使用寿命Life	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%


配光曲线 (全角) Distribution Curve Flux (SBC Case)

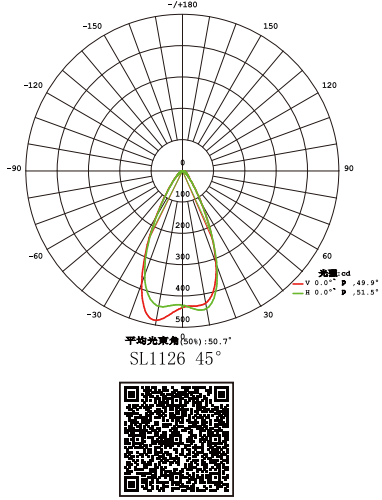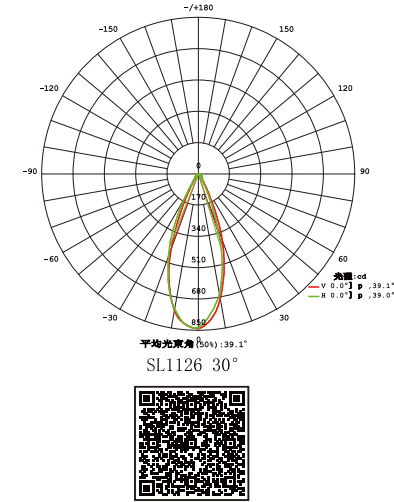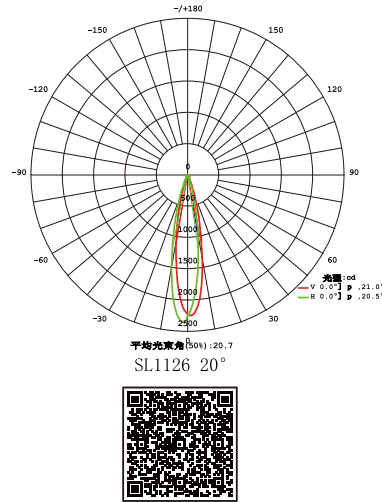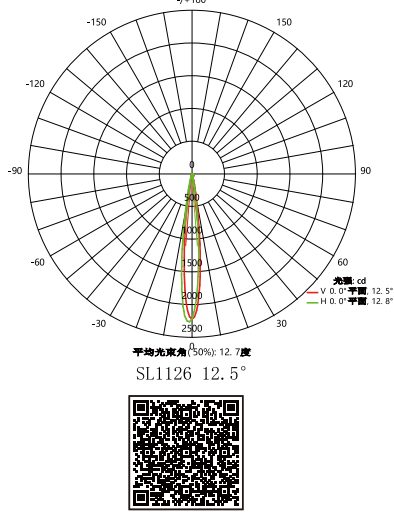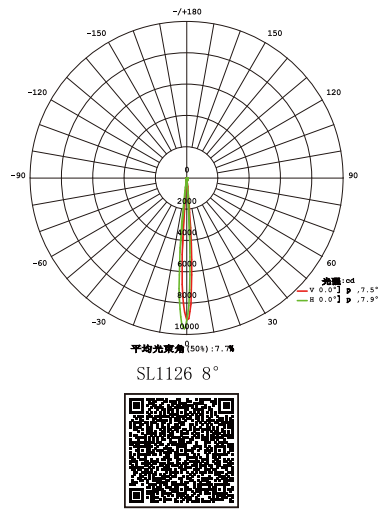

Flood Light Series
SL1127F

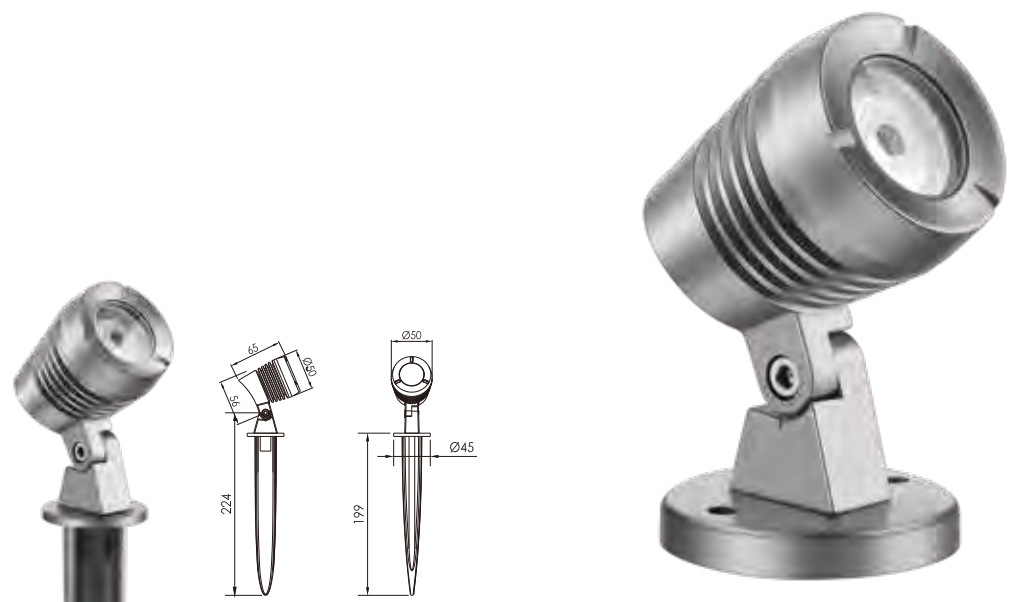

SL1127S


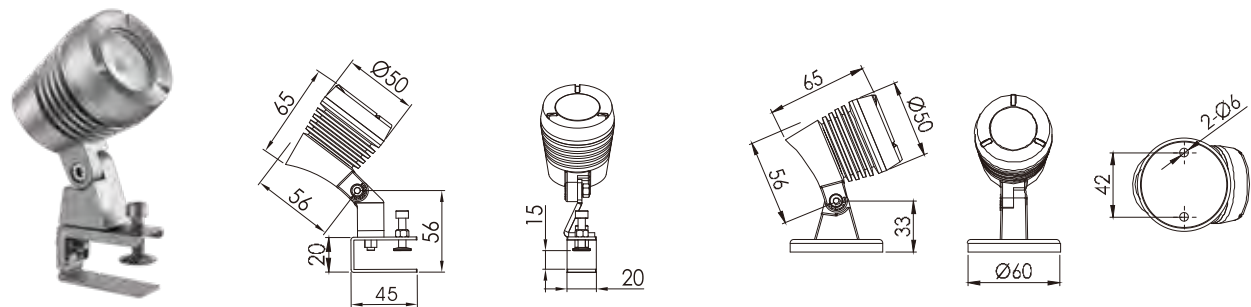


SL1127C

技术参数 Specification

产品型号Product Code	SL1127FC-1	SL1127FA-1
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	1pc	1pc
额定功率Rated Power	3W	1.5W
输入电压Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	Single	Single
发光角度Beam Angle	15° 28°	
控制方式Control Mode	CC	CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP66	IP66
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%


配光曲线 (半角) Distribution Curve Flux (SBC Case)

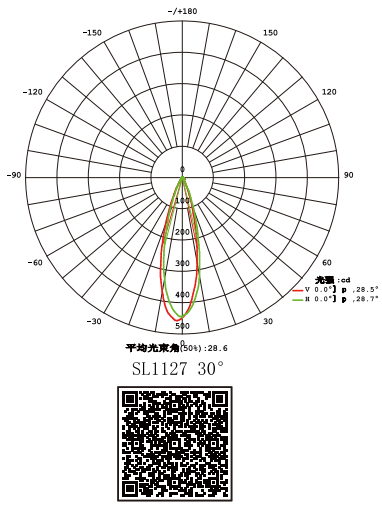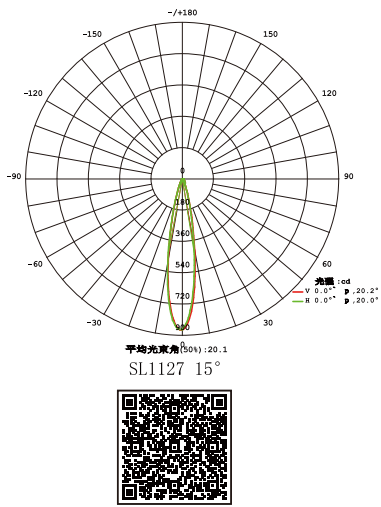


Flood Light Series
SL1269U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics		CO ₂ ↓50%
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics		
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics		原生1度角
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics		
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics		K值>500
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics		

LED 恒功率全色域染色灯

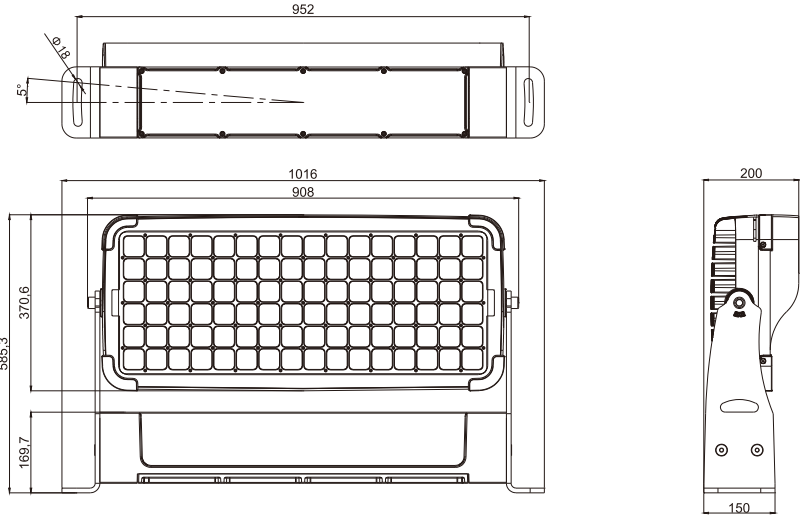

配光曲线 (半角) Distribution Curve Flux (SBC Case)

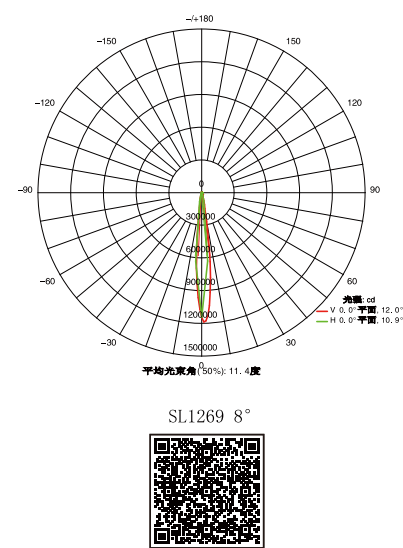

技术参数 Specification


产品型号/ Product Code	SL1269UM-96	SL1269UE-96	SL1269UN-96KP	SL1269UQ-96KP
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L/OSRAM P9	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	96pcs	96pcs	96pcs	96pcs
额定功率/ Rated Power	700W	800W	800W	800W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15X60°	6° 8° 15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1269UF-96	SL1269UE-96HE	SL1269UC-384	SL1269UM-40
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE XHP50	LUXEON 5050	CREE/OSRAM
Led数量/ Led Quantity	96pcs	96pcs	384pcs	40pcs
额定功率/ Rated Power	800W	800W	800W	350W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBW	Single	Single	Single/RGBW
发光角度/ Beam Angle	6° 8° 15° 20° 30° 15x60°	8° 12° 20° 30° 60° 10x70°	8° 15° 20° 30° 45° 20x40° 15x25°	1.5°
控制方式/ Control Mode	DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%

Flood Light Series


SL1272U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics		CO ₂ ↓50%
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics		
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics		原生1度角
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics		
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics		K值>500
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics		

LED 恒功率全色域染色灯

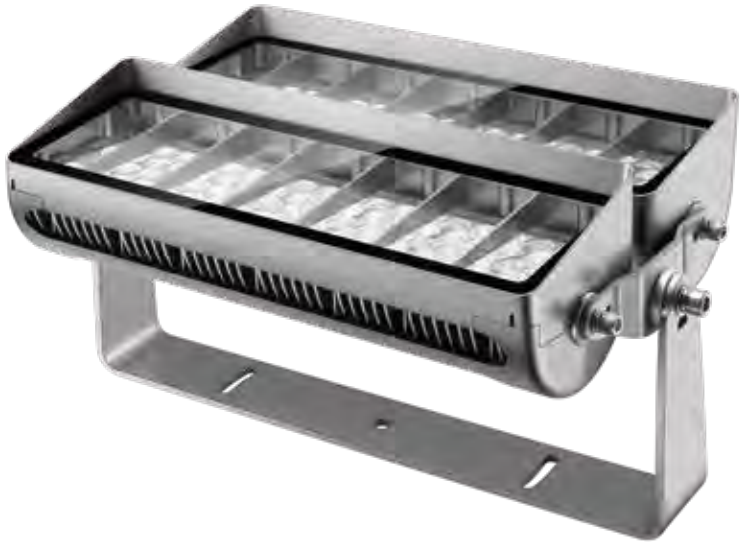

SL1272S


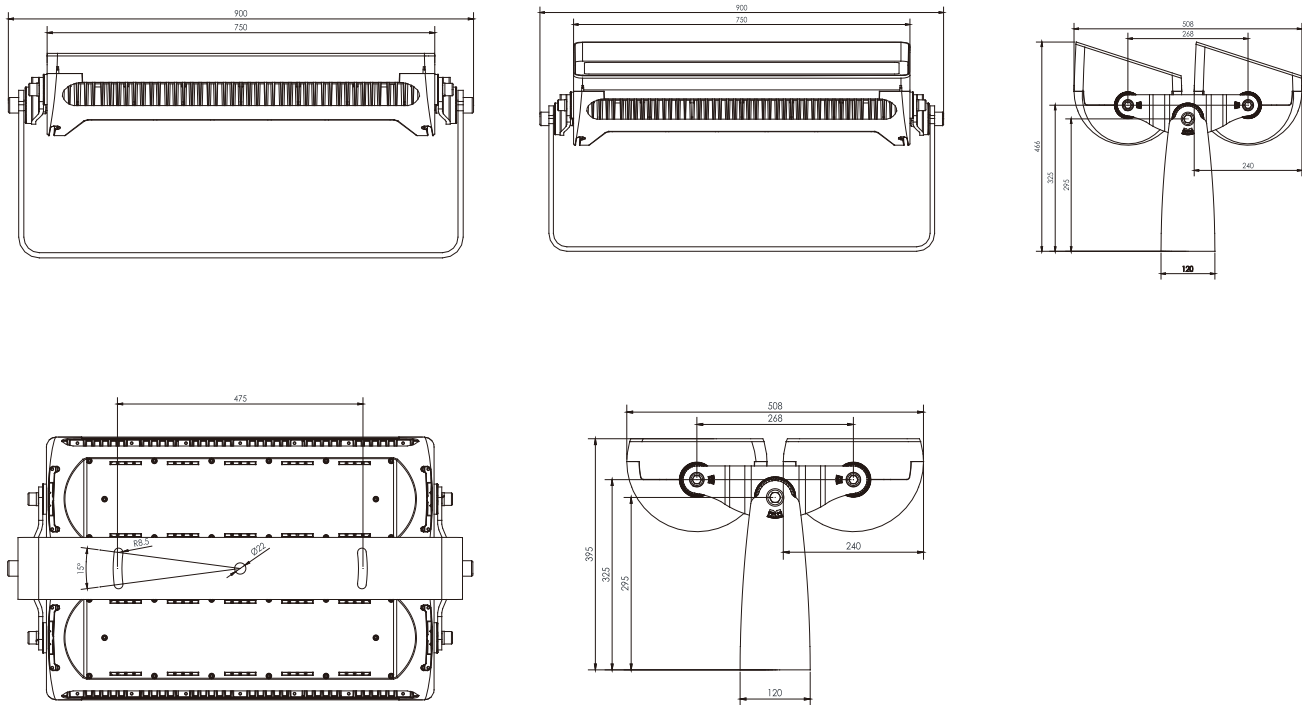


产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1272UM-180KP	SL1272UD-180	SL1272UC-180	SL1272UN-80KP
Led品牌/ Led Brand	RGBW Keepower	CREE/LUMILEDS	CREE/LUMILEDS	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	180pcs	180pcs	180pcs (48R 48G 48B 36W)	80pcs
额定功率/ Rated Power	600W	600W	420W	600W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBW/RGBA/Single	RGBWCLA
发光角度/ Beam Rangle	2.5°	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20°		8° 25° 10X45°
控制方式/ Control Mode	CC/DMX512/RDM	CC	DMX512/RDM/CC	DMX512/RDM/CC
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1272UQ-80KP	SL1272UF-80	SL1272UM-36	
Led品牌/ Led Brand	RGBW 4in1 Keepower	CREE RGBW 4 in 1	CREE/OSRAM	
Led数量/ Led Quantity	80pcs	80pcs	36pcs	
额定功率/ Rated Power	720W	720W	320W	
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBW	RGBW	2700K/3000K/4000K 6500K//Pc Amber/RGBW	
发光角度/ Beam Rangle	8° 25° 10x45°	8° 25° 10x45°	1.5°	
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	

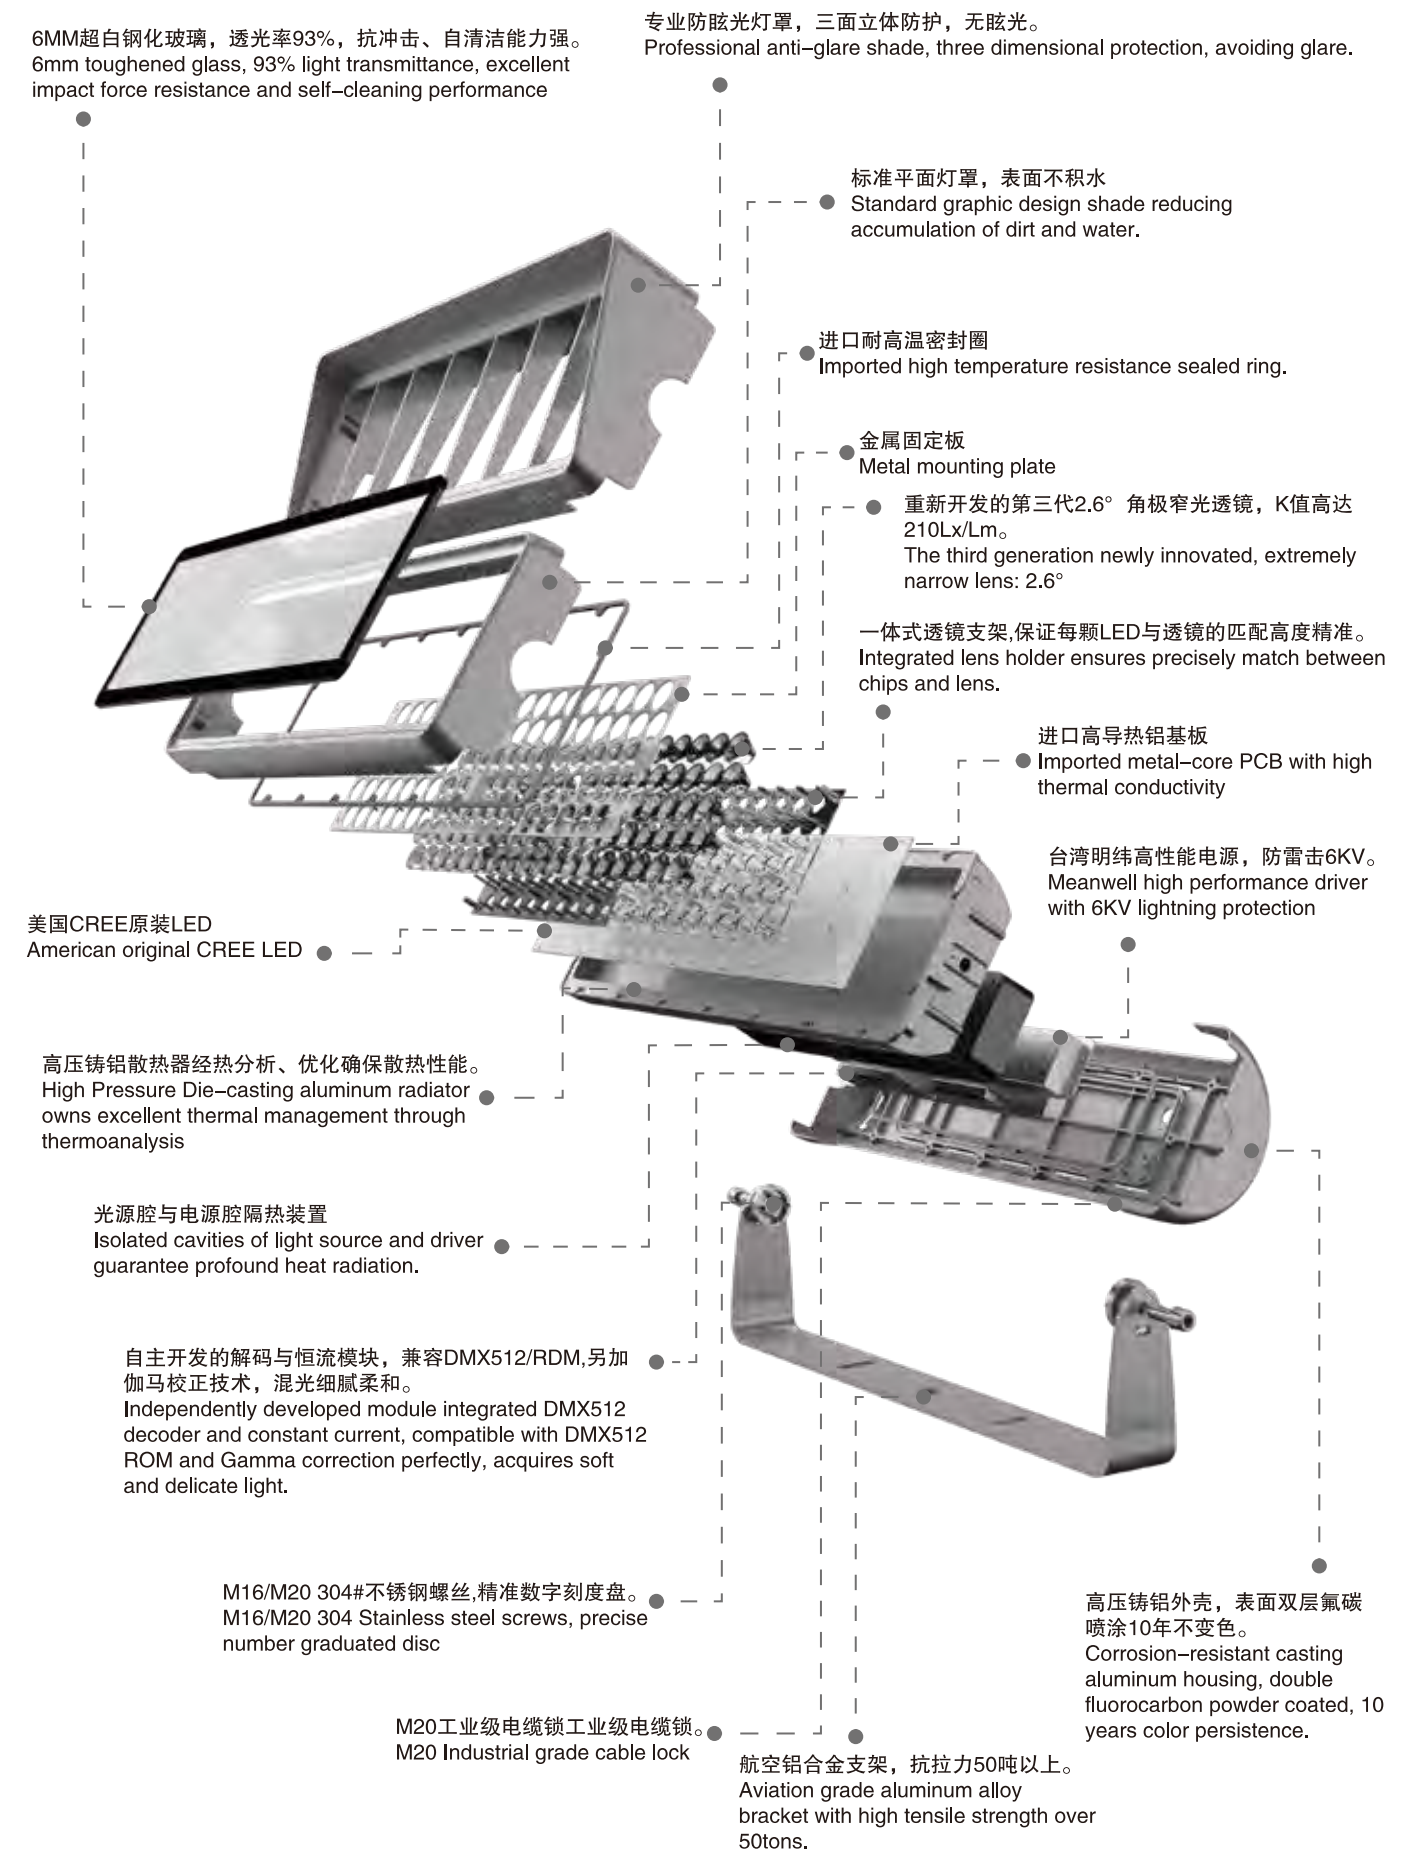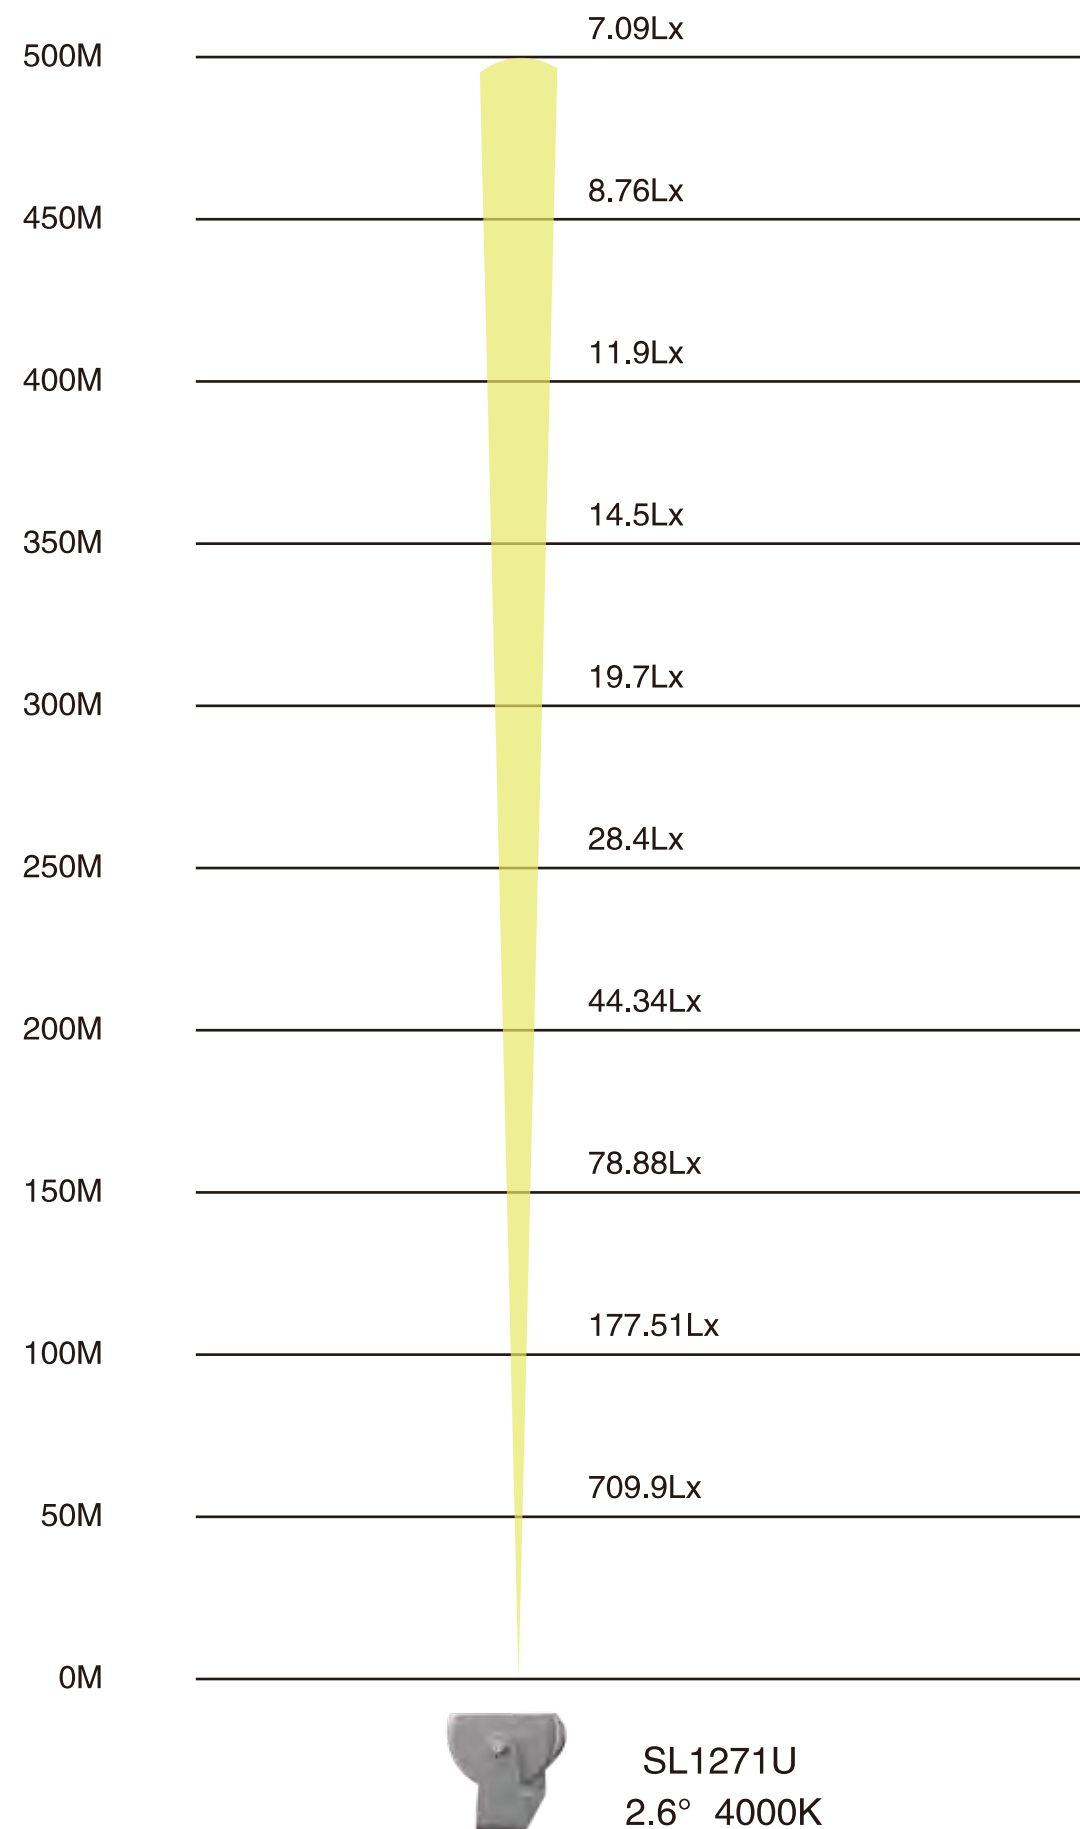

Flood Light Series







SL1271U

蜂窝格栅 Honeycomb gri		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics		CO ₂ ↓50%
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics		原生1度角
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics		K值>500
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics		
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics		
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics		

LED 恒功率全色域染色灯



SL1271S

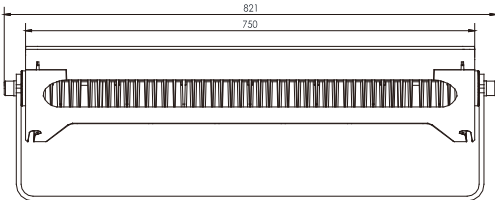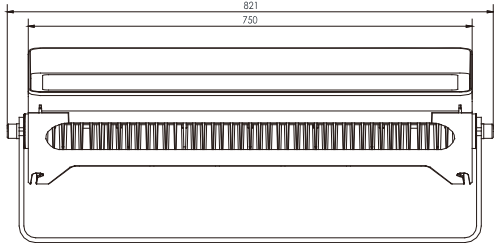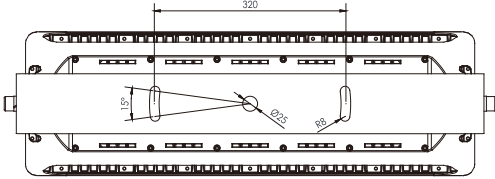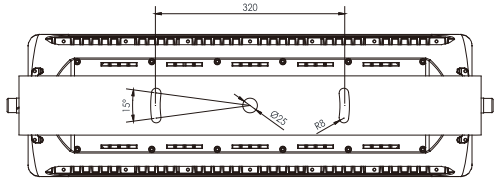


产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐摩擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1271UM-90KP	SL1271UD-90	SL1271UC-90	SL1271UN-40KP
Led品牌/ Led Brand	RGBW Keepower	CREE/LUMILEDS	CREE/LUMILEDS	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	90pcs	90pcs	90pcs (24R 24G 24B 18W)	40pcs
额定功率/ Rated Power	300W	300W	210W	300W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single		RGBW/RGBA/Single	RGBWCLA
发光角度/ Beam Angle	2.5°	2.6° 6° 12° 20° 30° 45° 60° 10x70°	5x20°	8° 25° 10X45°
控制方式/ Control Mode	CC/DMX512/RDM	CC	DMX512/RDM/CC	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1271UQ-40KP	SL1271UF-40	SL1271UM-18	
Led品牌/ Led Brand	CREE RGBW 4 in 1	CREE RGBW 4 in 1	CREE/OSRAM	
Led数量/ Led Quantity	40pcs	40pcs	18pcs	
额定功率/ Rated Power	360W	360W	160W	
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBW	RGBW	2700K/3000K/4000K 6500K/Pc Amber	
发光角度/ Beam Angle	8° 25° 10x45°	8° 25° 10x45°	1.5°	
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	

配光曲线 (半角) Distribution Curve Flux (SBC Case)

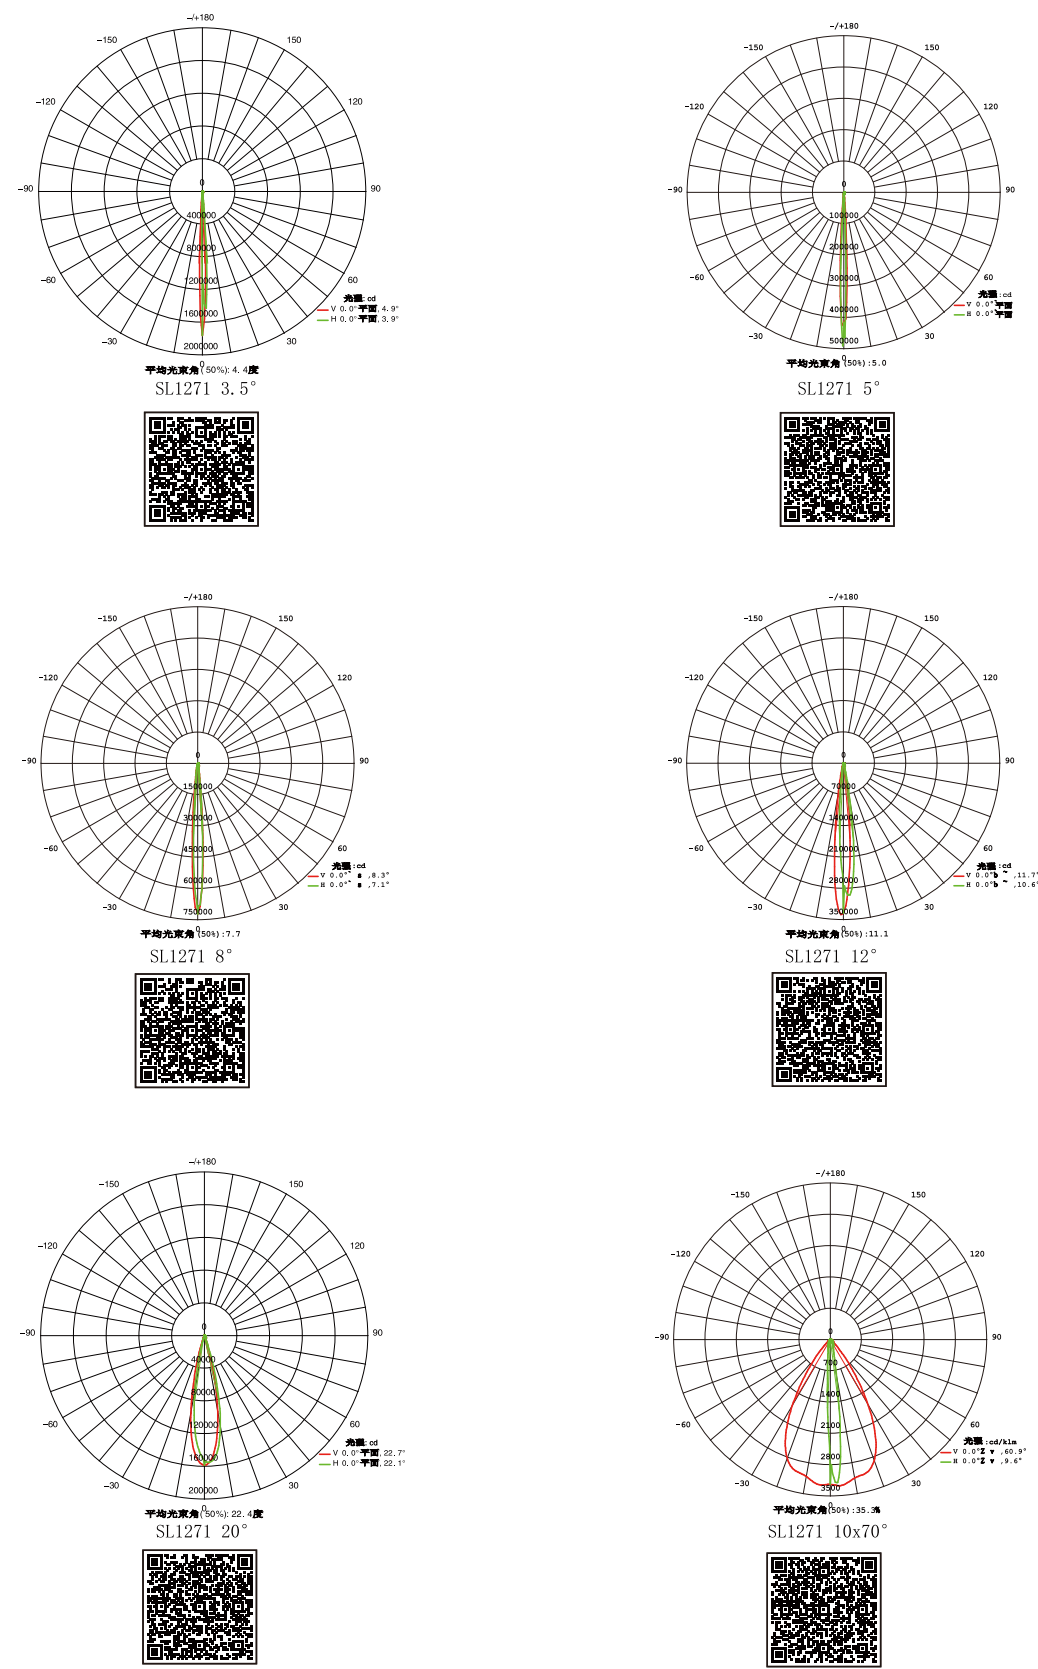

Flood Light Series






SL1278U

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics	CO ₂ ↓50%
防眩遮光罩 Anti-glare shield	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics	原生1度角
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	K值>500
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯



SL1278S

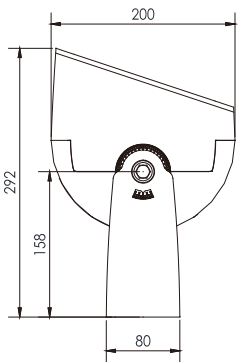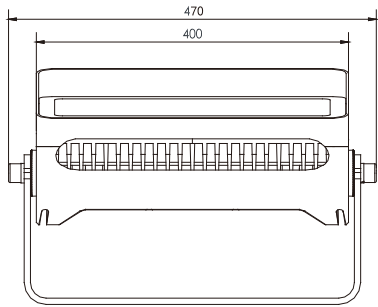


产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1278UM-36	SL1278UD-36	SL1278UC-36	SL1278UN-18KP
Led品牌/ Led Brand	CREE/OSRAM	LUMILEDS/CREE	LUMILEDS/CREE	RGBWCLA 7in1 Keepower
Led数量/ Led Quantity	36pcs	36pcs	36pcs (9R 9G 9B 9W)	18pcs
额定功率/ Rated Power	150W	150W	90W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBW/RGBA/Single	RGBWCLA
发光角度/ Beam Angle	2.5°	6° 12° 20°	30° 45° 60° 10x70° 5x20°	8° 25° 10x45°
控制方式/ Control Mode	DMX512/RDM/CC	CC	DMX512/RDM/CC	Bluetooth/DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10%-90%	10%-90%	10%-90%	10%-90%
产品型号/ Product Code	SL1278UQ-18KP	SL1278UF-18	SL1278UM-8	
Led品牌/ Led Brand	RGBW 4in1 Keepower	CREE RGBW 4in1	CREE/OSRAM	
Led数量/ Led Quantity	18pcs	18pcs	8pcs	
额定功率/ Rated Power	150W	150W	75W	
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	RGBW	RGBW	2700K/3000K/4000K 6500K/Pc Amber	
发光角度/ Beam Angle	8° 25° 10X45°	8° 25° 10X45°	1.5°	
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC	
使用寿命/ Life	80000H	80000H	80000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	
环境湿度/ Ambient Humidity	10%-90%	10%-90%	10%-90%	


配光曲线 (半角) Distribution Curve Flux (SBC Case)

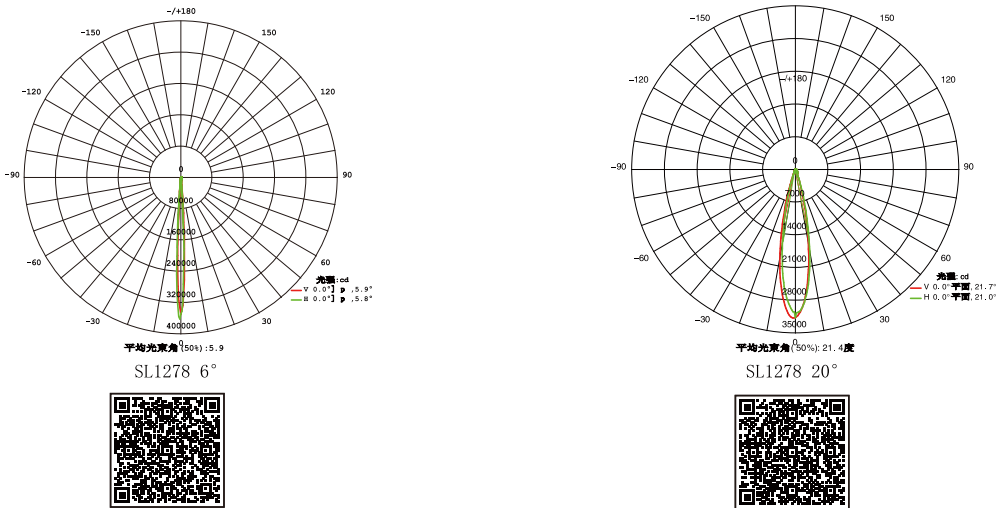

Flood Light Series

SL1281U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

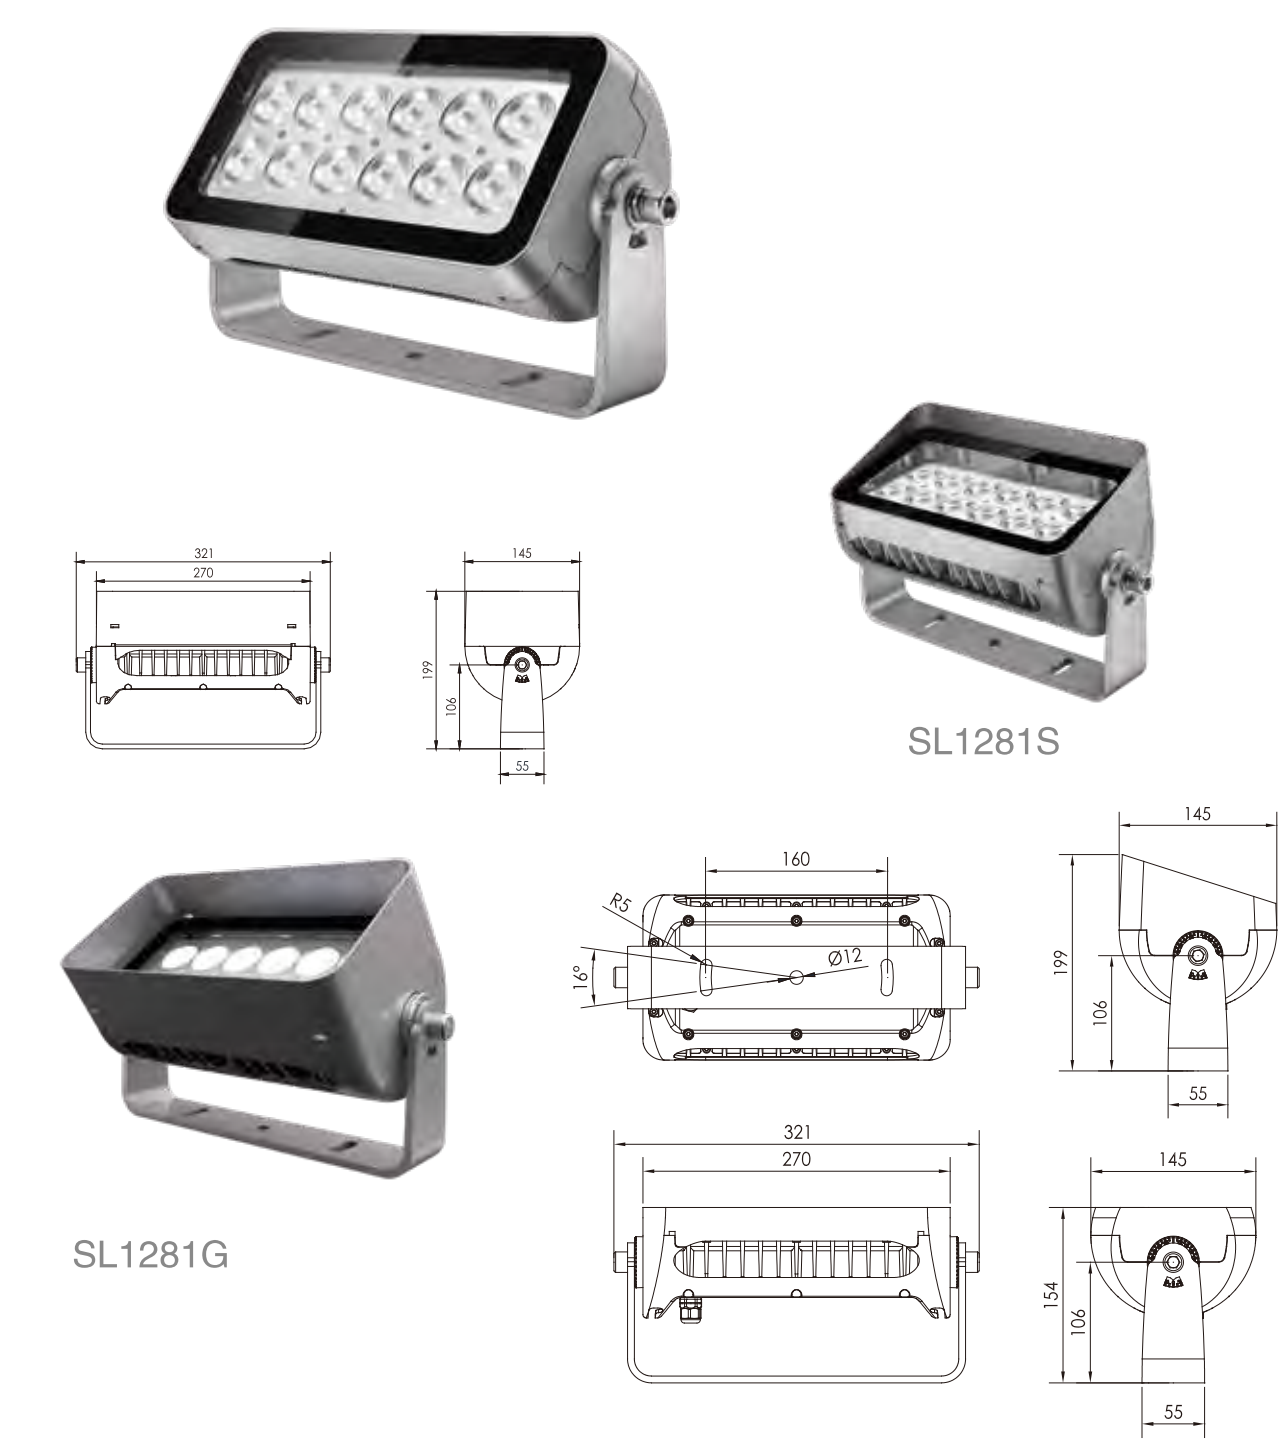


产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM，度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1281UM-12	SL1281UE-12	SL1281UD-12	SL1281UF-12
Led品牌/ Led Brand	CREE/OSRAM	CREE XP-L/XP-G3	LUMILEDS	CREE RGBW 4 in 1
Led数量/ Led Quantity	12pcs	12pcs	12pcs	12pcs
额定功率/ Rated Power	56W	56W	40W	72W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K//Pc Amber/RGBW	Single	Single	RGBW
发光角度/ Beam Angle	2.5°	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC	CC	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)

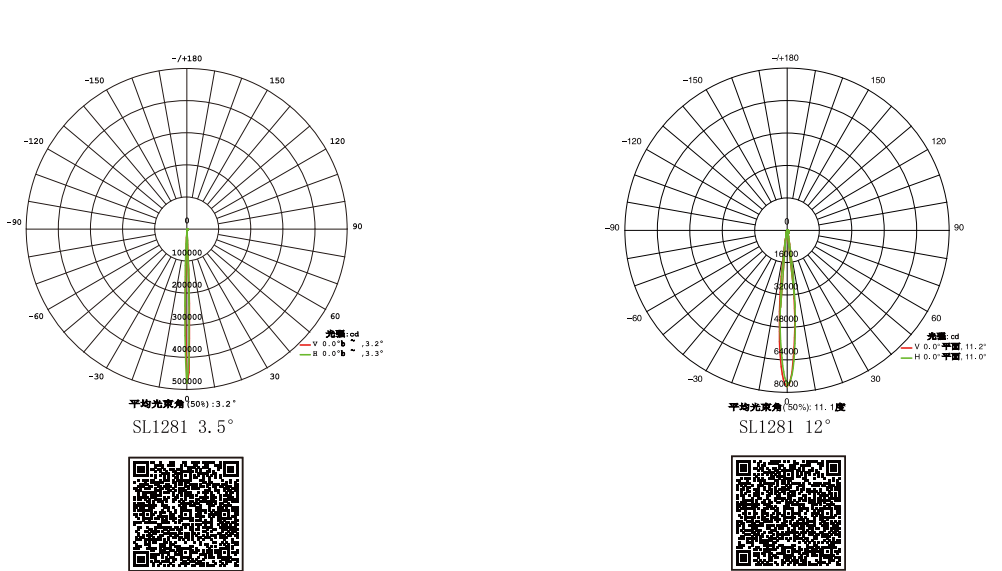


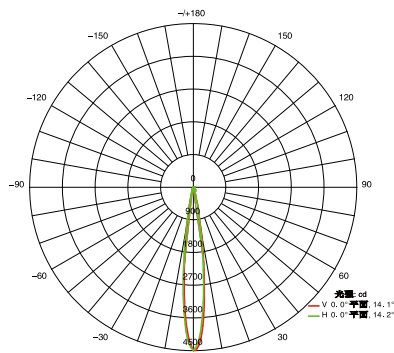

平均光束角 (30%): 14.2度
SL1281 15°

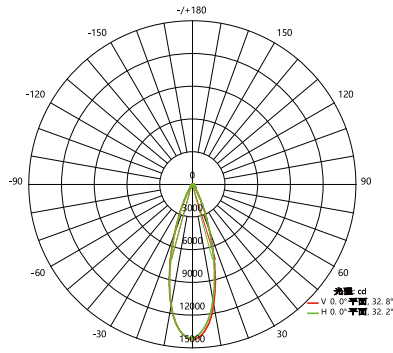

平均光束角 (30%): 32.5度
SL1281 30°

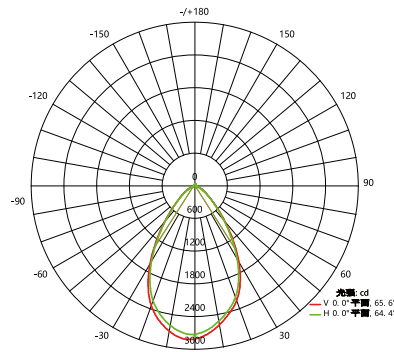

平均光束角 (30%): 65.0度
SL1281 60°



Flood Light Series

SL1232F

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

CO₂↓50%

原生1度角







K值>500






reddot winner 2021
innovative product






LED 恒功率数字染色灯

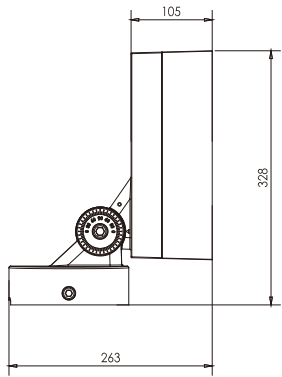


SL1232U



SL1232M



SL1232Z

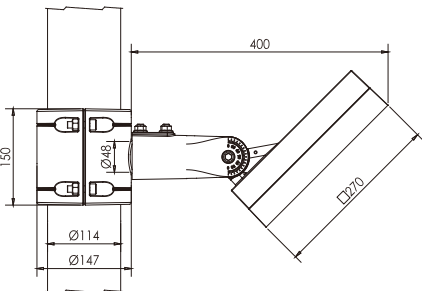





产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
 - 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
 - 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
 - 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
 - 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
 - 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1232FM-25	SL1232FE-25	SL1232FN-24KP	SL1232FQ-24KP	SL1232FF-24
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	CREE RGBW 4in1
Led数量/ Led Quantity	25pcs	25pcs	24pcs	24pcs	24pcs
额定功率/ Rated Power	120W	120W	150W	150W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	DC36V/AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 45° 15x60°	6° 8° 15° 20° 30°	15X60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10%-90%	10%-90%	10%-90%	10%-90%	10%-90%
产品型号/ Product Code	SL1232FC-48	SL1232FB-48	SL1232FZ-96	SL1232F-C120	SL1232FM-9
Led品牌/ Led Brand	OSRAM	OSRAM	CREE	CREE COB	CREE/OSRAM
Led数量/ Led Quantity	48pcs	48pcs	96pcs	4pcs	9pcs
额定功率/ Rated Power	120W	120W	120W	120W	85W
输入电压/ Input Voltage	DC36V/AC100-305V	DC36V/AC100-305	DC24V/AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	RGBW	Single	Single	Single/RGBW
发光角度/ Beam Angle	8° 15° 20° 30° 45° 20x40° 15x25°		7 ~ 36° Photoelectron zoom	12° 24° 36° 70°	1.5°
控制方式/ Control Mode	CC/DALI/0-10V	DMX512/RDM	Touch screen	CC/DALI/0-10V	CC/DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10%-90%	10%-90%	10%-90%	10%-90%	10%-90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)

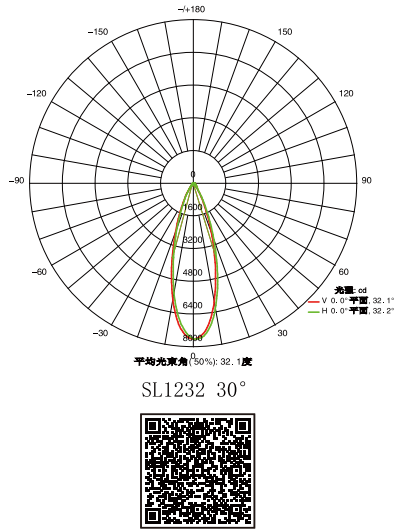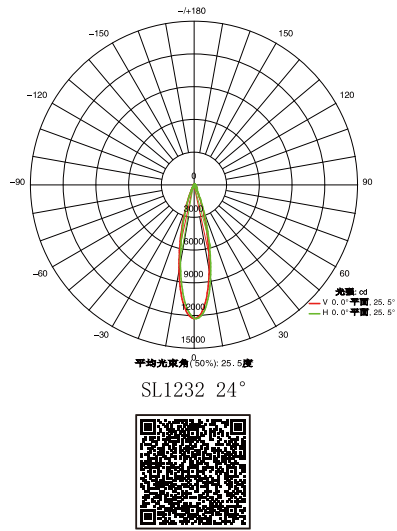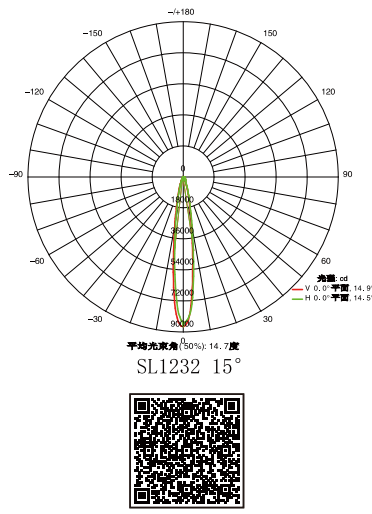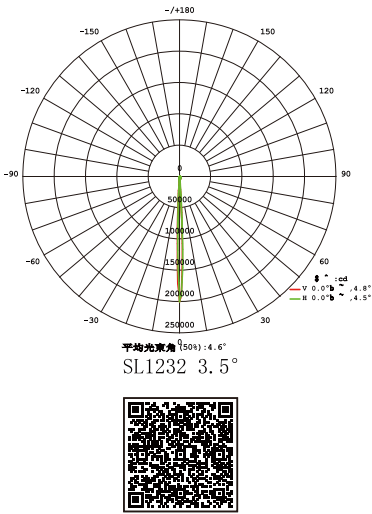

Flood Light Series
SL1235F





圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

CO₂↓50%


原生1度角

K值>500


LED 恒功率数字染色灯

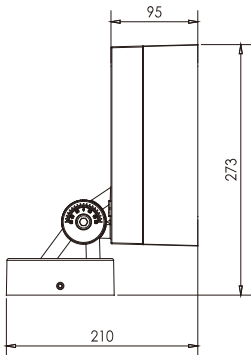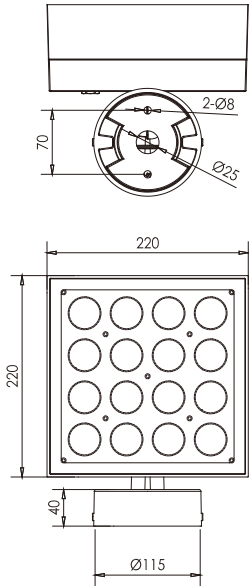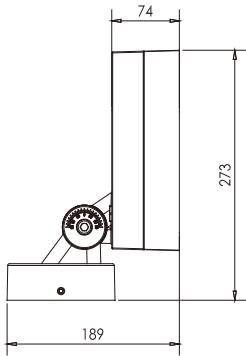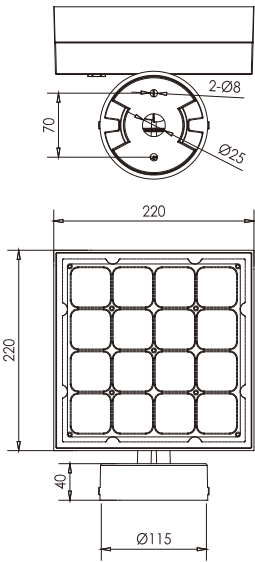


SL1235U

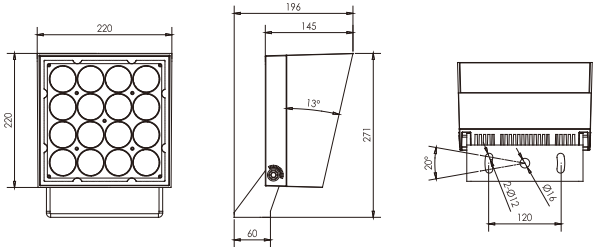


SL1235M

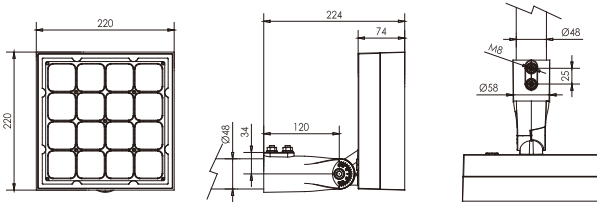


SL1235Z

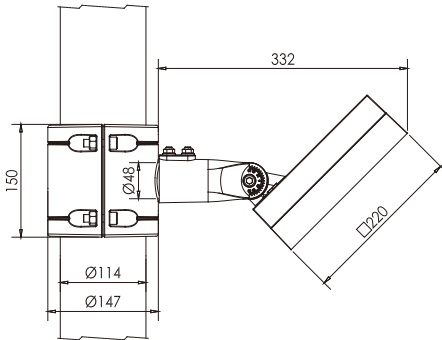

SL1235L

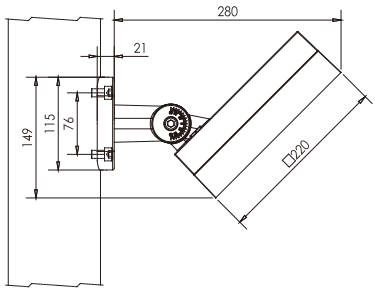






SL1235H



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4

适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm

配光曲线 (半角) Distribution Curve Flux (SBC Case)

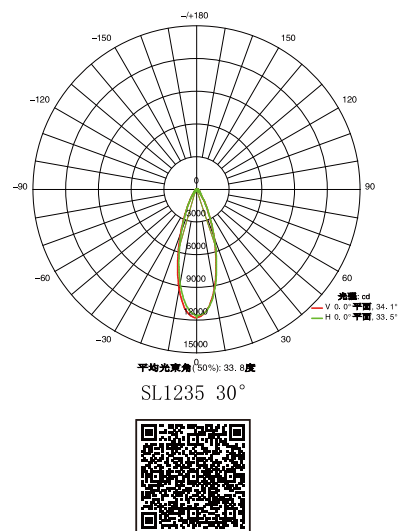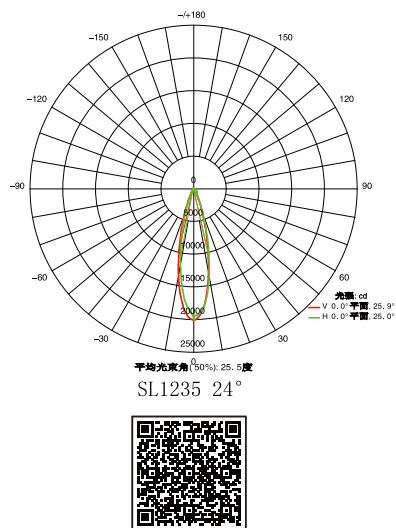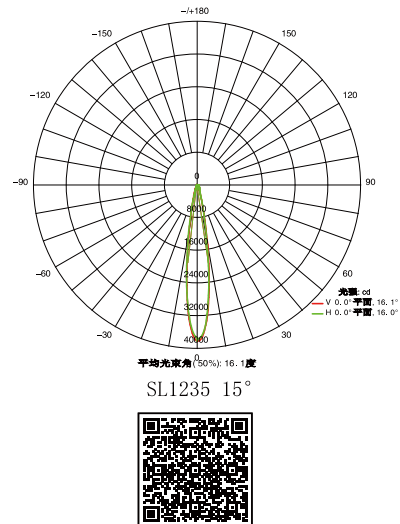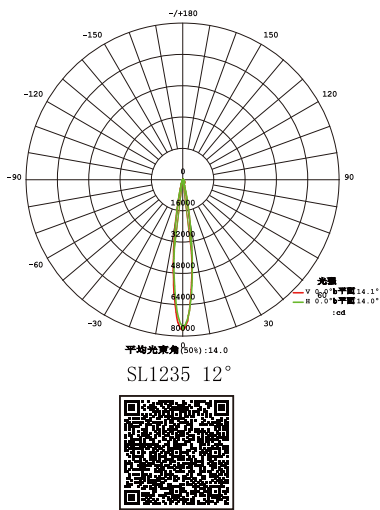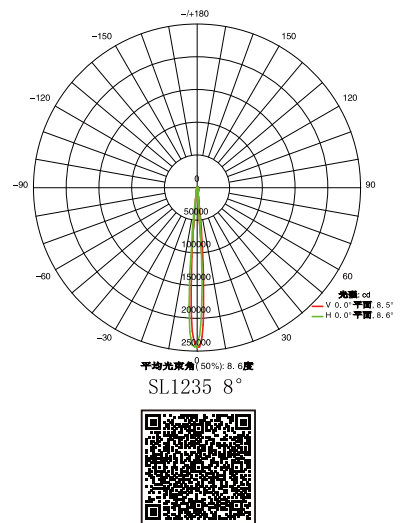

技术参数 Specification

产品型号/ Product Code	SL1235FM-16	SL1235FE-16	SL1235FN-16KP	SL1235FQ-16KP	SL1235FF-16
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower	CREE RGBW 4in1
Led数量/ Led Quantity	16pcs	16pcs	16pcs	16pcs	16pcs
额定功率/ Rated Power	75W	75W	100W	100W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC36V/AC100-305V	DC36V/AC100-305V	DC36V/AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15X60°	6° 8° 15° 20° 30° 15x60°	6° 8° 15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1235FC-32	SL1235FB-32	SL1235FZ-64	SL1235F-C80	SL1235FM-5
Led品牌/ Led Brand	OSRAM	OSRAM	CREE	CREE COB	CREE/OSRAM
Led数量/ Led Quantity	32pcs	32pcs	64pcs	4pcs	5pcs
额定功率/ Rated Power	75W	75W	75W	75W	50W
输入电压/ Input Voltage	DC36V/AC100-305V	DC36V/AC100-305	DC24V/AC100-305V	AC100-264V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	RGBW	Single	Single	Single
发光角度/ Beam Angle	8° 15° 20° 30° 45°	20x40° 15x25°	7 ~ 36° Photoelectron zoom	12° 24° 38° 45° 60°	1.5°
控制方式/ Control Mode	CC/DALI/0-10V	DMX512/RDM	Touch screen	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1235FF-5				
Led品牌/ Led Brand	CREE RGBW 4 in 1				
Led数量/ Led Quantity	5pcs				
额定功率/ Rated Power	70W				
输入电压/ Input Voltage	AC100-305				
频率/ Frequency Range	50/60Hz				
颜色 / Color	RGBW				
发光角度/ Beam Angle	4°				
控制方式/ Control Mode	DMX512/RDM				
使用寿命/ Life	80000H				
防护等级/ Protection Grade	IP66				
环境温度/ Ambient Temperature	-25℃~50℃				
环境湿度/ Ambient Humidity	10%~90%				

Flood Light Series

SL1236F



圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




SL1236U




SL1236M

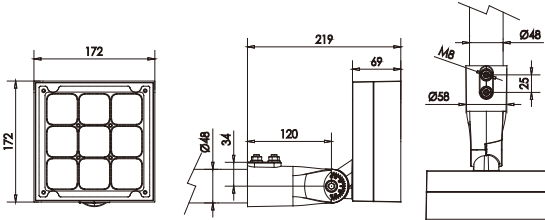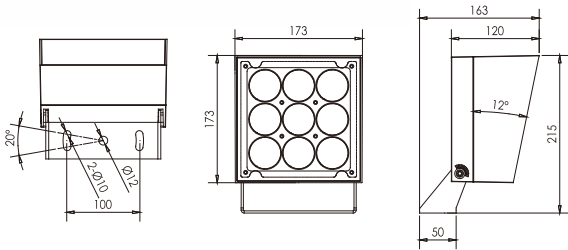


SL1236S




SL1236Z

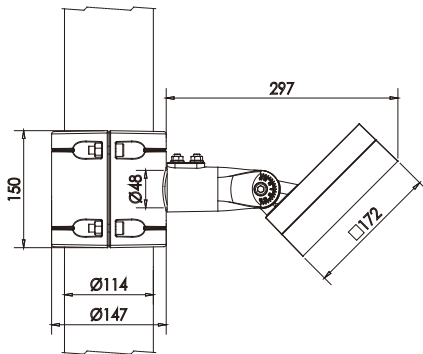

SL1236L

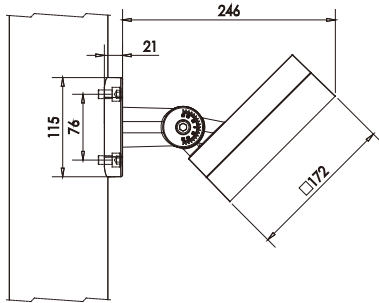

SL1236H



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4

适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm

产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态灯光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation ful ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die–casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gra control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1236FM–9	SL1236FE–9	SL1236FL–9	SL1236FF–9
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	OSRAM	CREE RGBW 4in1
Led数量/ Led Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rated Power	45W	45W	60W	60W
输入电压/ Input Voltage	AC100–264V	AC100–264V	DC36V/AC100–305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBW	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°		6° 8° 15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0–10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	28/22(pcs)	28/22(pcs)	3/22(pcs)	3/22(pcs)
产品型号/ Product Code	SL1236FC–18	SL1236FB–18	SL1236FZ–36	SL1236F–C50
Led品牌/ Led Brand	LUMILEDS/OSRAM	LUMILEDS/OSRAM	CREE	CREE COB
Led数量/ Led Quantity	18pcs	18pcs	36pcs	1pcs
额定功率/ Rated Power	45W	45W	45W	45W
输入电压/ Input Voltage	DC24V/AC100–240V	DC24V/AC100–305	DC36V/AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	RGBW	Single	Single
发光角度/ Beam Angle	8° 15° 20° 30° 45° 20x40° 15x25°		7 ~ 36° Photoelectron zoom	12° 24° 36° 70°
控制方式/ Control Mode	CC/DALI/0–10V	DMX512/RDM	Touch screen	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	2/22(pcs)	4/36(pcs)	3/33(pcs)	28pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)







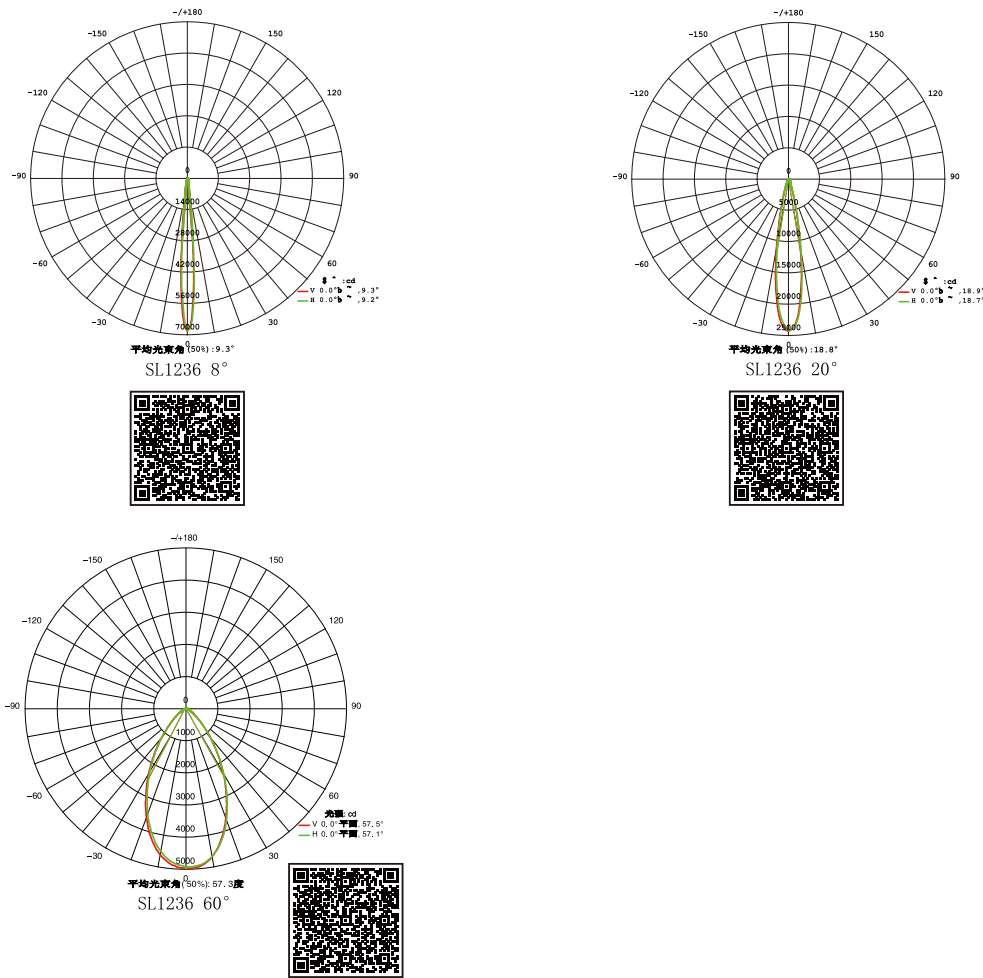


Flood Light Series
SL1239F


圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




SL1239S




SL1239U

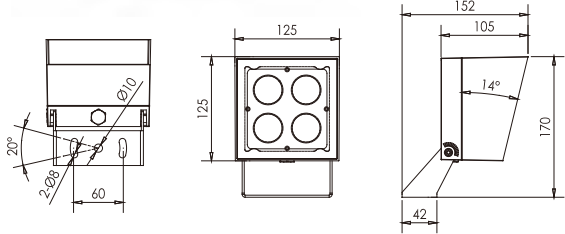


SL1239M

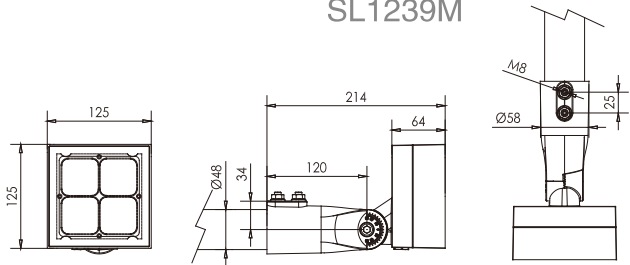

SL1239Z

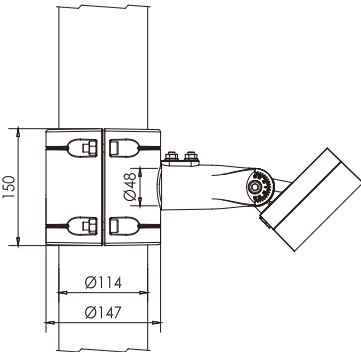


SL1239L



适配杆径(67-325)mm T≥4
AVL Dia of pole(67-325)mm T≥4



SL1239H



适配树杆尺寸(168-268)mm
AVL Dia of pole(168-268)mm


产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation ful ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gra control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1239FM-4	SL1239FE-4	SL1239FL-4	SL1239FF-4
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	OSRAM	CREE RGBW 4in1
Led数量/ Led Quantity	4pcs	4pcs	4pcs	4pcs
额定功率/ Rated Power	20W	20W	30W	20W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°		6° 8° 15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	61pcs	61pcs	4pcs	4pcs
产品型号/ Product Code	SL1239FB-8	SL1239FZ-16	SL1239F-C20	
Led品牌/ Led Brand	OSRAM	CREE	CREE COB	
Led数量/ Led Quantity	8pcs	16pcs	1pcs	
额定功率/ Rated Power	20W	20W	20W	
输入电压/ Input Voltage	DC24V/AC100-240V	DC24V/AC100-305V	AC100-264V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	Single/RGBW	Single	Single	
发光角度/ Beam Angle	8° 15° 20° 30° 45° 20x40° 15x25°	7 ~ 36° Photoelectron zoom	12° 24° 38° 45° 60°	
控制方式/ Control Mode	CC/DALI/0-10V/DMX512	DMX512	CC/DALI/0-10V	
使用寿命/ Life	50000H	50000H	50000H	
防护等级/ Protection Grade	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	
串联数量/ In series(max)	66pcs	8/70pcs	66pcs	

配光曲线 (半角) Distribution Curve Flux (SBC Case)

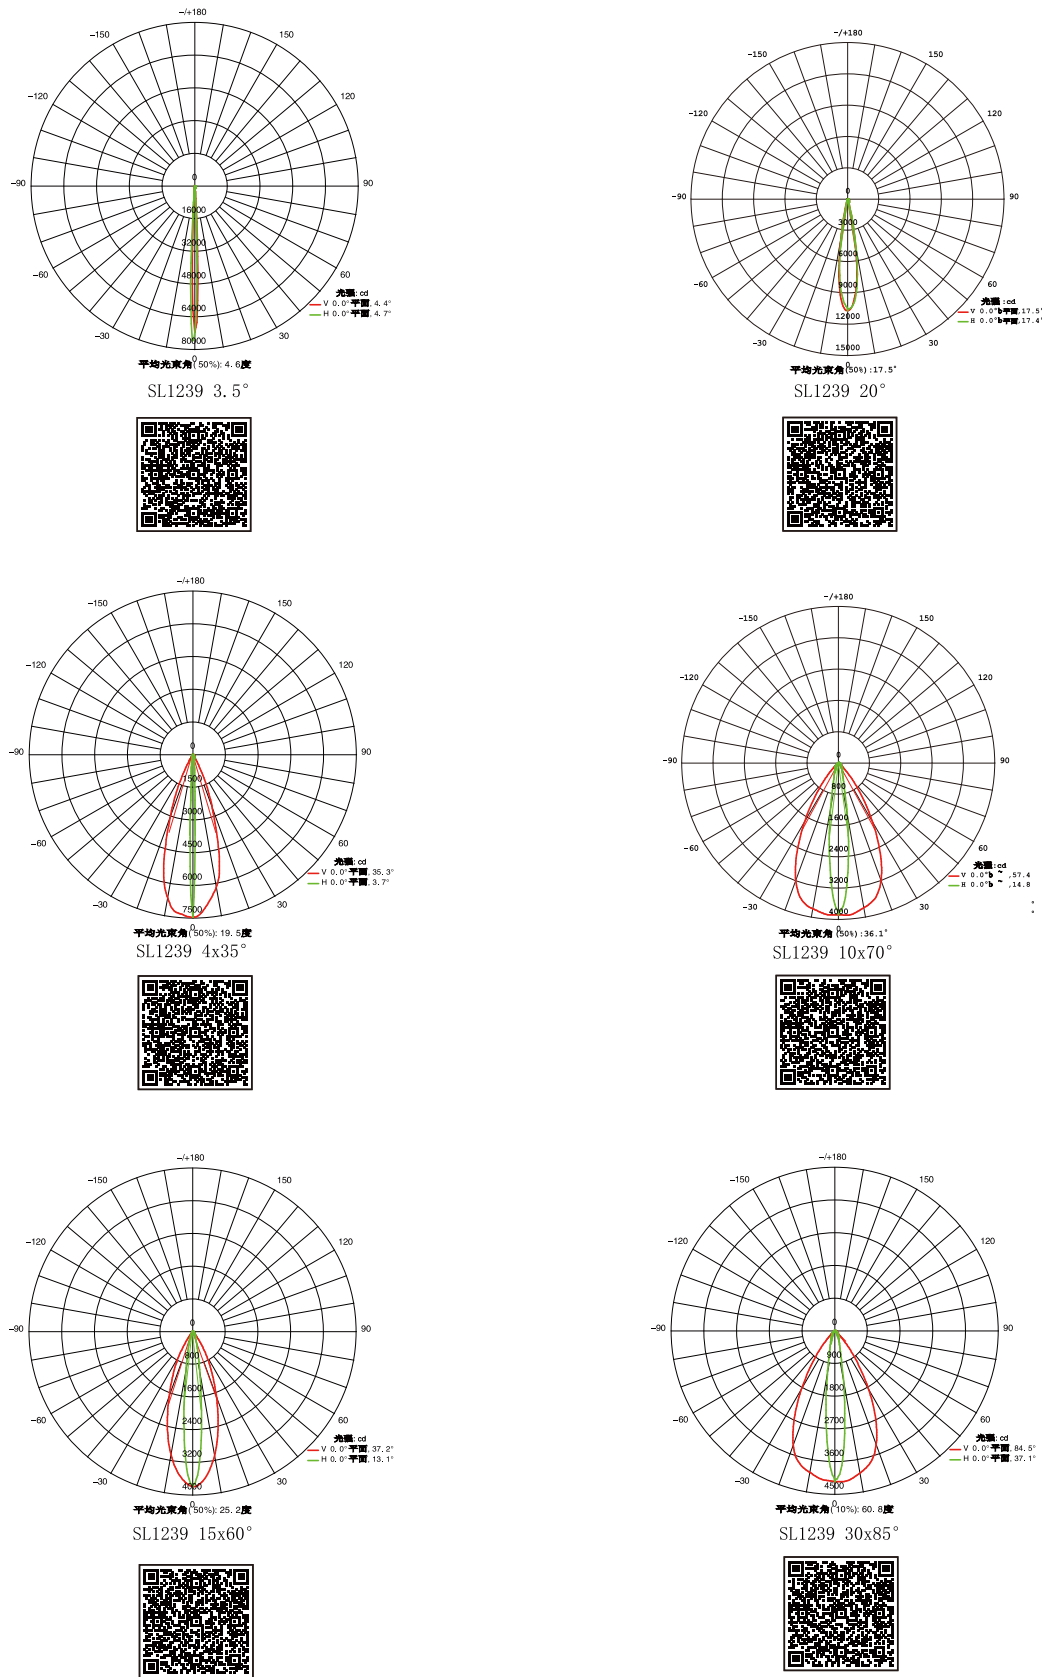



Flood Light Series

SL1240U



圓孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



SL1240C

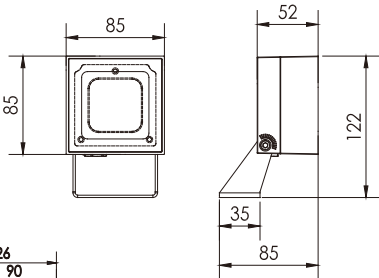



SL1240S

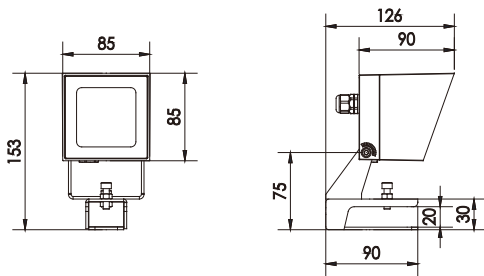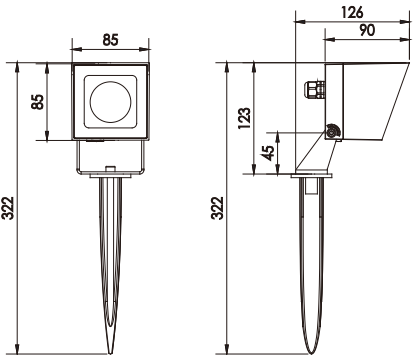


技术参数 Specification

产品型号/ Product Code	SL1240UM-1	SL1240UE-1	SL1240UF-1
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	CREE RGBW 4in1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	10W	10W	10W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	8° 15° 20° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL1240UB-4	SL1240UZ-4	SL1240F-C12
Led品牌/ Led Brand	OSRAM	CREE	CREE COB
Led数量/ Led Quantity	4pcs	4pcs	1pcs
额定功率/ Rated Power	10W	10W	12W
输入电压/ Input Voltage	DC12V/AC100-240V	DC24V/AC100-305V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single
发光角度/ Beam Angle	6° 8° 15° 20° 30° 15x60°	7 ~ 36° Photoelectron zoom	12° 24° 36°
控制方式/ Control Mode	CC	DMX512	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%

配光曲线 (半角) Distribution Curve Flux (SBC Case)

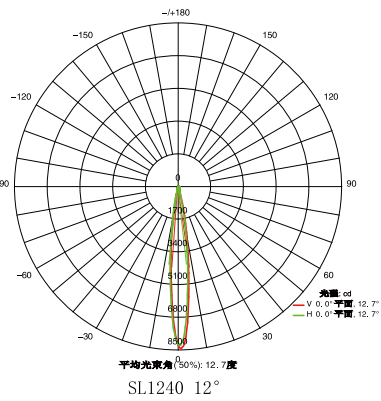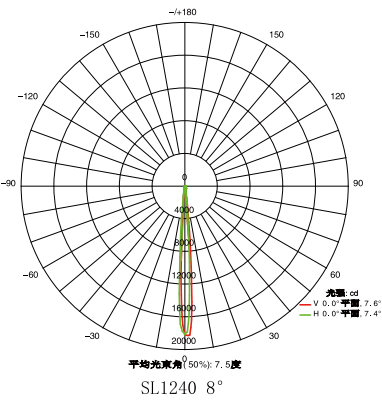

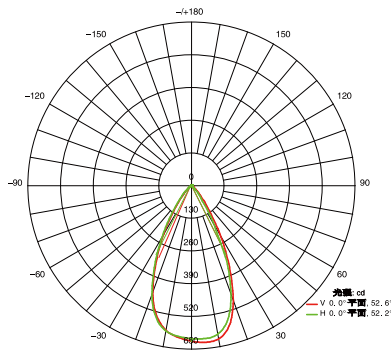

Flood Light Series

SL1245F


防眩遮光罩 Anti-glare shield		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	






SL1245C



SL1245S

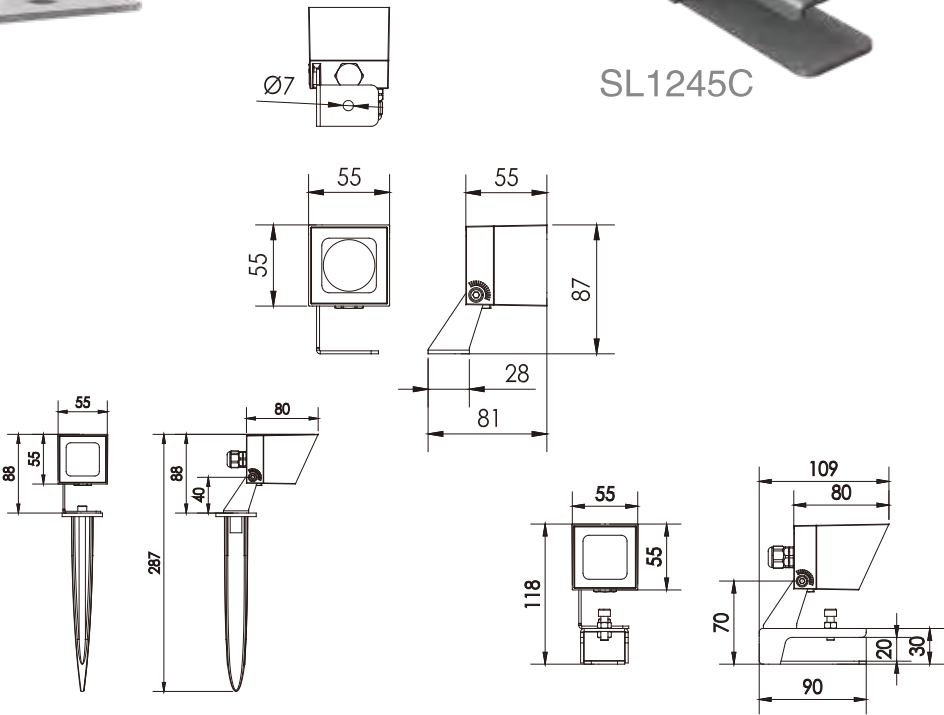

配光曲线 (半角) Distribution Curve Flux (SBC Case)

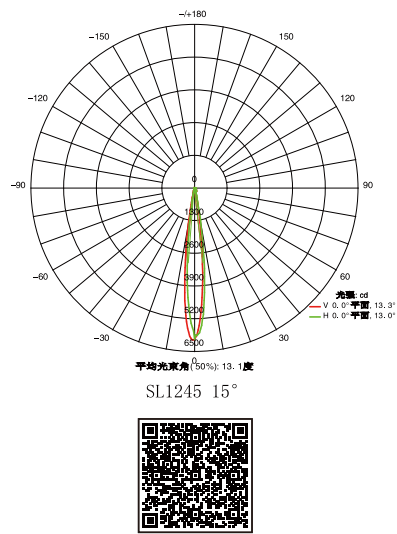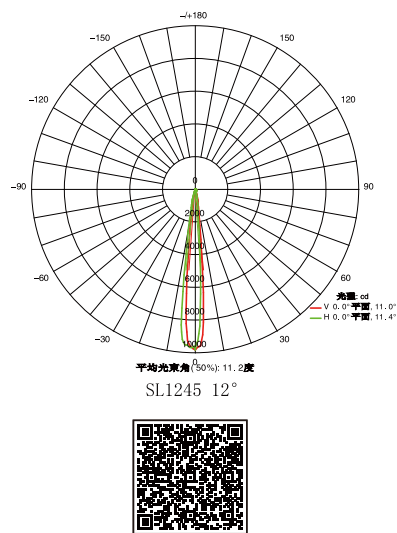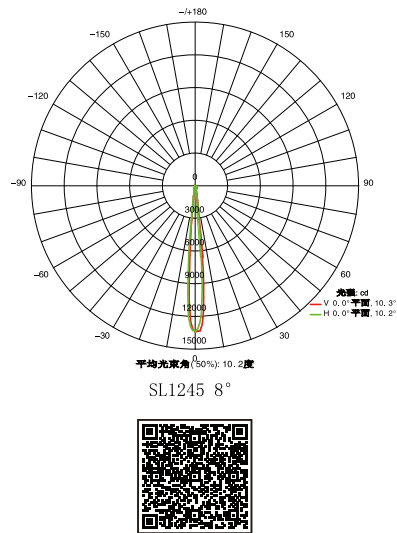



技术参数 Specification

产品型号/ Product Code	SL1245FM-1	SL1245FE-1	SL1245FF-1
Led品牌/ Led Brand	CREE	CREE XHP35	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	8W	10W	6W
输入电压/ Input Voltage	DC12V/DC24V	DC12V/DC24V	DC12V/DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	2.5°	6° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC	CC/DALI/0-10V	DMX512(External drive)
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%




Flood Light Series
SL1246U

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

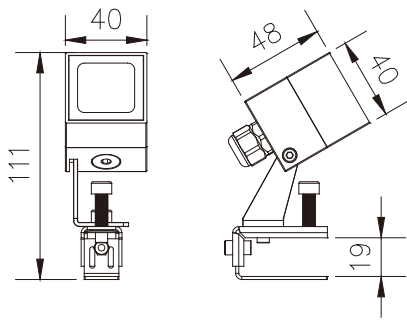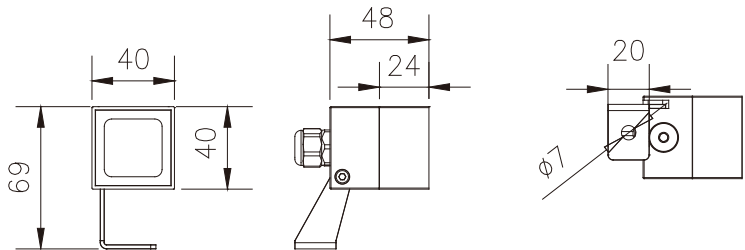

SL1246C

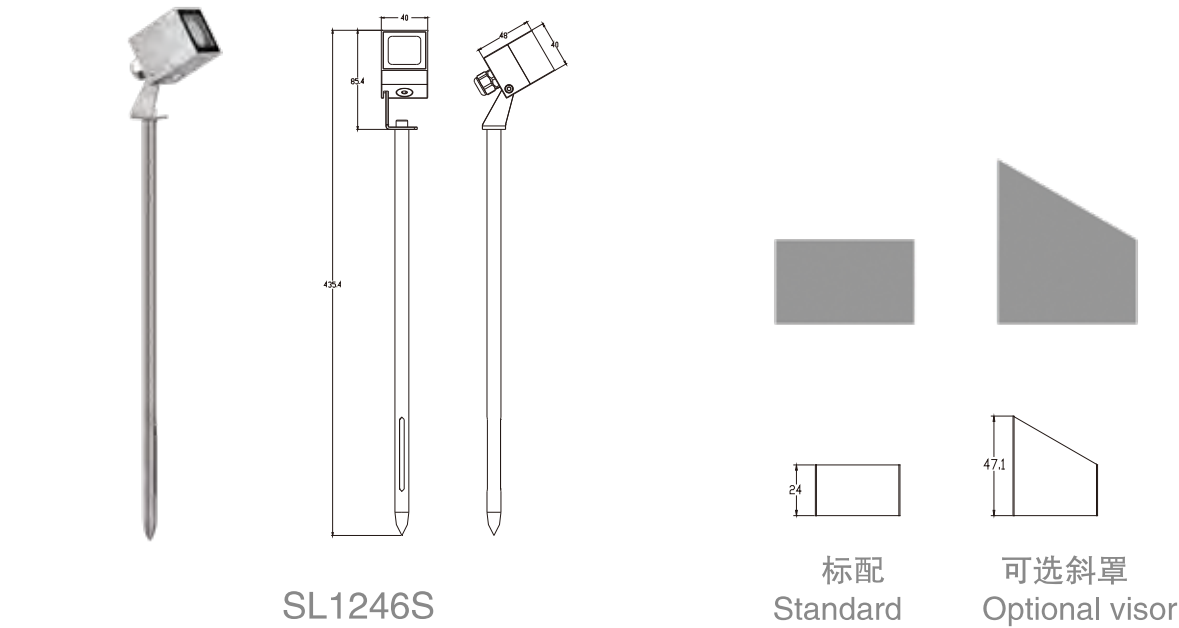


SL1246S

技术参数 Specification



产品型号/ Product Code	SL1246FM-1	SL1246FE-1	SL1246FF-1
Led品牌/ Led Brand	CREE	CREE	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	6W	6W	6W
输入电压/ Input Voltage	AC100-264V防水防雷阻气线 / DC12V/DC24V		DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	8° 12.5° 20° 30° 60° 15x30° 10x60°	6°	20° 45° 60° 15x60° 15x25°
控制方式/ Control Mode	CC	CC	DMX512
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%

Flood Light Series
SL1247U

圓孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

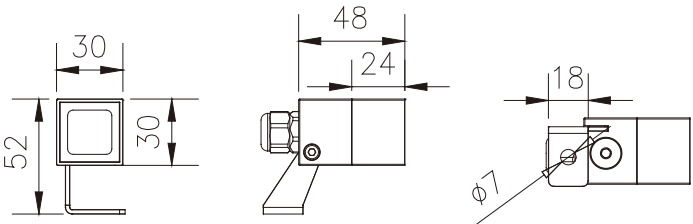


SL1247C

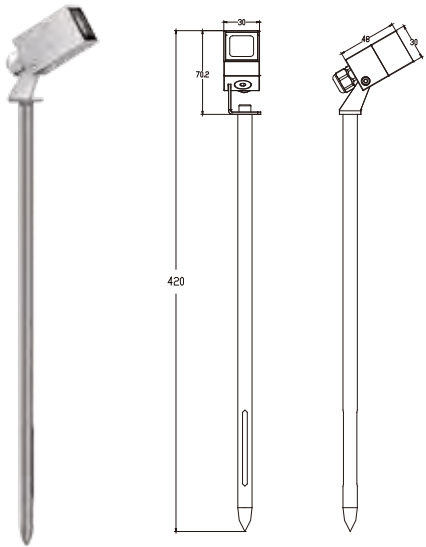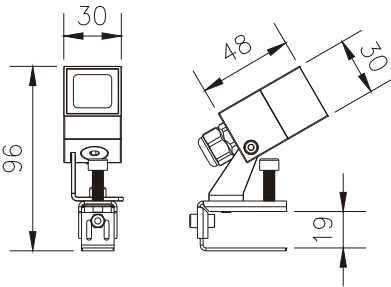

SL1247S



标配
Standard



可选斜罩
Optional visor

技术参数 Specification

产品型号/ Product Code	SL1247FE-1	
Led品牌/ Led Brand	CREE	
Led数量/ Led Quantity	1pcs	
额定功率/ Rated Power	3W	
输入电压/ Input Voltage	DC12V/DC24V	
频率/ Frequency Range	50/60Hz	
颜色 / Color	Single	
发光角度/ Beam Angle	20° 30° 45° 60° 25x45°	
控制方式/ Control Mode	CC	
使用寿命/ Life	50000H	
防护等级/ Protection Grade	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	



Flood Light Series

SL1258U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。



- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL1258UB-120	SL1258UB-90	SL1258UB-70
LED品牌/LED Brand	CREE	CREE	CREE
LED数量/LED Quantity	120pcs	90pcs	70pcs
额定功率/Rated Power	225W	185W	150W
输入电压/Input Voltage	DC36V/AC90-265V	DC36V/AC90-265V	AC180-305V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	Single
发光角度/Beam Angle	8° 12.5° 20° 30° 60° 15x30° 10x60°		
控制方式/Control Mode	DMX512/CC	DMX512/CC	CC
使用寿命/Life	50000H	50000H	50000H
防护等级/Protection Grade	IP66	IP66	IP66
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	1/6(pcs)	1/6(pcs)	8(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

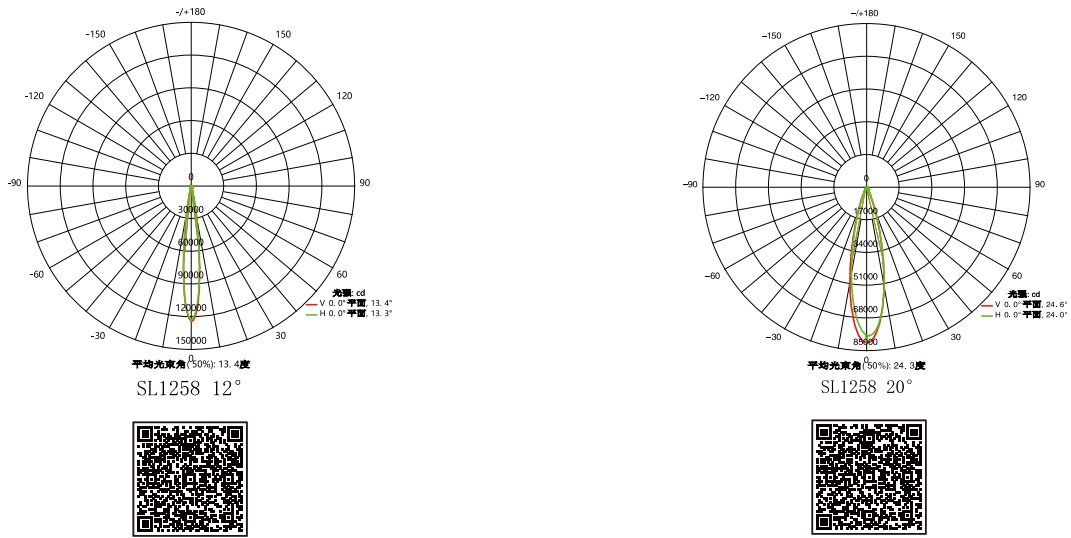

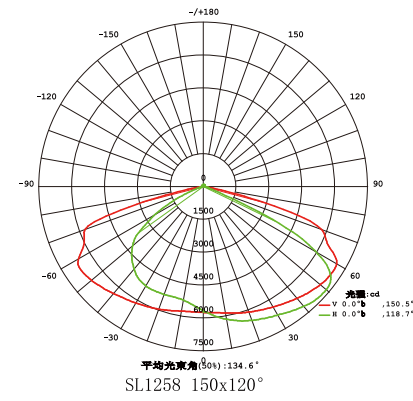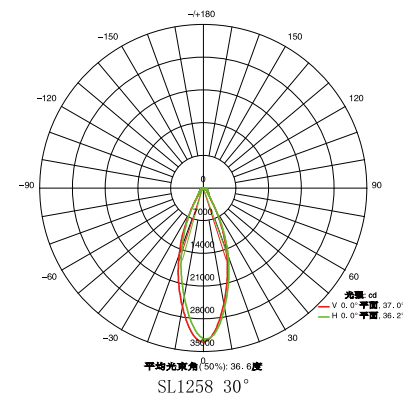

Flood Light Series

SL1260U

蜂巢格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	







SL1260UB-50



SL1260UB-30F



SL1260G

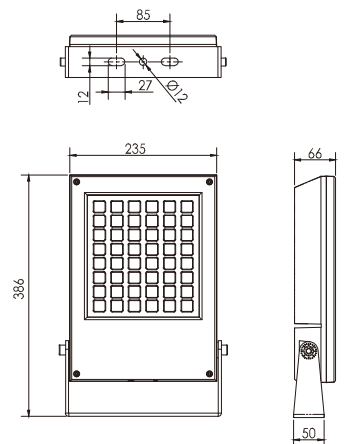





产品简介 Product Introduction



- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1260UC-50	SL1260UB-50	SL1260UB-30	SL1260UB-30F	
Led品牌/ Led Brand	OSRAM	CREE	CREE	CREE	
Led数量/ Led Quantity	48pcs	48pcs	30pcs	30pcs	
额定功率/ Rated Power	120W	102W/82W	60W	60W	
输入电压/ Input Voltage	AC200-240V	DC36V/AC90-265V	DC24V/AC90-265V	AC90-265V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	Single	RGB/Single	RGBW/Single	Single	
发光角度/ Beam Angle	8° 12.5° 20° 30° 48° 60° 15x30° 10x60°				120X70°
控制方式/ Control Mode	CC	DMX512/CC	DMX512/CC	CC	
使用寿命/ Life	50000H	50000H	50000H	50000H	
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	
串联数量/ In series(max)	10pcs	2/12(pcs)	2/22(pcs)	22pcs	

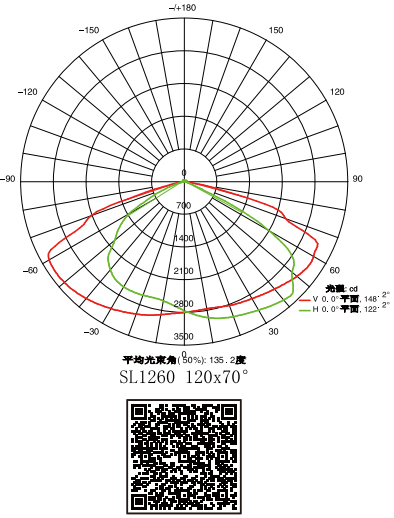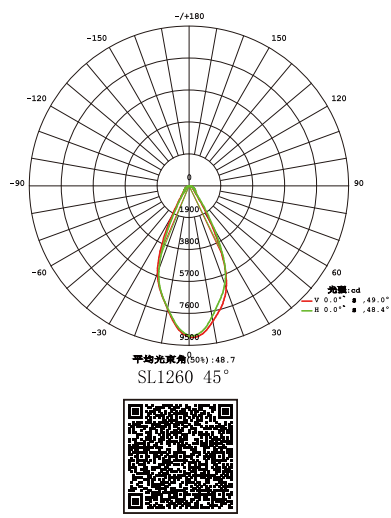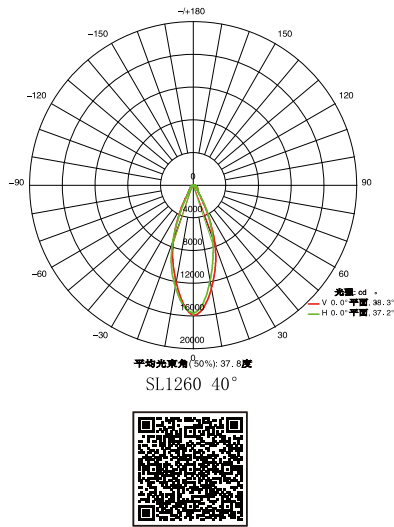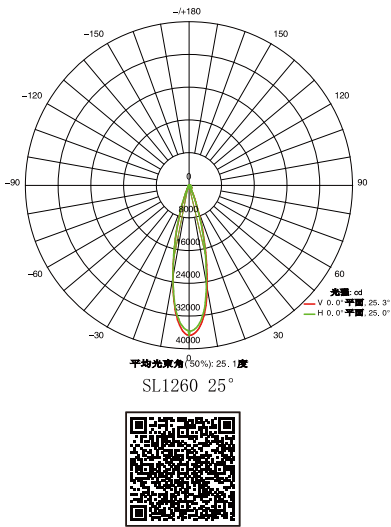

配光曲线 (半角) Distribution Curve Flux (SBC Case)

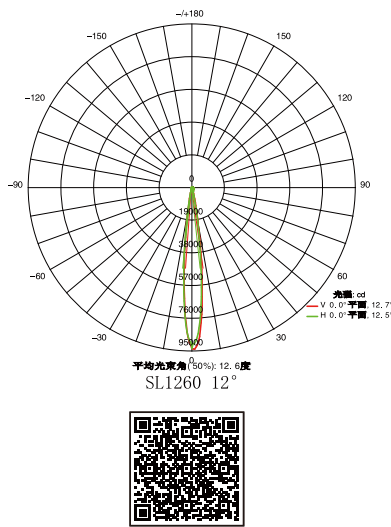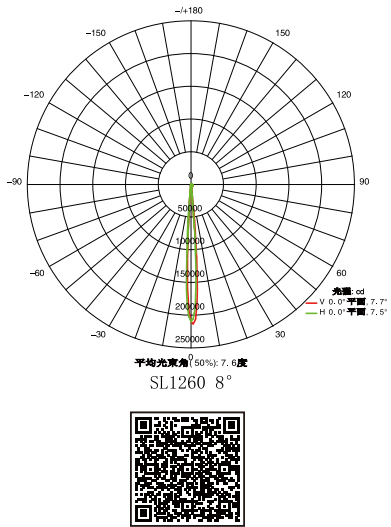

Flood Light Series

SL1260F



蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



技术参数 Specification

产品型号/ Product Code	SL1260FC-50	SL1260FB-50	SL1260FB-30	SL1260FB-30F
Led品牌/ Led Brand	OSRAM	CREE	CREE	CREE
Led数量/ Led Quantity	48pcs	48pcs	30pcs	30pcs
额定功率/ Rated Power	120W	102W/82W	60W	60W
输入电压/ Input Voltage	AC90-265V	AC90-265V	AC90-265V	AC90-265V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 48° 60° 15x30° 10x60°			120x70°
控制方式/ Control Mode	CC	CC	CC	CC
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	10pcs	12pcs	22pcs	22pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

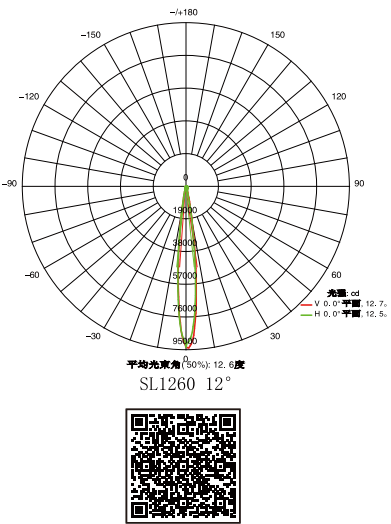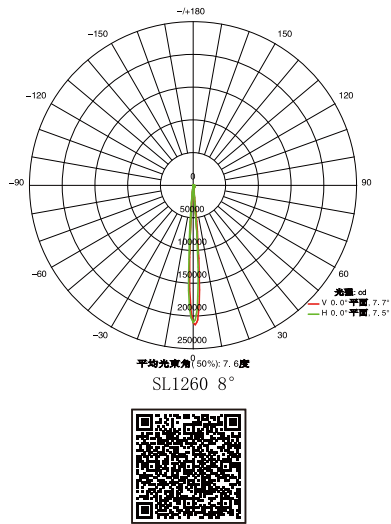


Flood Light Series

SL1262U

蜂窝格栅 Honeycomb glass		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	







SL1262UB-28F

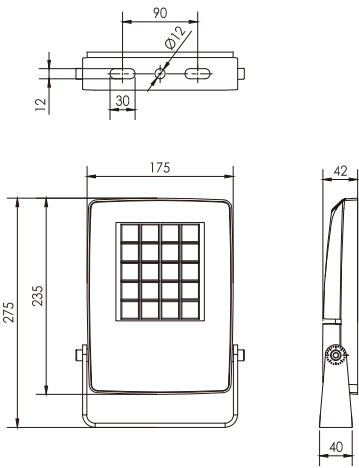

技术参数 Specification

产品型号Product Code	SL1262UB-20	SL1262UB-18	SL1262UB-12	SL1262UB-28F
LED品牌LED Brand	CREE	CREE	CREE	NICHIA/LUMILEDS
LED数量LED Quantity	20pcs	18pcs	12pcs	28pcs
额定功率Rated Power	36W	30W	22W	30W
输入电压Input Voltage	AC90-265V	DC24V	DC24V /AC90-265V	AC90-265V
频率Frequency Range	50/60Hz	/	50/60Hz	50/60Hz
颜色Color	Single	RGB/Single	RGB/Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 48° 60° 15x30° 10x60°			120x70°
控制方式Control Model	CC	DMX512/CC	DMX512/CC	CC
使用寿命Life	50000H	50000H	50000H	50000H
防护等级Protection Grade	IP66	IP66	IP66	IP66
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10%~90%	10%~90%	10%~90%	10% ~ 90%
串联数量/ In series(max)	36pcs	4pcs	6/60(pcs)	44pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

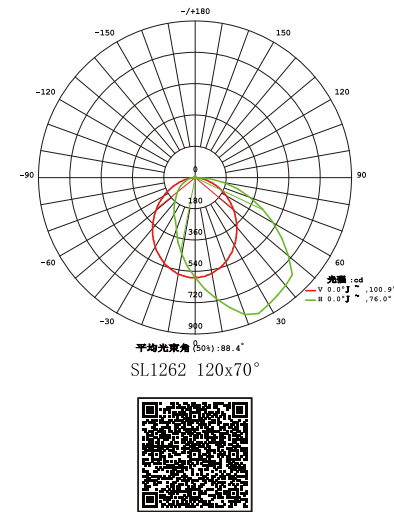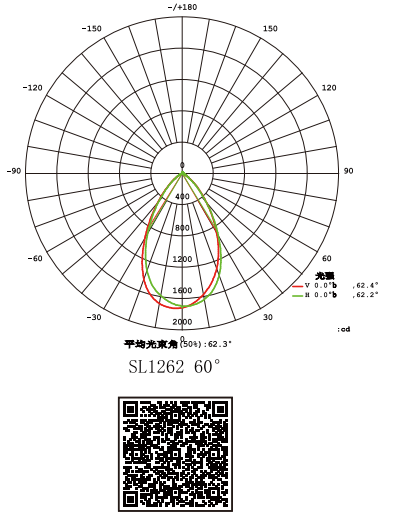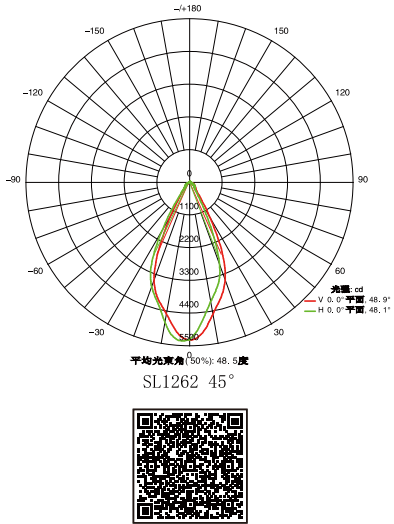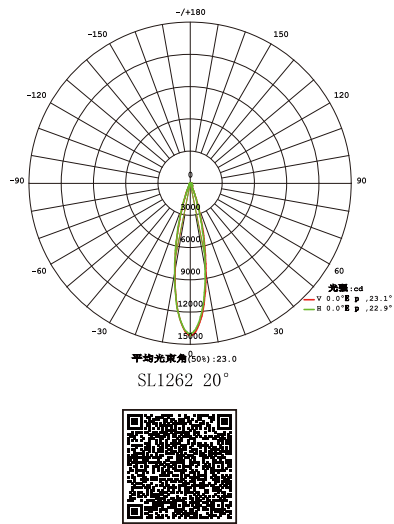


Flood Light Series

SL1318


蜂窝格栅 Honeycomb grid		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





A型

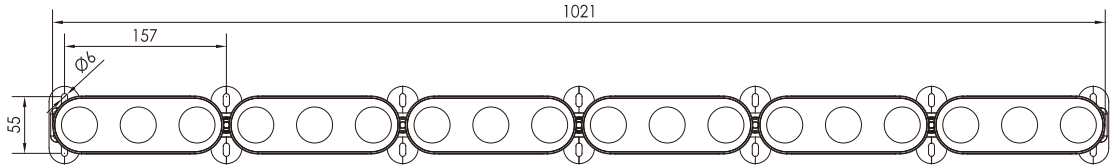

B型

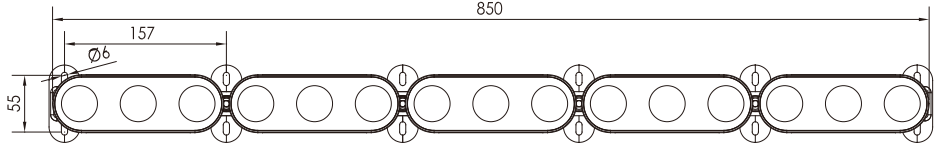







C型

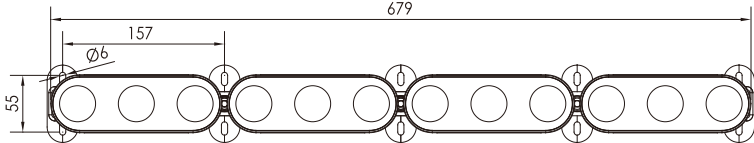

技术参数 Specification

产品型号/ Product Code	SL1318AE-18	SL1318AD-18	SL1318AF-18	SL1318AJ-18
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	18pcs	18pcs	18pcs	18pcs
额定功率/ Rated Power	90W	72W	144W	72W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	14/1(pcs)	18/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1318BE-15	SL1318BD-15	SL1318BF-15	SL1318BJ-15
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	15pcs	15pcs	15pcs	15pcs
额定功率/ Rated Power	75W	60W	120W	60W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	16/2(pcs)	22/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1318CE-12	SL1318CD-12	SL1318CF-12	SL1318CJ-12
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	12pcs	12pcs	12pcs	12pcs
额定功率/ Rated Power	60W	48W	96W	48W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	22/2(pcs)	26/3(pcs)	1pcs	3pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

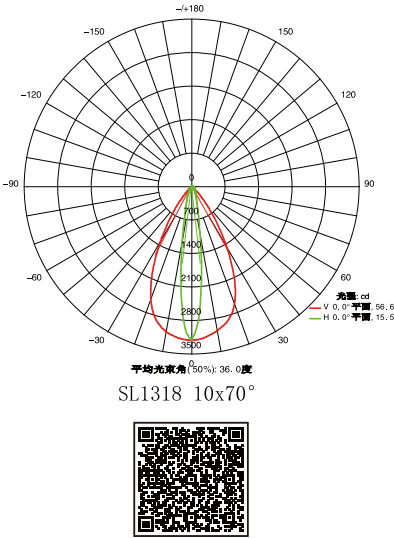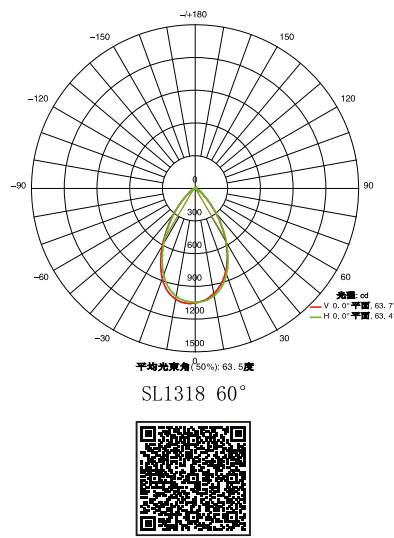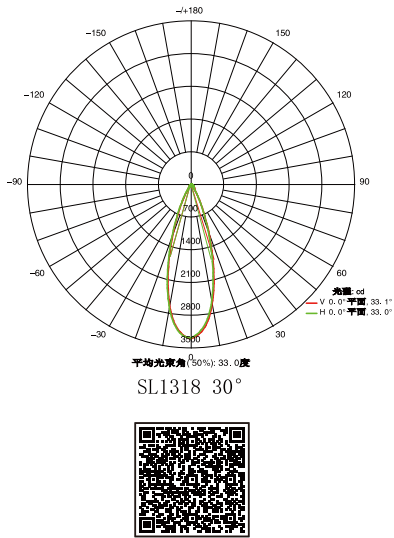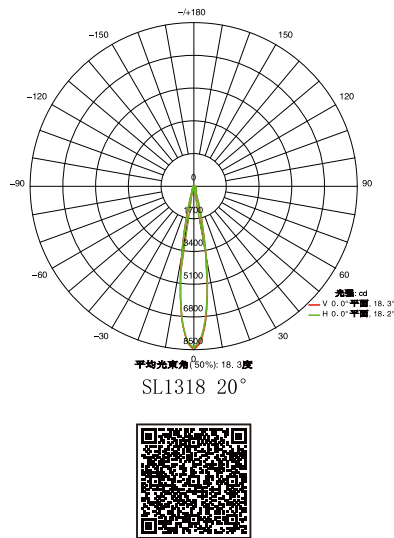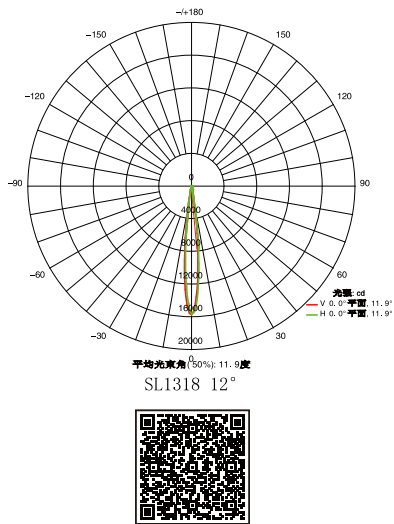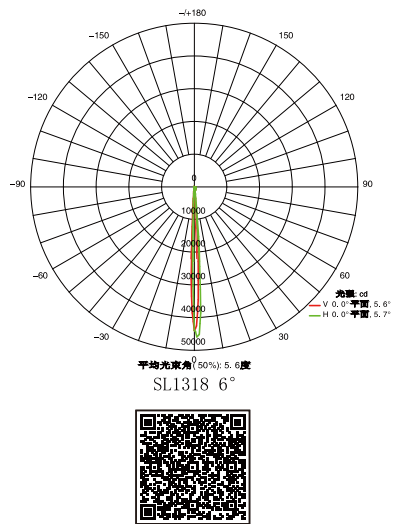

Flood Light Series

SL1318U

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

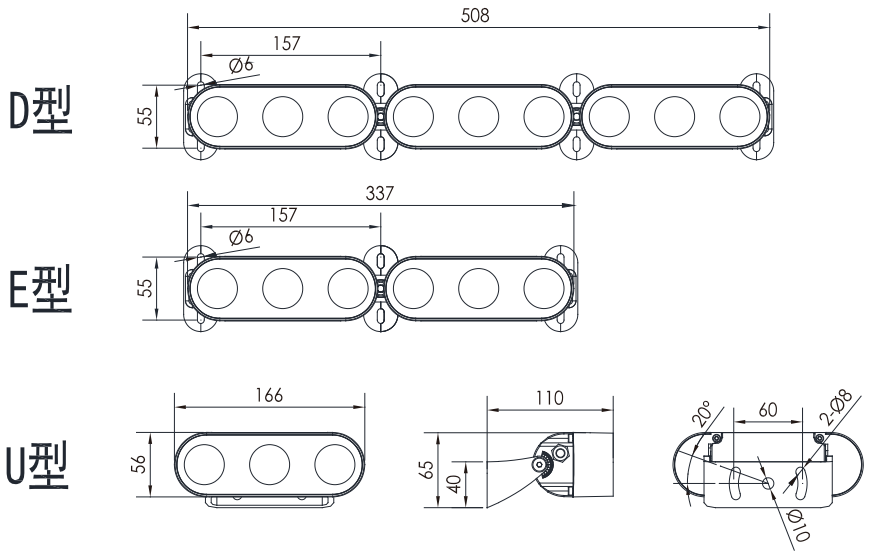

技术参数 Specification

产品型号/ Product Code	SL1318DE-9	SL1318DD-9	SL1318DF-9	SL1318DJ-9
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rated Power	45W	36W	72W	36W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	28/3(pcs)	36/4(pcs)	2pcs	4pcs
产品型号/ Product Code	SL1318EE-6	SL1318ED-6	SL1318EF-6	SL1318EJ-6
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	6pcs	6pcs	6pcs	6pcs
额定功率/ Rated Power	30W	24W	48W	24W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	44/4(pcs)	55/6(pcs)	3pcs	6pcs
产品型号/ Product Code	SL1318UE-3	SL1318UD-3	SL1318UF-3	SL1318UJ-3
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	3pcs	3pcs	3pcs	3pcs
额定功率/ Rated Power	15W	12W	24W	12W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	88/9(pcs)	110/12(pcs)	6pcs	12pcs



Flood Light Series

SL1319

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	









reddot winner 2020

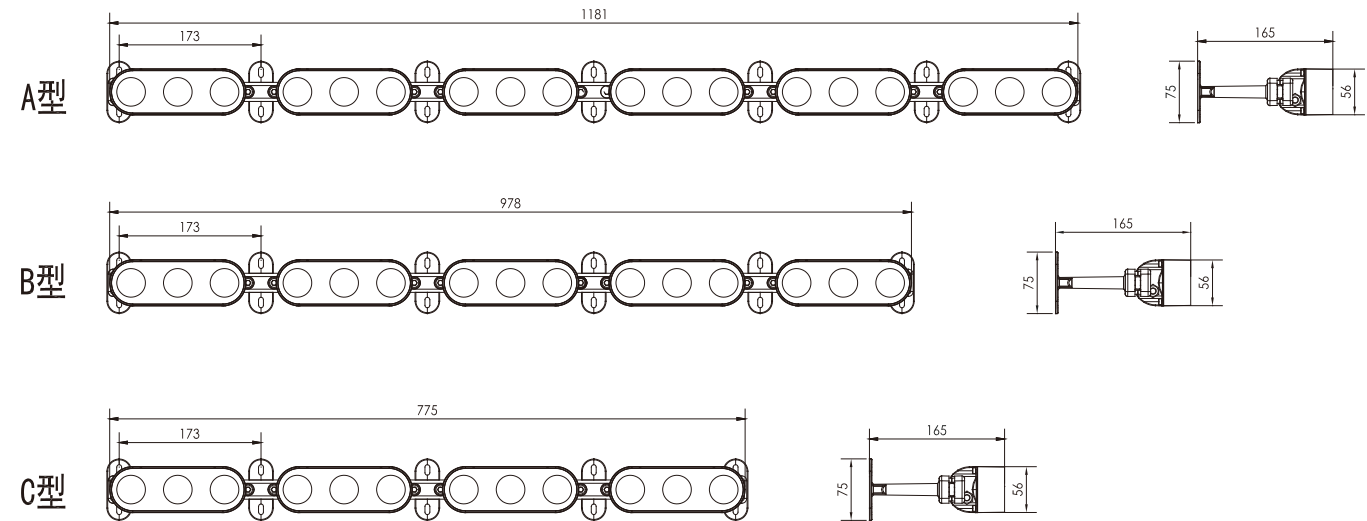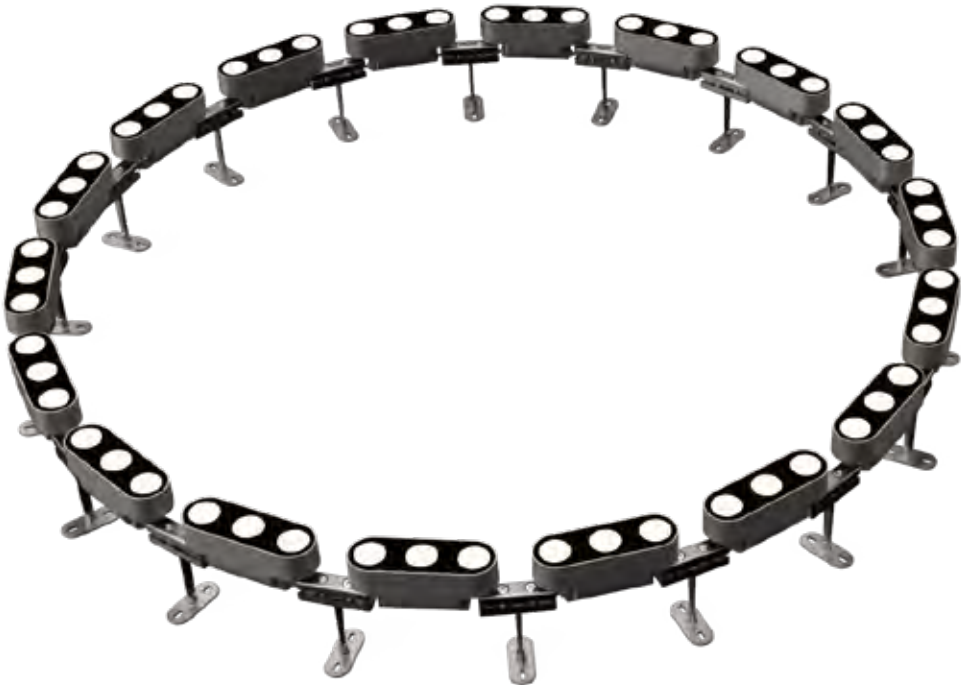

技术参数 Specification

产品型号/ Product Code	SL1319AE-18	SL1319AD-18	SL1319AF-18	SL1319AJ-18
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	18pcs	18pcs	18pcs	18pcs
额定功率/ Rated Power	90W	72W	144W	72W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	14/1(pcs)	18/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1319BE-15	SL1319BD-15	SL1319BF-15	SL1319BJ-15
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	15pcs	15pcs	15pcs	15pcs
额定功率/ Rated Power	75W	60W	120W	60W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	16/2(pcs)	22/2(pcs)	1pcs	2pcs
产品型号/ Product Code	SL1319CE-12	SL1319CD-12	SL1319CF-12	SL1319CJ-12
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	12pcs	12pcs	12pcs	12pcs
额定功率/ Rated Power	60W	48W	96W	48W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60°	10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	22/2(pcs)	26/3(pcs)	1pcs	3pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

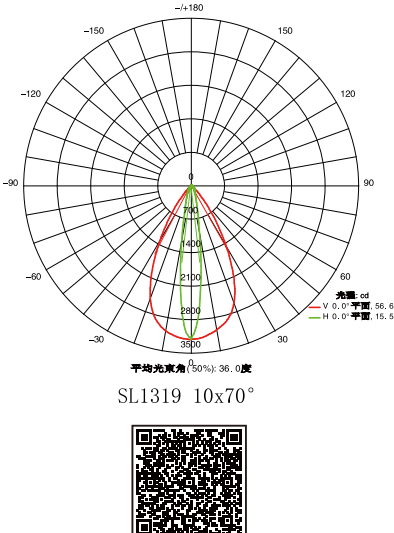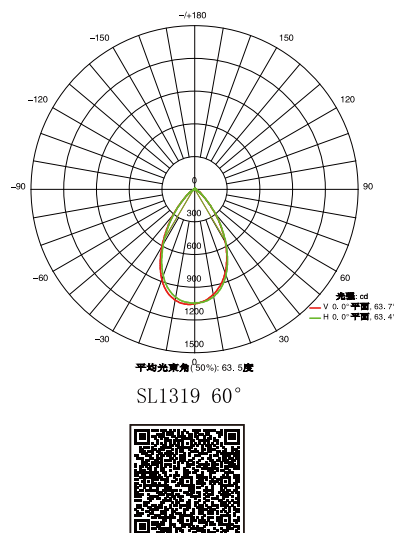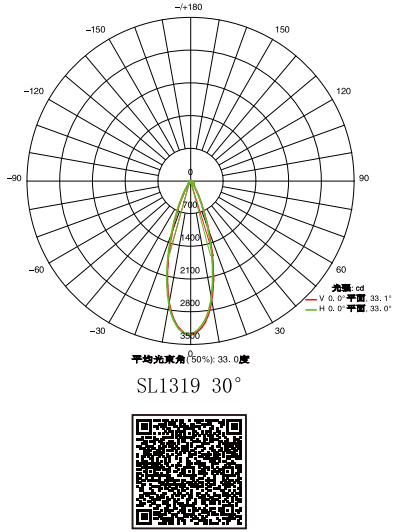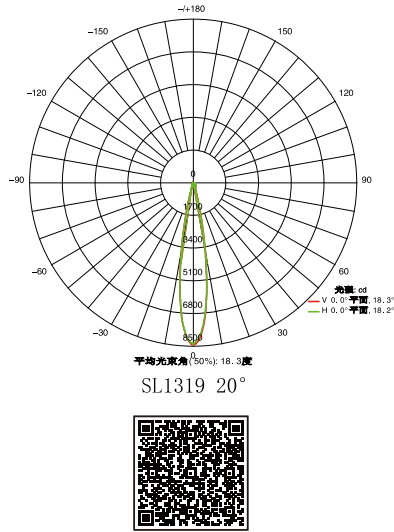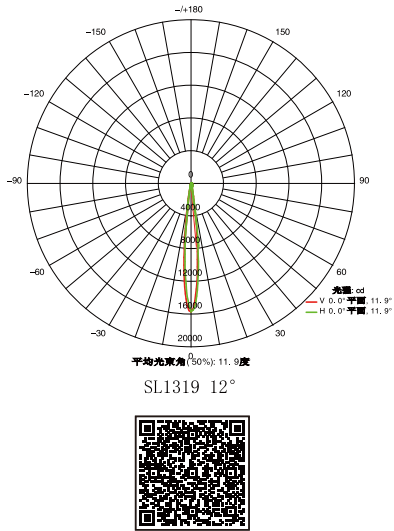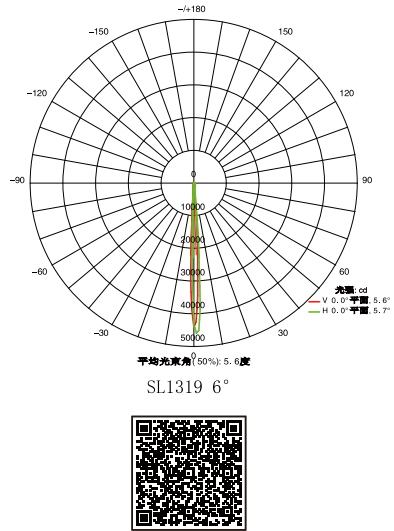


Flood Light Series

SL1319U


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




D型

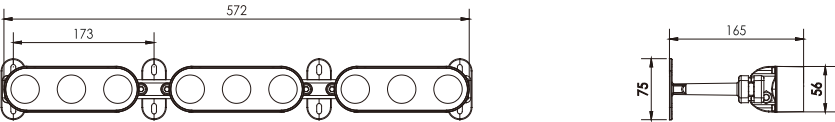

E型

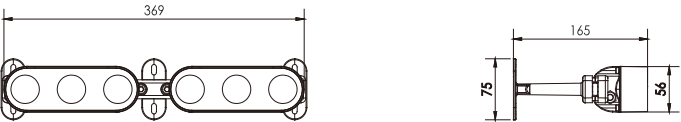

U型

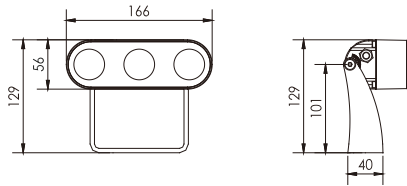

技术参数 Specification


产品型号/ Product Code	SL1319DE-9	SL1319DD-9	SL1319DF-9	SL1319DJ-9
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	9pcs
额定功率/ Rated Power	45W	36W	72W	36W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	28/3(pcs)	36/4(pcs)	2pcs	4pcs
产品型号/ Product Code	SL1319EE-6	SL1319ED-6	SL1319EF-6	SL1319EJ-6
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	6pcs	6pcs	6pcs	6pcs
额定功率/ Rated Power	30W	24W	48W	24W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	44/4(pcs)	55/6(pcs)	3pcs	6pcs
产品型号/ Product Code	SL1318UE-3	SL1319UD-3	SL1319UF-3	SL1319UJ-3
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	OSRAM
LED数量/ LED Quantity	3pcs	3pcs	3pcs	3pcs
额定功率/ Rated Power	15W	12W	24W	12W
输入电压/ Input Voltage	AC100-240V/DC24V	AC100-240V/DC24V	DC24V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/	/
颜色 / Color	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	10° 20° 30° 15x60°
控制方式/ Control Mode	CC	CC	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	88/8(pcs)	110/12(pcs)	6pcs	12pcs

Flood Light Series

SL1311 PRO MAX

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	


LED 恒功率全色域染色灯

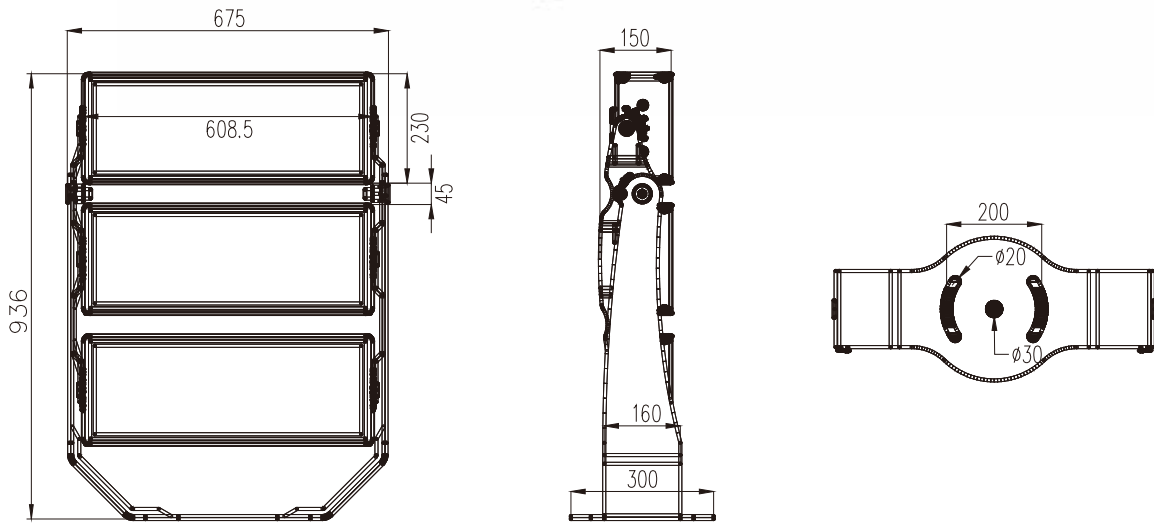

Flood Light Series

SL1311 PRO

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




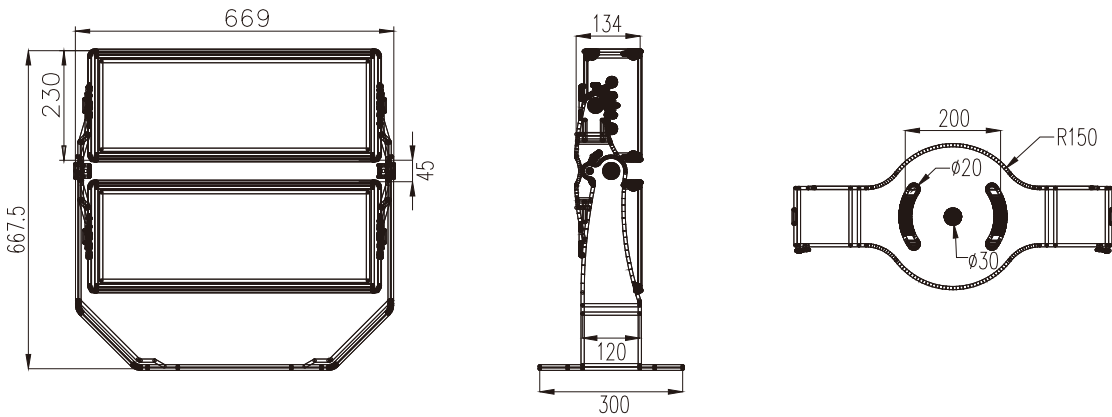


Flood Light Series

SL1311A

蜂窝格栅 Honeycomb gri		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯

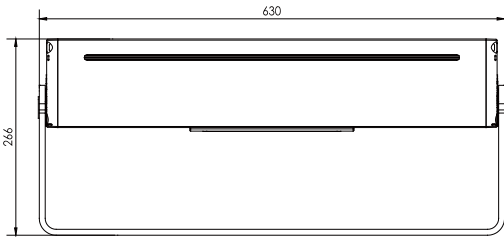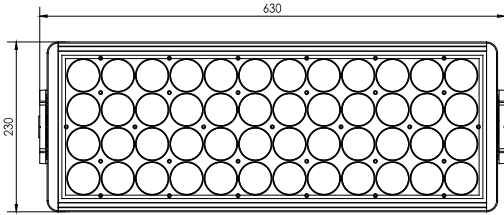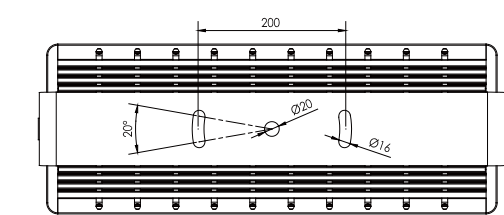

产品简介 Product Introduction

- 一、高功率LED灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可选择三种支架安装方式，满足多种场合的户外工程应用。
- 三、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Three rack mounting ways available can meet the various occasions demands for outdoor projects.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light--dimmer more soft,and the color richer.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.





产品型号/ Product Code	SL1311AM-48	SL1311AE-48	SL1311N-48KP	SL1311Q-48KP
Led品牌/ Led Brand	CREE	CREE	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	48pcs	48pcs	48pcs	48pcs
额定功率/ Rared Power	300W	300W	450W	450W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Rangle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15x60°	8° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10%~90%	10%~90%
产品型号/ Product Code	SL1311AF-48	SL1311AC-192		
Led品牌/ Led Brand	RGBW 4in1	LUXEON5050		
Led数量/ Led Quantity	48pcs	192pcs		
额定功率/ Rared Power	400W	320W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single		
发光角度/ Beam Rangle	5° 10° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°		
控制方式/ Control Mode	DMX512	CC/DALI/0-10V		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境温度/ Ambient Humidity	10%~90%	10% ~ 90%		

Flood Light Series

SL1311B

蜂窝格栅 Honeycomb grid		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯

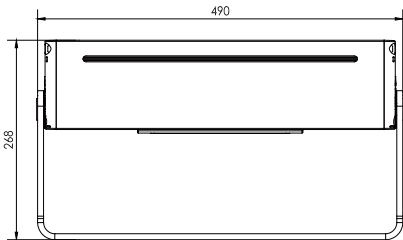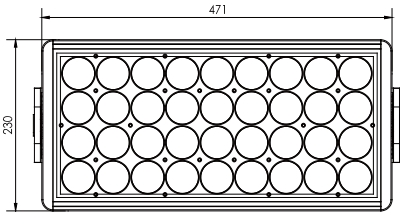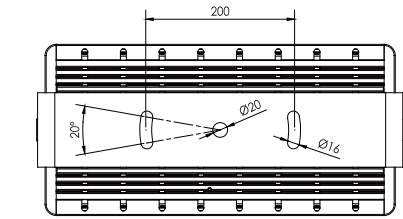

产品简介 Product Introduction

- 一、高功率LED灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可选择三种支架安装方式，满足多种场合的户外工程应用。
- 三、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Three rack mounting ways available can meet the various occasions demands for outdoor projects.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light--dimmer more soft,and the color richer.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


产品型号/ Product Code	SL1311BM-36	SL1311BE-36	SL1311BN-36KP	SL1311BQ-36KP
Led品牌/ Led Brand	CREE	CREE	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	36pcs	36pcs	36pcs	36pcs
额定功率/ Rared Power	230W	240W	320W	320W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Rangle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15x60°	8° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512/RDM	DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10%~90%	10%~90%
产品型号/ Product Code	SL1311BF-36	SL1311BC-144		
Led品牌/ Led Brand	RGBW 4in1	LUXEON5050		
Led数量/ Led Quantity	36pcs	144pcs		
额定功率/ Rared Power	280W	240W		
输入电压/ Input Voltage	AC100-305V	AC100-305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single		
发光角度/ Beam Rangle	5° 10° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°		
控制方式/ Control Mode	DMX512	CC/DALI/0-10V		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境温度/ Ambient Humidity	10%~90%	10% ~ 90%		

Flood Light Series

SL1311C

蜂窝格栅 Honeycomb grid		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯

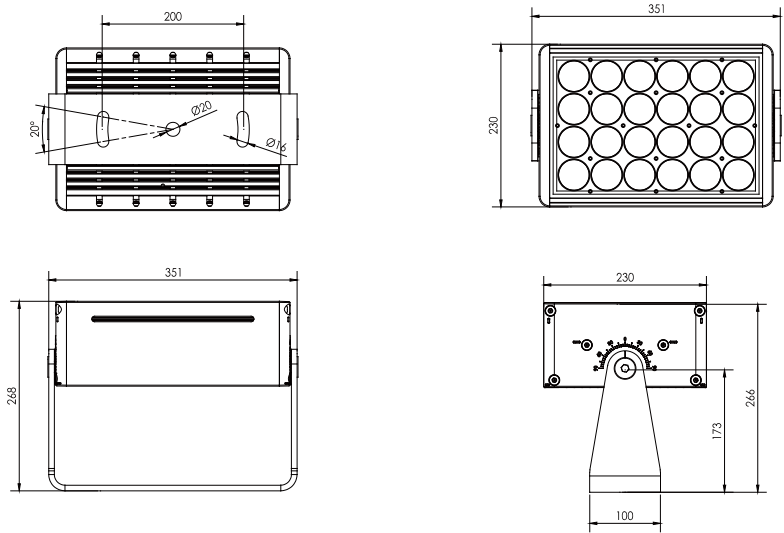

产品简介 Product Introduction

- 一、高功率LED灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可选择三种支架安装方式，满足多种场合的户外工程应用。
- 三、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源, 内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。


- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Three rack mounting ways available can meet the various occasions demands for outdoor projects.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

产品型号/ Product Code	SL1311CM–24	SL1311CE–24	SL1311CN–24KP	SL1311BQ–24KP
Led品牌/ Led Brand	CREE	CREE	RGBWCLA 7in1 Keepower	RGBW 4in1 Keepower
Led数量/ Led Quantity	24pcs	24pcs	24pcs	24pcs
额定功率/ Rared Power	160W	160W	240W	240W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBWCLA	RGBW
发光角度/ Beam Rangle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15x60°	8° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0–10V	DMX512	DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
产品型号/ Product Code	SL1311CF–24	SL1311CC–96		
Led品牌/ Led Brand	RGBW 4in1	LUXEON5050		
Led数量/ Led Quantity	24pcs	96pcs		
额定功率/ Rared Power	200W	160W		
输入电压/ Input Voltage	AC100–305V	AC100–305V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	RGBW	Single		
发光角度/ Beam Rangle	5° 10° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°		
控制方式/ Control Mode	DMX512	CC/DALI/0–10V		
使用寿命/ Life	80000H	80000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃		
环境温度/ Ambient Humidity	10%~90%	10% ~ 90%		

Flood Light Series

SL1310A

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

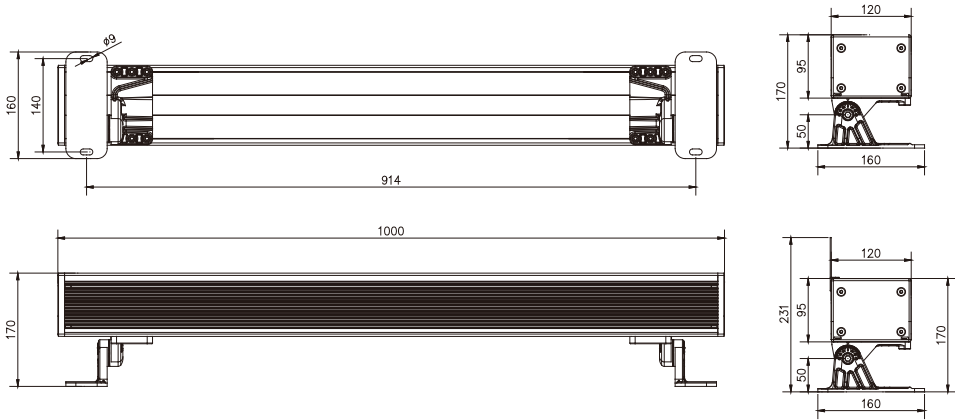

技术参数 Specification






产品型号/ Product Code	SL1310AM-48	SL1310AE-48	SL1310AP-48	SL1310AF-48	SL1310AC-108
LED品牌/ LED Brand	CREE	CREE XP-L/OSRAM P9	RGBWCL 6in1	OSRAM RGBW 4in1	CREE XP-G3
LED数量/ LED Quantity	48pcs	48pcs	48pcs	48pcs	108pcs
额定功率/ Rated Power	300W	300W	300W	300W	300W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBWCL	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512/RDM	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	4pcs	4pcs	4pcs	4pcs	4pcs



Flood Light Series

SL1310B

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

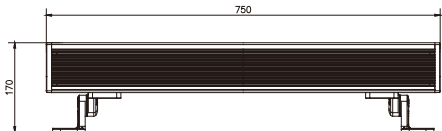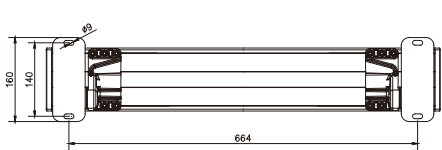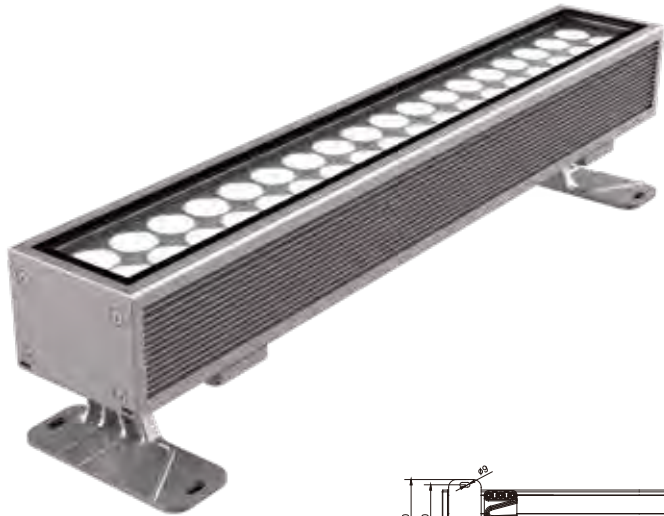






技术参数 Specification

产品型号/ Product Code	SL1310BM-36	SL1310BE-36	SL1310BP-36	SL1310BF-36	SL1310BC-80
LED品牌/ LED Brand	CREE	CREE XP-L/OSRAM P9	RGBWCL 6in1	OSRAM RGBW 4in1	CREE XP-G3
LED数量/ LED Quantity	36pcs	36pcs	36pcs	36pcs	80pcs
额定功率/ Rated Power	230W	240W	240W	240W	220W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	RGBWCL	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512/RDM	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	5pcs	5pcs	5pcs	5pcs	6pcs

Flood Light Series

SL1310C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

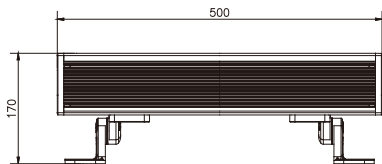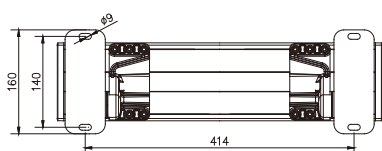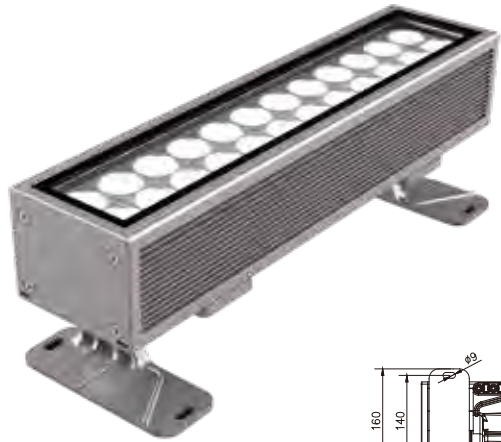


技术参数 Specification

产品型号/ Product Code	SL1310CM-24	SL1310CE-24	SL1310CP-24	SL1310CF-24	SL1310CC-54
LED品牌/ LED Brand	CREE	CREE XP-L/OSRAM P9	RGBWCL 6in1	OSRAM RGBW 4in1	CREE XP-G3
LED数量/ LED Quantity	24pcs	24pcs	24pcs	24pcs	54pcs
额定功率/ Rated Power	160W	160W	160W	160W	160W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K 6500K/Pc Amber/RGBW	Single	RGBWCL	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	8pcs	8pcs	8pcs	8pcs	8pcs

Flood Light Series

SL1310D

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

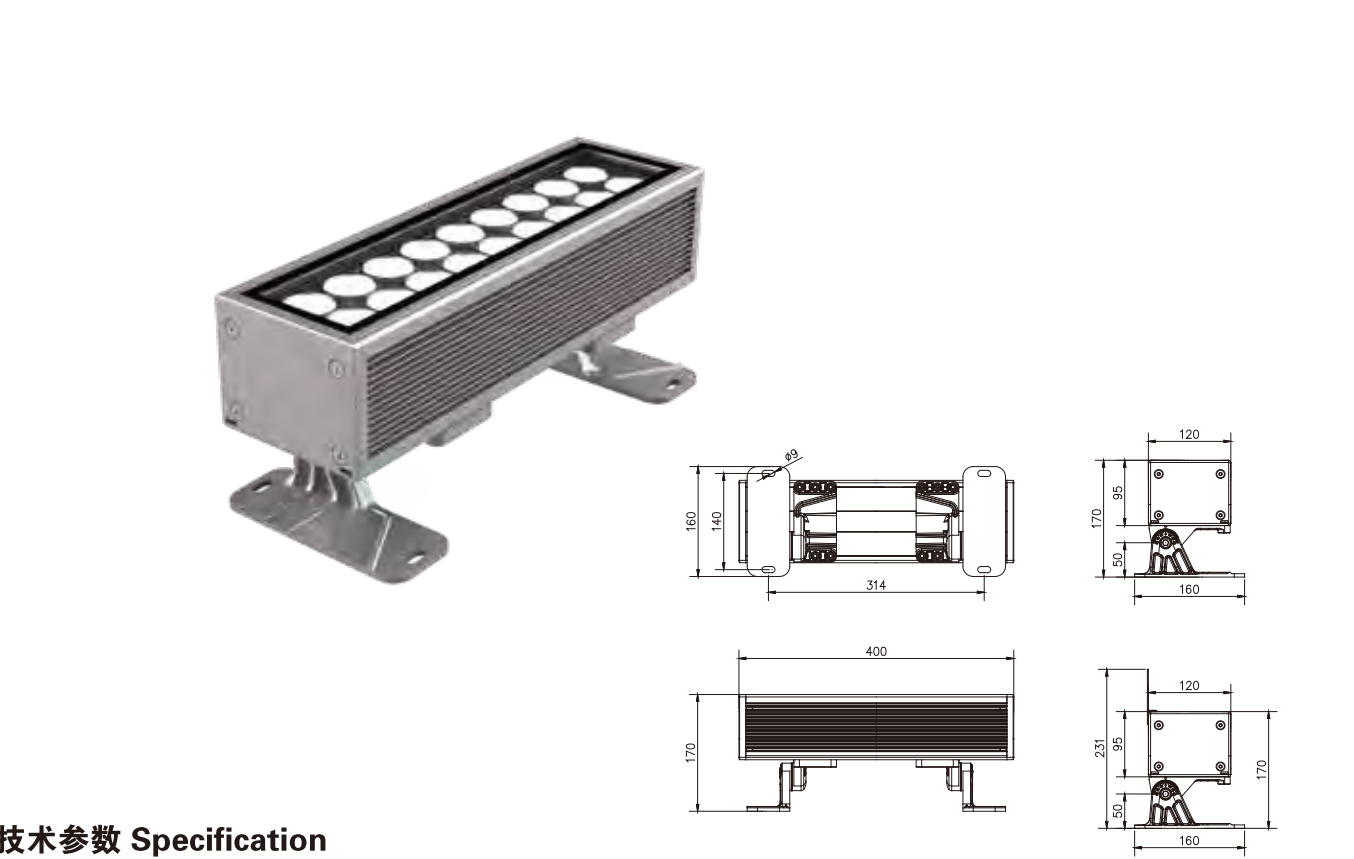


技术参数 Specification

产品型号/ Product Code	SL1310DM-18	SL1310DE-18	SL1310DP-18	SL1310DF-18	SL1310DC-40
LED品牌/ LED Brand	CREE	CREE XP-L/OSRAM P9	RGBWCL 6in1	OSRAM RGBW 4in1	CREE XP-G3
LED数量/ LED Quantity	18pcs	18pcs	18pcs	18pcs	40pcs
额定功率/ Rated Power	120W	120W	120W	120W	120W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBWCL	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°		8° 12.5° 20° 30° 60° 15x30° 10x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	10pcs	10pcs	10pcs	10pcs	10pcs

Flood Light Series

SL1310E

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

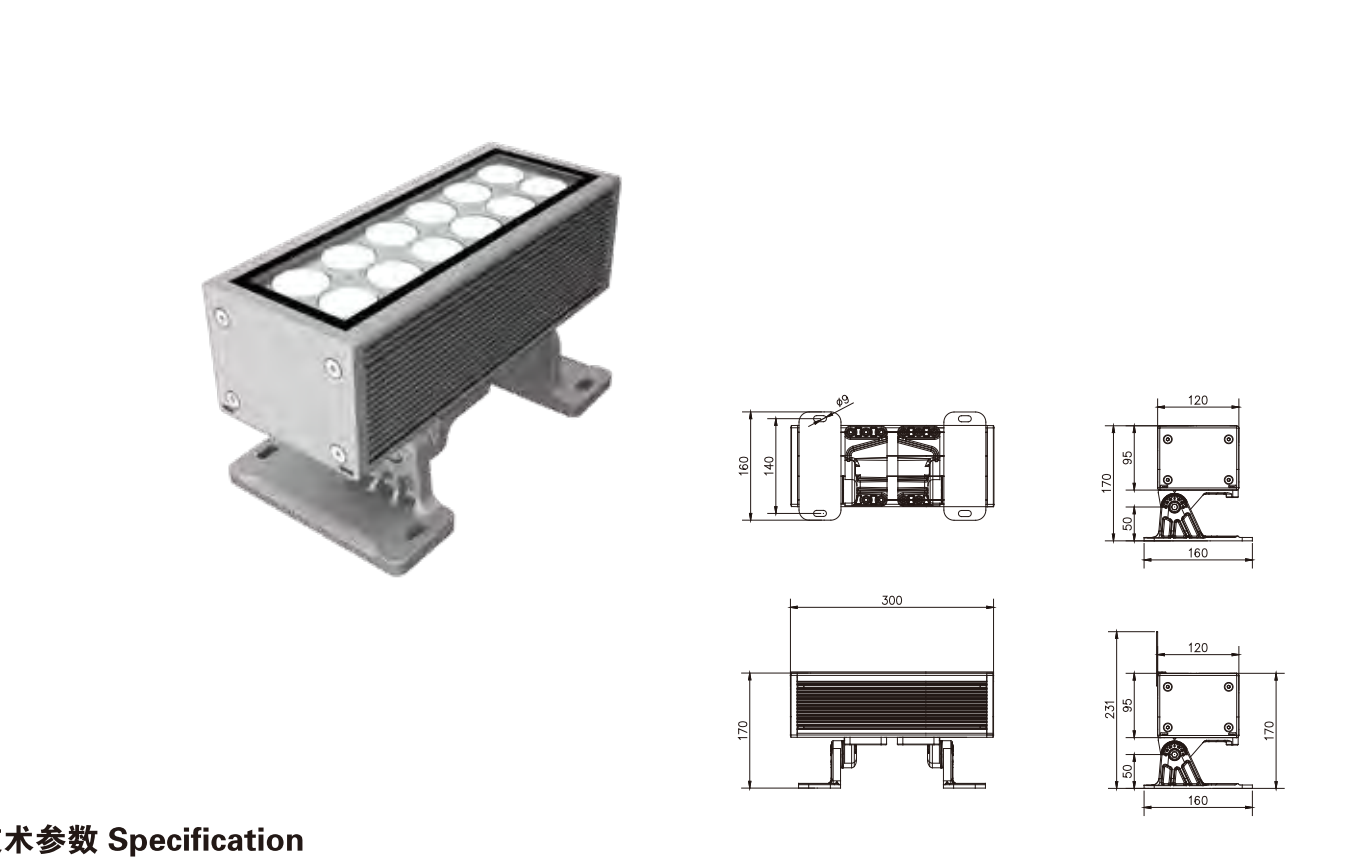


技术参数 Specification

产品型号/ Product Code	SL1310EM-12	SL1310EE-12	SL1310EP-12	SL1310EF-12	SL1310EC-28
LED品牌/ LED Brand	CREE	CREE XP-L/OSRAM P9	RGBWCL 6in1	OSRAM RGBW 4in1	CREE XP-G3
LED数量/ LED Quantity	12pcs	12pcs	12pcs	12pcs	28pcs
额定功率/ Rated Power	80W	80W	80W	80W	80W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	2700K/3000K/4000K/6500K Pc Amber/RGBW	Single	RGBWCL	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 20° 30° 45° 15x60°	9° 15° 20° 30° 45° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	DMX512	DMX512	CC/DALI/0-10V
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	15pcs	15pcs	15pcs	15pcs	15pcs

Flood Light Series

SL1312A

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

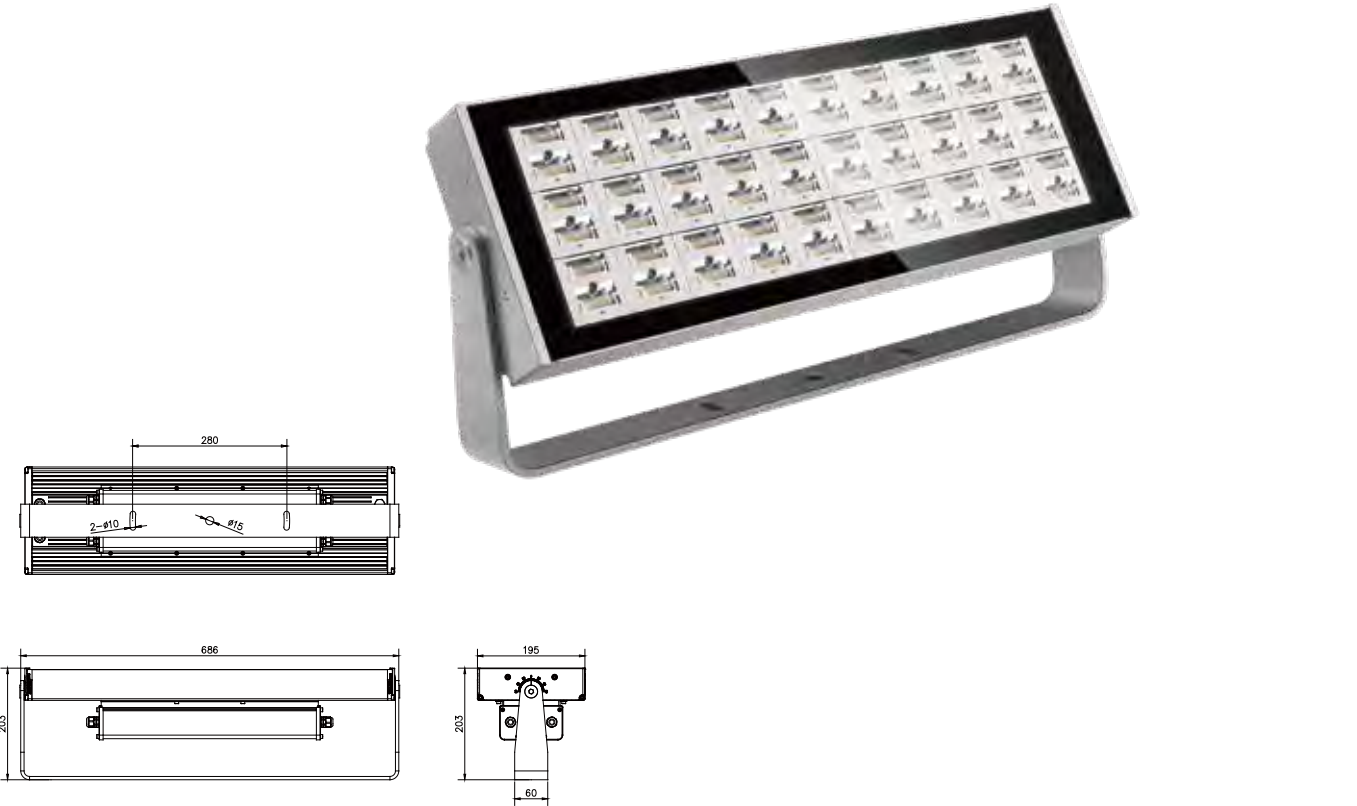


技术参数 Specification

产品型号/ Product Code	SL1312A-180	SL1312A-480
Led品牌/ Led Brand	LUXEON5050	LUXEON3030
Led数量/ Led Quantity	180pcs	480pcs
额定功率/ Rared Power	300W	300W
输入电压/ Input Voltage	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Rangle	150x60° 40x70° Tilt60° TYPEI TYPEII TYPEIII TYPEIV	15° 25° 40° 60° 90° 120° 40x110° 90x120°
控制方式/ Control Mode	CC/DALI/1-10V/PLC电力载波控制/RS-485控制系统	
使用寿命/ Life	80000H	80000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%

Flood Light Series

SL1312B

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

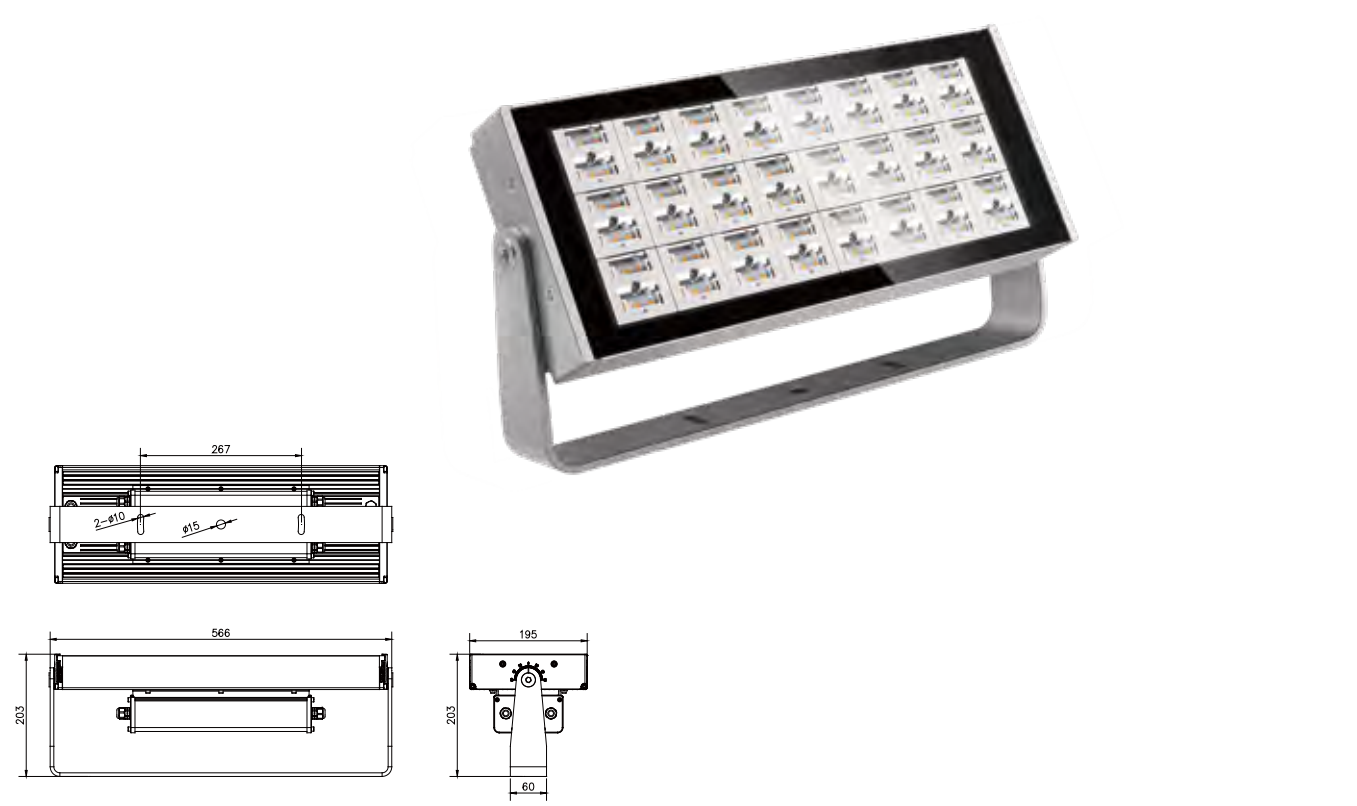


技术参数 Specification

产品型号/ Product Code	SL1312B-144	SL1312B-384
Led品牌/ Led Brand	LUXEON5050	LUXEON3030
Led数量/ Led Quantity	144pcs	384pcs
额定功率/ Rared Power	200W	200W
输入电压/ Input Voltage	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Rangle	150x60° 40x70° Tilt60° TYPEI TYPEII TYPEIII TYPEIV	15° 25° 40° 60° 90° 120° 40x110° 90x120°
控制方式/ Control Mode	CC/DALI/1-10V/PLC电力载波控制/RS-485控制系统	
使用寿命/ Life	80000H	80000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%

Flood Light Series

SL1312C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

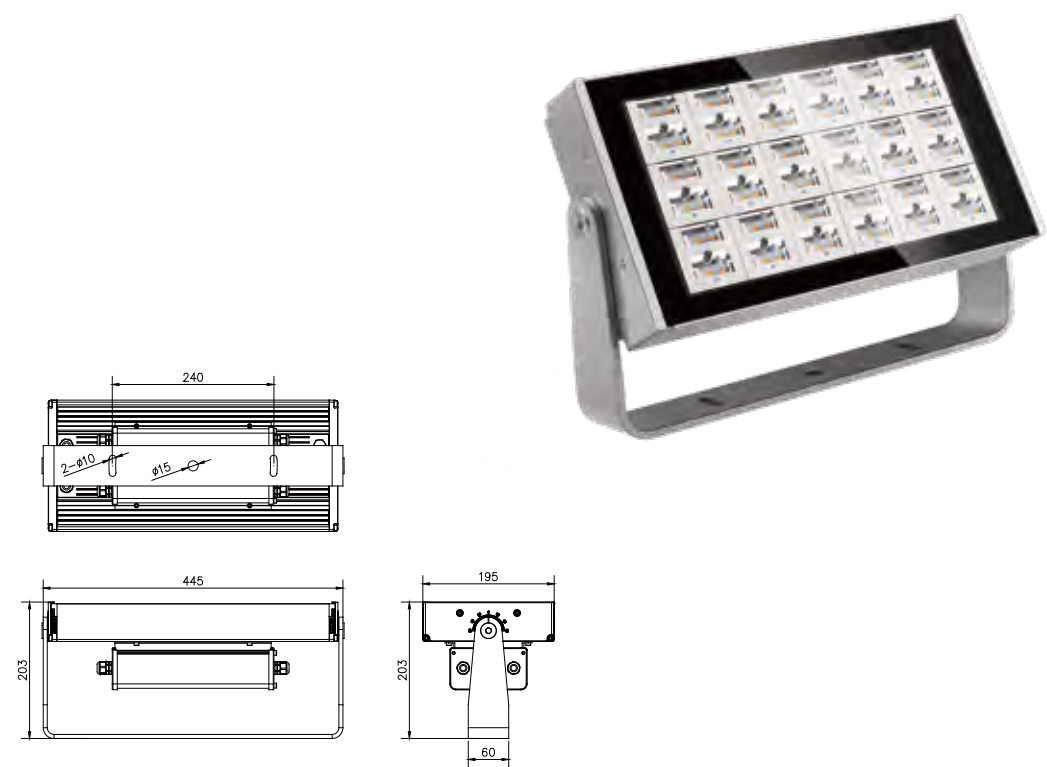


技术参数 Specification

产品型号/ Product Code	SL1312C-180	SL1312C-288
Led品牌/ Led Brand	LUXEON5050	LUXEON3030
Led数量/ Led Quantity	108pcs	288pcs
额定功率/ Rared Power	150W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Rangle	150x60° 40x70° Tilt60° TYPEI TYPEII TYPEIII TYPEIV	15° 25° 40° 60° 90° 120° 40x110° 90x120°
控制方式/ Control Mode	CC/DALI/1-10V/PLC电力载波控制/RS-485控制系统	
使用寿命/ Life	80000H	80000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%

Flood Light Series

SL1312D

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

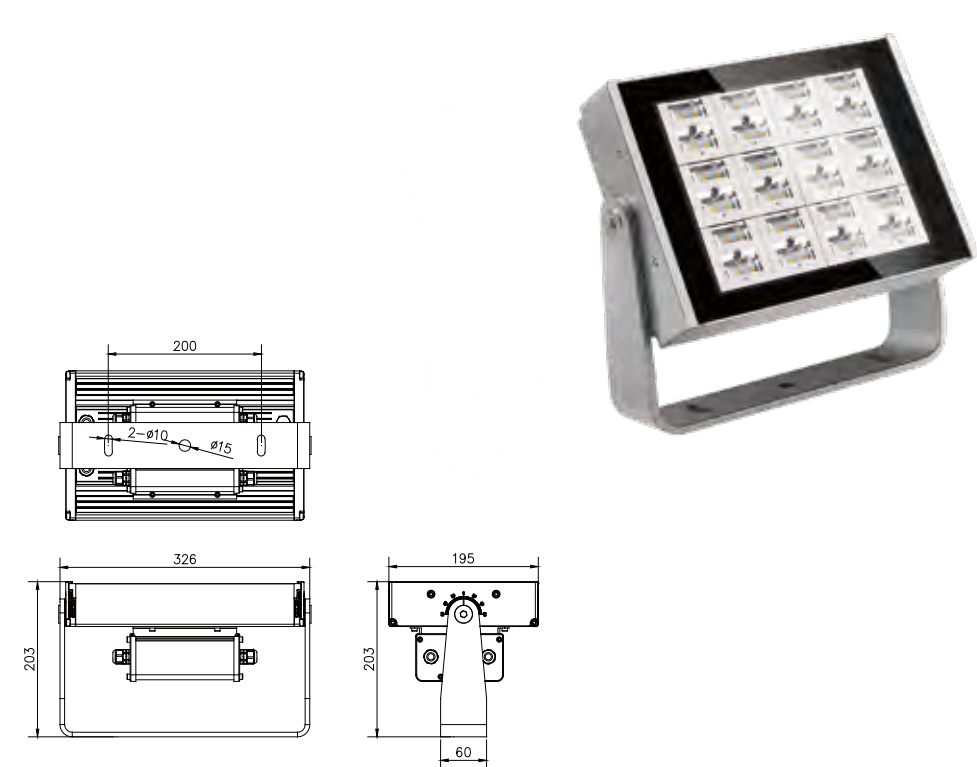

技术参数 Specification

产品型号/ Product Code	SL1312D-72	SL1312D-192
Led品牌/ Led Brand	LUXEON5050	LUXEON3030
Led数量/ Led Quantity	72pcs	192pcs
额定功率/ Rared Power	100W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Rangle	150x60° 40x70° Tilt60° TYPEI TYPEII TYPEIII TYPEIV	15° 25° 40° 60° 90° 120° 40x110° 90x120°
控制方式/ Control Mode	CC/DALI/1-10V/PLC电力载波控制/RS-485控制系统	
使用寿命/ Life	80000H	80000H
防护等级/ Protection Grade	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%

Flood Light Series

SL1315


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



隧道灯/Tunnel Light



投光灯/Flood Light

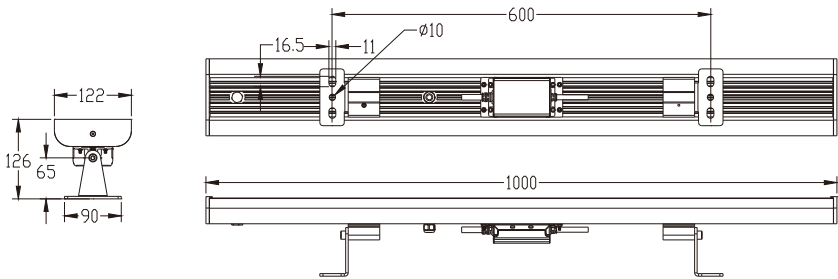

产品简介 Product Introduction

- 一、高功率LED灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可选择三种支架安装方式，满足多种场合的户外工程应用。
- 三、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃，抗冲击耐摩擦，具有优良的雨水清洁能力。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Three rack mounting ways available can meet the various occasions demands for outdoor projects.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1315–288A	SL1315–288C	SL1315–48
Led品牌/ Led Brand	LUXEON2835	LUXEON2835	LUXEON5050
Led数量/ Led Quantity	288pcs	288pcs	48pcs
额定功率/ Rared Power	26W	10W	100W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single
发光角度/ Beam Rangle	95°110° 均匀无颗粒感配光	95°110° 均匀无颗粒感配光	8° 12° 20° 30° 45° 60° 10x60°
控制方式/ Control Mode	CC/DALI/1–10V/PLC电力载波控制/RS–485控制系统		
使用寿命/ Life	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境温度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%



LED Tree Light

SL1132T

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2,5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3,5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

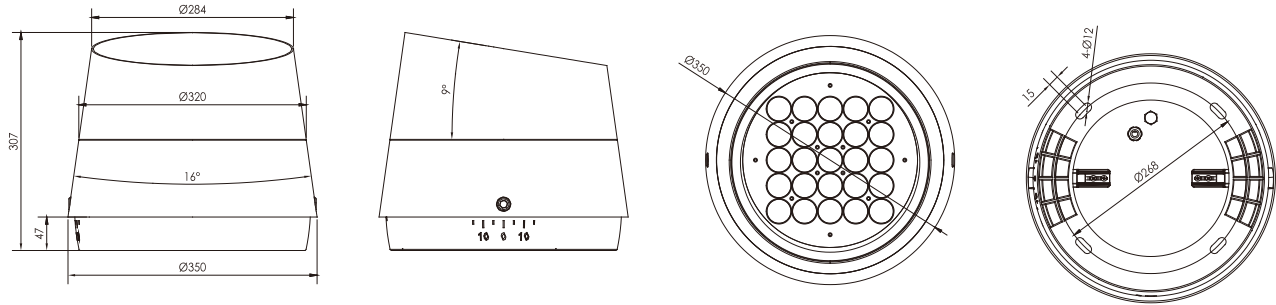

产品简介 Product Introduction




- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1132TE-25	SL1132TD-25	SL1132TF-24	SL1132TC-72
Led品牌/ Led Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in1	CREE XP-E2
Led数量/ Led Quantity	25pcs	25pcs	24pcs	72pcs
额定功率/ Rated Power	120W	85W	150W/200W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC36V / AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5X20		15° 20° 30° 15x60°	5° 8° 12.5° 30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%



配光曲线 (半角) Distribution Curve Flux (SBC Case)

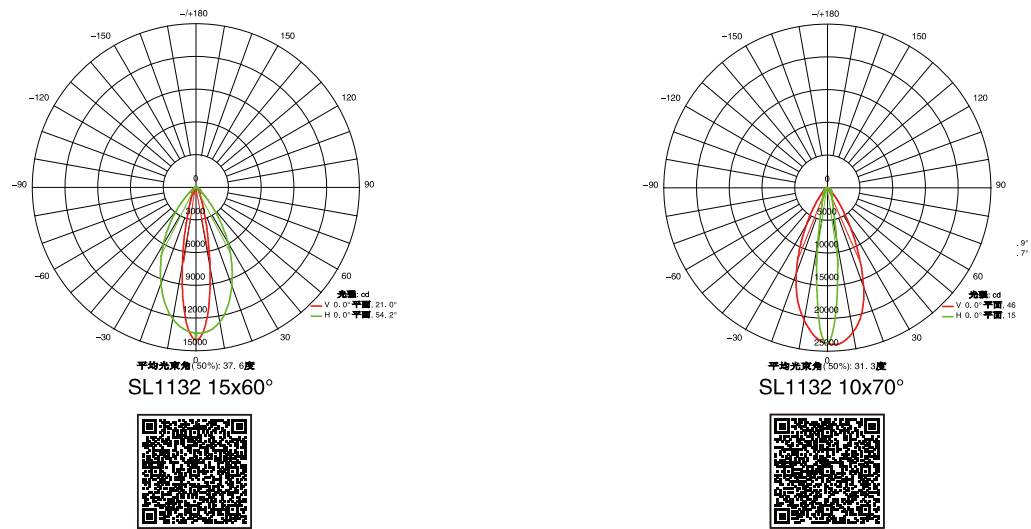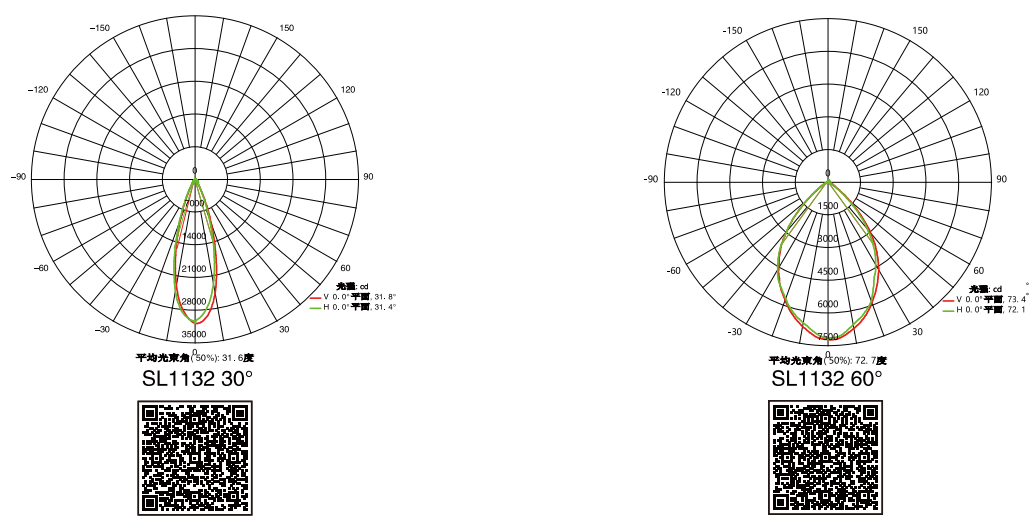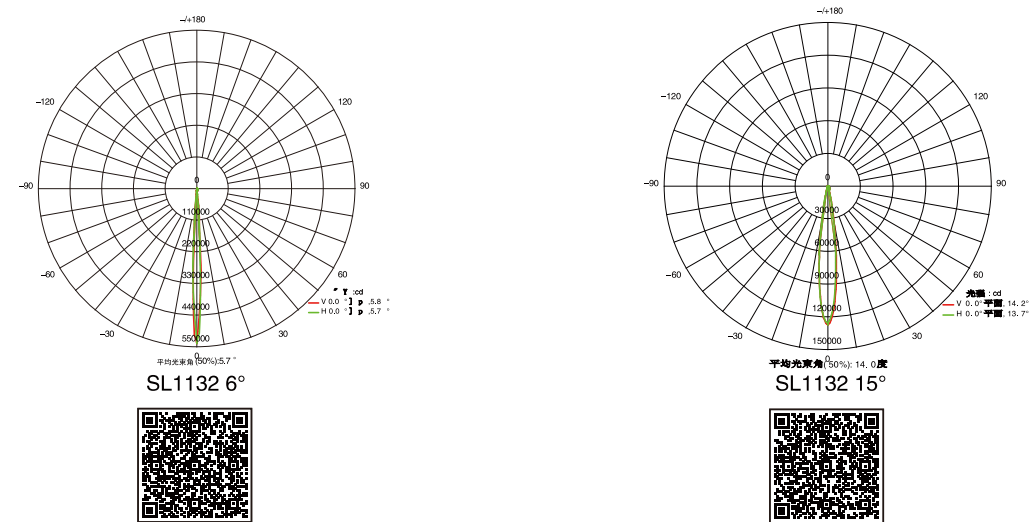


LED Tree Light
SL1135T

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb grill	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
蜂窝玻璃 Honeycomb glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
防眩遮光罩 Anti-glare shield	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics



reddot winner 2020

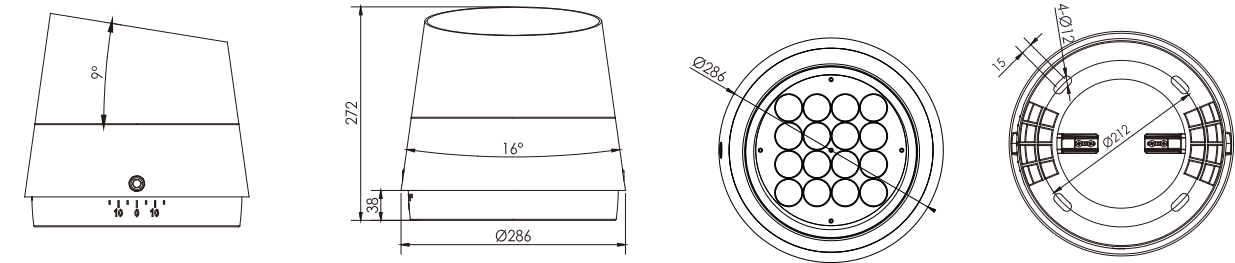

产品简介 Product Introduction




- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。

- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design,could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification


产品型号/ Product Code	SL1135TE-16	SL1135TD-16	SL1135TF-16	SL1135TC-48
Led品牌/ Led Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in1	CREE XP-E2
Led数量/ Led Quantity	16pcs	16pcs	16pcs	48pcs
额定功率/ Rated Power	75W	60W	100W	100W
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC36V / AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20		15° 20° 30° 15x60°	5° 8° 12.5° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	16pcs	22pcs	2/12pcs	2/12pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

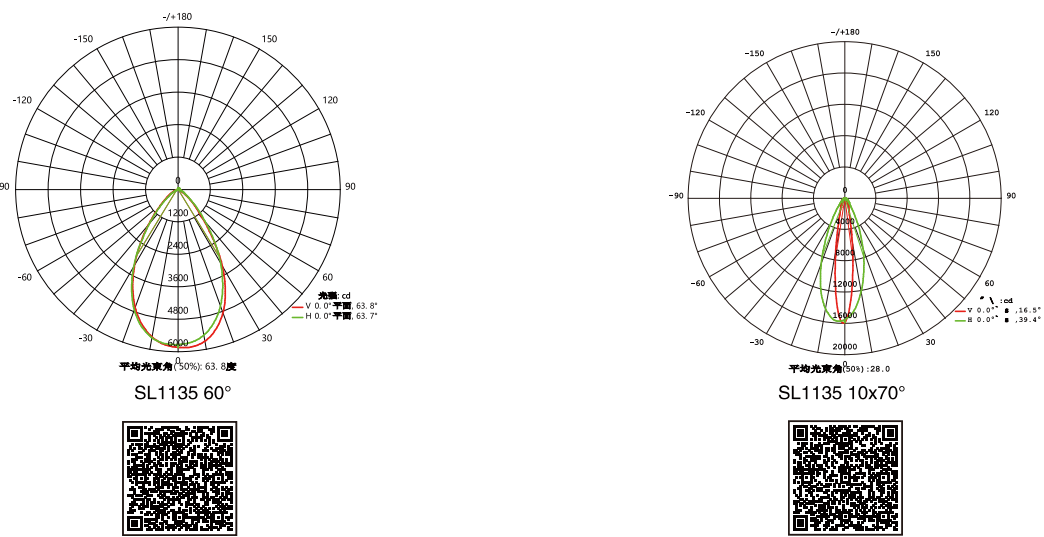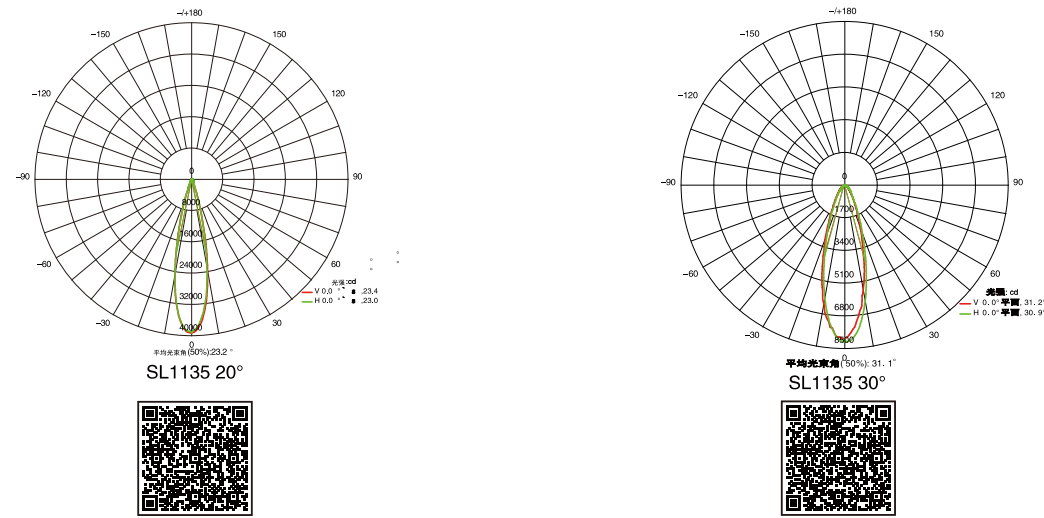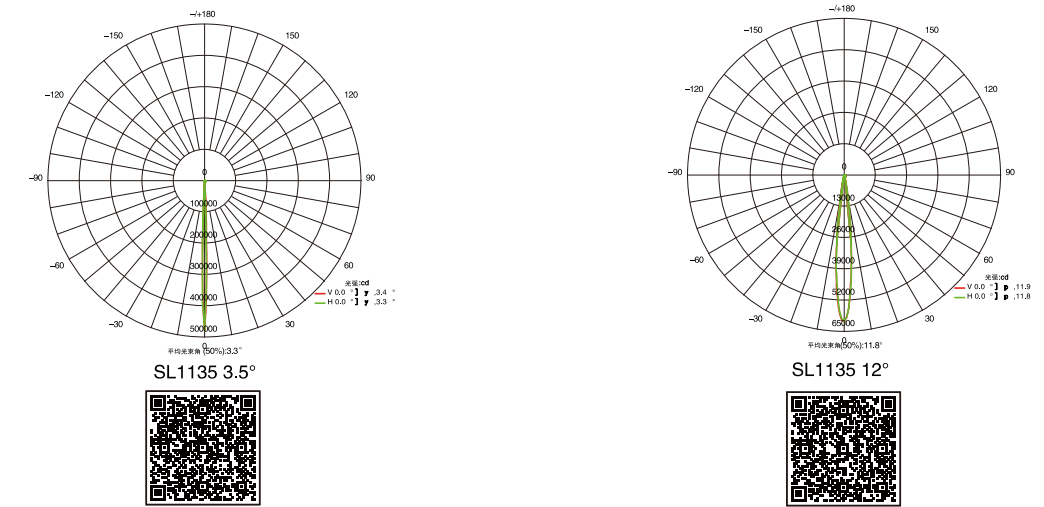

LED Tree Light
SL1136T

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

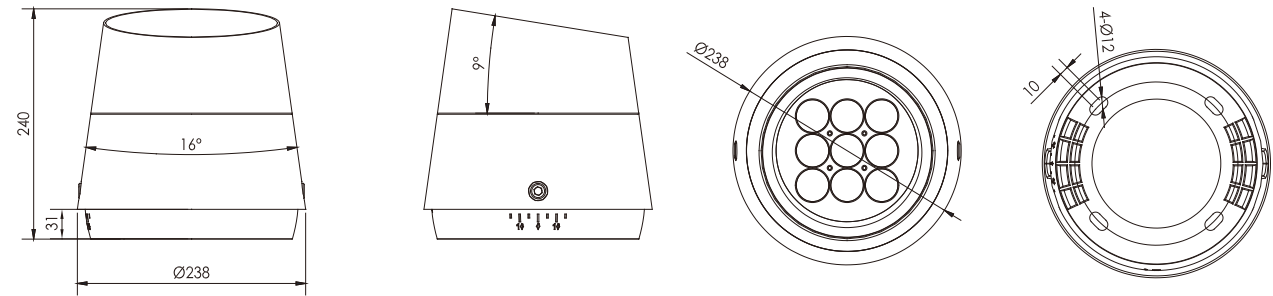


技术参数 Specification


产品型号/ Product Code	SL1136TE-9	SL1136TD-9	SL1136TF-9	SL1136TC-27
Led品牌/ Led Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in1	CREE XP-E2
Led数量/ Led Quantity	9pcs	9pcs	9pcs	27pcs
额定功率/ Rated Power	45W	35W	60W	60W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC36V / AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20°		15° 20° 30° 15x60°	5° 8° 12.5° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	28pcs	36pcs	3/22pcs	3/22pcs

SL1132T / SL1135T / SL1136T / SL1137T




配光曲线 (半角) Distribution Curve Flux (SBC Case)

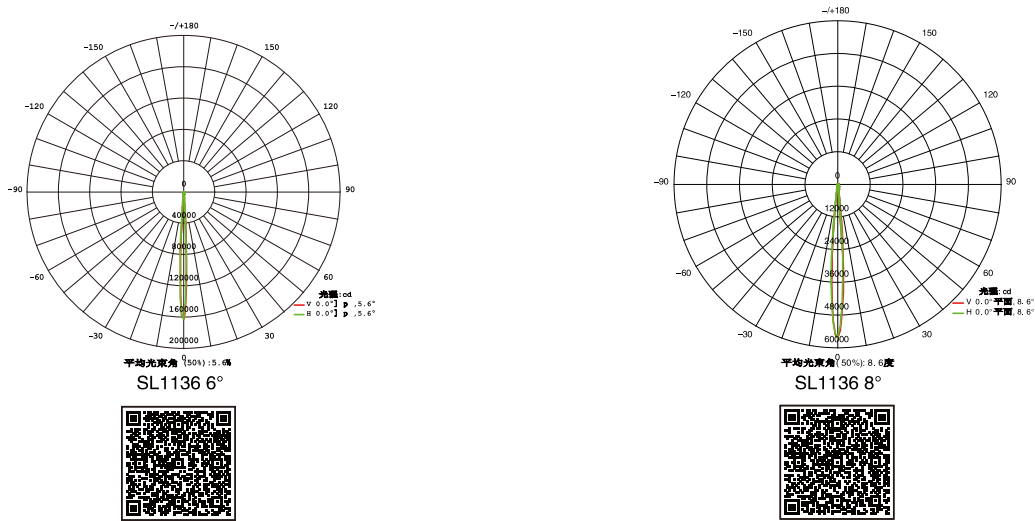


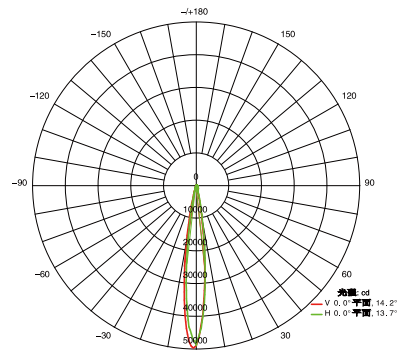


平均光束角 (50%): 13.0度
SL1136 12°

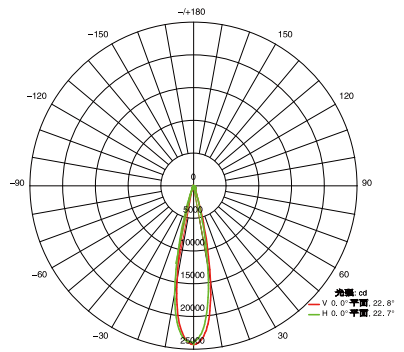


平均光束角 (50%): 22.4度
SL1136 20°

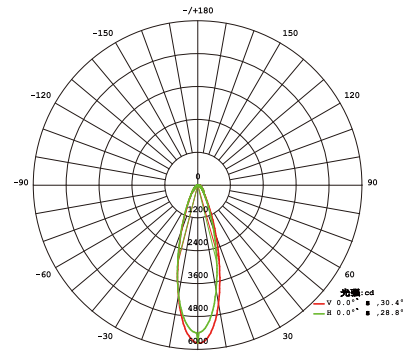

平均光束角 (50%): 29.6度
SL1136 30°

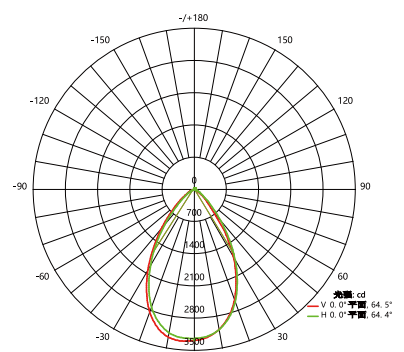

平均光束角 (50%): 64.5度
SL1136 60°

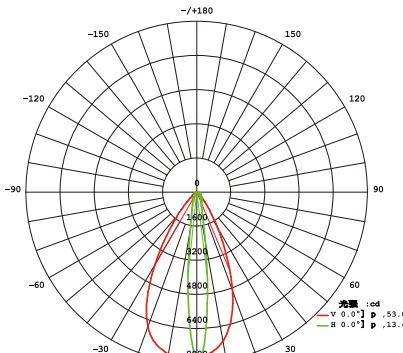





平均光束角 (50%): 33.2°
SL1136 10x70°



LED Tree Light

SL1137T





圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



技术参数 Specification

产品型号/ Product Code	SL1137TE-6	SL1137TD-6	SL1137TF-6	SL1137TC-18
LED品牌/ LED Brand	CREE XP-L	CREE XP-G3	CREE RGBW 4 in 1	CREE XP-E
LED数量/ LED Quantity	6pcs	6pcs	6pcs	18pcs
额定功率/ Rated Power	30W	22W	30W	36W
输入电压/ Input Voltage	AC100-264V	AC100-DC264V	DC24V/AC100-264V	DC24V/AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	RGB
发光角度/ Beam Angle	2.6° 6° 12° 20° 30° 45° 60° 10x70° 5x20°		15° 20° 30° 15x60°	5° 8° 12.5° 30° 15x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	44pcs	60pcs	4/44pcs	4/36pcs

配光曲线 (半角) Distribution Curve Flux (SBC Case)

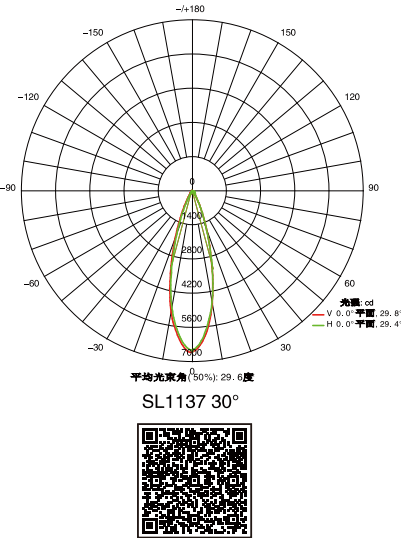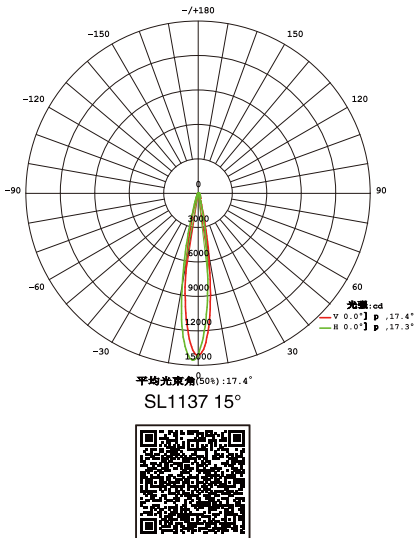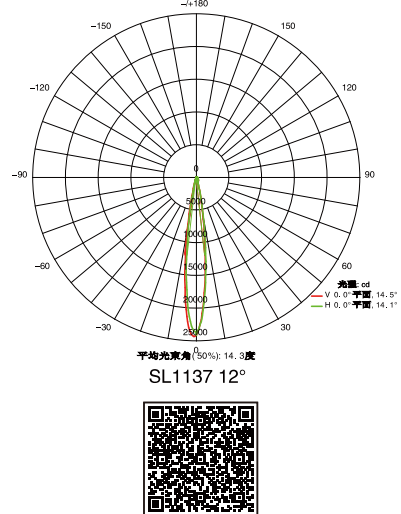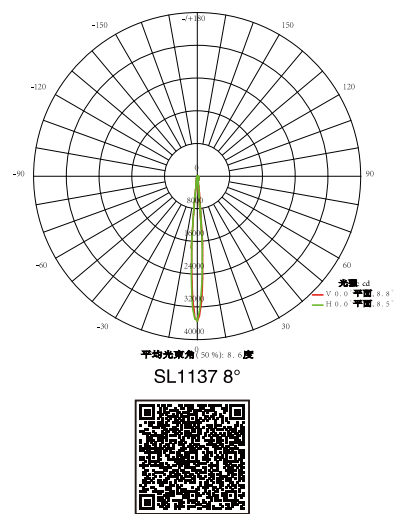




灯体自带30度一体化遮光罩，内部采用高端博物馆照明的防眩光方案，可选用圆孔格栅，蜂窝格栅，布纹玻璃等防眩和控光措施实现见光不见灯的效果。

With external 30 degree Integrated hood and internal anti-glare solution which usually for high-end museum lighting, this uplight also provides round-meshed grill, honeycomb grill, textured glass to get the “only lighting no lamp” effect.

全系列产品均已通过3C、CE、ETL认证测试要求，并获得认证证书。产品工业设计由芯龙欧洲设计中心完成，正在申报全球多个设计大奖，产品的光学和结构组合在国内已申请发明专利。

Designed by SHYLON Europe Design Centre, whole uplight series have got CCC, CE, ETL certificates, and is applying for various Industrial design awards, and the optical design and body structure have applied for patent in China. .

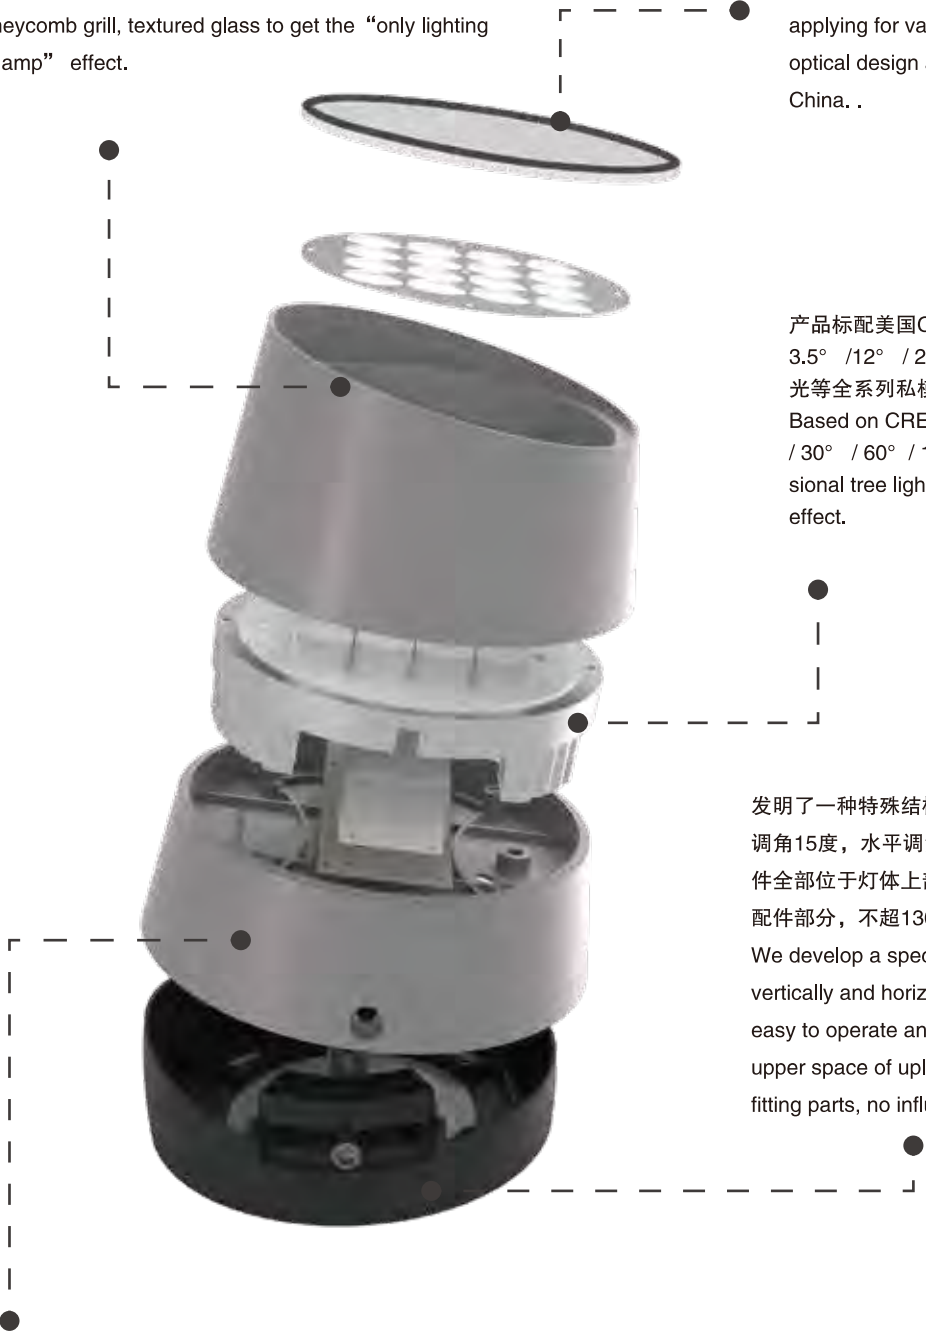

产品标配美国CREE LED，根据LED的光学特点自主开发3.5° /12° / 20° / 30° / 60° / 10X70° / 5X20° /照树配光等全系列私模透镜实现精准光学。
Based on CREE LED chips, we develop 3.5° /12° / 20° / 30° / 60° / 10X70° / 5X20° private lens for professional tree lighting, which can realize precise lighting effect.

发明了一种特殊结构，灯体上只有两个固定点就可实现灯具前后调角15度，水平调角15度，操作方便，安装牢固；灯具的核心部件全部位于灯体上部，底座预留了130mm以上的空间容纳支架和配件部分，不超130mm水深的浸水淹没，对灯具没有影响。
We develop a special structure which can adjust 15deg by vertically and horizontally realized by two fixed points, and it is easy to operate and securely installed; All core parts are in the upper space of uplight, there is 130mm height for brackets and fitting parts, no influences on uplight for water lower than 130mm.


高压铸铝灯体，平均壁厚大于2.5mm,专利技术内外组合式散热设计；采用进口硅胶密封圈,耐高低温,耐老化。产品表面双层氟碳喷涂，耐候能力十年以上。灯具的安装底座采用抗UV增强型PC（聚碳酸酯），适合长期接触地面，防腐性能优良。

High pressure die casting aluminum light body with more than 2.5mm thickness; Patented internal and external combined heat dissipation design;


Imported silicone sealing ring ensures resistance to high/low temperature and aging; Double layer fluorocarbon coating provides a 10years ; Made in UV-resistant PC, Light base is suitable for long-term contact with the ground and has excellent corrosion resistance.

Inground Light Series
SL2311A

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

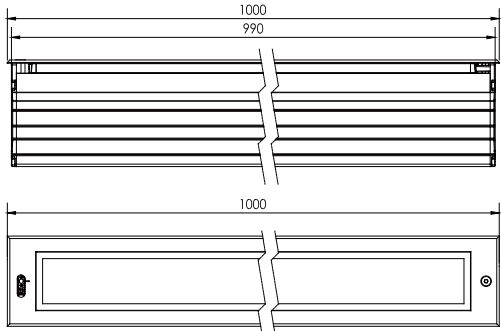

开孔尺寸: L990*W100*H130



不带预埋件




技术参数 Specification

产品型号/ Product Code	SL2311AM-20	SL2311AE-20	SL2311AD-20	SL2311AF-20	SL2311AH-20
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE XP-G3	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量/ LED Quantity	20pcs	20pcs	20pcs	20pcs	20pcs
额定功率/ Rated Power	100W	100W	60W	100W	60W
输入电压/ Input Voltage	AC176-264V	AC176-264V	AC90-264V	AC176-264V	AC90-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	8° 15° 20° 30° 45° 10x30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	12pcs	12pcs	20pcs	12pcs	20pcs



Inground Light Series
 SL2311B

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

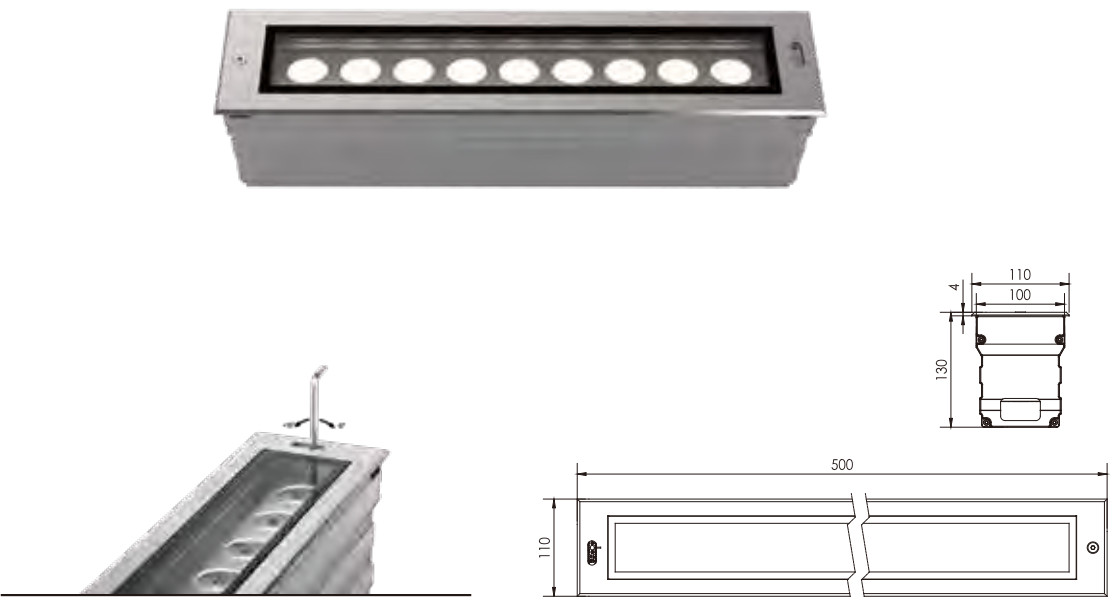


技术参数 Specification

产品型号/ Product Code	SL2311BM-10	SL2311BE-10	SL2311BD-10	SL2311BF-10	SL2311BH-10
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE XP-G3	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量/ LED Quantity	10pcs	10pcs	10pcs	10pcs	10pcs
额定功率/ Rated Power	50W	50W	30W	50W	30W
输入电压/ Input Voltage	AC90-264V	AC90-264V	AC90-264V	AC90-264V	AC90-264V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	20° 30° 10x30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	26pcs	26pcs	40pcs	26pcs	40pcs

Inground Light Series
 SL2311C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

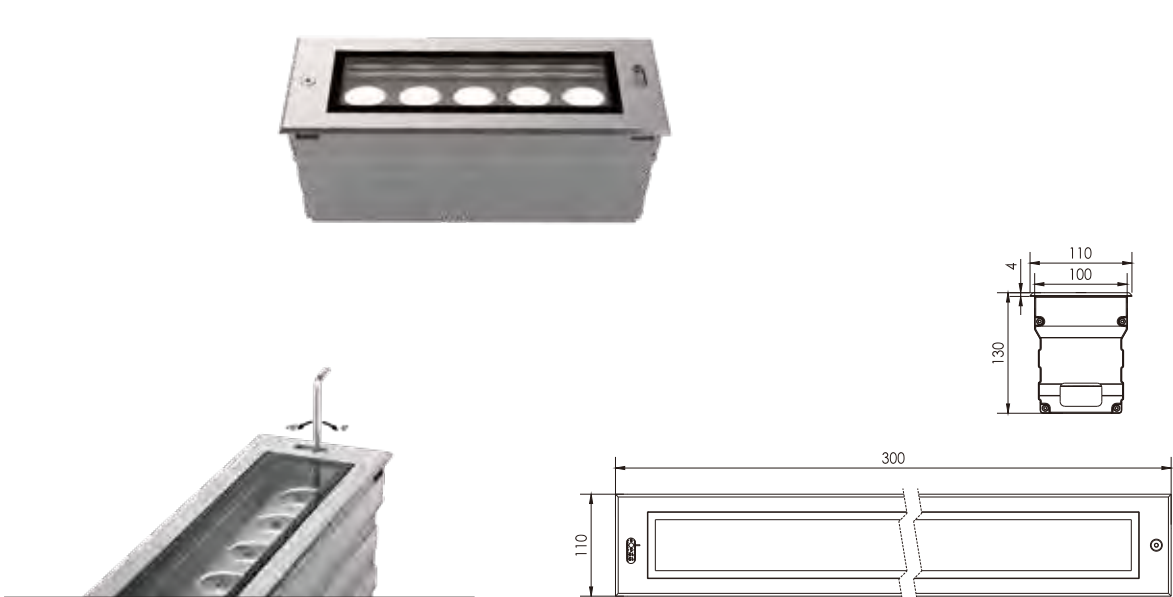


技术参数 Specification

产品型号/ Product Code	SL2311CM-5	SL2311CE-5	SL2311CD-5	SL2311CF-5	SL2311CH-5
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE XP-G3	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量/ LED Quantity	5pcs	5pcs	5pcs	5pcs	5pcs
额定功率/ Rated Power	30W	30W	20W	30W	20W
输入电压/ Input Voltage	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	Single	RGBW	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10x70° 5x20°		9° 15° 20° 30° 45° 15x60°	20° 30° 10x30° 10x60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	40pcs	40pcs	60pcs	40pcs	60pcs

Inground Light Series
SL2312

蜂窝格栅 Honeycomb grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
防滑玻璃 Anti-slip glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics

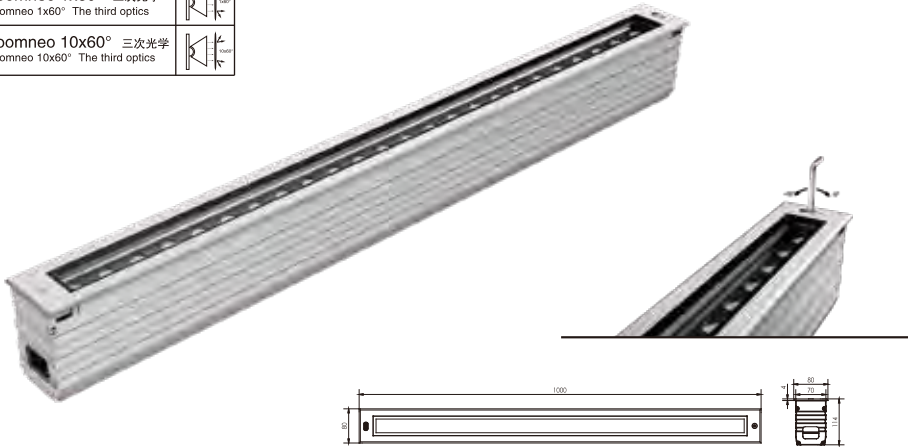

技术参数 Specification


产品型号/Product Code	SL2312B-24	SL2312A-24	SL2312A-18	SL2312B-12(0.5m)	SL2312H-24	
LED品牌/LED Brand	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	OSRAM	
LED数量/LED Quantity	24pcs	24pcs	18pcs	12pcs	24pcs	
额定功率/Rated Power	45W	28W	21W	28W	48W	
输入电压/Input Voltage	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-240V	DC24V/AC100-265V	
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	
颜色/Color	Single	Single	Single	Single	RGBW 4IN1	
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°				20° 45° 60° 15x25° 15x60°	
控制方式/Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	
串联数量/ In series(max)	3/20pcs	5/46pcs	6/60pcs	5/46pcs	3/20pcs	
产品型号/Product Code	SL2312A-12(0.5m)	SL2312A-9(0.5m)	SL2312A-8(0.3m)	SL2312A-6(0.3m)	SL2312H-12(0.5m)	SL2312H-6(0.5m)
LED品牌/LED Brand	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	CREE/OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	12pcs	9pcs	9pcs	6pcs	12pcs	6pcs
额定功率/Rated Power	14W	11W	11W	7W	24W	12W
输入电压/Input Voltage	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V	DC24V/AC100-265V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	Single	Single	Single	Single	RGBW 4IN1	RGBW 4IN1
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°				20° 45° 60° 15x25° 15x60°	
控制方式/Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	10/80pcs	13/120pcs	6/54pcs	13/120pcs	20/150pcs	12/110pcs



Inground Light Series

SL1307P

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

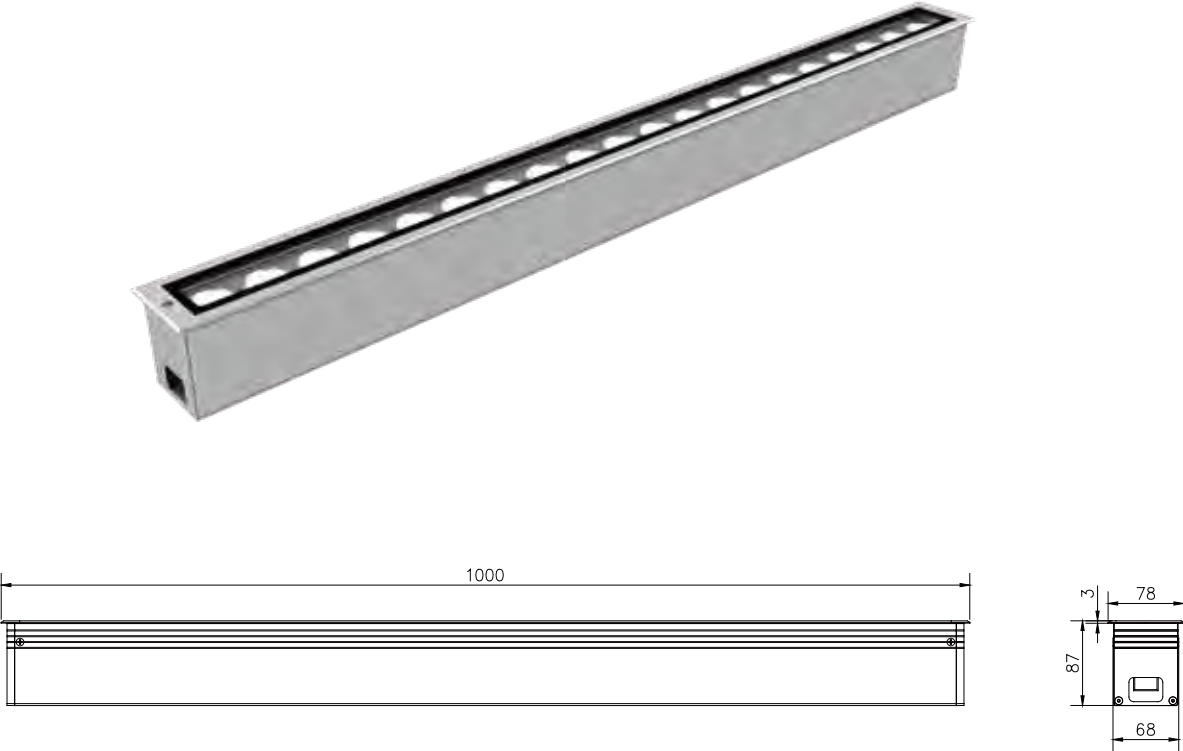


技术参数 Specification

产品型号/Product Code	SL1307PE-20	SL1307PE-10(0.5m)	SL1307PE-6(0.3m)	SL1307PF-20	SL1307PF-10(0.5m)	SL1307PF-6(0.3m)
LED品牌/LED Brand	CREE/OSRAM	CREE/LUMILEDS	CREE/LUMILEDS	OSRAM RGBW 4in1	OSRAM RGBW 4in1	OSRAM RGBW 4in1
LED数量/LED Quantity	20pcs	10pcs	6pcs	20pcs	10pcs	6pcs
额定功率/Rated Power	95W	48W	30W	100W	50W	30W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	6° 12° 20° 30° 60° 10x70° 5x20°			9° 15° 20° 30° 45° 15x60°		
控制方式/Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	DMX512/RDM
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/20pcs	5/46pcs	6/60pcs	5/46pcs		


Inground Light Series

SL2306


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



开孔尺寸/Cut Size: L992*W70*H100mm



开孔尺寸/Cut Size: L492*W70*H100mm



开孔尺寸/Cut Size: L292*W70*H100mm



产品简介 Product Introduction


- 一、埋地式条形LED洗墙灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、可调角度的光源模块，实现精准完美的投光和洗墙效果。
- 三、不锈钢面板；灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦，铝合金预埋件。
- 四、采用美国CREE原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、Recessed in–ground liner LED wall washer, fashion and beautiful appearance; with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、Adjustable beam angle illuminant module make the effect of washing wall accurate and perfect.
- 3、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment; Faceplate use stainless steel; Lampshade adopts high strength toughened glass, resist the impact and friction. and use aluminum alloy buried barrel.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL2306A–36	SL2306A–24	SL2306A–18	SL2306A–9(0.5m)	SL2306A–6(0.3m)	SL2306–48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	6pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	7W	11W
输入电压/Input Voltage	DC24V/AC100–240V	DC36V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V	DC24V/AC100–240V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°					>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	30000H	30000H	30000H	30000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/30(pcs)	5/46(pcs)	6/60(pcs)	13/120(pcs)	20/180(pcs)	13/120(pcs)
产品型号/Product Code	SL2306H–24					
LED品牌/LED Brand	CREE RGBW 4 in1					
LED数量/LED Quantity	24pcs					
额定功率/Rated Power	48W					
输入电压/Input Voltage	DC24V					
频率/Frequency Range	/					
颜色/Color	RGBW					
发光角度/Beam Angle	20° 45° 60° 15x60°					
控制方式/Control Mode	DMX512					
使用寿命/Life	30000H					
防护等级/Protection Grade	IP67					
环境温度/Ambient Temperature	– 25℃ ~ 50℃					
环境湿度/Ambient Humidity	10% ~ 90%					
串联数量/ In series(max)	3pcs					

配光曲线 (半角) Distribution Curve Flux (SBC Case)

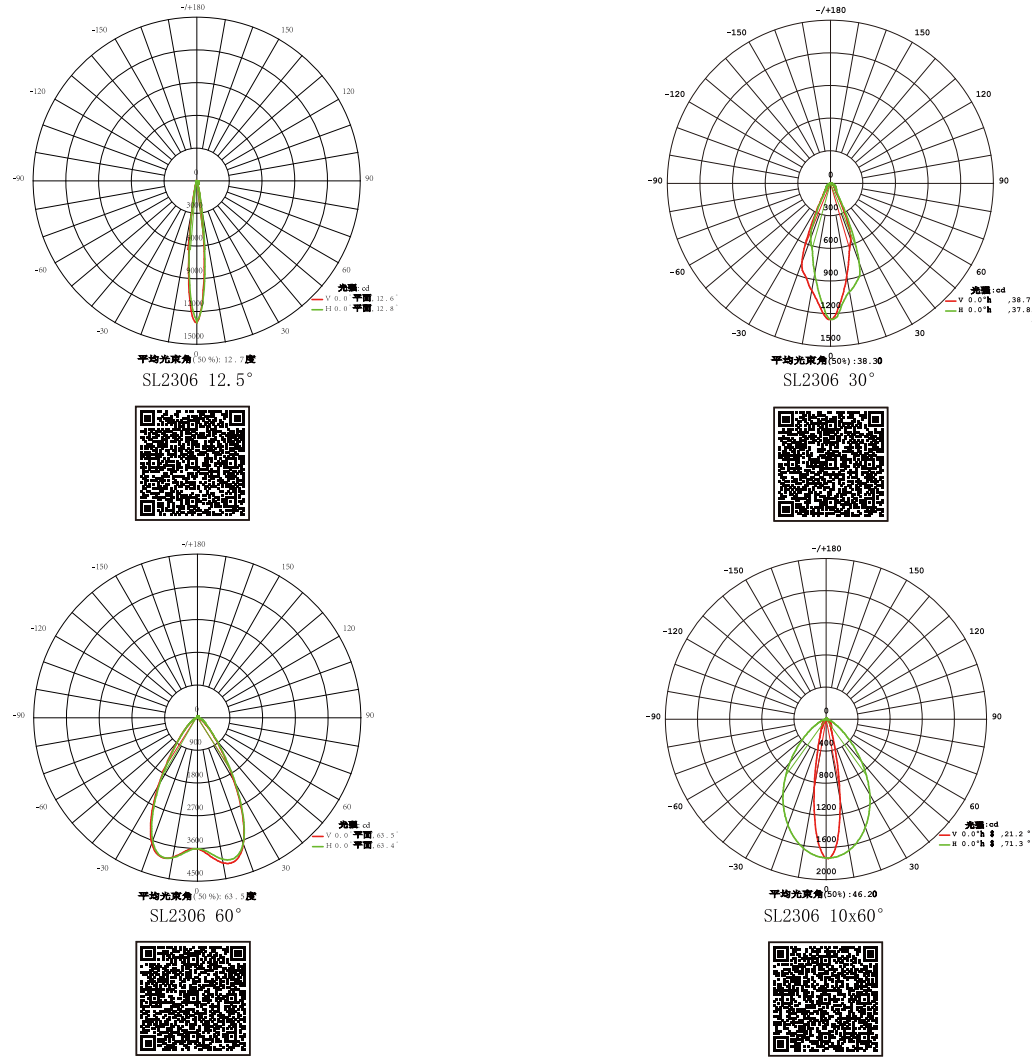

Inground Light Series

SL2307

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	






技术参数 Specification

产品型号/Product Code	SL2307A-36	SL2307A-24	SL2307A-18	SL2307A-9(0.5m)	SL2307A-6(0.3m)	SL2307-48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	6pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	7W	11W
输入电压/Input Voltage	DC24V/AC100-240V	DC36V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°					>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/30(pcs)	6/46(pcs)	6/60(pcs)	13/120(pcs)	20/180(pcs)	13/120(pcs)

产品型号/Product Code	SL2307H-24					
LED品牌/LED Brand	CREE CLQ6A 4in1					
LED数量/LED Quantity	24pcs					
额定功率/Rated Power	48W					
输入电压/Input Voltage	DC24V					
频率/Frequency Range	/					
颜色/Color	RGBW					
发光角度/Beam Angle	20° 40° 60° 15X60°					
控制方式/Control Mode	DMX512					
使用寿命/Life	50000H					
防护等级/Protection Grade	IP67					
环境温度/Ambient Temperature	- 25℃ ~ 50℃					
环境湿度/Ambient Humidity	10% ~ 90%					
串联数量/ In series(max)	3pcs					



配光曲线 (半角) Distribution Curve Flux (SBC Case)

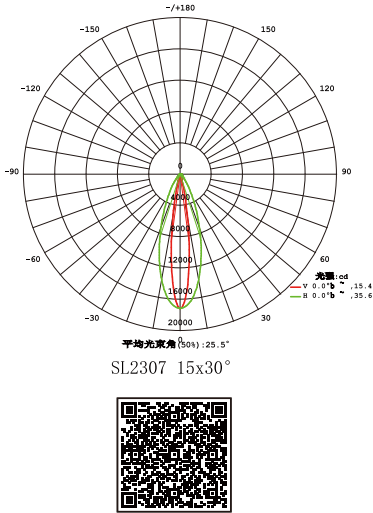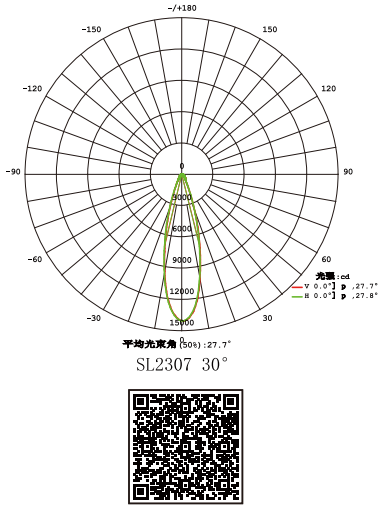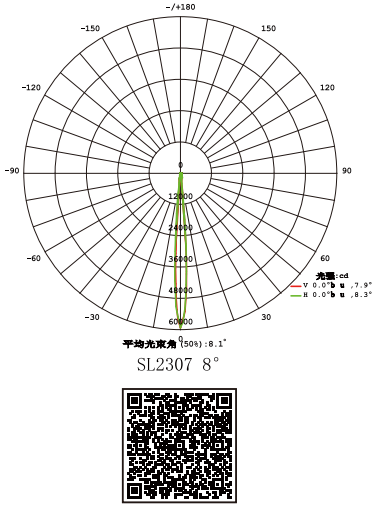

Inground Light Series

SL2308

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2,5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3,5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




开孔尺寸/Cut Size: L999*W50*H87mm


技术参数 Specification

产品型号/Product Code	SL2308A–36	SL2308A–24	SL2308A–18	SL2308A–9(0.5m)	SL2308–48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	11W
输入电压/Input Voltage	DC24V	DC36V/DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60° (Tilted 10 degrees:15° 30° 45° 20x35°)				>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/30(pcs)	7/5(pcs)	6pcs	13pcs	13pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

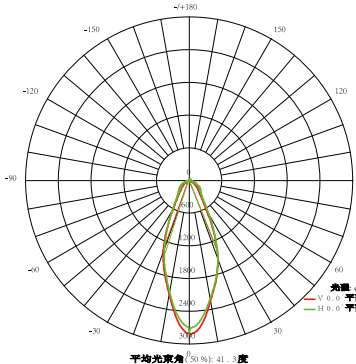


SL2308 45°

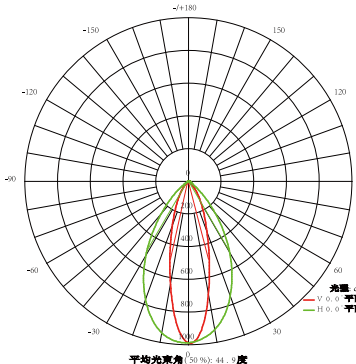

SL2308 25x45°

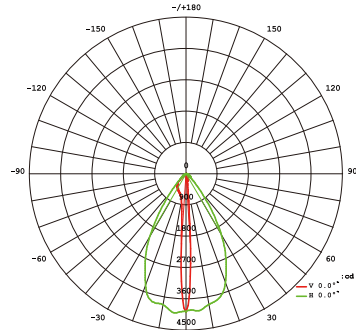

SL2308 10x60°

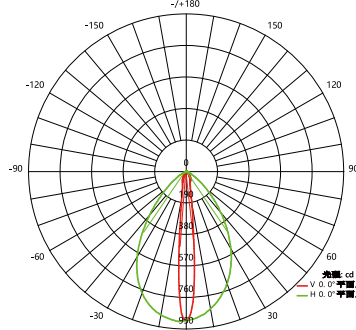


SL2308 10x70°



Inground Light Series
 SL2308P

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

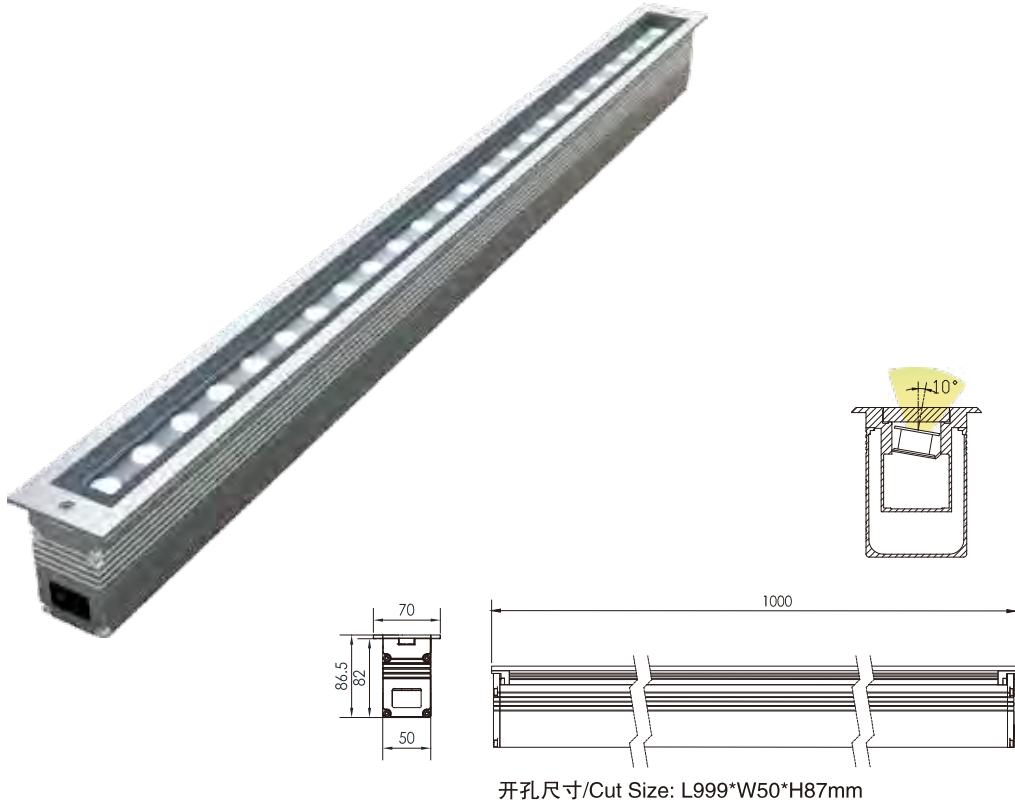

技术参数 Specification

产品型号/Product Code	SL2308PA-36	SL2308PA-24	SL2308PA-18	SL2308PA-9(0.5m)	SL2308P-48
LED品牌/LED Brand	CREE	CREE	CREE	CREE	EPISTAR
LED数量/LED Quantity	36pcs	24pcs	18pcs	9pcs	48pcs
额定功率/Rated Power	42W	28W	21W	11W	11W
输入电压/Input Voltage	DC24V	DC36V/DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/
颜色/Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60° (Tilted 10 degrees:15° 30° 45° 20x35°)				>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3/30(pcs)	7/5(pcs)	6pcs	13pcs	13pcs

Inground Light Series
 SL2309



技术参数 Specification

产品型号/Product Code	SL2309-48	SL2309-156
LED品牌/LED Brand	EPISTAR	EPISTAR
LED数量/LED Quantity	48pcs	156pcs
额定功率/Rated Power	11W	15W/10W
输入电压/Input Voltage	DC24V	DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	Single
发光角度/Beam Angle	>120°	
控制方式/Control Mode	DMX512/CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP67	IP67
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	3pcs	9pcs




Inground Light Series

SL2304



reddot winner 2021



技术参数 Specification

产品型号/Product Code	SL2304-288
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	288pcs
额定功率/Rated Power	15W/10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	Single/RGB
发光角度/Beam Angle	>120°
控制方式/Control Mode	CC/DMX 512
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	- 25℃~50℃
环境湿度/Ambient Humidity	10%~90%
串联数量/ In series(max)	9pcs

Inground Light Series


SL2305



技术参数 Specification

产品型号/Product Code	SL2305-156
LED品牌/LED Brand	EPISTAR
LED数量/LED Quantity	156pcs
额定功率/Rated Power	15W/10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	Single/RGB
发光角度/Beam Angle	>120°
控制方式/Control Mode	CC/DMX 512
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	- 25℃~50℃
环境湿度/Ambient Humidity	10%~90%
串联数量/ In series(max)	9pcs


配光曲线 (半角) Distribution Curve Flux (SBC Case)

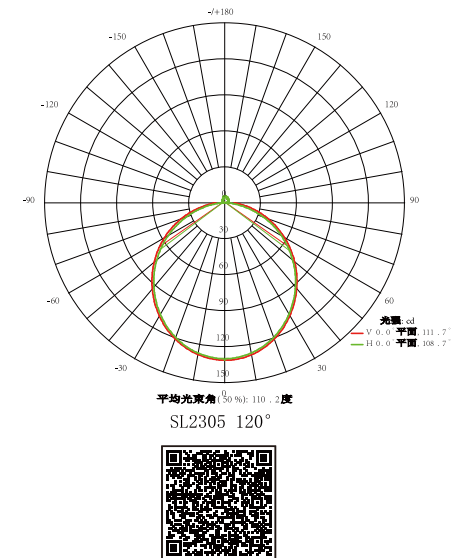

Inground Light Series
SL2270

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

LED 恒功率全色域染色灯

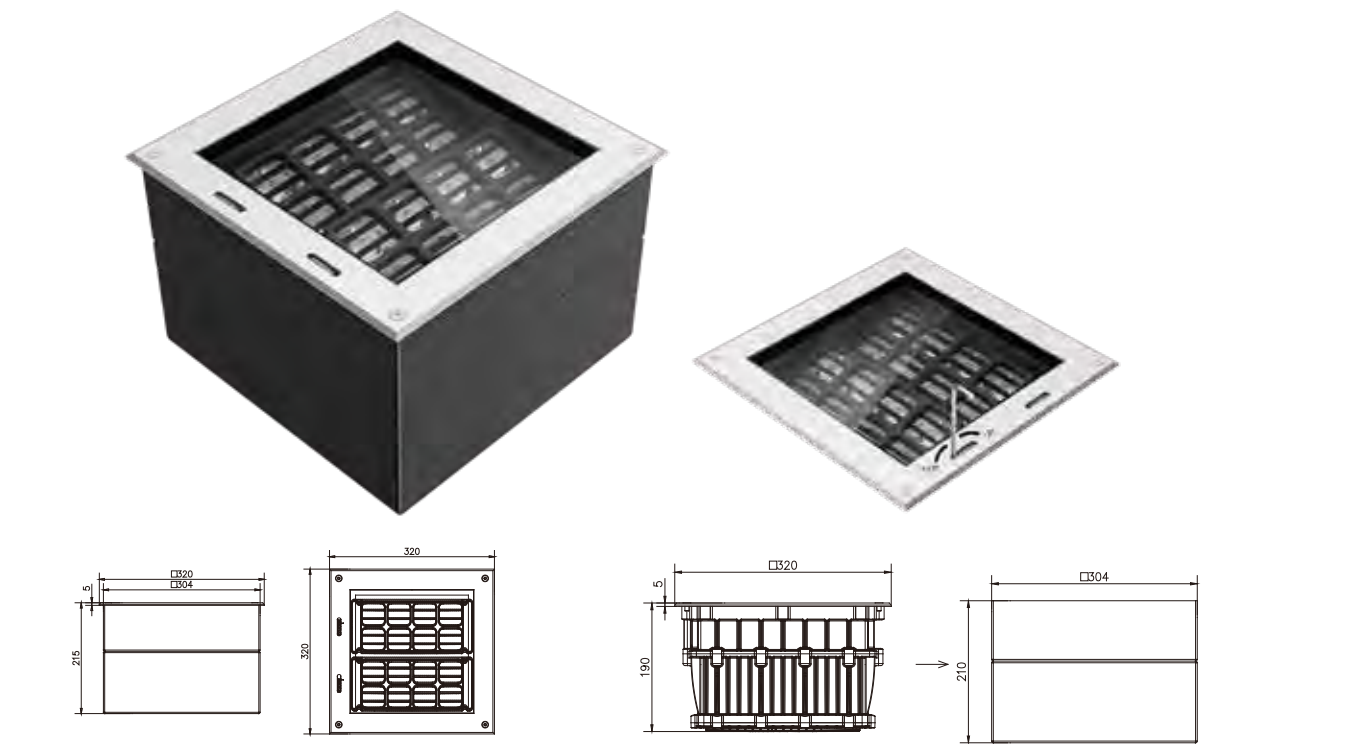


技术参数 Specification

产品型号/ Product Code	SL2270M-16	SL2270E-16	SL2270N-16KP	SL2270F-16	SL2270C-64	SL2270A-144
LED品牌/ LED Brand	CREE	CREE XP-L	RGBWCLA 7in1 Keepower	CREE/OSRAM 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	16pcs	16pcs	16pcs	16pcs	64pcs	144pcs
额定功率/ Rated Power	120W	120W	150W	150W	120W	150W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBWCLA	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	10° 15° 20° 30° 15x60°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	DMX512/RDM	CC/DALI/0-10V	CC
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	26pcs	26pcs	26pcs	40pcs	26pcs	40pcs

Inground Light Series
SL2269

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

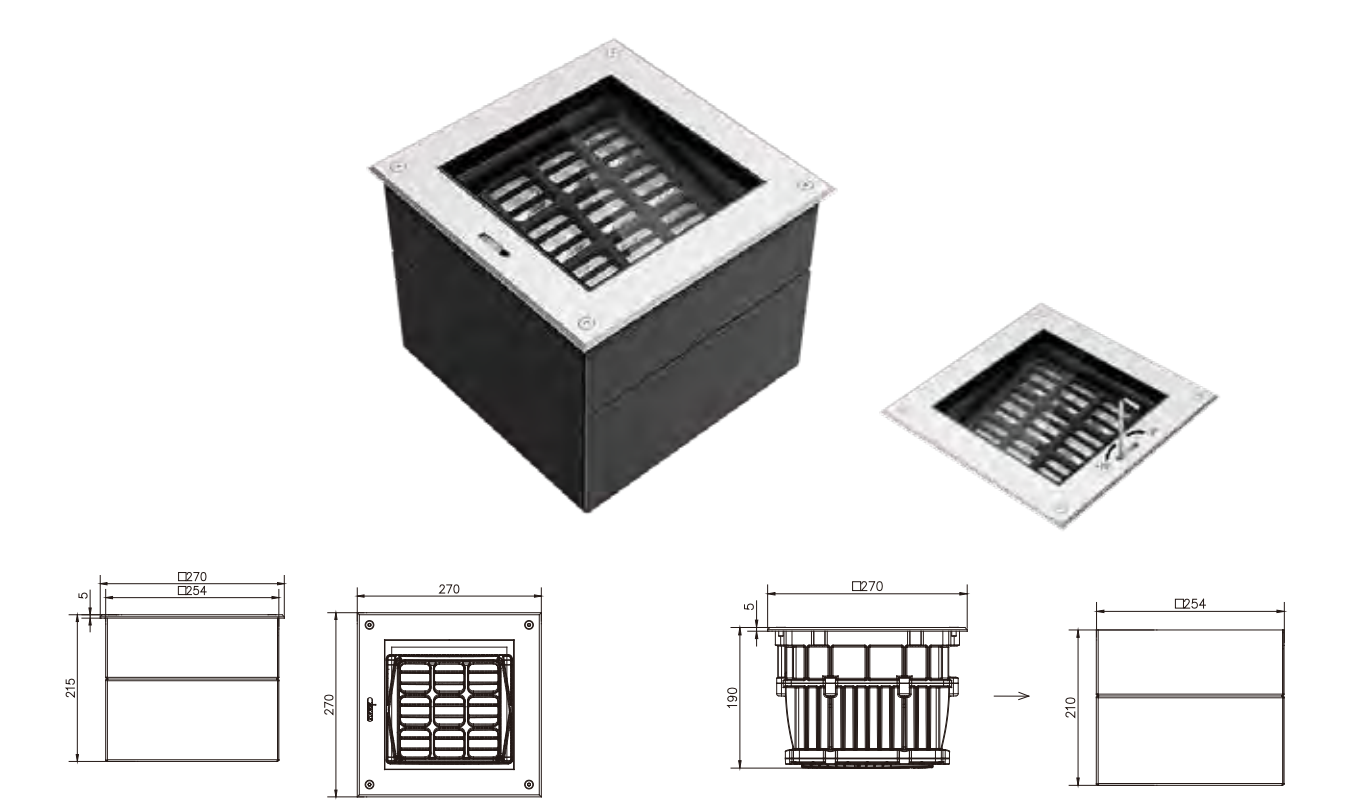


技术参数 Specification

产品型号/ Product Code	SL2269M-9	SL2269E-9	SL2269F-9	SL2269C-36	SL2269A-81
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	36pcs	81pcs
额定功率/ Rated Power	70W	80W	90W	80W	90W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	CC
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	26pcs	26pcs	40pcs	26pcs	40pcs

Inground Light Series
SL2264

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

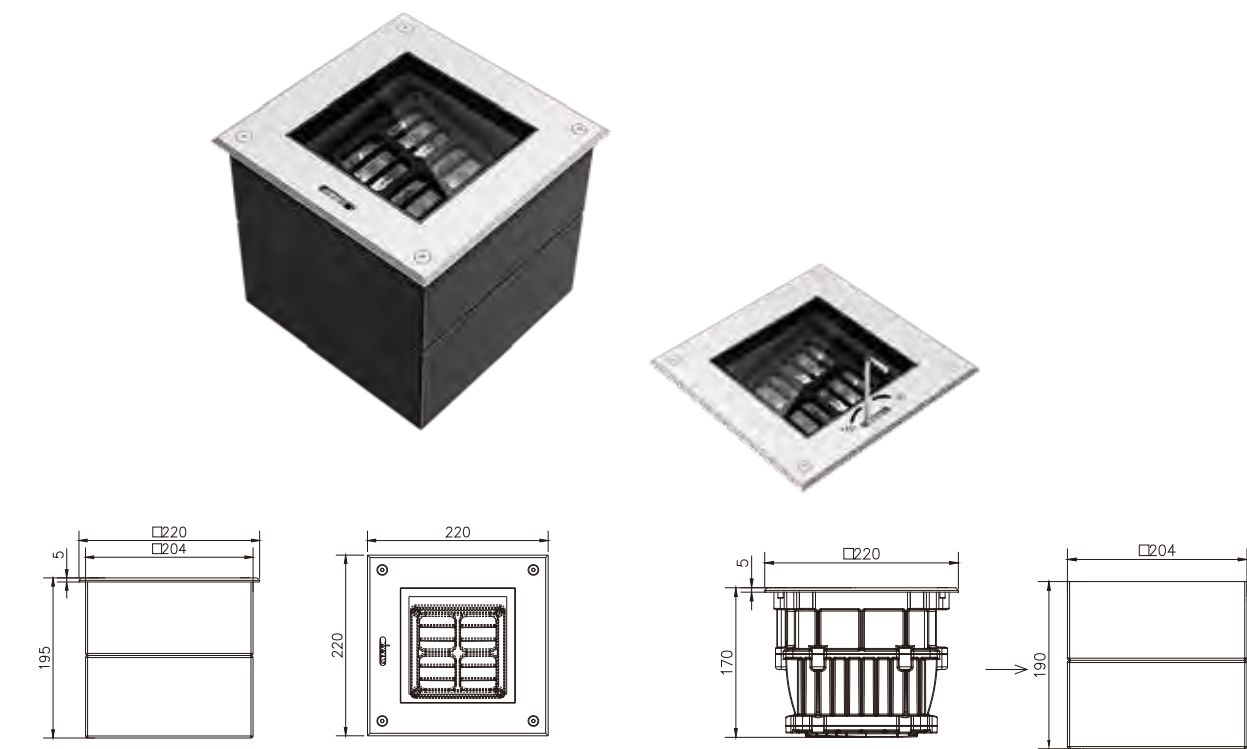

技术参数 Specification

产品型号/ Product Code	SL2264M-4	SL2264E-4	SL2264F-4	SL2264C-16	SL2264A-36
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	4pcs	4pcs	4pcs	16pcs	36pcs
额定功率/ Rated Power	30W	30W	40W	30W	40W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-264V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	26pcs	26pcs	40pcs	26pcs	40pcs

Inground Light Series
SL2169C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



技术参数 Specification



产品型号/ Product Code	SL2169CM-9	SL2169CE-9	SL2169CF-9	SL2169CC-36	SL2169CA-81
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	9pcs	9pcs	9pcs	36pcs	81pcs
额定功率/ Rated Power	70W	80W	90W	80W	90W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100V-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	CC/DALI/0-10V	CC	DMX512	CC/DALI/0-10V	DMX512
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	14pcs	14pcs	14pcs	14pcs	14pcs



Inground Light Series

SL2166C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





技术参数 Specification

产品型号/ Product Code	SL2166CM-6	SL2166CE-6	SL2166CF-6	SL2166CC-24	SL2166CA-54
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	6pcs	6pcs	6pcs	24pcs	54pcs
额定功率/ Rated Power	40W	50W	60W	50W	60W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100V-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	CC
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃	-25℃-50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	20pcs	20pcs	20pcs	20pcs	20pcs

Inground Light Series
SL2164C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

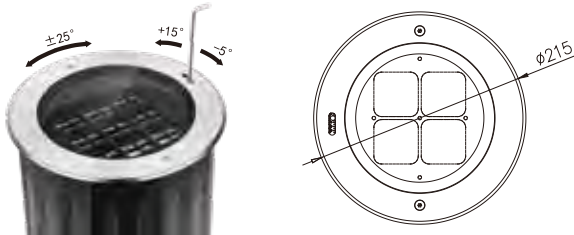



技术参数 Specification

产品型号/ Product Code	SL2164CM-4	SL2164CE-4	SL2164CF-4	SL2164CC-16	SL2164CA-36
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	4pcs	4pcs	4pcs	16pcs	36pcs
额定功率/ Rated Power	30W	30W	40W	30W	40W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100V-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	DMX512
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	30pcs	30pcs	30pcs	30pcs	30pcs

Inground Light Series
SL2162C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

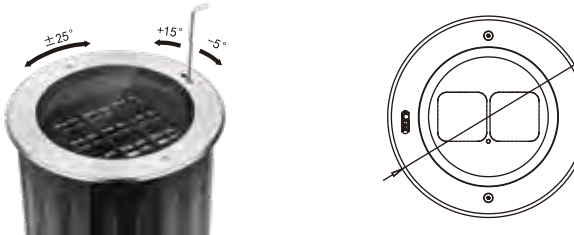


技术参数 Specification

产品型号/ Product Code	SL2162CM-2	SL2162CE-2	SL2162CF-2	SL2162CC-8	SL2162CA-18
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	2pcs	2pcs	2pcs	8pcs	18pcs
额定功率/ Rated Power	16W	20W	20W	20W	20W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100V-305V	AC100V-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	DMX512	CC	DMX512/RDM	CC/DALI/0-10V	DMX512
使用寿命/ Life	50000H	80000H	50000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	60pcs	60pcs	60pcs	60pcs	60pcs

Inground Light Series

SL2161C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

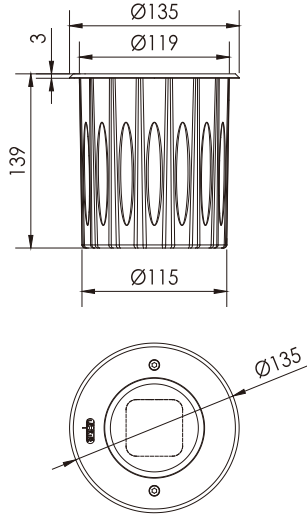


技术参数 Specification

产品型号/ Product Code	SL2161CM-1	SL2161CE-1	SL2161CF-1	SL2161CC-4	SL2161CA-9
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	1pcs	1pcs	1pcs	4pcs	1pcs
额定功率/ Rated Power	10W	10W	10W	10W	10W
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC12V/DC24V	AC100V-305V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10x70° 5x20°	6° 8° 15° 20° 30° 15x60°	8° 12.5° 20° 30° 60° 15x30° 10x60°	12° 15° 24° 20x30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	DMX512
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	120pcs	120pcs	7pcs	120pcs	7pcs

Inground Light Series

SL2160C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

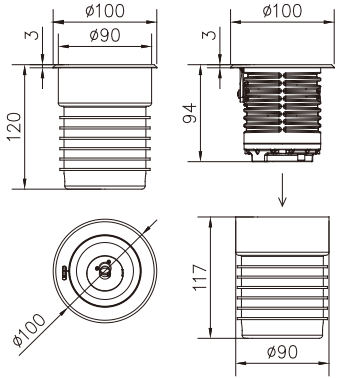

技术参数 Specification

产品型号/ Product Code	SL2160CM-1	SL2160CE-1	SL2160CF-1
LED品牌/ LED Brand	CREE	CREE XP-L	CREE/OSRAM XM-L 4in1
LED数量/ LED Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	6W	6W	10W
输入电压/ Input Voltage	AC100-264V / DC12V	AC100-264V / DC12V	DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10x70° 5x20°	9° 15° 20° 30° 45° 15x60°
控制方式/ Control Mode	CC	CC	DMX512
使用寿命/ Life	50000H	80000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	60pcs	60pcs	60pcs

Inground Light Series
SL2152C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




产品简介
Product Introduction

- 一、高功率LED地埋灯，外型时尚美观；灯体采用加大的散热结构设计，灯具预埋筒采用铝合金材质模压成型，表面静电喷塑处理，具备优良的结构强度和防腐能力，比普通的工程塑料材质导热率高出200倍以上，满足LED灯体向外部混凝土和土壤的热传导，充分保证LED的稳定性和长寿命。
- 二、不锈钢面板；灯体采用高强度压铸铝成型；灯罩采用高强度钢化玻璃.抗冲击耐磨擦。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.
- 2、Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数
Specification

产品型号Product Code	SL2152CC-36	SL2152CB-36
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	36pcs	36pcs
额定功率Rated Power	72W	56W
输入电压Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	RGB/Single	RGB/Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式Control Mode	DMX512/CC	DMX512/CC
使用寿命Life	80000H	80000H
防护等级Protection Grade	IP67	IP67
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	2/18(pcs)	2/22(pcs)

配光曲线 (半角)
Distribution Curve Flux (SBC Case)

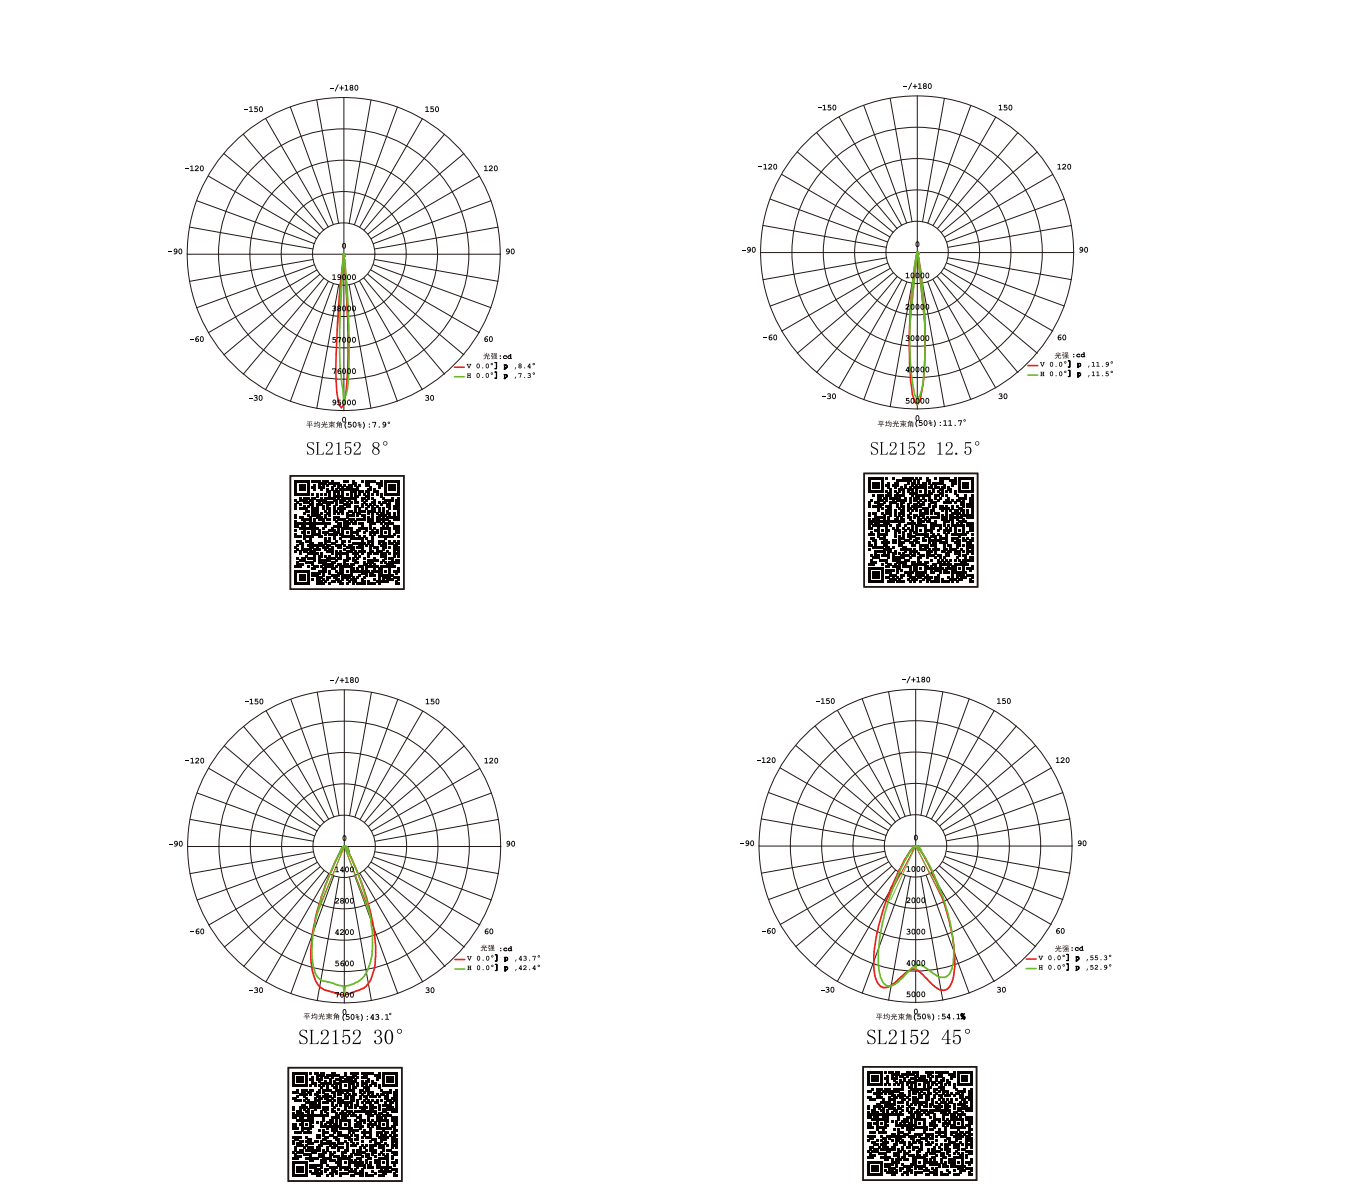

Inground Light Series
SL2150C

圆孔格栅 Round-meshed gril		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb gril		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	




产品简介 Product Introduction



- 一、高功率LED地埋灯，外型时尚美观；灯体采用加大的散热结构设计，灯具预埋筒采用铝合金材质模压成型，表面静电喷塑处理，具备优良的结构强度和防腐能力，比普通的工程塑料材质导热率高出200倍以上，满足LED灯体向外部混凝土和土壤的热传导，充分保证LED的稳定性和长寿命。
二、不锈钢面板；灯体采用高强度压铸铝成型；灯罩采用高强度钢化玻璃.抗冲击耐摩擦。
三、采用美国CREE 原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.
 - Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.
 - Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
 - Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/Product Code	SL2150CE-12	SL2150CD-12	SL2150CC-24	SL2150CB-24	SL2150CF-12	SL2150CB-64
LED品牌 LED Brand	CREE	CREE	CREE	CREE	CREE RGBW 4 in 1	CREE
LED数量 LED Quantity	12pcs	12pcs	24pcs	24pcs	12pcs	64pcs
额定功率 Rated Power	60W	42W	60W	42W	100W	100W
输入电压 Input Voltage	AC100-240V	AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC36V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	RGB/Single	RGB/Single	RGBW	RGBW
发光角度 Beam Angle	6° 8° 12° 20° 30° 60° 10x70°		8° 12.5° 20° 30° 45° 60° 15x30° 10x60°		9° 15° 20° 30° 45° 15x60°	12° 30° 55° 25x45°
控制方式 Control Mode	CC	CC	DMX512/CC	DMX512/CC	DMX512	DMX512
使用寿命 Life	80000H	80000H	80000H	80000H	80000H	80000H
防护等级 Protection Grade	IP67	IP67	IP67	IP67	IP67	IP67
环境温度 Ambient Temperature	- 25℃ ~ 50℃		- 25℃ ~ 50℃		- 25℃ ~ 50℃	
环境湿度 Ambient Humidity	10% ~ 90%°		10% ~ 90%		10% ~ 90%	
串联数量/ In series(max)	22pcs	30pcs	3/22(pcs)	3/30(pcs)	1/12(pcs)	1/12(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

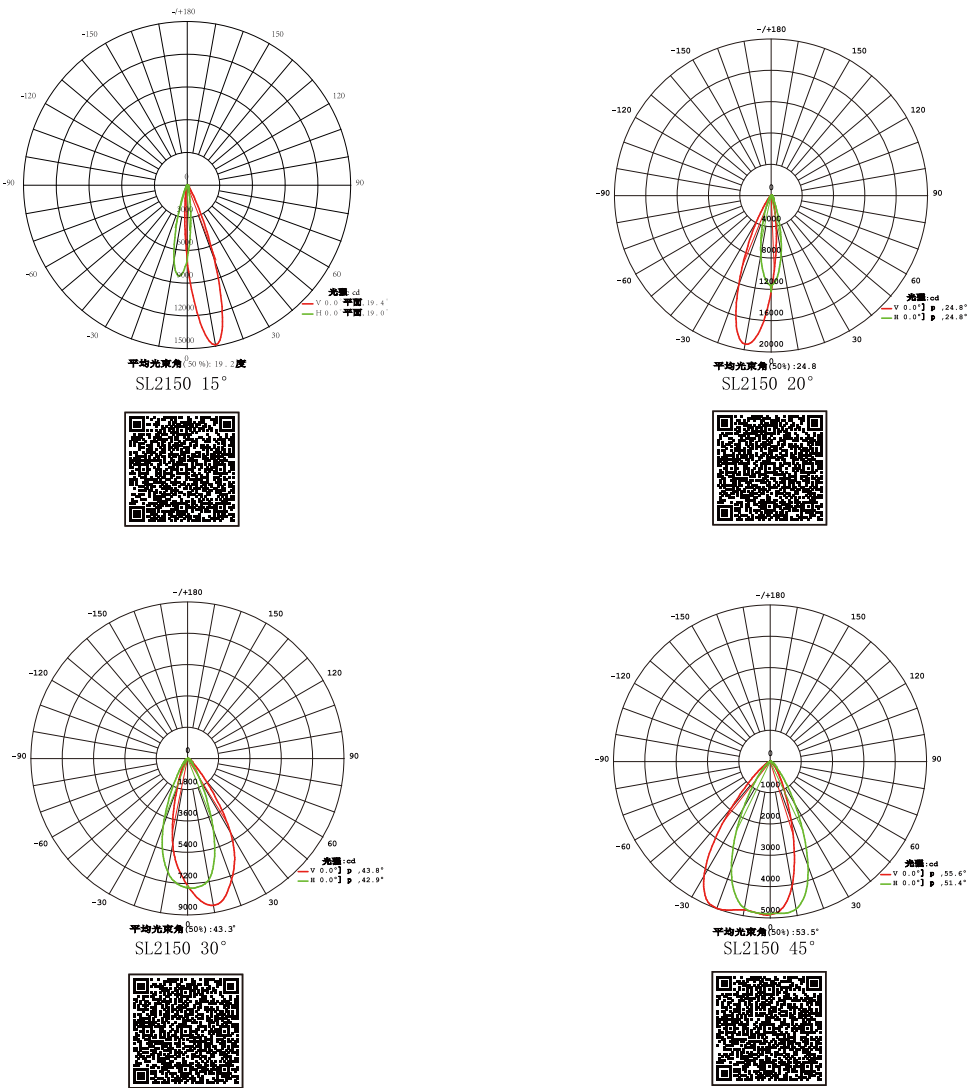


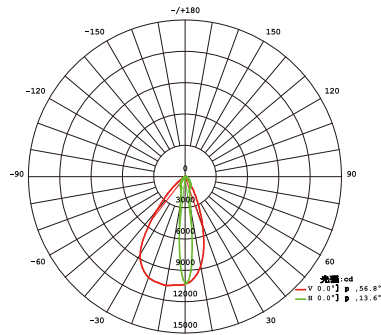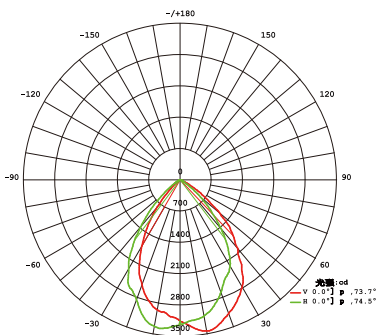

Inground Light Series

SL2130C




圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

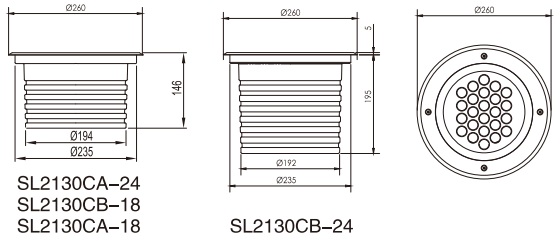

产品简介 Product Introduction

- 一、高功率LED埋灯，外型时尚美观；灯体采用加大的散热结构设计，灯具预埋筒采用铝合金材质模压成型，表面静电喷塑处理，具备优良的结构强度和防腐能力，比普通的工程塑料材质导热率高出200倍以上，满足LED灯体向外部混凝土和土壤的热传导，充分保证LED的稳定性和长寿命。
- 二、不锈钢面板；灯体采用高强度压铸铝成型；灯罩采用高强度钢化玻璃.抗冲击耐磨擦。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性优良；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、High power LED underground light, fashionable and beautiful appearance. The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's, meet the LED light body requirement for heat conduct to the outside of concrete and land, fully ensure the stability and long lifespan of LED fixture.
- 2、Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

配光曲线 (半角) Distribution Curve Flux (SBC Case)

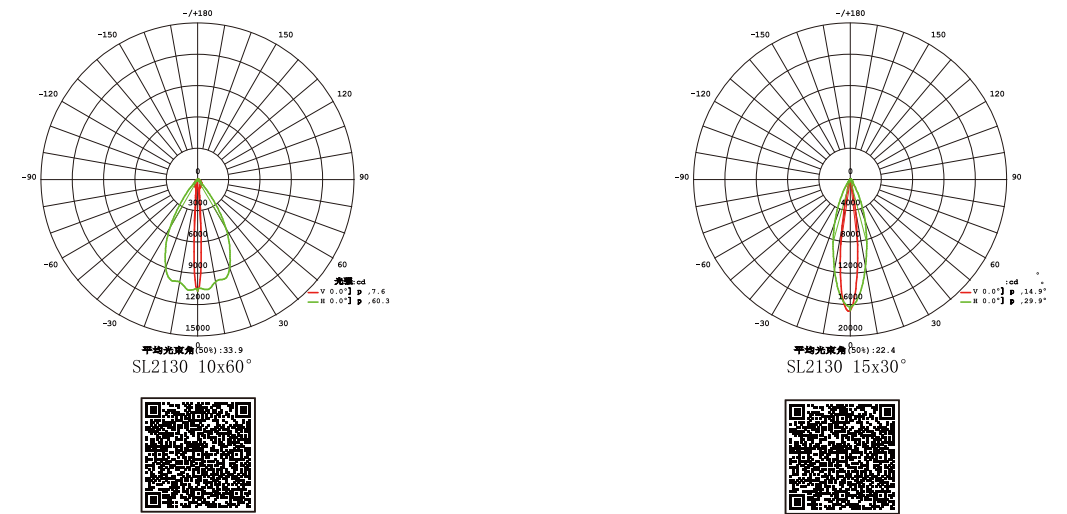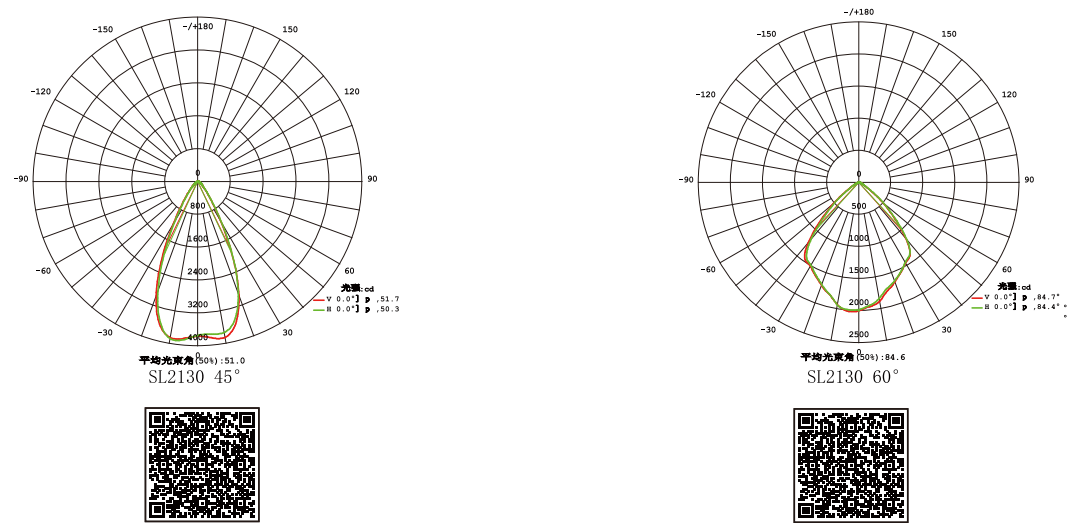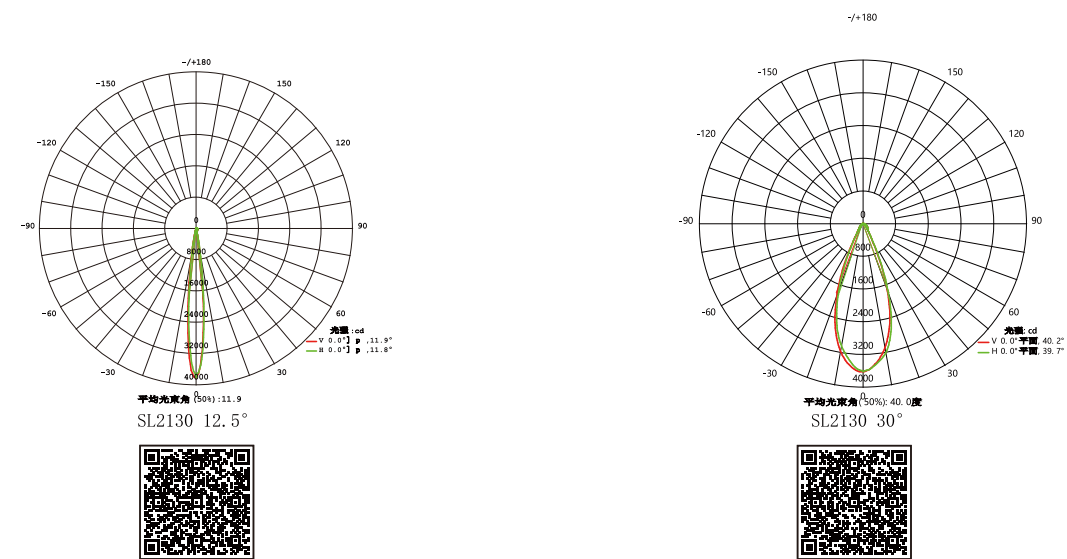




技术参数 Specification

产品型号/Product Code	SL2130CB-24	SL2130CA-24	SL2130CB-18	SL2130CA-18	SL2130CF-9
LED品牌 LED Brand	CREE	CREE	CREE	CREE	CREE RGBW 4 in 1
LED数量 LED Quantity	24pcs	24pcs	18pcs	18pcs	9pcs
额定功率 Rated Power	40W	30W	30W	21W	72W
输入电压 Input Voltage	DC36V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 Color	RGB/Single	RGB/Single	RGB/Single	RGB/Single	RGBW
发光角度 Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°				9° 15° 20° 30° 15x60°
控制方式 Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512
使用寿命 Life	50000H	50000H	50000H	50000H	50000H
防护等级 Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%°	10% ~ 90%°	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	5/30(pcs)	4/44(pcs)	4/44(pcs)	6/60(pcs)	2/18(pcs)









Inground Light Series
 SL2128C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2,5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3,5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



配光曲线 (半角) Distribution Curve Flux (SBC Case)

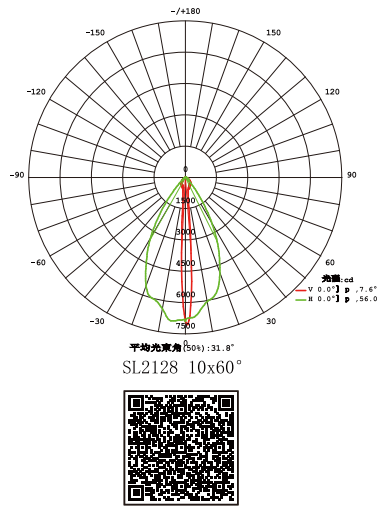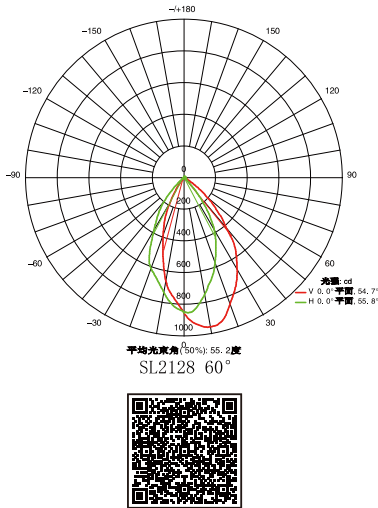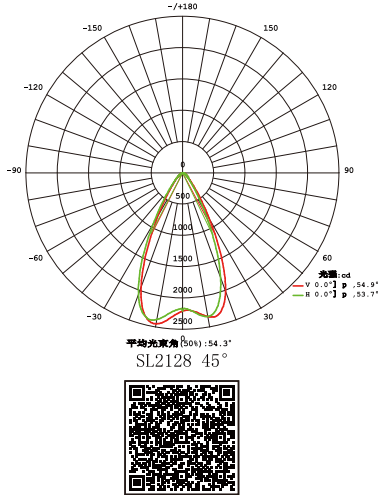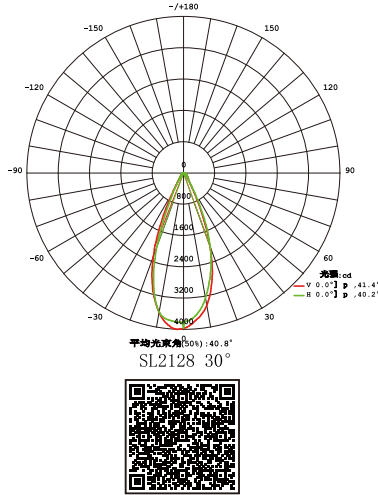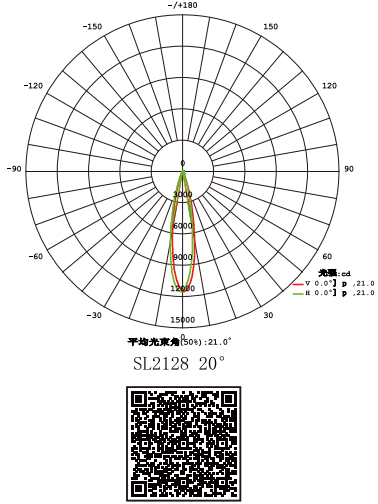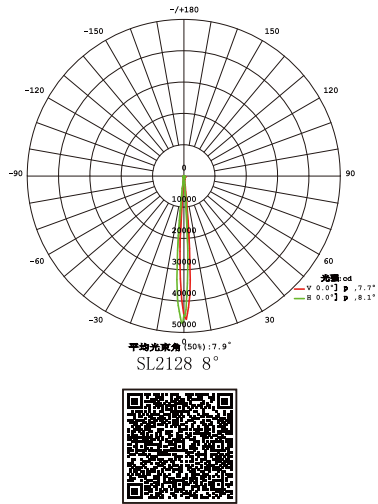

技术参数 Specification


产品型号Product Code	SL2128CC-12	SL2128CA-12
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	12pcs	12pcs
额定功率Rated Power	32W	14W
输入电压Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	RGB/Single	RGB/Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式Control Mode	DMX512/CC	DMX512/CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP67	IP67
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	4/40(pcs)	10/90(pcs)









Inground Light Series

SL2112C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

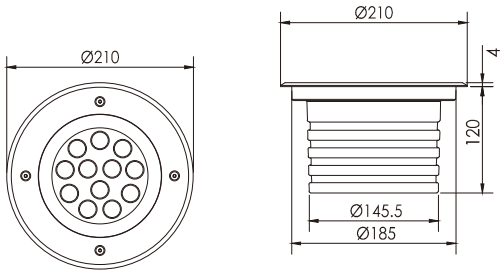

配光曲线 (半角) Distribution Curve Flux (SBC Case)

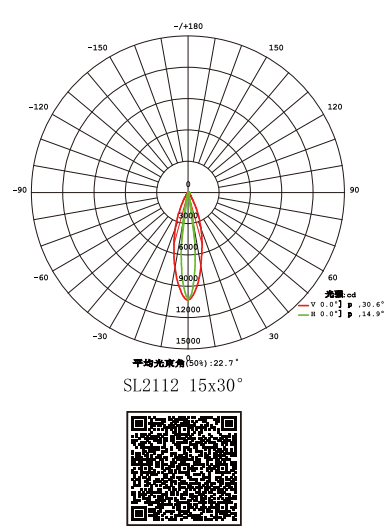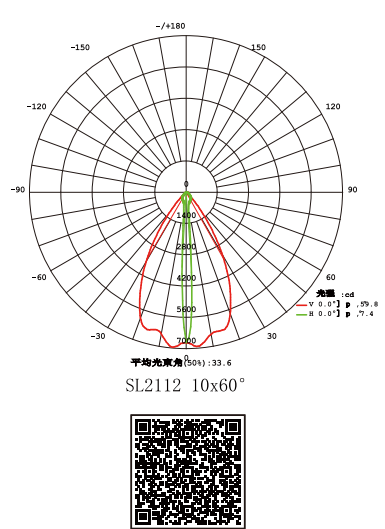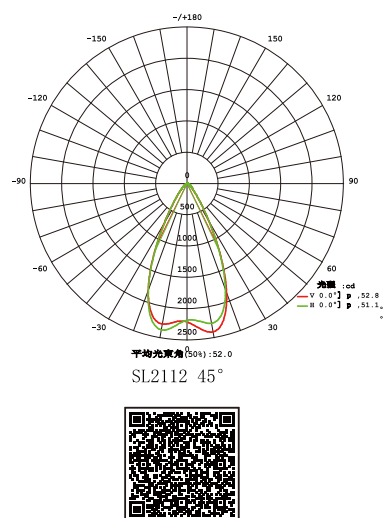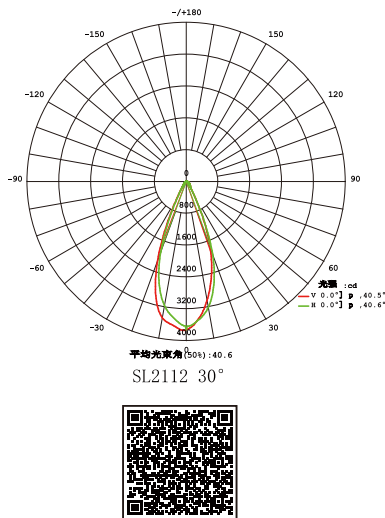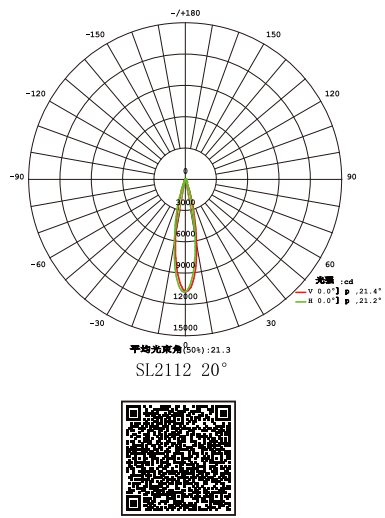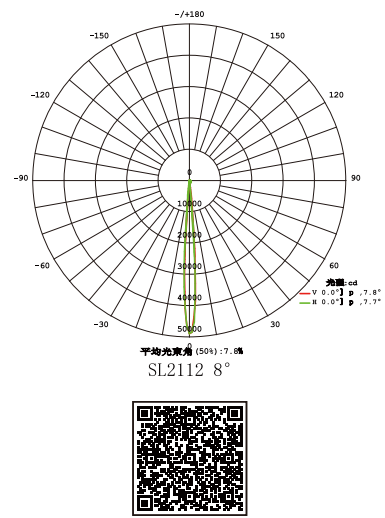


技术参数 Specification

产品型号Product Code	SL2112CB-12	SL2112CA-12
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	12pcs	12pcs
额定功率Rated Power	22W	14W
输入电压Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	RGB/Single	RGB/Single
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式Control Mode	DMX512/CC	DMX512/CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP67	IP67
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	6/60(pcs)	10/90(pcs)









Inground Light Series
 SL2110C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

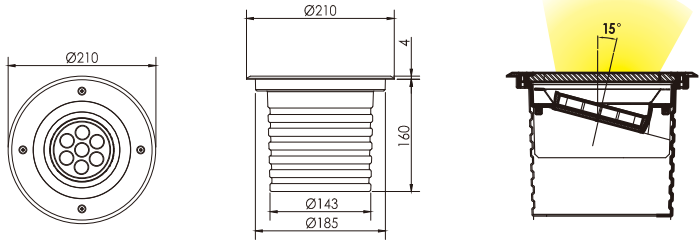

配光曲线 (半角) Distribution Curve Flux (SBC Case)

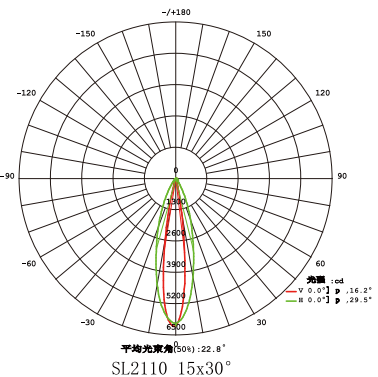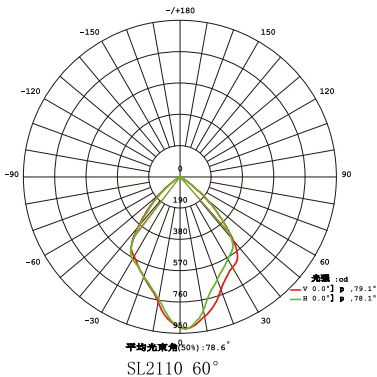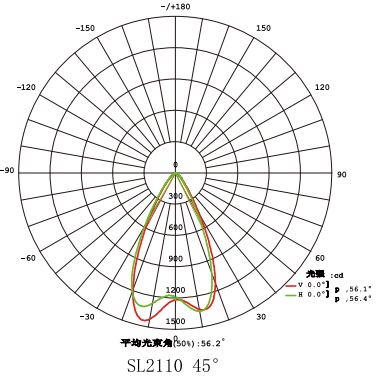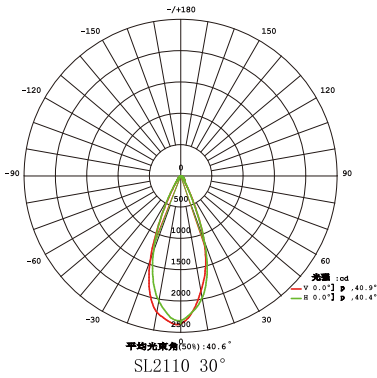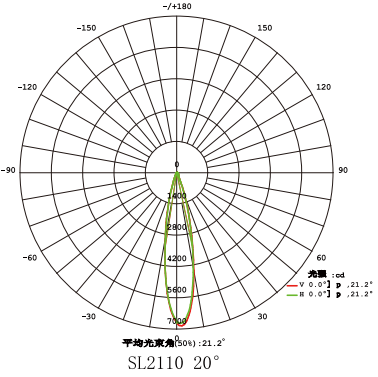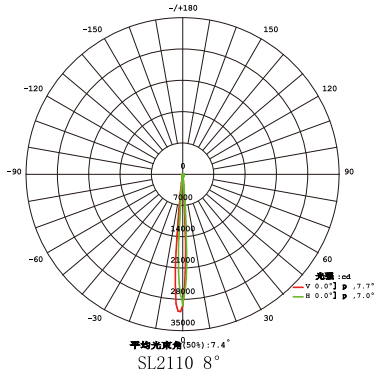




技术参数 Specification

产品型号Product Code	SL2110CC-7	SL2110CC-6
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	7pcs	6pcs
额定功率Rated Power	16W	14W
输入电压Input Voltage	AC100-240V	DC24V/AC100-240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	Single	RGB
发光角度Beam Angle	8° 12.5° 20° 30° 45° 60° 15x30° 10x60°	
控制方式Control Mode	CC	DMX512/CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP67	IP67
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	80pcs	10/90pcs

Inground Light Series

SL2109C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	







SL2109C-C12



技术参数 Specification

产品型号/ Product Code	SL2109CB-9	SL2109CA-9	SL2109C-C12
Led品牌/ Led Brand	CREE	CREE	CREE COB
Led数量/ Led Quantity	9pcs	9pcs	1pcs
额定功率/ Rated Power	16W	11W	12W
输入电压/ Input Voltage	DC12V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGB/Single	RGB/Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60°		25° Tilt,10°
控制方式/ Control Mode	DMX512/CC	DMX512/CC	CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	9/80(pcs)	3/120(pcs)	12/110(pcs)



配光曲线 (半角) Distribution Curve Flux (SBC Case)

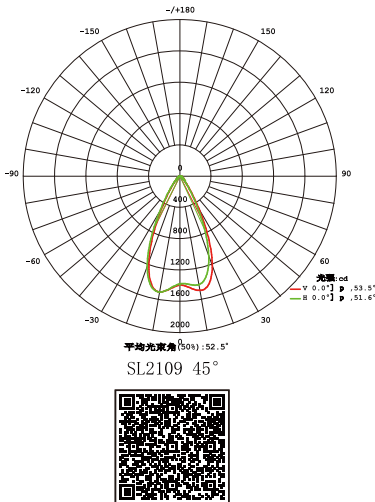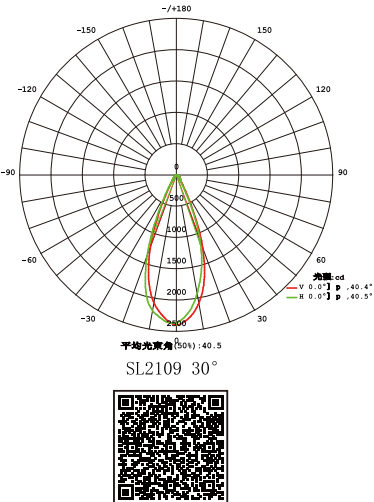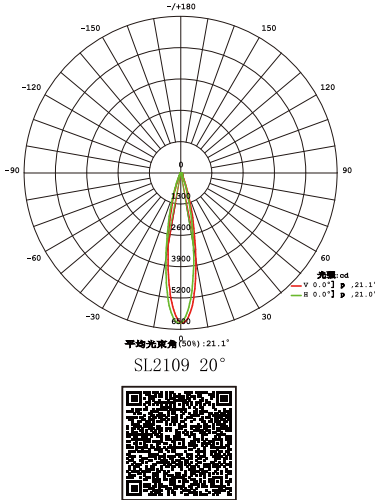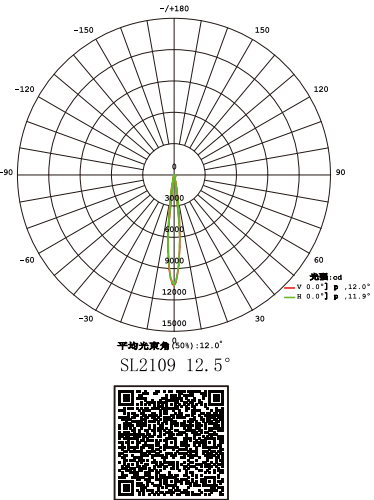

Inground Light Series

SL2106C

圆孔格栅 Round-meshed grill	zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics	zoomneo 30° 三次光学 zoomneo 30° The third optics
蜂窝格栅 Honeycomb glass	zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics	zoomneo 40° 三次光学 zoomneo 40° The third optics
防滑玻璃 Anti-slip glass	zoomneo 5° 三次光学 zoomneo 5° The third optics	zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics
	zoomneo 10° 三次光学 zoomneo 10° The third optics	zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics
	zoomneo 15° 三次光学 zoomneo 15° The third optics	zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics
	zoomneo 20° 三次光学 zoomneo 20° The third optics	zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics







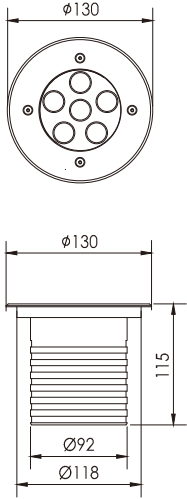


SL2106C-C8

技术参数 Specification



产品型号/ Product Code	SL2106CB-6	SL2106CA-6	SL2106C-C8
Led品牌/ Led Brand	CREE	CREE	CREE COB
Led数量/ Led Quantity	6pcs	6pcs	1pcs
额定功率/ Rated Power	12W	7W	8W
输入电压/ Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V	DC24V/AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGB/Single	RGB/Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60°		25° Tilt.10°
控制方式/ Control Mode	DMX512/CC	DMX512/CC	CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	12/110(pcs)	20/180(pcs)	18/160(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

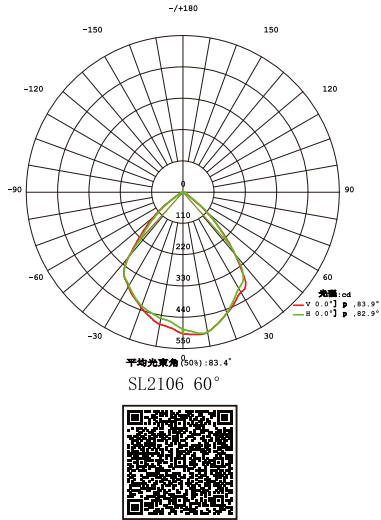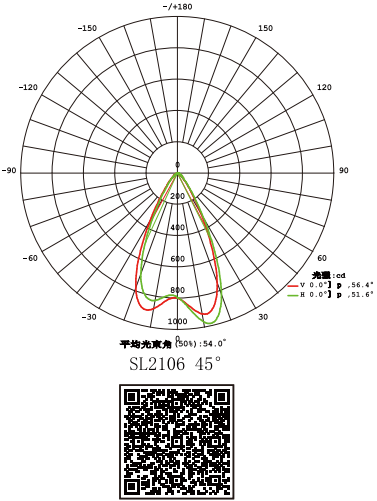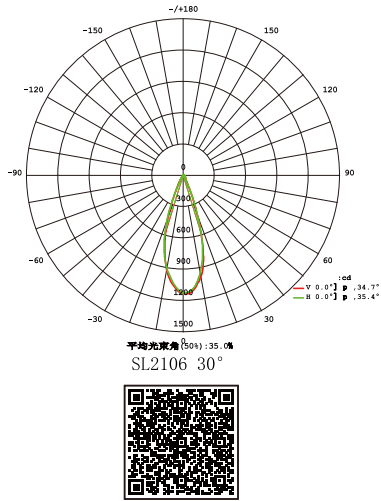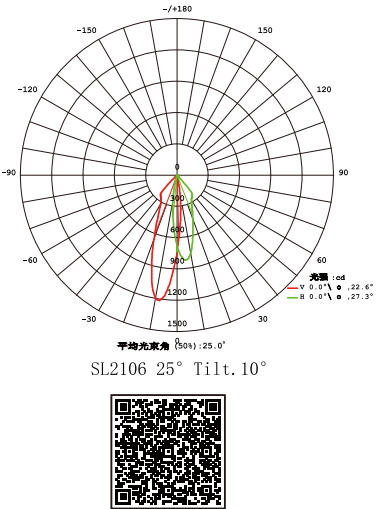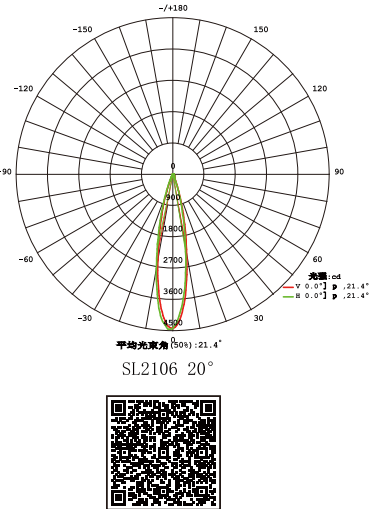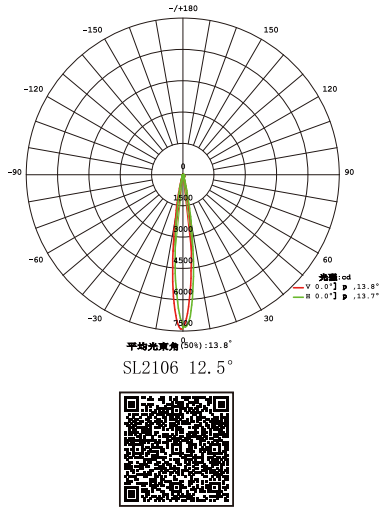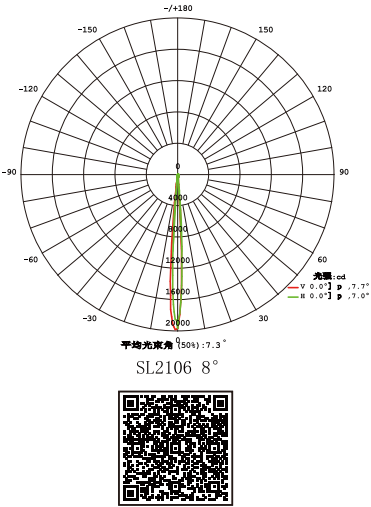


Inground Light Series
SL2103C

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	





SL2103C-C6




技术参数 Specification

产品型号/ Product Code	SL2103CB-3	SL2103CA-3	SL2103C-C6
Led品牌/ Led Brand	CREE	CREE	CREE COB
Led数量/ Led Quantity	3pcs	3pcs	1pcs
额定功率/ Rated Power	6W	3.5W	6W
输入电压/ Input Voltage	DC12V/AC100-240V	DC12V/AC100-240V	DC12V/AC100-240V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGB/Single	RGB/Single	Single
发光角度/ Beam Angle	8° 12.5° 20° 30° 45° 60°		25° Tilt.10°
控制方式/ Control Mode	PWM/CC	PWM/CC	CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	12/200(pcs)	20/300(pcs)	12/200(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

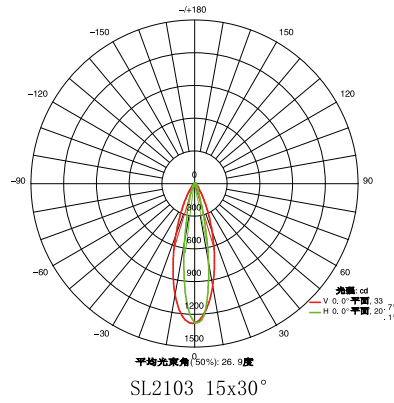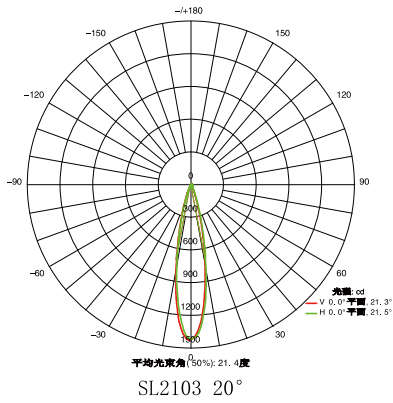

Inground Light Series
 SL2102

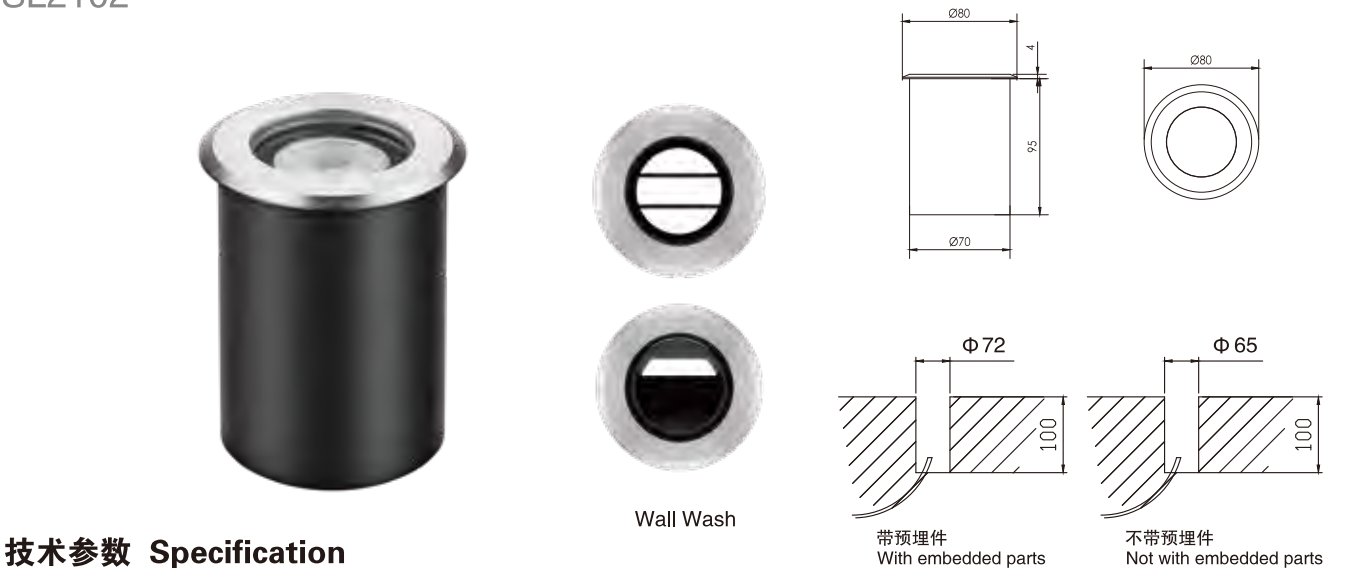


技术参数 Specification

产品型号/Product Code	SL2102E-1	SL2102C-1	SL2102F-1	SL2102A-3
LED品牌/LED Brand	CREE XP-L	CREE	CREE	CREE
LED数量/LED Quantity	1pc	1pc	1pc	3pcs
额定功率/Rated Power	6W	3W	5W	4W
输入电压/Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V	DC24V	DC24V/DC12V
频率/Frequency Range	50/60Hz	50/60Hz	50/60Hz	/
颜色/Color	Single	Single	RGBW 4IN1	Single/RGB
发光角度/Beam Angle	8° 12° 20° 30° 45° 60° 45° Tilt.45° (Wall Wash)	8° 12° 20° 30° 45° 60°	15° 20° 30° 45° 15X60°	8° 12.5° 20° 30° 45° 60°
控制方式/Control Mode	CC	CC	DMX512	DMX512/CC
使用寿命/Life	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP67	IP67	IP67	IP67
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%



Inground Light Series
 SL2101

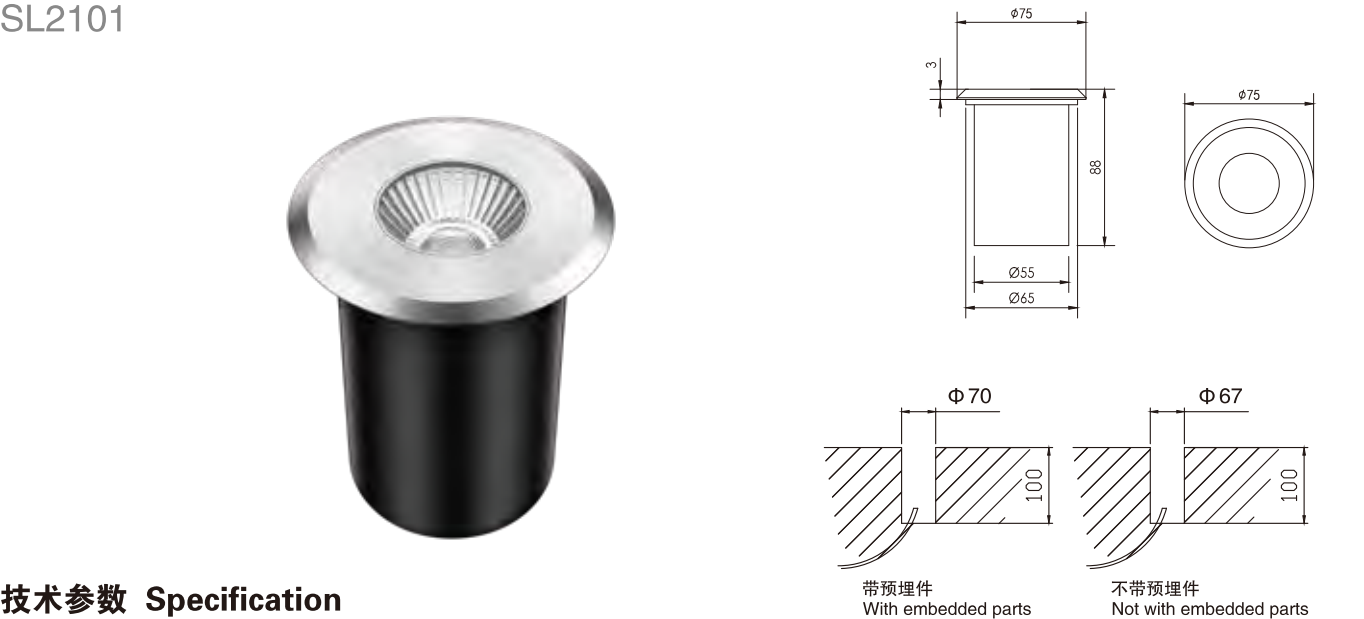


技术参数 Specification

产品型号/Product Code	SL2101A-1
LED品牌/LED Brand	CREE
LED数量/LED Quantity	1pc
额定功率/Rated Power	1.5W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	25° 120°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%



Inground Light Series
 SL21006

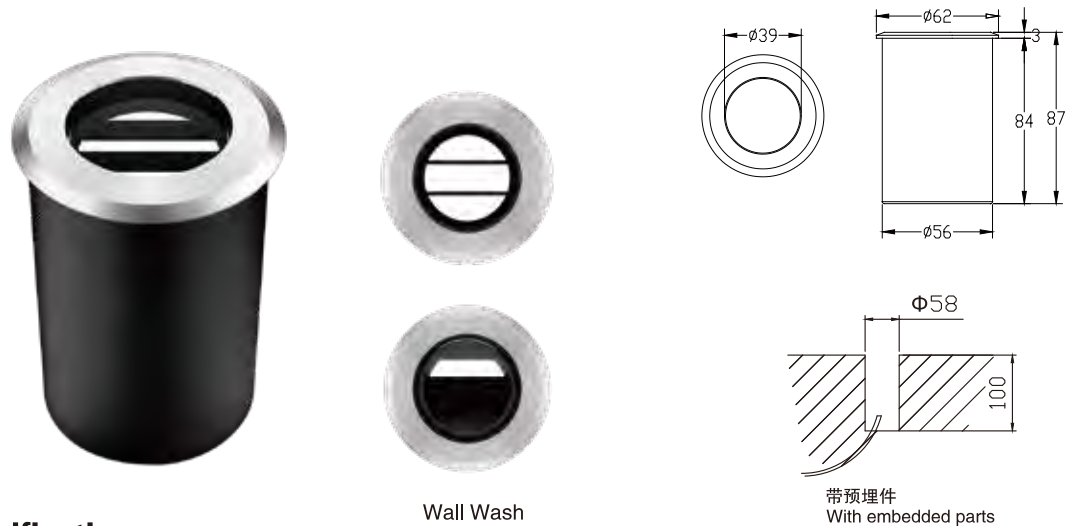


技术参数 Specification

产品型号/Product Code	SL21006E-1	SL21006F-1
LED品牌/LED Brand	CREE XP-L	CREE RGBW 4 in 1
LED数量/LED Quantity	1pc	1pc
额定功率/Rated Power	6W	6W
输入电压/Input Voltage	DC24V / AC100-240V	DC24V / DC12V
频率/Frequency Range	50/60Hz	/
颜色/Color	Single	RGBW
发光角度/Beam Angle	8° 12° 20° 30° 45° 60° 45° Tilt,45° (Wall Wash)	15° 20° 30° 45° 15X60°
控制方式/Control Mode	CC	DMX512
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP66	IP66
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%



Inground Light Series
 SL21005





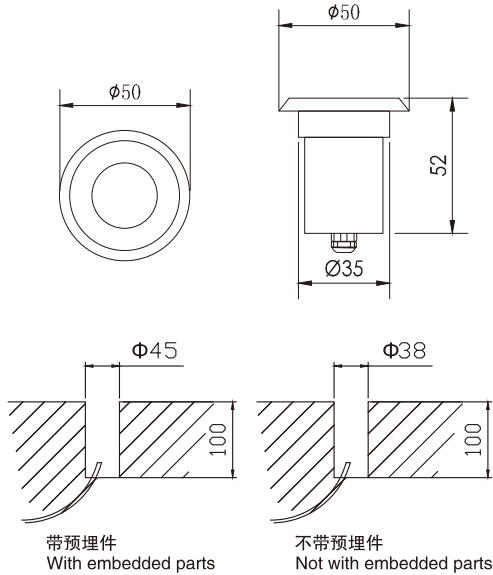


技术参数 Specification


产品型号/Product Code	SL21005A-1	
LED品牌/LED Brand	CREE	
LED数量/LED Quantity	1pc	
额定功率/Rated Power	1.5W	
输入电压/Input Voltage	DC12V/DC24V	
频率/Frequency Range	/	
颜色/Color	RGB/Single	
发光角度/Beam Angle	12.5° 20° 30° 45° 120°	
控制方式/Control Mode	DMX512/PWM/CC	
使用寿命/Life	50000H	
防护等级/Protection Grade	IP67	
环境温度/Ambient Temperature	- 25℃ ~ 50℃	
环境湿度/Ambient Humidity	10% ~ 90%	



配光曲线 (半角) Distribution Curve Flux (SBC Case)

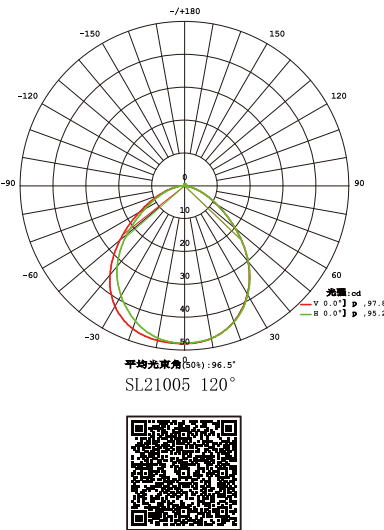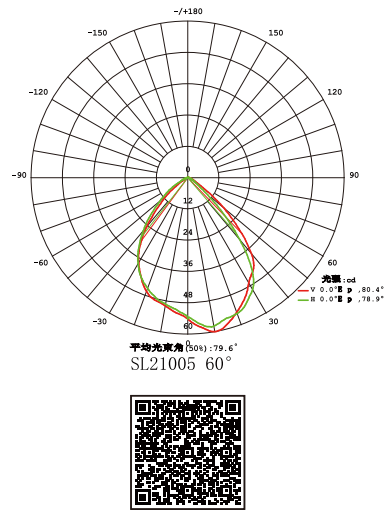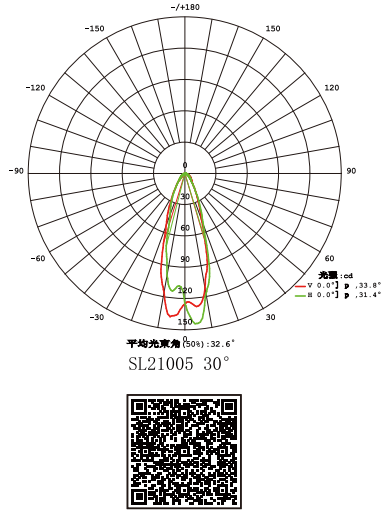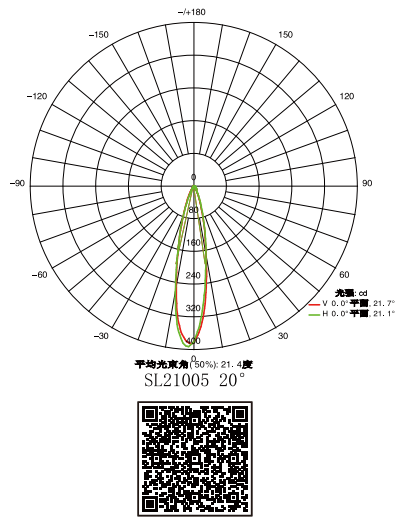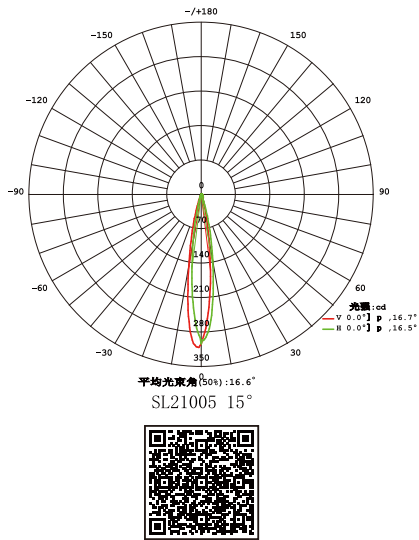

Inground Light Series
SL21003


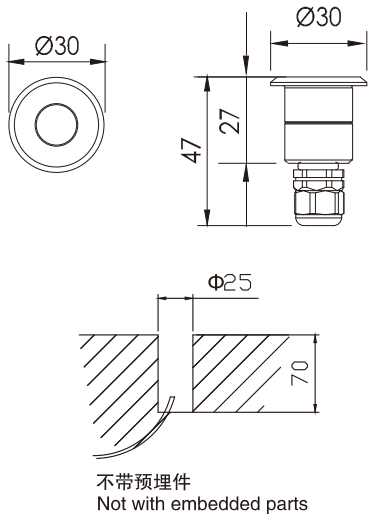


技术参数 Specification

产品型号/Product Code	SL21003A-1
LED品牌/LED Brand	EPISTAR
LED数量/LED Quantity	1pc
额定功率/Rated Power	0.5W
输入电压/Input Voltage	DC12V/DC24V
频率/Frequency Range	/
颜色/Color	Single
发光角度/Beam Angle	120°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	- 25℃~50℃
环境湿度/Ambient Humidity	10%~90%





Inground Light Series
SL2108A

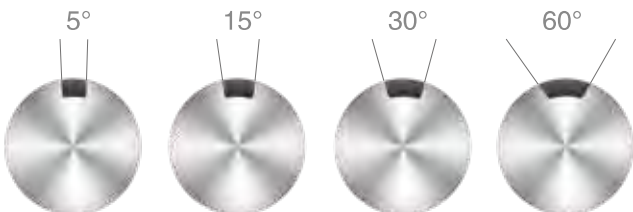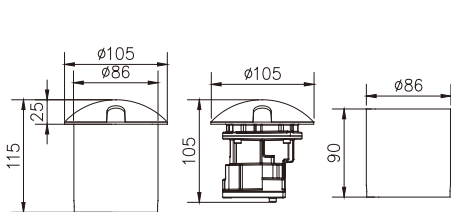

技术参数 Specification

产品型号/Product Code	SL2108AE-1
LED品牌/LED Brand	CREE
LED数量/LED Quantity	1pc
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	5° 15° 30° 60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	- 25℃~50℃
环境湿度/Ambient Humidity	10%~90%


Inground Light Seri es
SL2108B

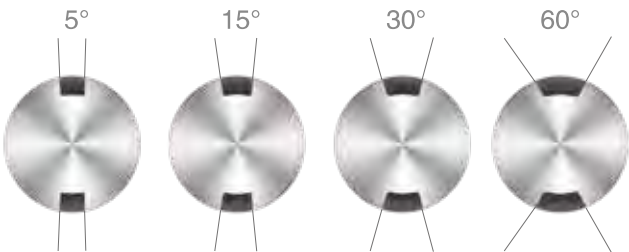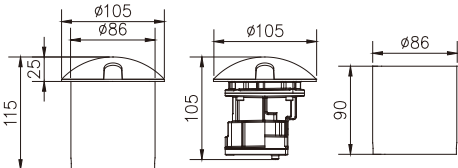

技术参数 Specification

产品型号/Product Code	SL2108BE-2
LED品牌/LED Brand	CREE
LED数量/LED Quantity	2pc
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	2x5° 2x15° 2x30° 2x60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	- 25℃~50℃
环境湿度/Ambient Humidity	10%~90%


Inground Light Series
 SL2104A

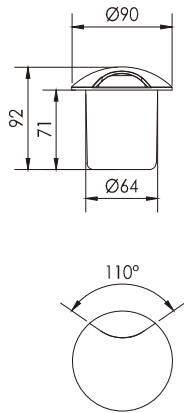


技术参数 Specification

产品型号/Product Code	SL2104AB-1
LED品牌/LED Brand	CREE
LED数量/LED Quantity	1pc
额定功率/Rated Power	3W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

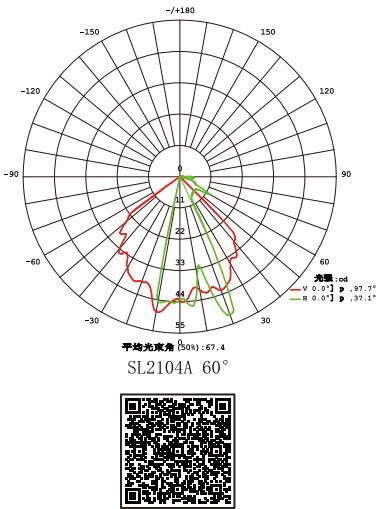


Inground Light Series
 SL2104B

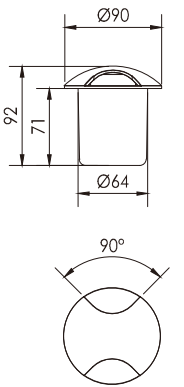

技术参数 Specification

产品型号/Product Code	SL2104BB-2
LED品牌/LED Brand	CREE
LED数量/LED Quantity	2pcs
额定功率/Rated Power	4W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	2x60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

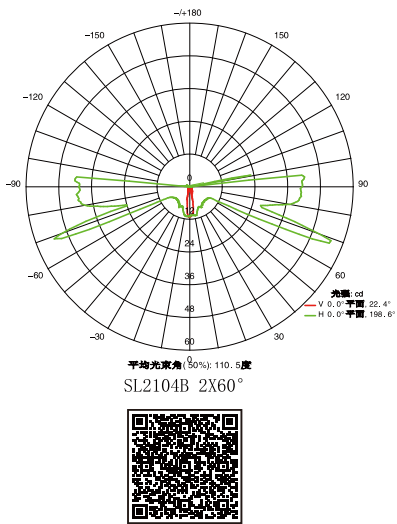


Inground Light Series
 SL2104C



技术参数 Specification

产品型号/Product Code	SL2104CB-4
LED品牌/LED Brand	CREE
LED数量/LED Quantity	4pcs
额定功率/Rated Power	4W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	4x60°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

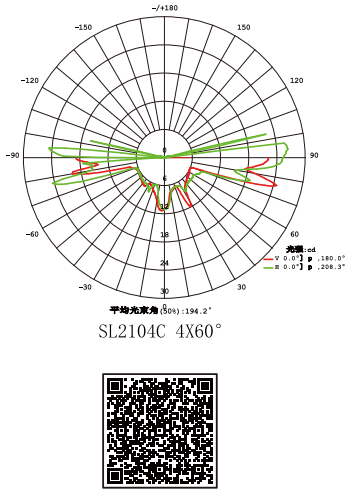


Inground Light Series
 SL2104D



技术参数 Specification

产品型号/Product Code	SL2104DB-12
LED品牌/LED Brand	CREE
LED数量/LED Quantity	4pcs
额定功率/Rated Power	4W
输入电压/Input Voltage	DC24V/AC100-240V
频率/Frequency Range	50/60Hz
颜色/Color	Single
发光角度/Beam Angle	12x15°
控制方式/Control Mode	CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP67
环境温度/Ambient Temperature	-25℃~50℃
环境湿度/Ambient Humidity	10%~90%


配光曲线 (全角) Distribution Curve Flux (SBC Case)

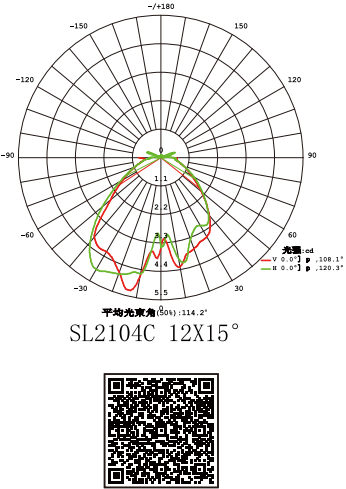

Outline Light Series

SL3315


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2,5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3,5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

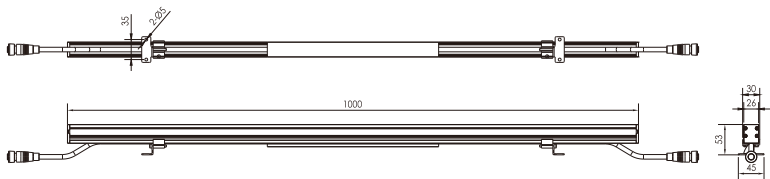


技术参数 Specification

产品型号/Product Code	SL3315-48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W/15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/RGB+W/Single
发光角度/Beam Angle	20° 30° 45° 60° 20x40° 120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10/8(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

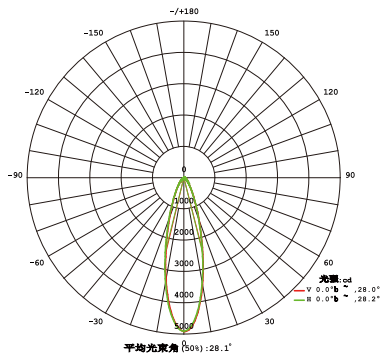

SL3315 30°

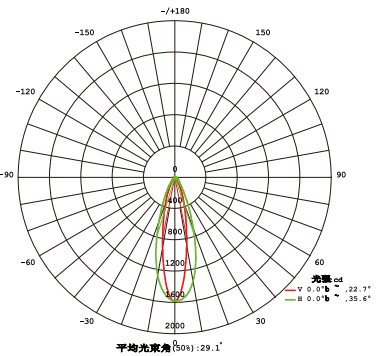


SL3315 25x45°



Outline light series

SL3316


蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

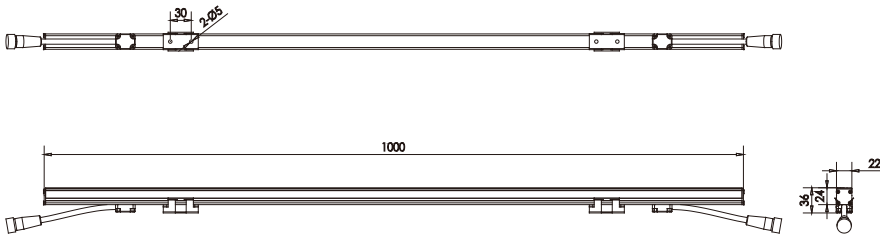


技术参数 Specification

产品型号/Product Code	SL3316-48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W/15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	30° 60° 120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10/8(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

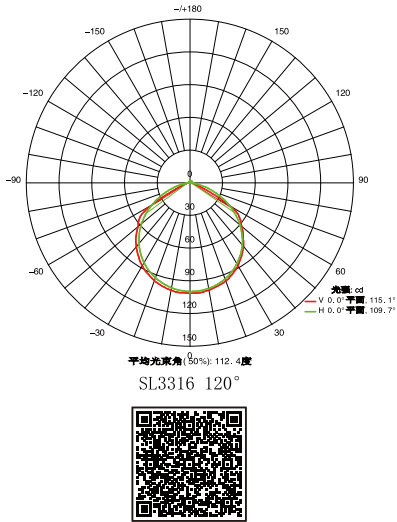

Outline Light Series
SL3317

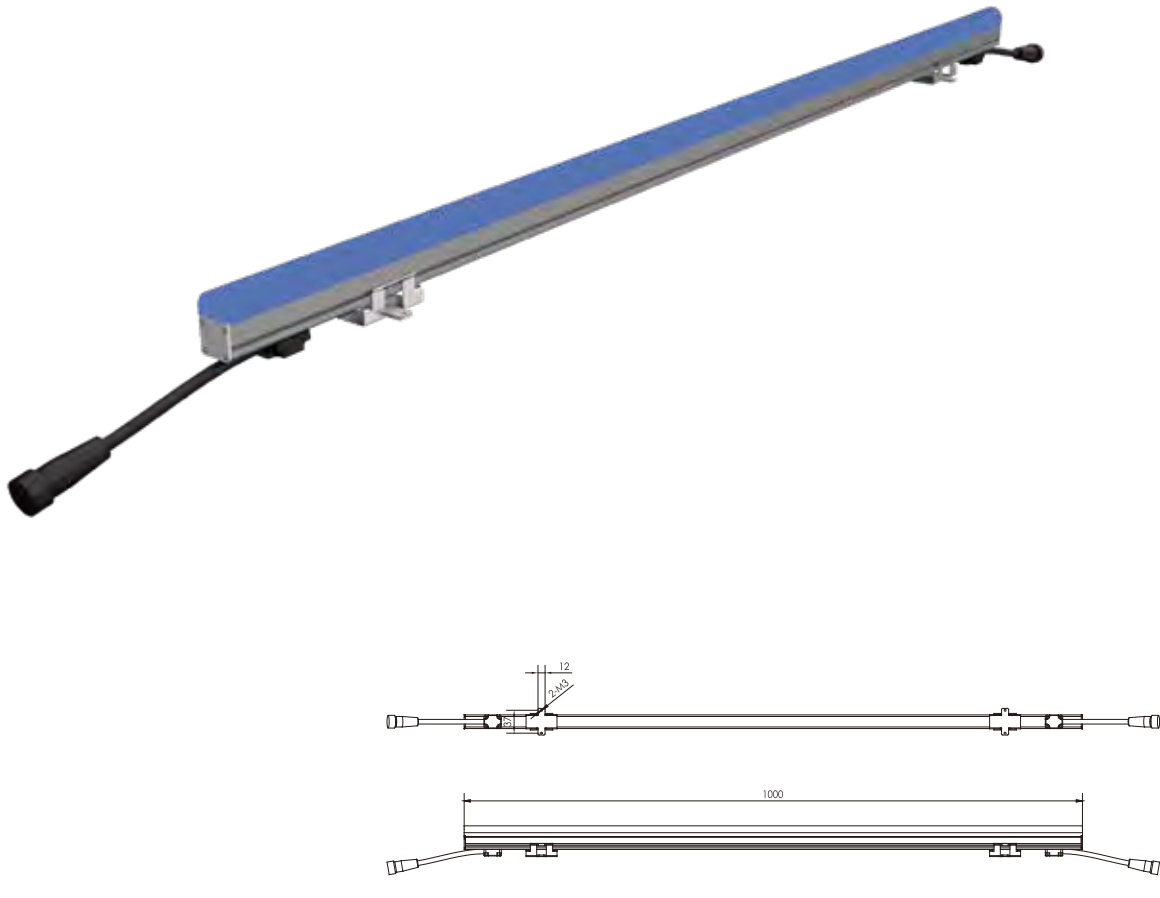


技术参数 Specification

产品型号/Product Code	SL3317-60
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	60pcs
额定功率/Rated Power	15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	>120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10(pcs)

Outline light series
SL3317L





red dot winner 2021

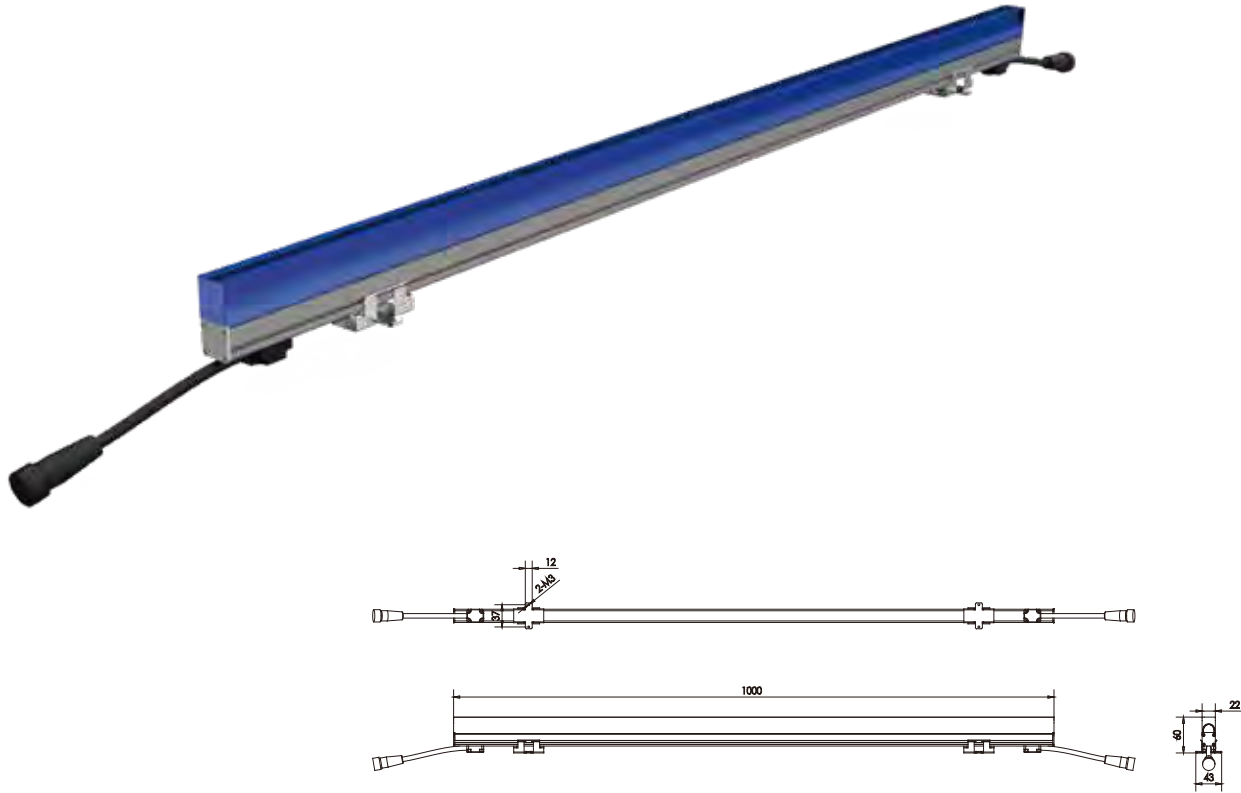

技术参数 Specification

产品型号/Product Code	SL3317L-60
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	60pcs
额定功率/Rated Power	15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	>120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10(pcs)



Outline Light Series
SL3317S

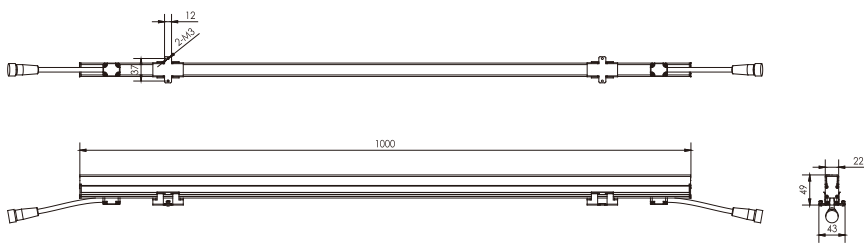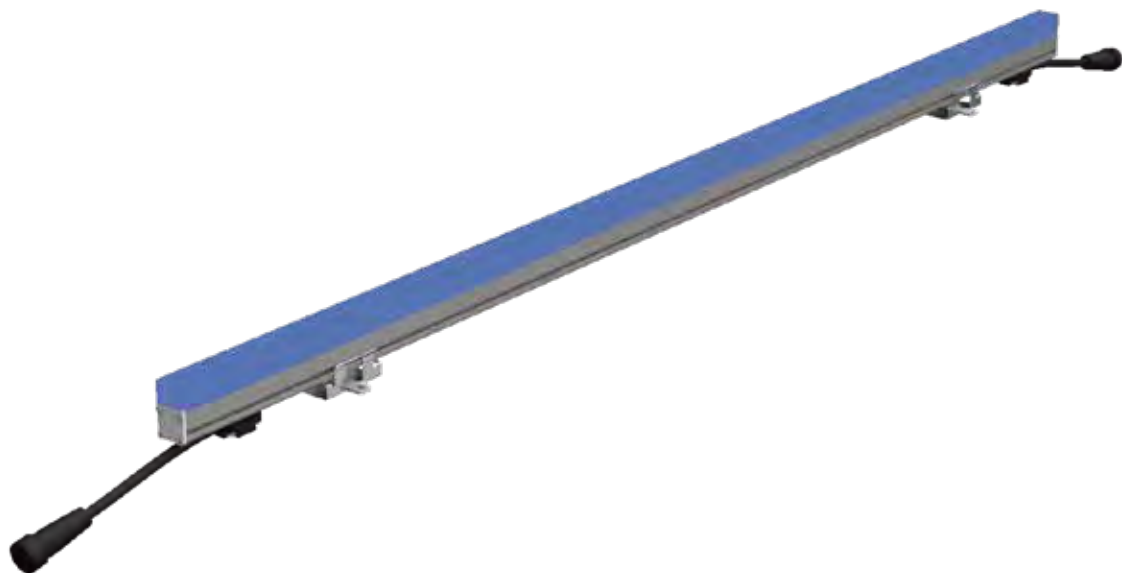

技术参数 Specification

产品型号/Product Code	SL3317S-60
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	60pcs
额定功率/Rated Power	15W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/RGBW/Single
发光角度/Beam Angle	>120°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10(pcs)

Outline light series
SL3321

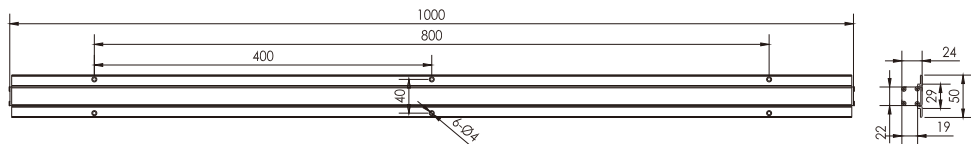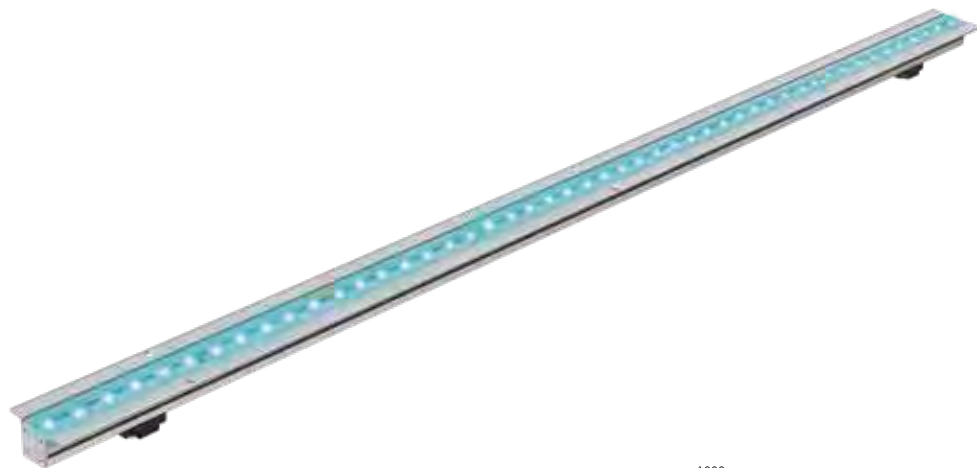


技术参数 Specification

产品型号/Product Code	SL3321-48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/Single
发光角度/Beam Angle	30° 60° 120°
控制方式/Control Model	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%
串联数量/ In series(max)	10/8(pcs)




Outline Light Series
SL3322

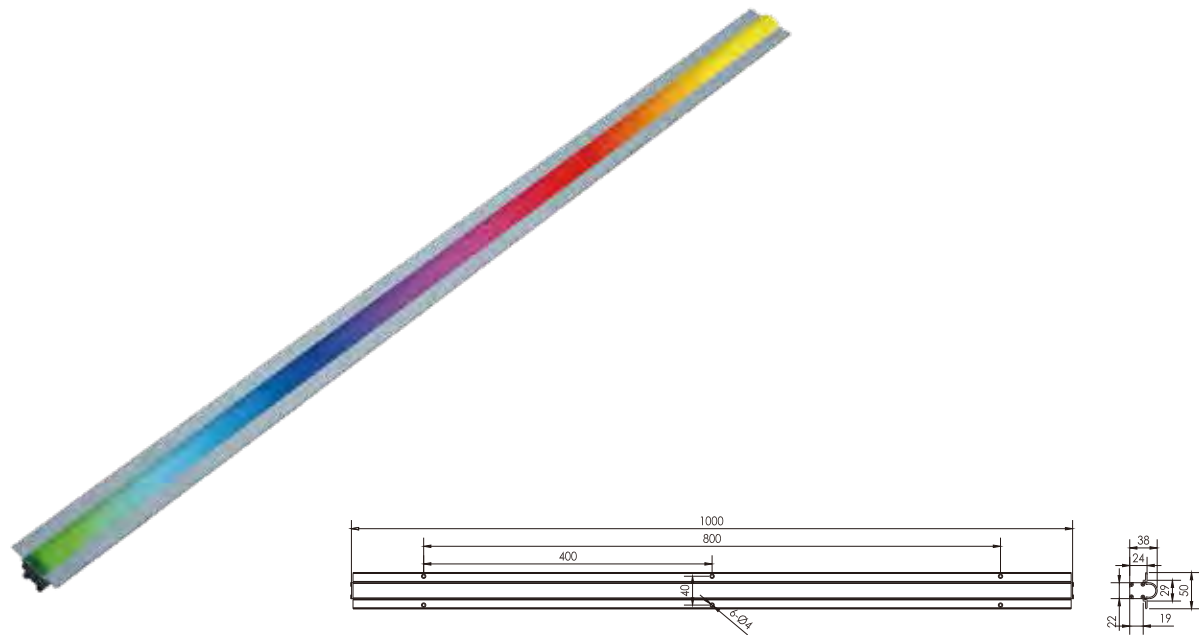

技术参数 Specification

产品型号/Product Code	SL3322-48
LED品牌/LED Brand	OSRAM Chips
LED数量/LED Quantity	48pcs
额定功率/Rated Power	10W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGB/Single
发光角度/Beam Angle	>120°
控制方式/Control Model	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

Outline light series
SL3312A

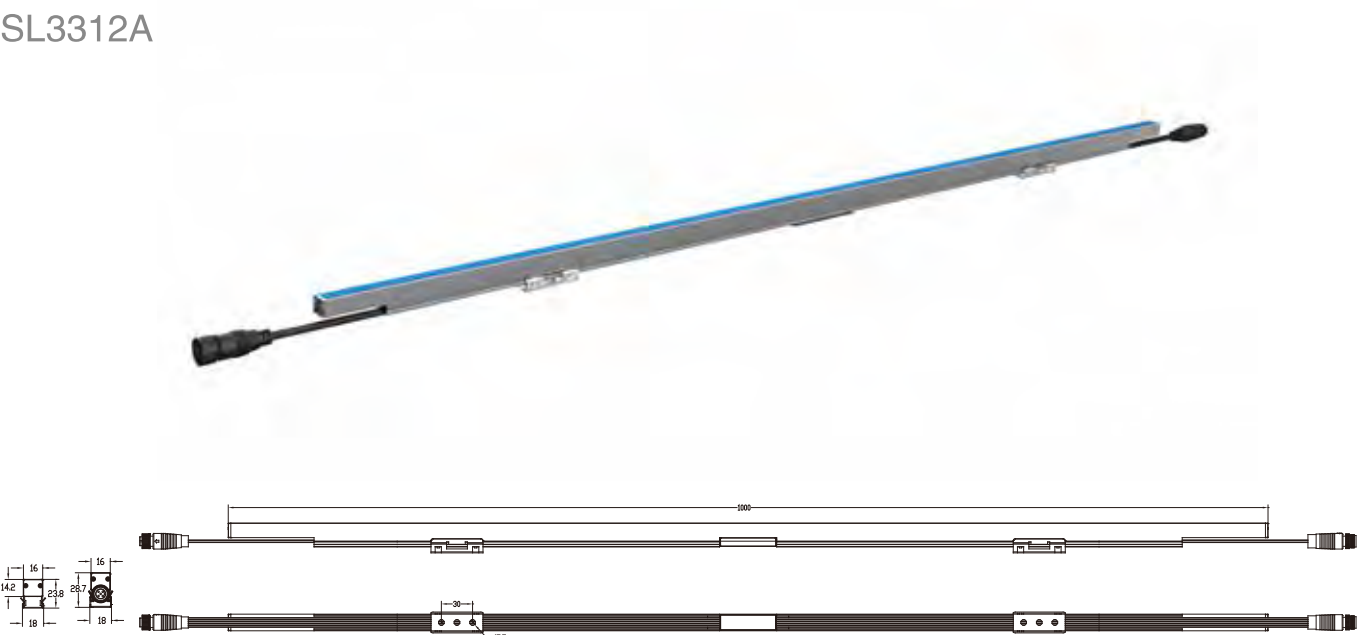


技术参数 Specification

产品型号/Product Code	SL3312A-60	SL3312A-30(0.5m)	SL3312A-18(0.3m)	SL3312A-60	SL3312A-30(0.5m)	SL3312A-18(0.3m)
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	60pcs	30pcs	18pcs	60pcs	30pcs	18pcs
额定功率/Rated Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	120°	120°	120°	120°	120°	120°
控制方式/Control Model	CC	CC	CC	DMX512	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃		- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%




Outline light series
SL3312B

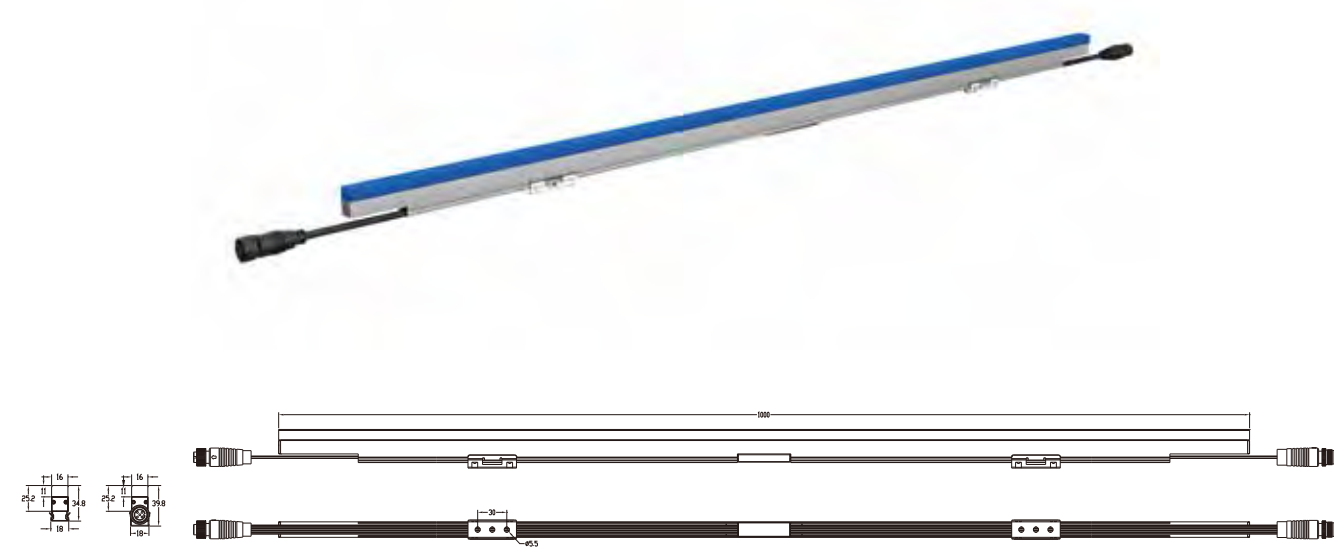

技术参数 Specification

产品型号/Product Code	SL3312B-60	SL3312B-30(0.5m)	SL3312B-18(0.3m)	SL3312B-60	SL3312B-30(0.5m)	SL3312B-18(0.3m)
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	60pcs	30pcs	18pcs	60pcs	30pcs	18pcs
额定功率/Rated Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	160°	160°	160°	160°	160°	160°
控制方式/Control Model	CC	CC	CC	DMX512	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃		- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

Outline light series
SL3312C

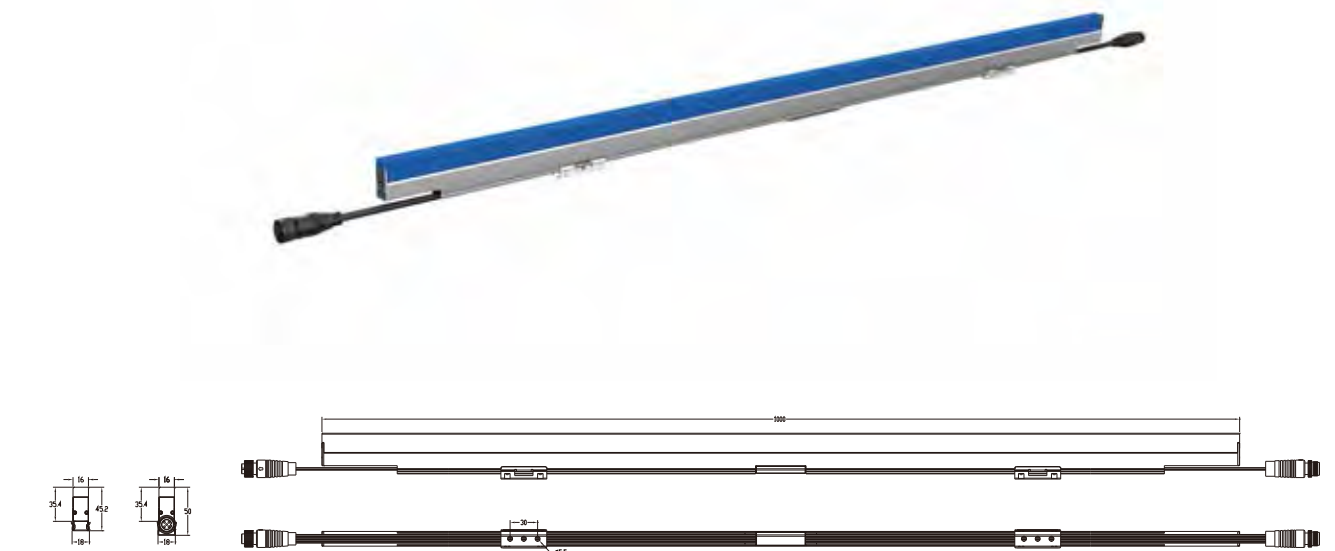


技术参数 Specification

产品型号/Product Code	SL3312C-60	SL3312C-30(0.5m)	SL3312C-18(0.3m)	SL3312C-60	SL3312C-30(0.5m)	SL3312C-18(0.3m)
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	60pcs	30pcs	18pcs	60pcs	30pcs	18pcs
额定功率/Rated Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	160°	160°	160°	160°	160°	160°
控制方式/Control Model	CC	CC	CC	DMX512	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃		- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%




Outline light series
SL3312D

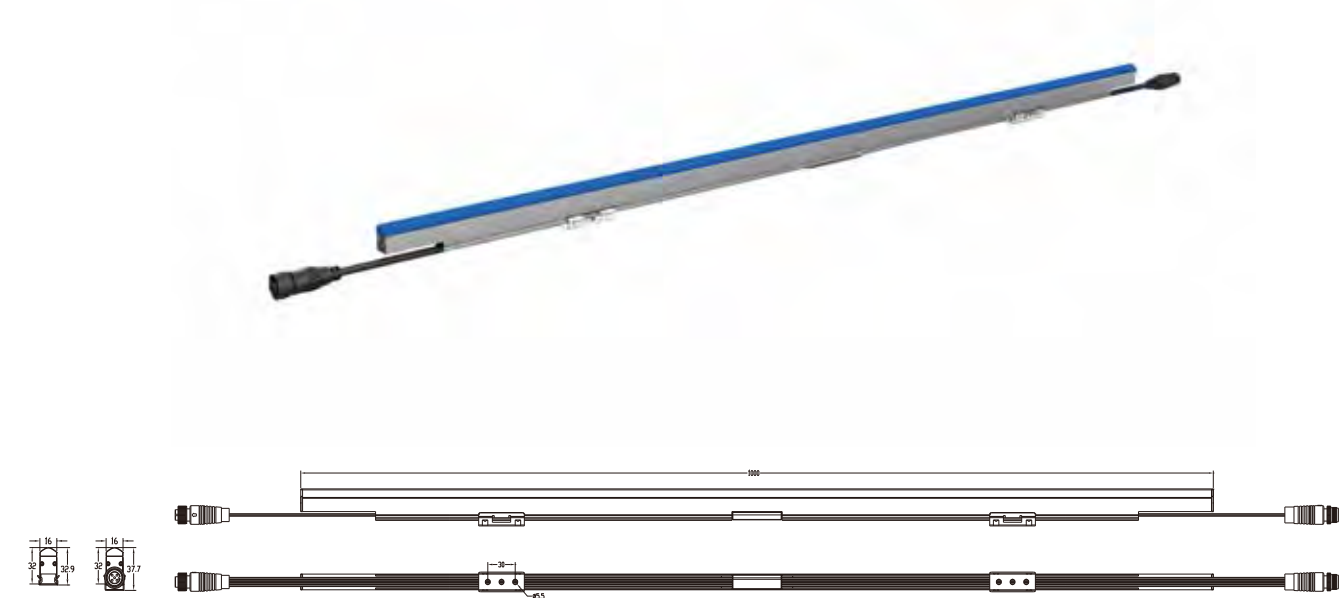

技术参数 Specification

产品型号/Product Code	SL3312D-60	SL3312D-30(0.5m)	SL3312D-18(0.3m)	SL3312D-60	SL3312D-30(0.5m)	SL3312D-18(0.3m)
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	60pcs	30pcs	18pcs	60pcs	30pcs	18pcs
额定功率/Rated Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/	/	/	/
颜色/Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/Beam Angle	25x45°	25x45°	25x45°	25x45°	25x45°	25x45°
控制方式/Control Model	CC	CC	CC	DMX512	DMX512	DMX512
使用寿命/Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃		- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

Outling light Series
SL3371

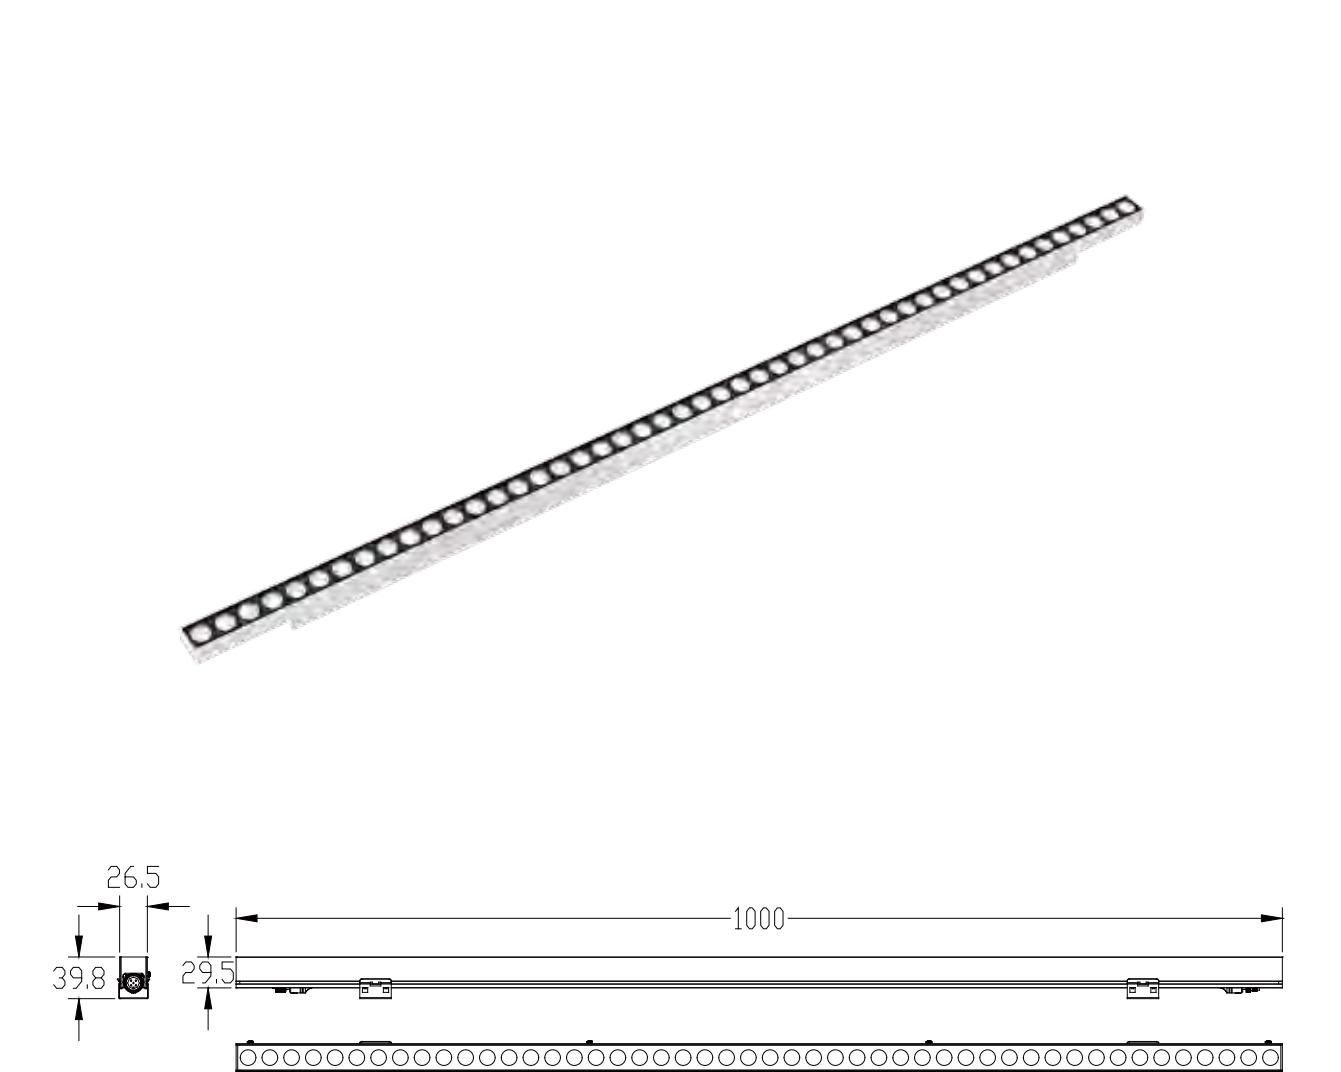

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。

二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。

三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。

四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。
- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.

2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.

3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.


4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL3371-48	SL3371-24(0.5m)	SL3371-12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs
额定功率/ Rated Power	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	Single	Single	Single
发光角度/ Beam Angle	20° 30° 45° 60° 15x40°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL3371-48	SL3371-24(0.5m)	SL3371-12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs
额定功率/ Rated Power	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	RGBW	RGBW	RGBW
发光角度/ Beam Angle	40° 60° 10X65° 35x45°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%




Outling light Series
SL3351

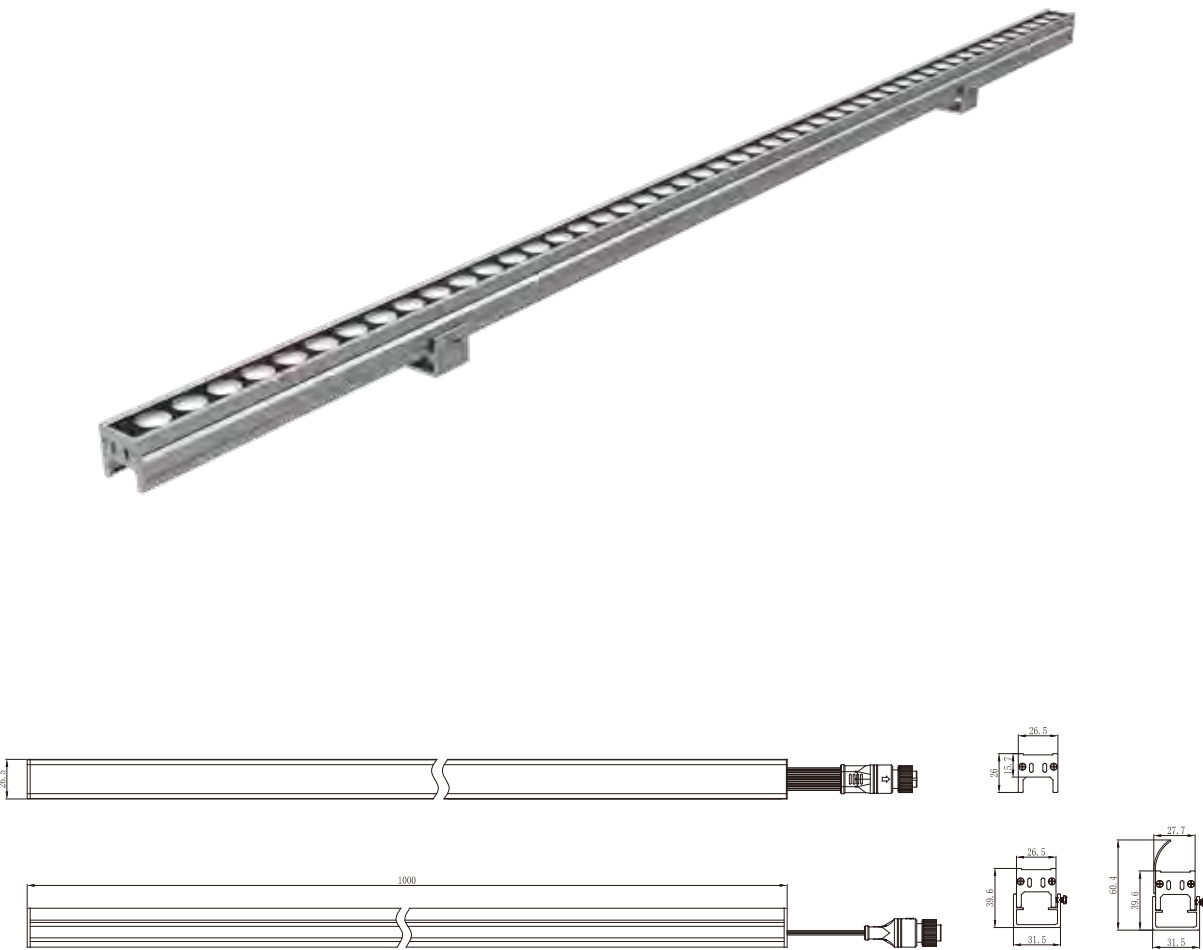

技术参数 Specification

产品型号/ Product Code	SL3351-48	SL3351-24(0.5m)	SL3351-12(0.3m)	SL3351-48	SL3351-24(0.5m)	SL3351-12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs	48pcs	24pcs	12pcs
额定功率/ Rated Power	12W/15W	6W/8W	4W/5W	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/	/	/
颜色 / Color	Single	Single	Single	RGBW	RGBW	RGBW
发光角度/ Beam Angle	20° 30° 45° 60° 15x40°			40° 60° 10x65° 35x45°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%


Outling light Series
SL3352

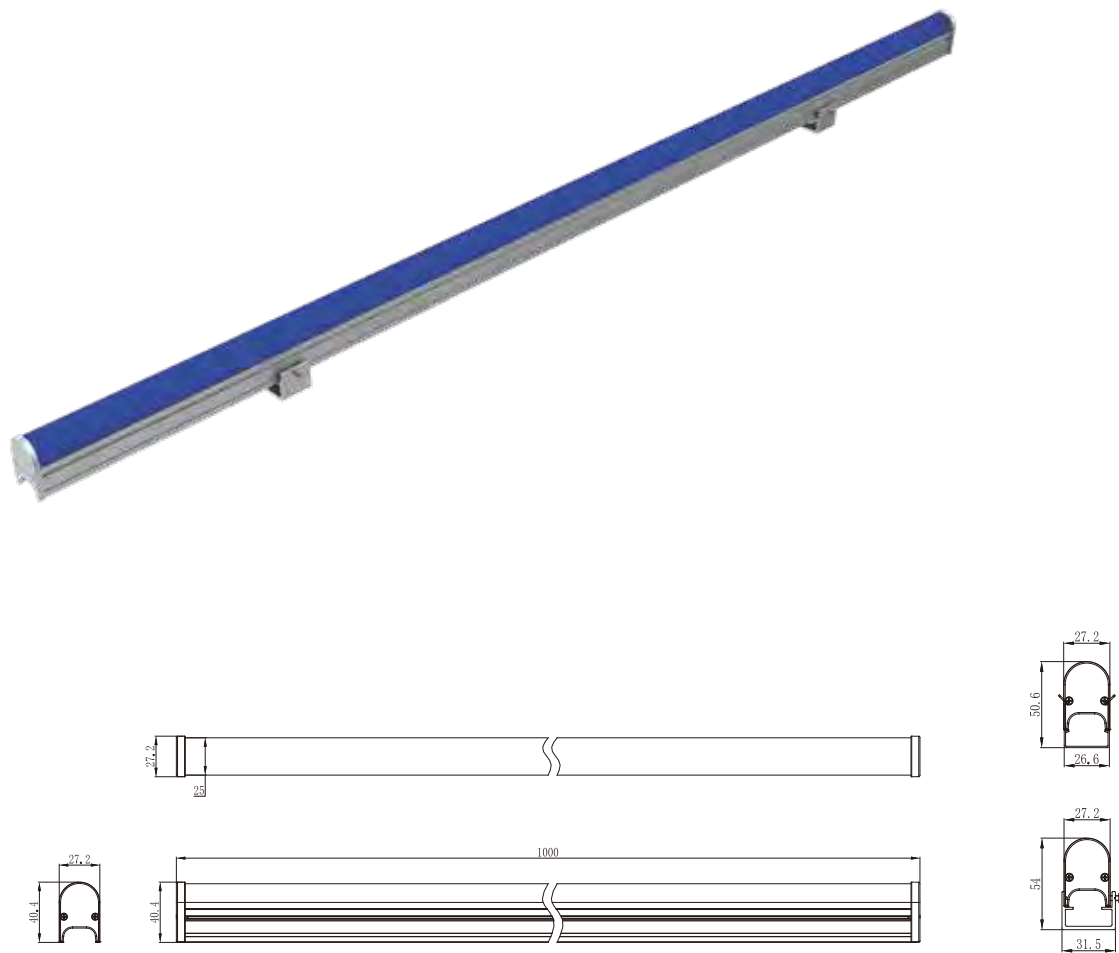

技术参数 Specification

产品型号/ Product Code	SL3352-48	SL3352-24(0.5m)	SL3352-12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs
额定功率/ Rated Power	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	RGBW/Single	RGBW/Single	RGBW/Single
发光角度/ Beam Angle	180°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%

Outling Light Series
SL3353

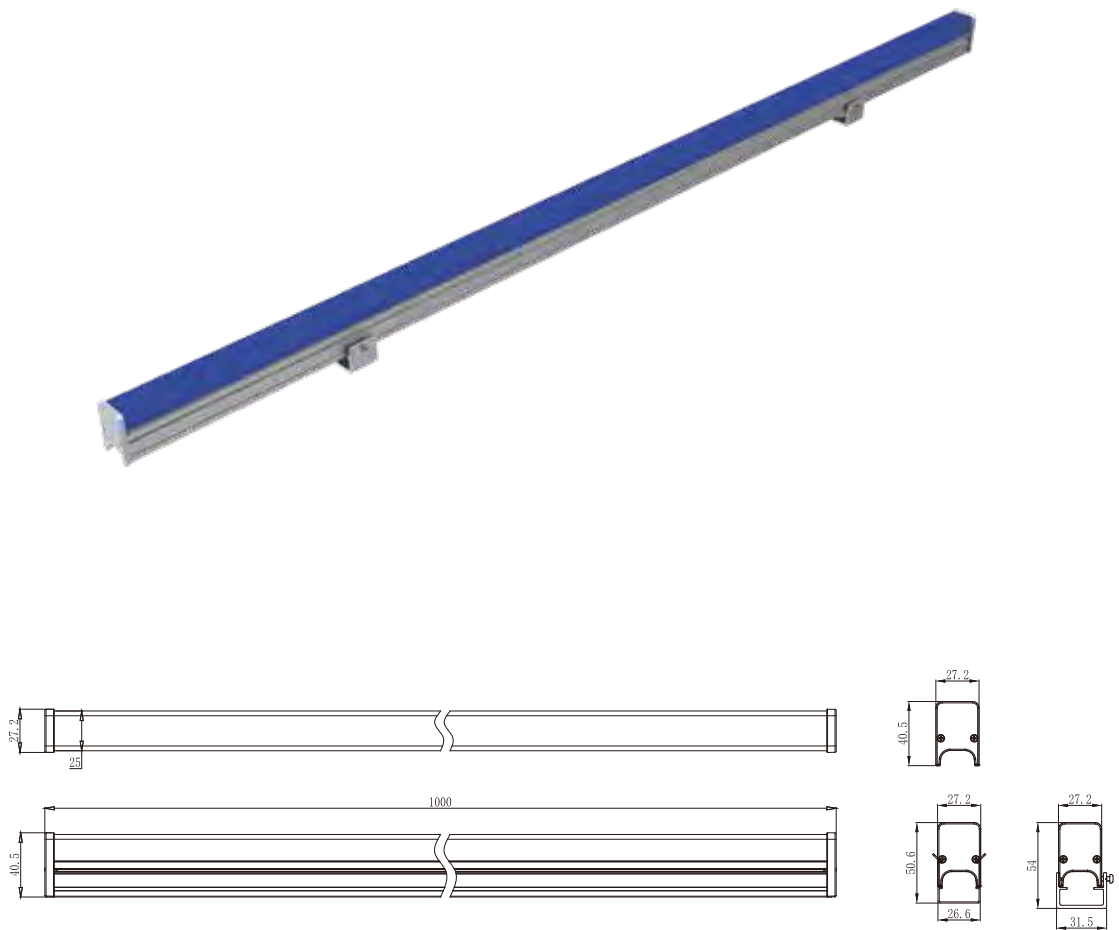


技术参数 Specification

产品型号/ Product Code	SL3353-48	SL3352-24(0.5m)	SL3353-12(0.3m)
Led品牌/ Led Brand	OSRAM	OSRAM	OSRAM
Led数量/ Led Quantity	48pcs	24pcs	12pcs
额定功率/ Rated Power	12W/15W	6W/8W	4W/5W
输入电压/ Input Voltage	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/
颜色 / Color	RGBW/Single	RGBW/Single	RGBW/Single
发光角度/ Beam Angle	180°		
控制方式/ Control Mode	DMX512/CC	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP65	IP65	IP65
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%

Outling light Series
SL3323



细节 Particulars

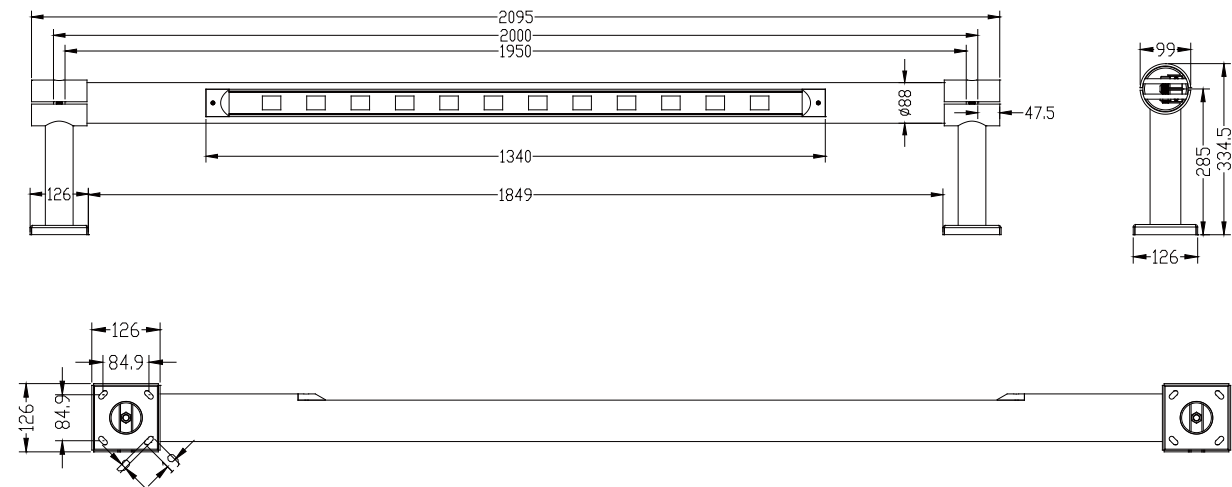

产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light–dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL3323A–24	SL3323A–12
Led品牌/ Led Brand	LUXEON 5050	LUXEON 5050
Led数量/ Led Quantity	12pcs	12pcs
额定功率/ Rated Power	24W	12W
输入电压/ Input Voltage	AC100–240V/DC24V	AC100–240V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz
颜色 / Color	Single	Single
发光角度/ Beam Angle	8x100°	
控制方式/ Control Mode	DMX512/CC	DMX512/CC
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
阻燃等级/ Flame retardant grade	UL94V–0	UL94V–0
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%



道路类型 Road type	道路宽度 road width	安装高度 installation height	灯具功率 Lamp power	布灯间距 Lamp spacing	平均辉度 Average brightness(cd/m²)	Uo	UI
2车道(2 lanes)	7.5(m)	0.8~1.2(m)	12(w)	2(m)	4.51	0.74	0.97
3车道(3 lanes)	11.25(m)				3.08	0.70	0.95






平均照度 Average illuminance	最小照度 Min illuminance	最大照度 Max illuminance	g1	g2
71.3lx	60.2lx	88.1lx	0.84	0.68


技术特点 Technical Characteristics

- 1、定制低位照明光学透镜与灯具结构相结合，隐藏光源曝光点，有效降低眩光。避免对行人或驾驶员眩光影响。
 - 2、定制的光学镜头可实现更高的均匀度，照明质量优于相关道路照明标准。
 - 3、定制的光学镜头在满足道路照明设计标准的前提下，可实现大间距的布灯，推荐2–4米，同时可实用多种道路类型。
 - 4、灯具设计了防松动结构，有效保障产品在桥梁项目的可靠性。
1. The combination of customized low level lighting optical lenses and lamp structures hides the exposure points of the light source, effectively reducing glare. Avoid glare effects on pedestrians or drivers.
 2. Customized optical lenses can achieve higher uniformity and better lighting quality than relevant road lighting standards.
 3. Customized optical lenses can achieve large spacing of lamps while meeting road lighting design standards. It is recommended to use 2–4 meters and can be applied to various road types.
 4. The lighting fixtures are designed with an anti loosening structure, effectively ensuring the reliability of the product in bridge projects.

配光曲线 Distribution curve flux

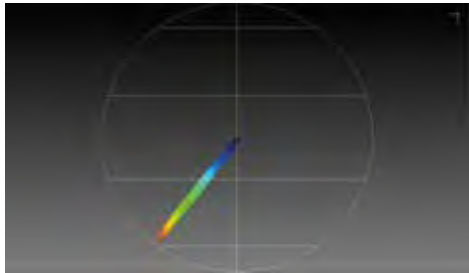

Outling Light Series SL3121




技术参数 Specification

产品型号/ Product Code	SL3121–9	SL3121–12
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM
Led数量/ Led Quantity	RGB+W	RGB+W
额定功率/ Rated Power	3W	3W
输入电压/ Input Voltage	DC24V	DC24V
频率/ Frequency Range	/	/
颜色 / Color	RGBW	RGB
发光角度/ Beam Angle	120°	
控制方式/ Control Mode	DMX512	DMX512
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
阻燃等级/ Flame retardant grade	UL94V–0	UL94V–0
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%




Outling Light Series
SL3122



技术参数 Specification

产品型号/ Product Code	SL3122-9	SL3122-6
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM
Led数量/ Led Quantity	RGB+W	RGB
额定功率/ Rated Power	1.8W	1.8W
输入电压/ Input Voltage	DC24V	DC24V
频率/ Frequency Range	/	/
颜色 / Color	RGBW	RGB
发光角度/ Beam Angle	120°	
控制方式/ Control Mode	DMX512	DMX512
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
阻燃等级/ Flame retardant grade	UL94V-0	UL94V-0
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%

Outling Light Series
SL3123



技术参数 Specification

产品型号/ Product Code	SL3123-4	SL3123-3
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM
Led数量/ Led Quantity	4pcs 3RGB3in1+1W	3pcs RGB3in1
额定功率/ Rated Power	1W	1W
输入电压/ Input Voltage	DC24V	DC24V
频率/ Frequency Range	/	/
颜色 / Color	RGBW	RGB
发光角度/ Beam Angle	120°	
控制方式/ Control Mode	DMX512	DMX512
使用寿命/ Life	50000H	50000H
防护等级/ Protection Grade	IP66	IP66
阻燃等级/ Flame retardant grade	UL94V-0	UL94V-0
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%



Outling Light Series
SL3361




Outling Light Series
SL3362



技术参数 Specification

产品型号/Product Code	SL3361A-210	SL3361B-180	SL3361B-120
LED品牌/LED Brand	OSRAM	OSRAM	OSRAM
LED数量/LED Quantity	120pcs	120pcs	120pcs
额定功率/Rated Power	18W	16W	16W
输入电压/Input Voltage	DC24V	DC24V	DC24V
频率/Frequency Range	/	/	/
颜色/Color	2700K/3000K/4000K/5000K/6000K		
发光角度/Beam Angle	>120°		
控制方式/Control Mode	CC	CC	CC
使用寿命/Life	30000H	30000H	30000H
防护等级/Protection Grade	IP67	IP67	IP67
环境温度/Ambient Temperature	- 25℃~50℃	- 25℃~50℃	- 25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%



技术参数 Specification

产品型号/Product Code	SL3362A-120	SL3362B-144	
LED品牌/LED Brand	OSRAM	OSRAM	
LED数量/LED Quantity	120pcs	144pcs	
额定功率/Rated Power	14W	10W	
输入电压/Input Voltage	DC24V	DC24V	
频率/Frequency Range	/	/	
颜色/Color	2700K/3000K/4000K/5000K/6000K		
发光角度/Beam Angle	>120°		
控制方式/Control Mode	CC	CC	
使用寿命/Life	30000H	30000H	
防护等级/Protection Grade	IP67	IP67	
环境温度/Ambient Temperature	- 25℃~50℃	- 25℃~50℃	
环境湿度/Ambient Humidity	10%~90%	10%~90%	

Outline light series
SL3110



产品简介 Product Introduction

- 一、LED点光源系列具有时尚简约的外形， 加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、采用双重防水结构，简易的安装方式，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用光扩散PC或高强度钢化玻璃，抗冲击耐磨擦，具有优良的雨水清洁能力。
- 四、采用SMD 单色或3合1 LED光源；光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接， 均带有DMX 在线自动寻址功能。
-
- 1、LED point light series have fashionable and simple appearance, with the design of increasing heat dissipation to fully ensure the stability and long life—span of LED fixture.
- 2、Adopt double waterproof structure and easy installation ways meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die—casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability
- 4、Adopt SMD single color or 3in1 light source, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing

技术参数 Specification

产品型号/Product Code	SL3110B-3	SL3110A-3
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	3pcs	3pcs
额定功率/Rated Power	6W	3.5W
输入电压/Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	>120°	>120°
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP66	IP66
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	16/140(pcs)	26/250(pcs)

Outline Light Series
SL3106




技术参数 Specification

产品型号/Product Code	SL3106C-1	SL3106-9
LED品牌/LED Brand	CREE	EPISTAR
LED数量/LED Quantity	1pc	9pcs
额定功率/Rated Power	3W	2W
输入电压/Input Voltage	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	Single	Single
发光角度/Beam Angle	>120°	>120°
控制方式/Control Mode	CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%





Outline light series
SL3210

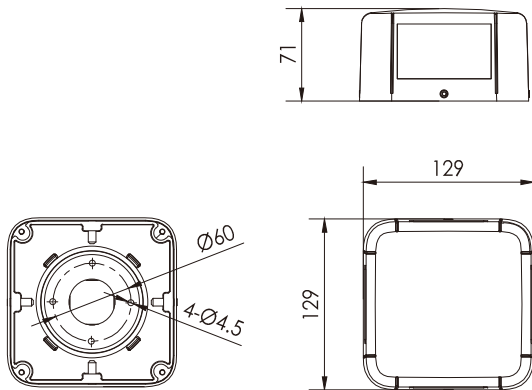


技术参数 Specification

产品型号/Product Code	SL3210R-12	SL3210B-4	SL3210B-2
LED品牌/LED Brand	CREE	CREE	CREE
LED数量/LED Quantity	12pcs	4pcs	2pcs
额定功率/Rated Power	14W	8W	4W
输入电压/Input Voltage	DC24V	DC24V/AC100-240V	DC24V/AC100-240V
频率/Frequency Range	/	50/60Hz	50/60Hz
颜色/Color	RGB	Single	Single
发光角度/Beam Angle	2° 20° 30° 60°		
控制方式/Control Mode	DMX512	CC	CC
使用寿命/Life	50000H	50000H	50000H
防护等级/Protection Grade	IP65	IP65	IP65
环境温度/Ambient Temperature	- 25℃~50℃	- 25℃~50℃	- 25℃~50℃
环境湿度/Ambient Humidity	10%~90%	10%~90%	10%~90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

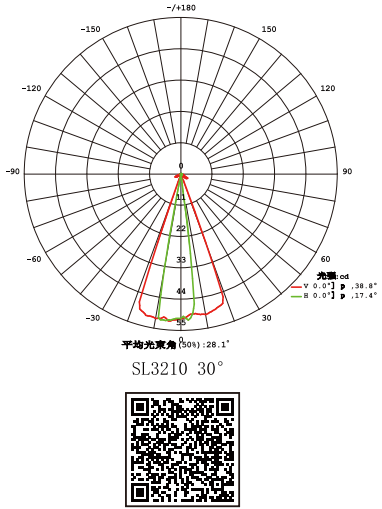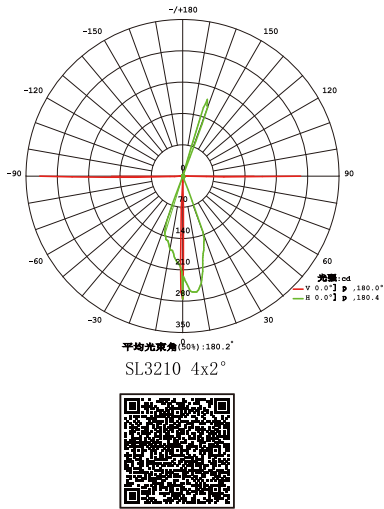


Outline light series
SL3240

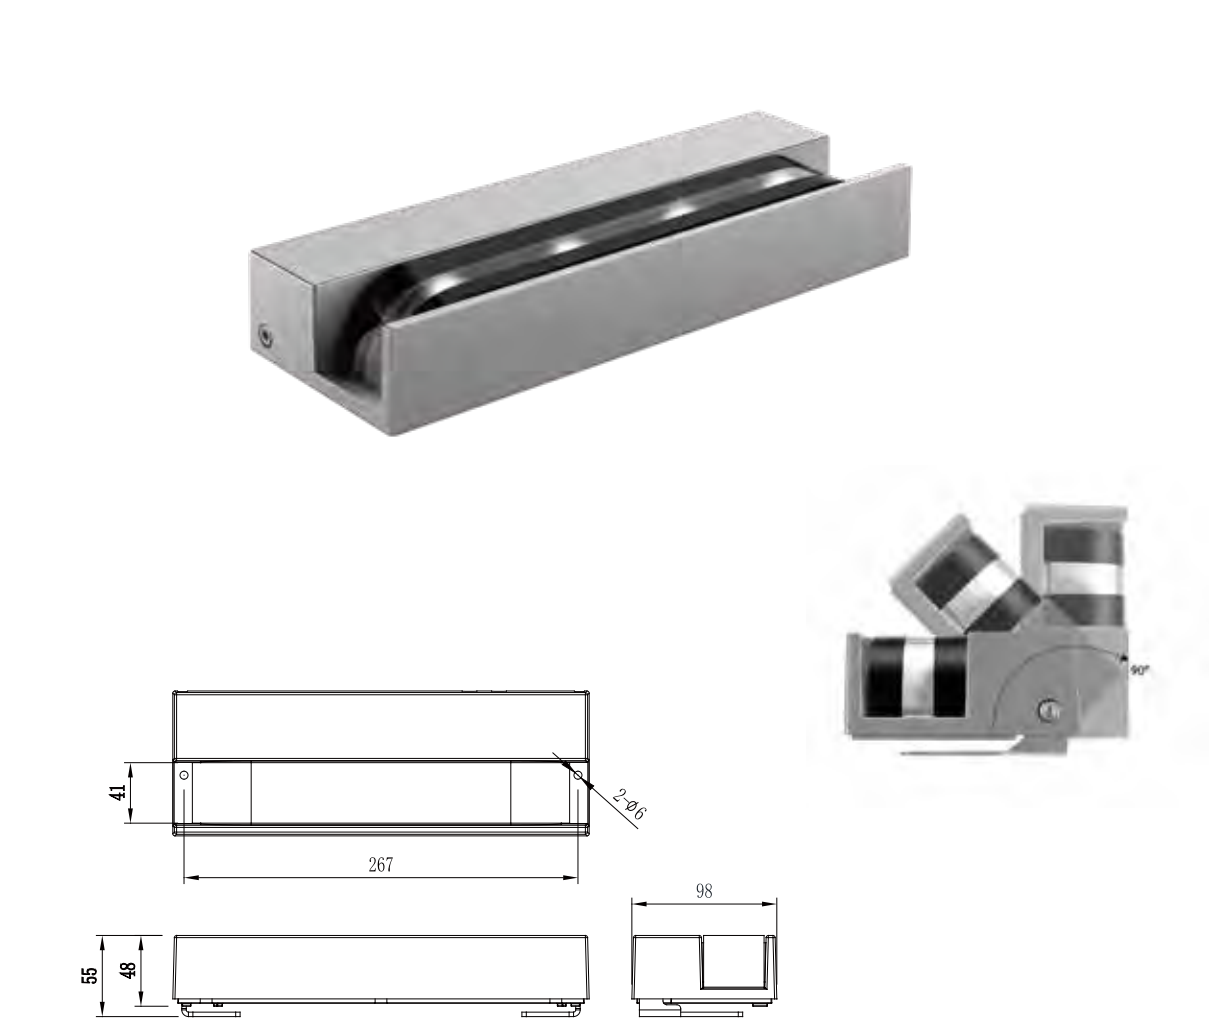

技术参数 Specification

产品型号/Product Code	SL3240C-16	SL3240C-16
LED品牌/LED Brand	LUMILEDS/晶元	LUMILEDS/晶元
LED数量/LED Quantity	16pcs	16pcs
额定功率/Rated Power	36W	36W
输入电压/Input Voltage	AC100-240V	DC24V
频率/Frequency Range	50/60Hz	/
颜色/Color	Single	RGBW
发光角度/Beam Angle	2x180°	2x180°
控制方式/Control Mode	CC	DMX512
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	8(pcs)	8(pcs)


Outline light series
SL3230

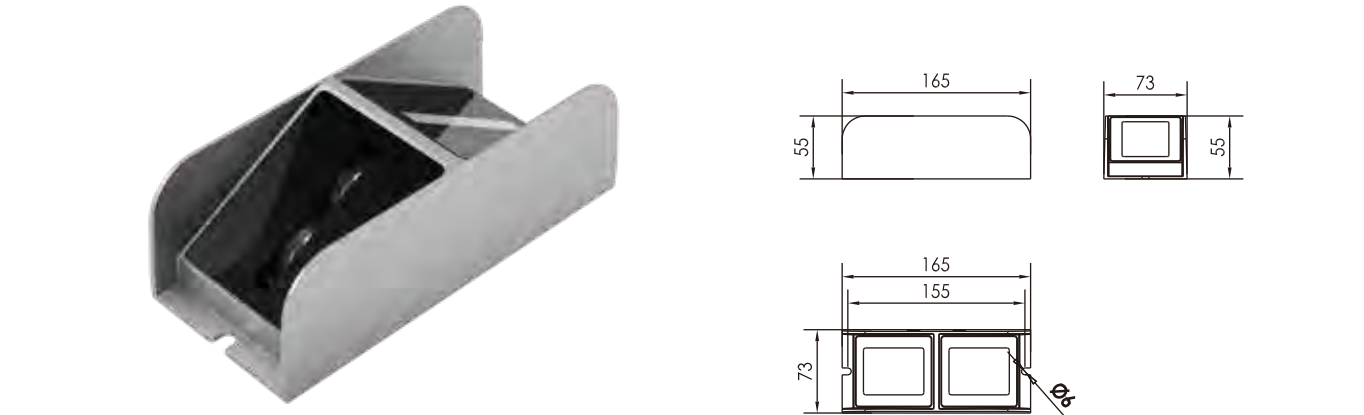


技术参数 Specification

产品型号/Product Code	SL3230C-8
LED品牌/LED Brand	CREE
LED数量/LED Quantity	8pcs
额定功率/Rated Power	20W
输入电压/Input Voltage	DC24V
频率/Frequency Range	/
颜色/Color	RGBW/Single
发光角度/Beam Angle	8x180°
控制方式/Control Mode	DMX512/CC
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

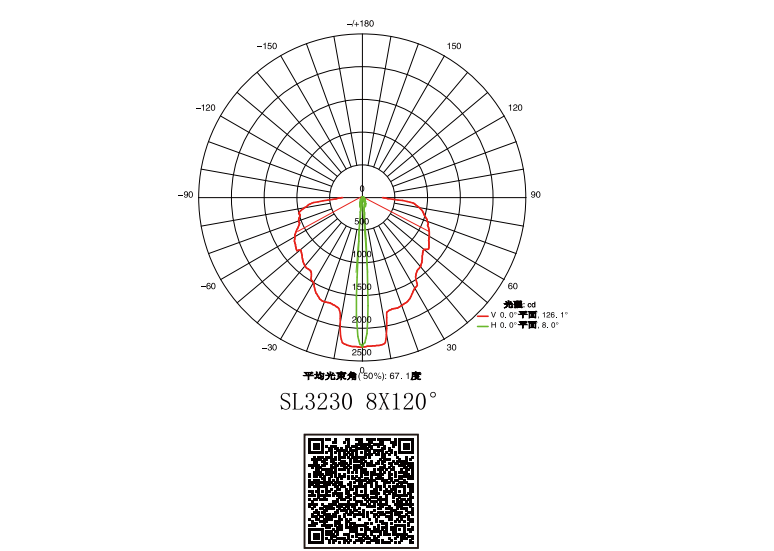

Outline Light Series
SL3220

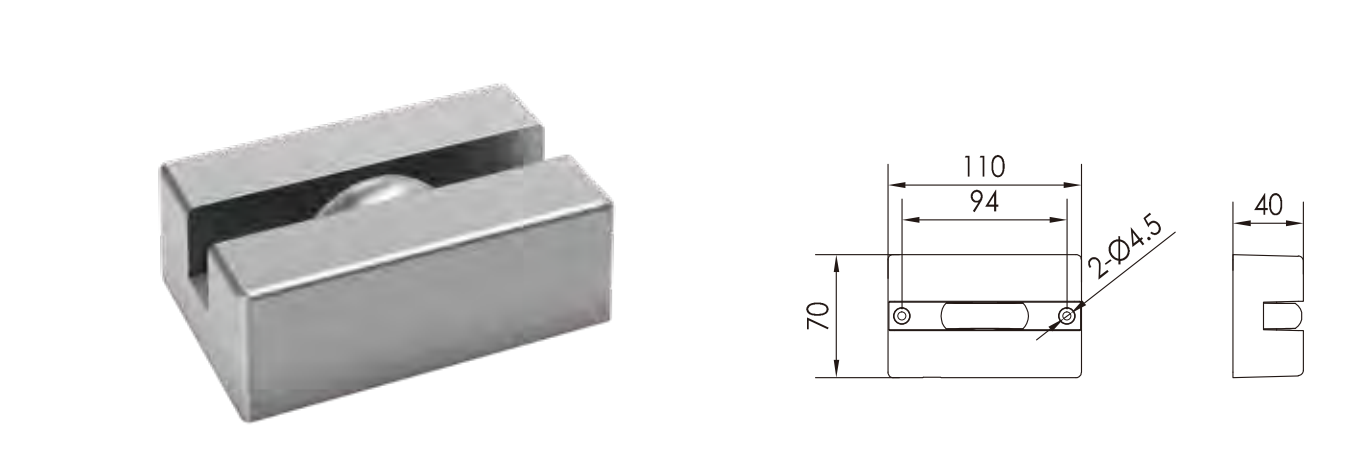


技术参数 Specification

产品型号/Product Code	SL3220A-3	SL3220C-1
LED品牌/LED Brand	CREE	CREE XP-G2
LED数量/LED Quantity	3pcs / 12pcs	1pcs
额定功率/Rated Power	3W	3W
输入电压/Input Voltage	AC100-240V/DC12V	AC100-240V/DC24V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	RGBW/Single	Single
发光角度/Beam Angle	2° X 180°	
控制方式/Control Mode	DMX512/CC	CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%



Underwater Light Series
SL5109

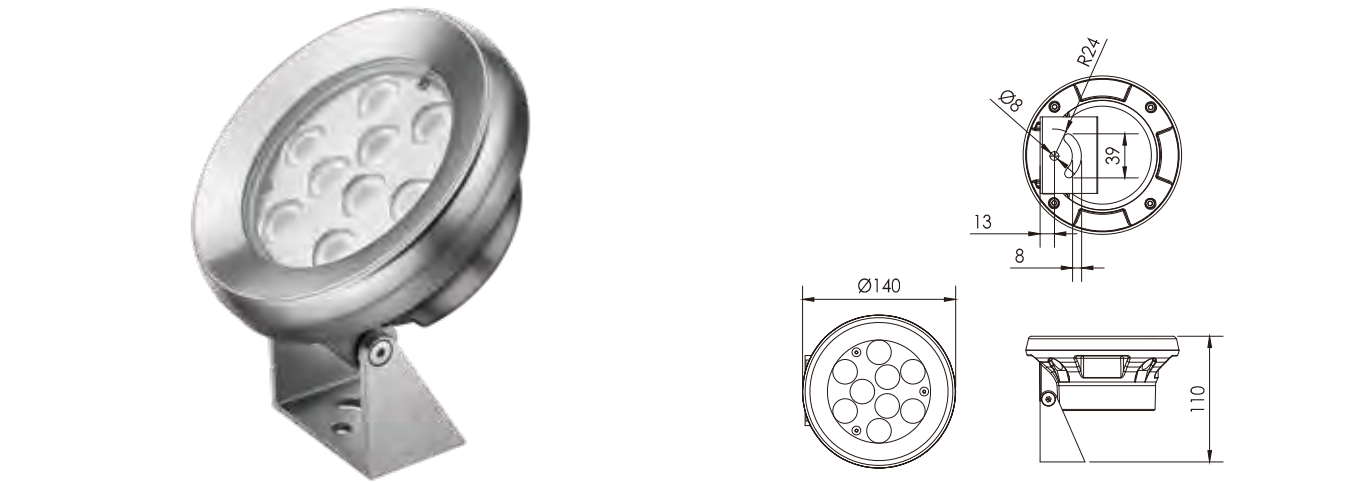


技术参数 Specification

产品型号/Product Code	SL5109B-9	SL5109A-9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	16W	10W
输入电压/Input Voltage	DC12V/DC24V	DC12V/DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	4/9(pcs)	7/14(pcs)




Underwater Light Series
SL5106

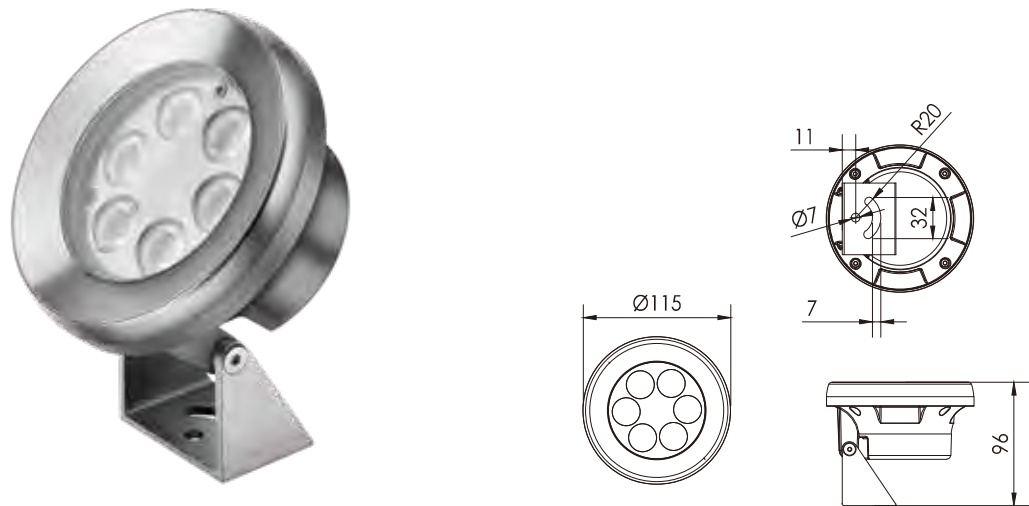

技术参数 Specification


产品型号/Product Code	SL5106B-6	SL5106A-6
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	6pcs	6pcs
额定功率/Rated Power	12W	7W
输入电压/Input Voltage	DC12V/DC24V	DC12V/DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	6/12(pcs)	10/20(pcs)

配光曲线 (全角) Distribution Curve Flux (SBC Case)

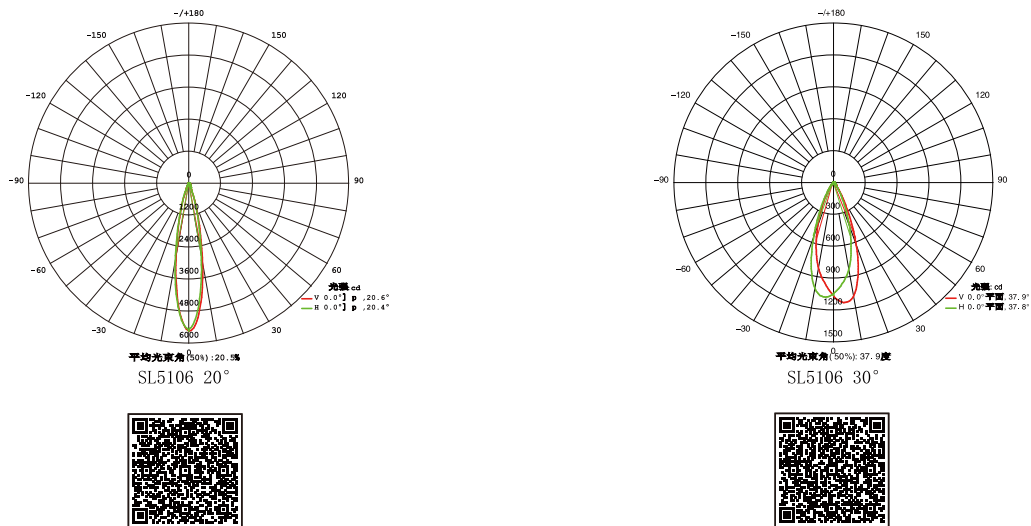


接线示意图 Wiring Diagram

RGB B 型

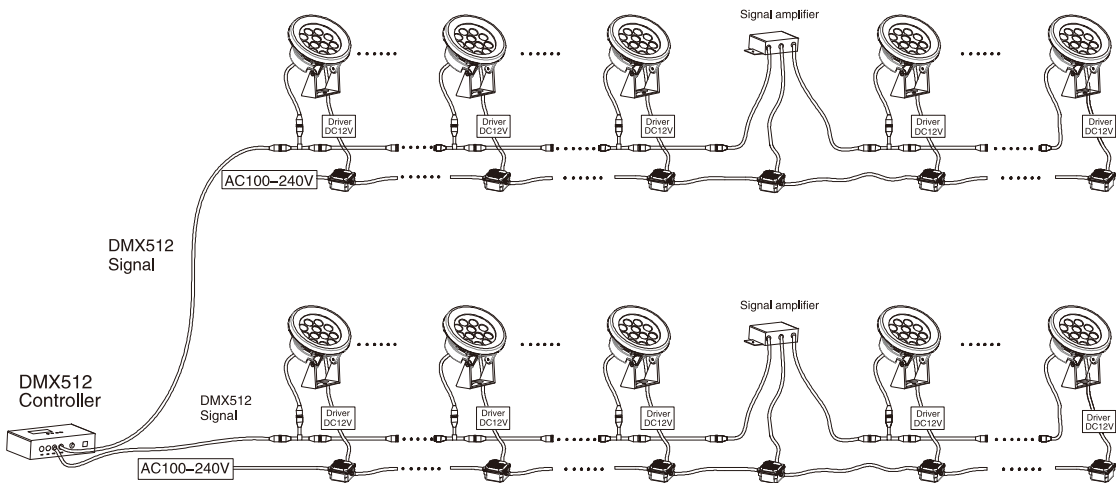


单色 (Single Color)

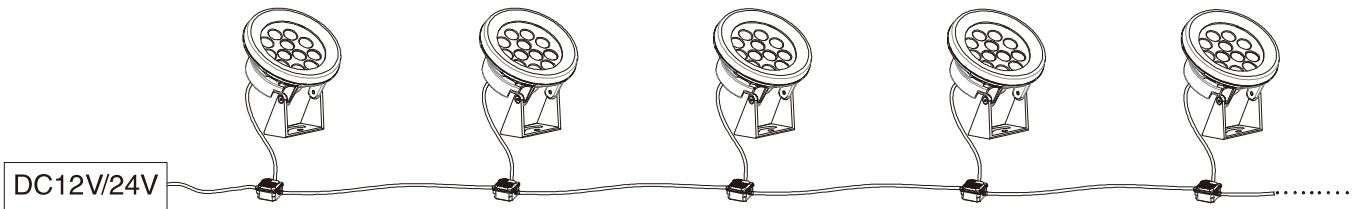

Underwater Light Series

SL5119

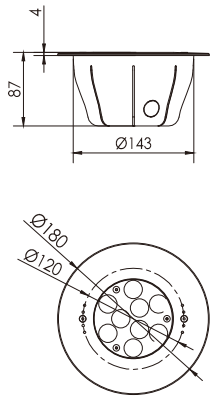


技术参数 Specification

产品型号/Product Code	SL5119B-9	SL5119A-9
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	9pcs	9pcs
额定功率/Rated Power	16W	10W
输入电压/Input Voltage	DC12V /DC24V	DC12V /DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	4/9(pcs)	7/14(pcs)



Underwater Light Series



SL5116

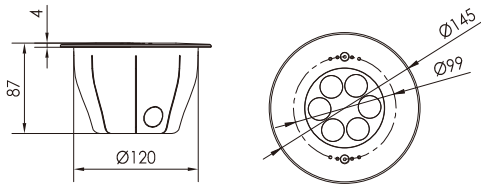

技术参数 Specification

产品型号/Product Code	SL5116B-6	SL5116A-6
LED品牌/LED Brand	CREE	CREE
LED数量/LED Quantity	6pcs	6pcs
额定功率/Rated Power	12W	7W
输入电压/Input Voltage	DC12V /DC24V	DC12V /DC24V
频率/Frequency Range	/	/
颜色/Color	RGB/Single	RGB/Single
发光角度/Beam Angle	8° 12.5° 20° 30° 45°	
控制方式/Control Mode	DMX512/CC	DMX512/CC
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP68	IP68
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	6/22(pcs)	10/20(pcs)

配光曲线 (半角) Distribution Curve Flux (SBC Case)

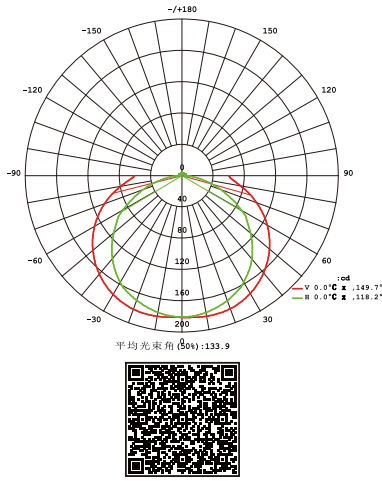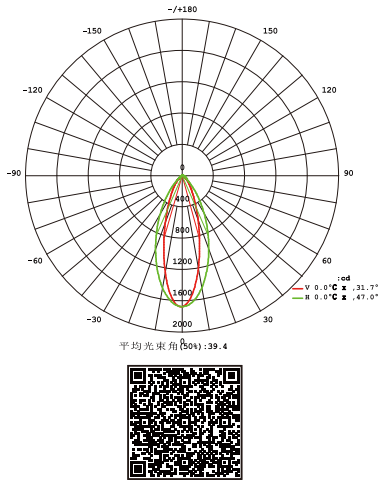



INTERNATIONAL WATCH CO.


TAG Heuer

BOBBI BROWN

HOME
PLISSE

Wall light series

SL6165 SL6132

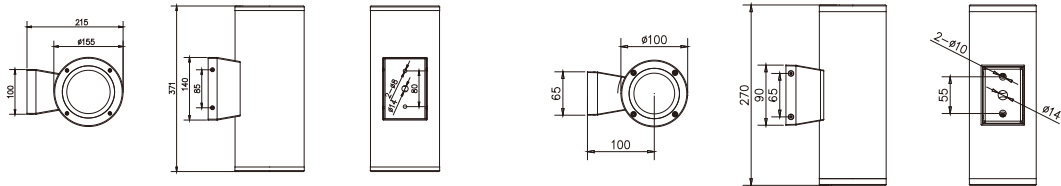


SL6165

SL6132

产品型号/Product Code	SL6165E-8	SL6165-C60	SL6132-C40
发光方向 Light direction	Up and down	Up and down	Up and Down
LED品牌 LED Brand	CREE	CREE COB	CREE COB
LED数量 LED Quantity	4pcsx2	1pcsx2	1pcsx2
额定功率 Rated Power	30Wx2/20Wx2	60W	20Wx2/10Wx2
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 24° 36° 60°	
控制方式 Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

Wall Light Series

SL6166 SL6133

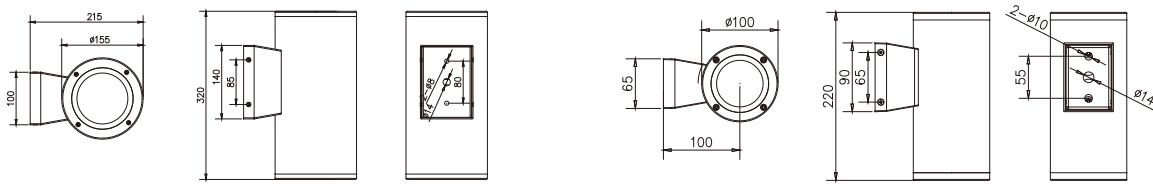


SL6166


SL6133

产品型号/Product Code	SL6166E-4	SL6166-C30	SL6133-C20
发光方向 Light direction	Down	Down	Down
LED品牌 LED Brand	CREE	CREE COB	CREE COB
LED数量 LED Quantity	4pcs	1pcs	1pcs
额定功率 Rated Power	30W	50W/30W	20W/10W
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°	15° 24° 36° 60°	
控制方式 Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

Wall light series
SL6167 SL6135

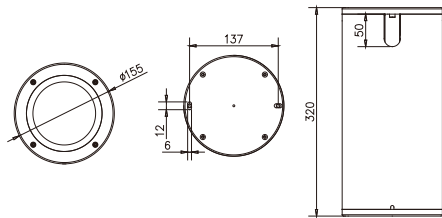



SL6167

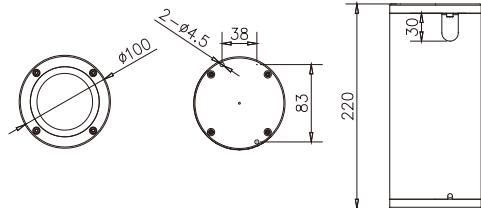


SL6135

产品型号/Product Code	SL6167E-4		SL6167-C30	SL6135-C20
发光方向 Light direction	Down		Down	Down
LED品牌 LED Brand	CREE		CREE COB	CREE COB
LED数量 LED Quantity	4pcs		1pcs	1pcs
额定功率 Rated Power	30W		50W/30W	20W/10W
输入电压 Input Voltage	AC100-240V		AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz		50/60Hz	50/60Hz
颜色 Color	Single		Single	Single
发光角度 Beam Angle	6° 12° 20° 30° 45° 60° 10x70° 5x20°		15° 24° 36° 60°	
控制方式 Control Mode	CC/DALI/0-10V		CC/DALI/0-10V	CC
使用寿命 Life	50000H		50000H	50000H
防护等级 Protection Grade	IP66		IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃		- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%		10% ~ 90%	10% ~ 90%



Wall light series
SL6155 SL6122

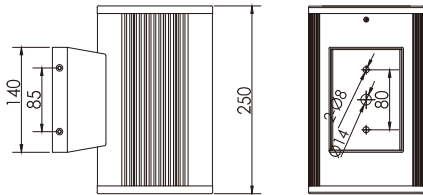


A型

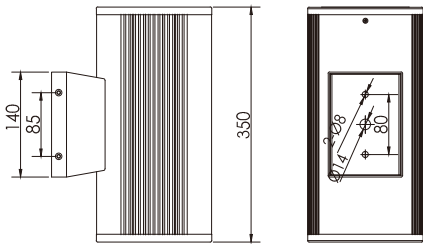

B型

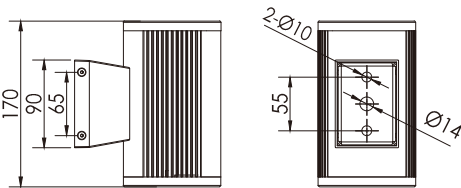





A型

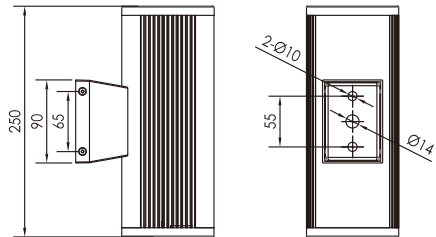





B型

技术参数 Specification

产品型号/Product Code	SL6155B-18	SL6155A-18
发光方向 Light direction	Up and down	Up and down
LED品牌 LED Brand	CREE	CREE
LED数量 LED Quantity	9pcsx2	9pcsx2
额定功率 Rated Power	18Wx2	10.5Wx2
输入电压 Input Voltage	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz
颜色 Color	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°	
控制方式 Control Mode	CC	CC
使用寿命 Life	50000H	50000H
防护等级 Protection Grade	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%
产品型号Product Code	SL6122C-6	SL6122A-6
发光方向 Light direction	Up and down	Up and down
LED品牌LED Brand	CREE	CREE
LED数量LED Quantity	3pcsx2	3pcsx2
额定功率Rated Power	8Wx2	4Wx2
输入电压Input Voltage	AC100-240V	AC100-240V
频率Frequency Range	50/60Hz	50/60Hz
颜色Color	Single	Single
发光角度Beam Angle	8° 12.5° 20° 30° 45°	
控制方式Control Mode	CC	CC
使用寿命Life	50000H	50000H
防护等级Protection Grade	IP66	IP66
环境温度Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度Ambient Humidity	10% ~ 90%	10% ~ 90%

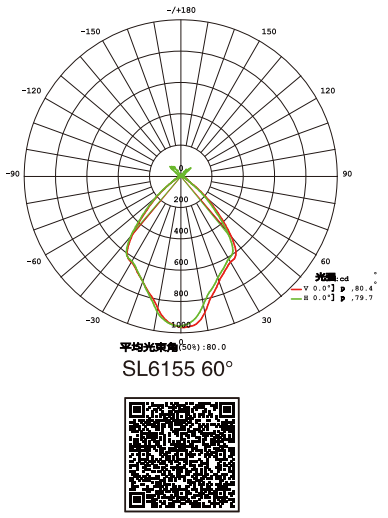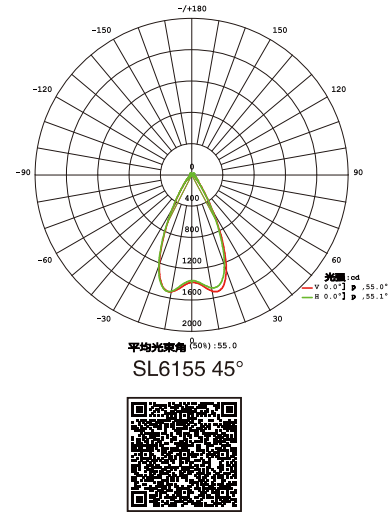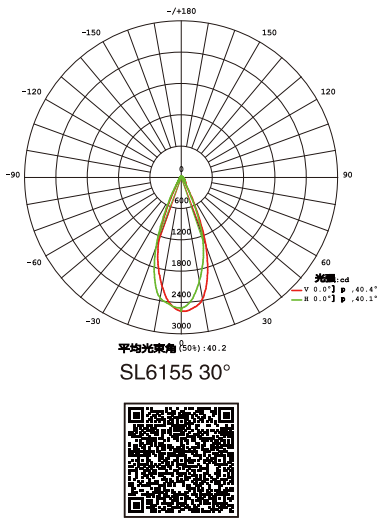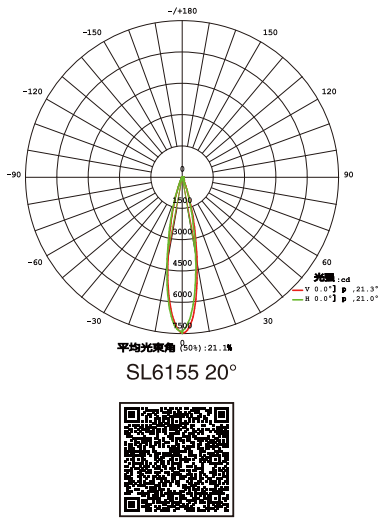


配光曲线 (全角) Distribution Curve Flux (SBC Case)

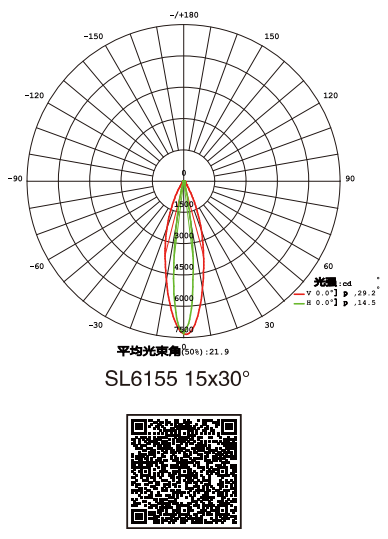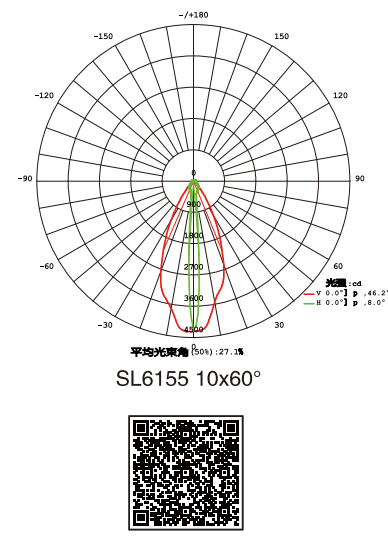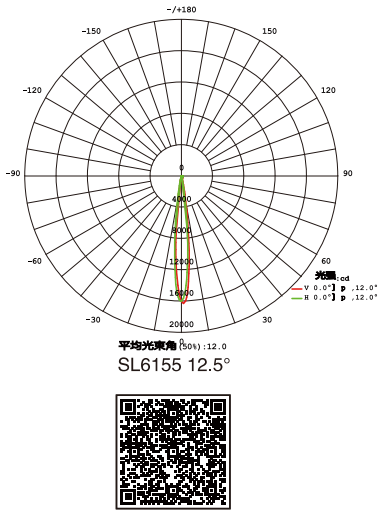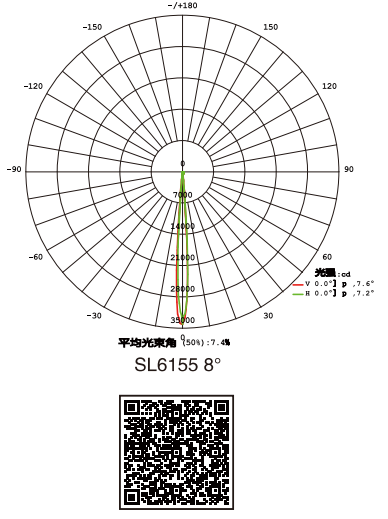

Wall Light Series



SL6156 SL6123

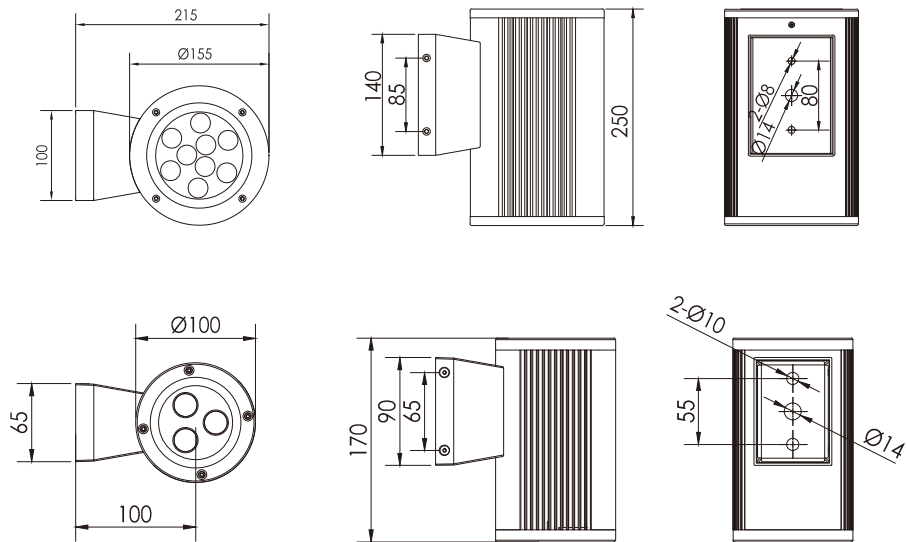


技术参数 Specification

产品型号/Product Code	SL6156B-9	SL6156A-9	SL6156-C20
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	9pcs	9pcs	1pc
额定功率 Rated Power	16W	11W	26W
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
产品型号/Product Code	SL6123C-3	SL6123A-3	SL6123-C10
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	3pcs	3pcs	1pc
额定功率 Rated Power	8W	3.5W	10W
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

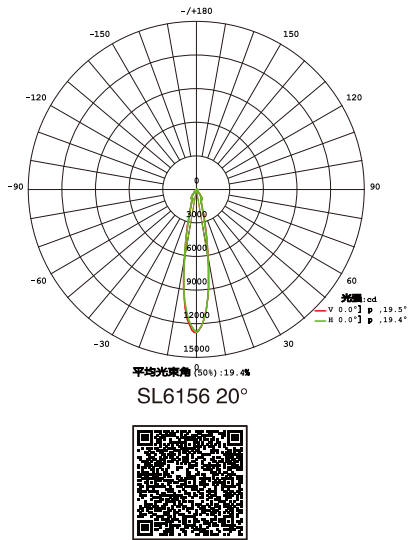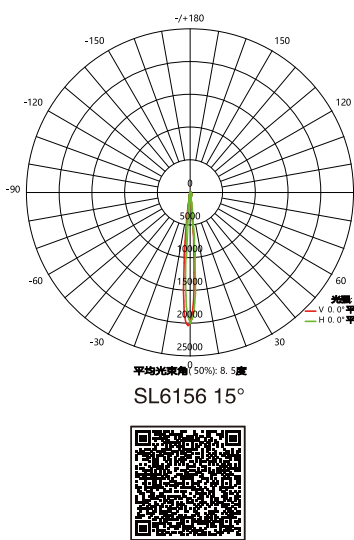

Wall light series
SL6157 SL6125

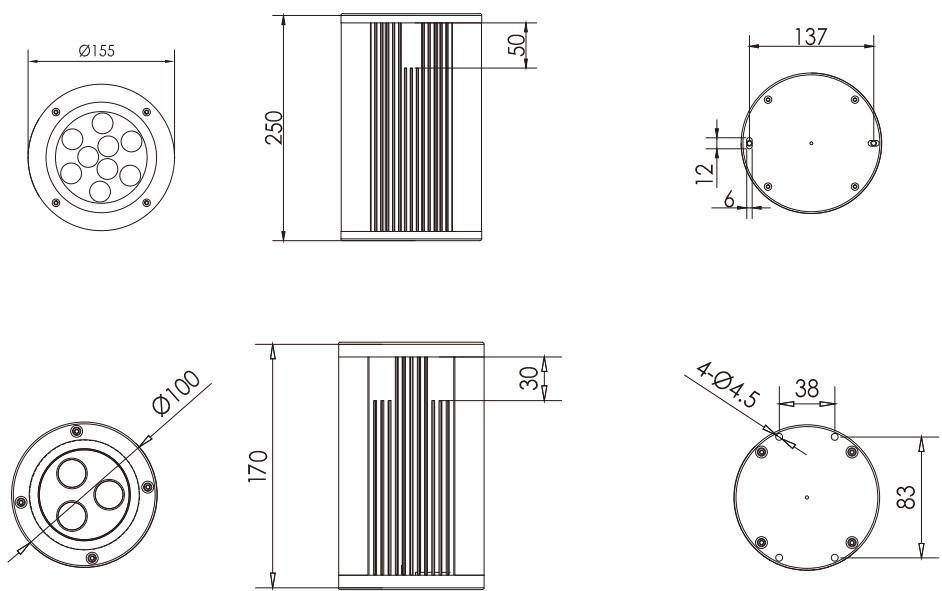

技术参数 Specification

产品型号/Product Code	SL6157B-9	SL6157A-9	SL6157-C20
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	9pcs	9pcs	1pc
额定功率 Rated Power	16W	11W	26W
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		15°
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
产品型号/Product Code	SL6125C-3	SL6125A-3	SL6125-C10
发光方向 Light direction	Down	Down	Down
LED品牌LED Brand	CREE	CREE	CREE COB
LED数量 LED Quantity	3pcs	3pcs	1pc
额定功率 Rated Power	8W	3.5W	10W
输入电压 Input Voltage	AC100-240V	AC100-240V	AC100-240V
频率 Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 Color	Single	Single	Single
发光角度 Beam Angle	8° 12.5° 20° 30° 45°		15°
控制方式 Control Mode	CC	CC	CC
使用寿命 Life	50000H	50000H	50000H
防护等级 Protection Grade	IP66	IP66	IP66
环境温度 Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度 Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%



Road Light Series

SL7500



产品简介 Product Introduction



- 一、独创的流体雕塑式灯体结构,卡扣式开启, 内置快速插拔连接器,开盖后自动断电,安装维护方便安全。
- 二、灯体采用高强度压铸铝材料, 表面氟碳喷涂处理; 灯罩采用透光率94%的高性能钢化玻璃。
- 三、采用美国CREE大功率LED光源,高光通量输出,光色一致性优良; 具有多种透镜角度可选, 合理控制光的分布, 保证理想的路面亮度及均匀度。
- 四、输入电压100–305V AC, 驱动电源效率高达93%, 防雷击6KV; 内置主动式功率因数校正, 功率因数大于0.95; 电源内建PWM恒流技术, 效率高, 热量低, 恒流精度高。
- 五、可加装防雷保护模块, 防浪涌电流高达20KA。

- 1、The luminaire is shaped as original fluid sculpture ,designed to lift up by snapping, and in–built quick plug connector. The luminaire enables to switch off automatically after removing the lid, which keeps the installation and maintenance secure and convenient.
- 2、The housing is high strength die–casting aluminum, the appearance with fluorine carbon spraying; diffuser is high–performance tempered glass which owns 94% light transmittance.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; provide types of optional beam angle, control the light distribution rationally, ensure street surface with ideal brightness and uniformity.
- 4、The diver in– built which owns power efficiency as high as 93% is with the input voltage 100–305V AC and 6KV lightning stroke resistance, in–built active power factor with correction surpasses 0.95; Construct PWM constant current technology internal with the performance of high efficiency, low heat and superior precision of constant current.
- 5、Support the installation of lightning protection module which can prevent the luminaire from attack of surge as high as 20KA.

技术参数 Specification


产品型号/ Product Code	SL7500–M235	SL7500–M200	SL7500–M180	SL7500–M150	SL7500–C215
Led品牌/ Led Brand	LUMILEDS	LUMILEDS	LUMILEDS	LUMILEDS	CREE
Led数量/ Led Quantity	80pcs	64pcs	64pcs	48pcs	80pcs
额定功率/ Rated Power	235W	205W	180W	155W	215W
输入电压/ Input Voltage	AC100–305V	AC100–305V	AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K				
发光角度/ Beam Angle	120x50° 150x65° 150x60° 140x30° 148°				
控制方式/ Control Mode	CC / PLC / Zigbee / Light–operated control				
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
功率因数/ Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL7500–C180		SL7500–C150	SL7500–M235HE	SL7500–M200HE
Led品牌/ Led Brand	CREE		CREE	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	80pcs		80pcs	117Pcs	96Pcs
额定功率/ Rated Power	180W		150W	235W	200W
输入电压/ Input Voltage	AC100–305V		AC100–305V	AC100–305V	AC100–305V
频率/ Frequency Range	50/60Hz		50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K			3000K4000K/5000K/6000K	
发光角度/ Beam Angle	120x50° 150x65° 150x60° 140x30° 148°			150x60° 90°	
控制方式/ Control Mode	CC / PLC / Zigbee / Light–operated control			CC / PLC/ zigbee / Light–operated control	
使用寿命/ Life	80000H		80000H	80000H	80000H
功率因数/Power Factor	>0.95		>0.95	>0.95	>0.95
防浪涌电压/Surge Voltage	>6KV		>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66		IP66	IP66	IP66
环境温度/ Ambient Temperature	–25℃~50℃		–25℃~50℃	–25℃~50℃	–25℃~50℃
环境湿度/ Ambient Humidity	10%~90%		10%~90%	10%~90%	10%~90%

Road Light Series
SL7501

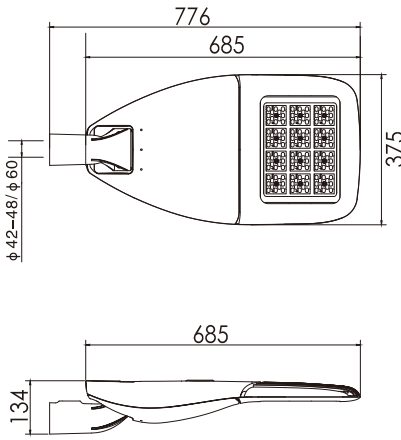
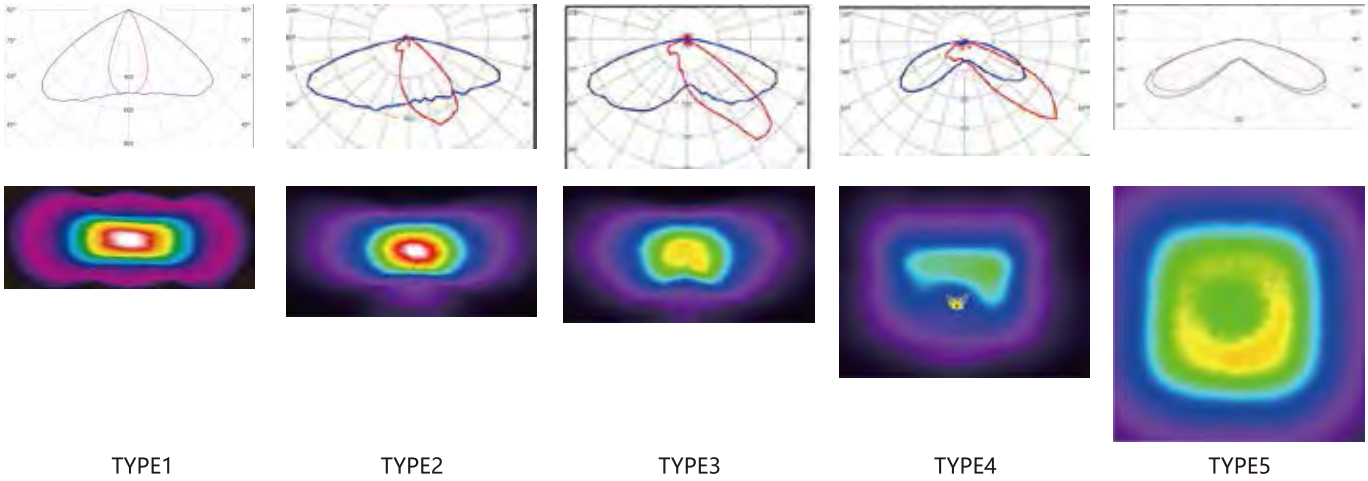


技术参数 Specification


产品型号/ Product Code	SL7501-M155	SL7501-M125	SL7501-M105	SL7501-M80	SL7501-C135
Led品牌/ Led Brand	LUMILEDS	LUMILEDS	LUMILEDS	LUMILEDS	CREE
Led数量/ Led Quantity	48pcs	48pcs	32pcs	32pcs	48pcs
额定功率/ Rated Power	155W	125W	105W	80W	135W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K				
发光角度/ Beam Angle	120X50° 150X65° 150X60° 140X30° 148°				
控制方式/ Control Mode	CC / PLC / Zigbee / Light-operated control				
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
功率因数/ Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	10%~90%
产品型号/ Product Code	SL7501-C110	SL7501-C80	SL7501-M150HE	SL7501-M125HE	
Led品牌/ Led Brand	CREE	CREE	LUMILEDS	LUMILEDS	
Led数量/ Led Quantity	48pcs	36pcs	72Pcs	70Pcs	
额定功率/ Rated Power	110W	80W	155W	125W	
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	
颜色 / Color	3000K / 4000K / 5000K / 6000K				
发光角度/ Beam Angle	120x50° 150x65° 150x60° 140x30° 148°		150x60° 90°		
控制方式/ Control Mode	CC / PLC / Zigbee / Light-operated control		CC / PLC/ Zigbee / Light-operated control		
使用寿命/ Life	80000H	80000H	80000H	80000H	
功率因数/ Power Factor	>0.95	>0.95	>0.95	>0.95	
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV	>6KV	
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%	

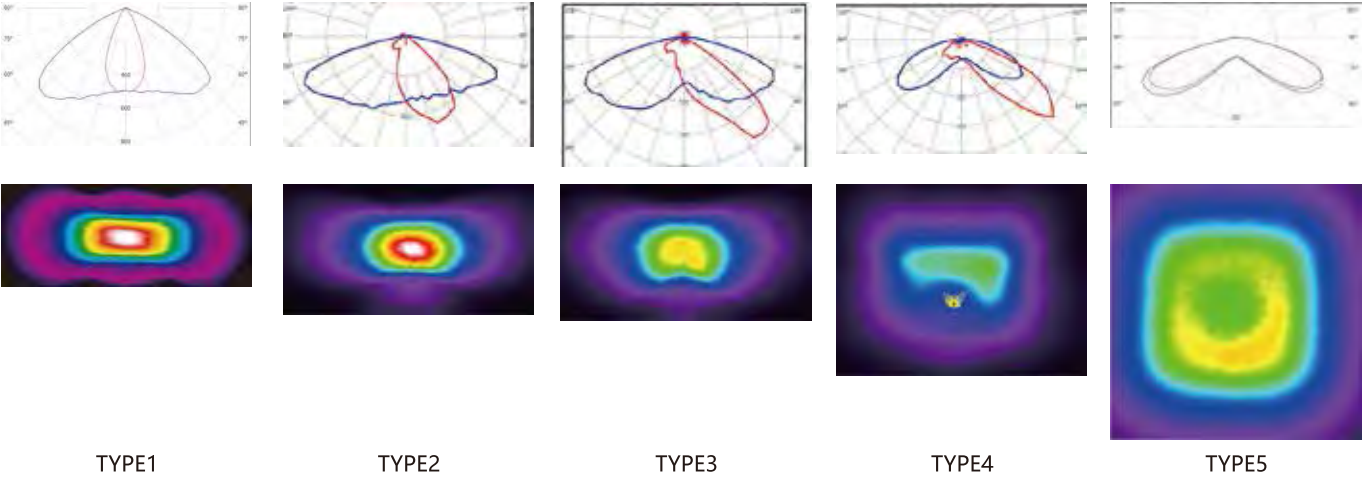

SL7500/SL7501/SL7502/SL7503

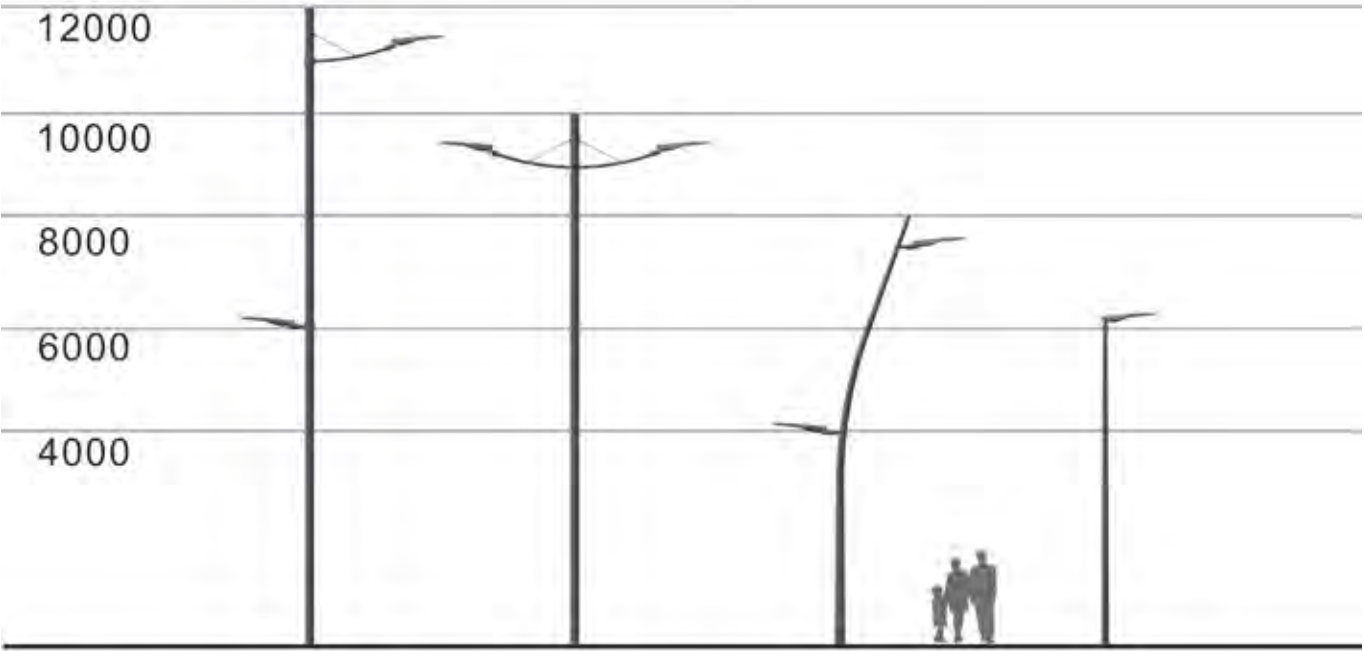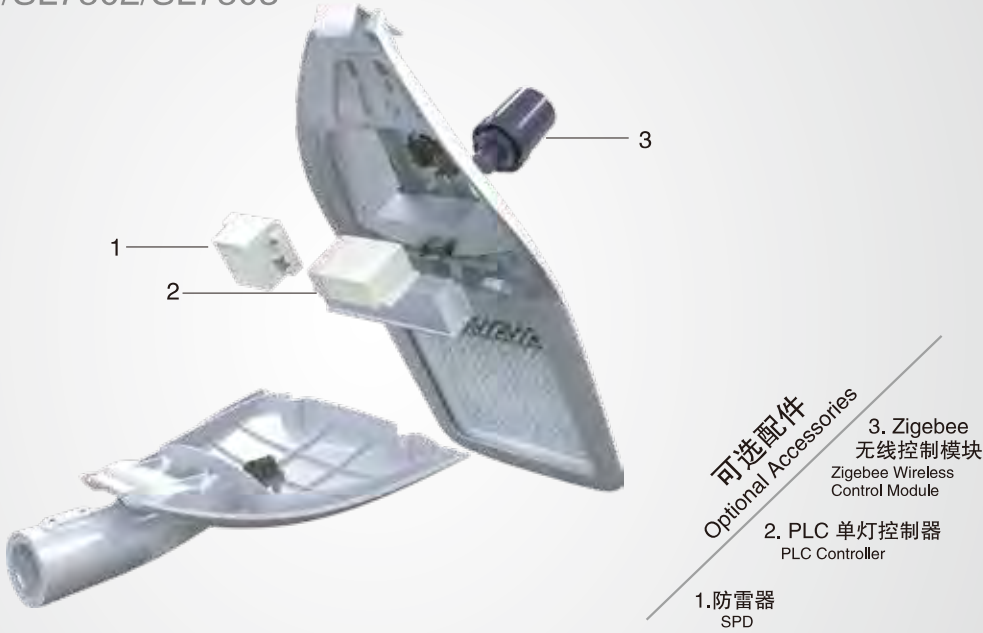


Road Light Series
SL7502

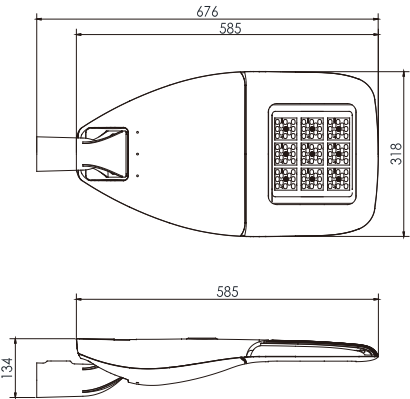


技术参数 Specification

产品型号/ Product Code	SL7502-M110	SL7502-M80	SL7502-C80	SL7502-M110HE	SL7502-M80HE
Led品牌/ Led Brand	LUMILEDS	LUMILEDS	CREE	LUMILEDS	LUMILEDS
Led数量/ Led Quantity	36pcs	24pcs	36pcs	54pcs	42pcs
额定功率/ Rated Power	105W	80W	80W	110W	80W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K				
发光角度/ Beam Angle	120x50° 150x65° 150x60° 140x30° 148°			150x60° 90°	
控制方式/ Control Mode	CC / PLC/ zigbee / Light-operated control			CC / PLC/ zigbee / Light-operated control	
使用寿命/ Life	80000H	80000H	80000H	80000H	80000H
功率因数/ Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%

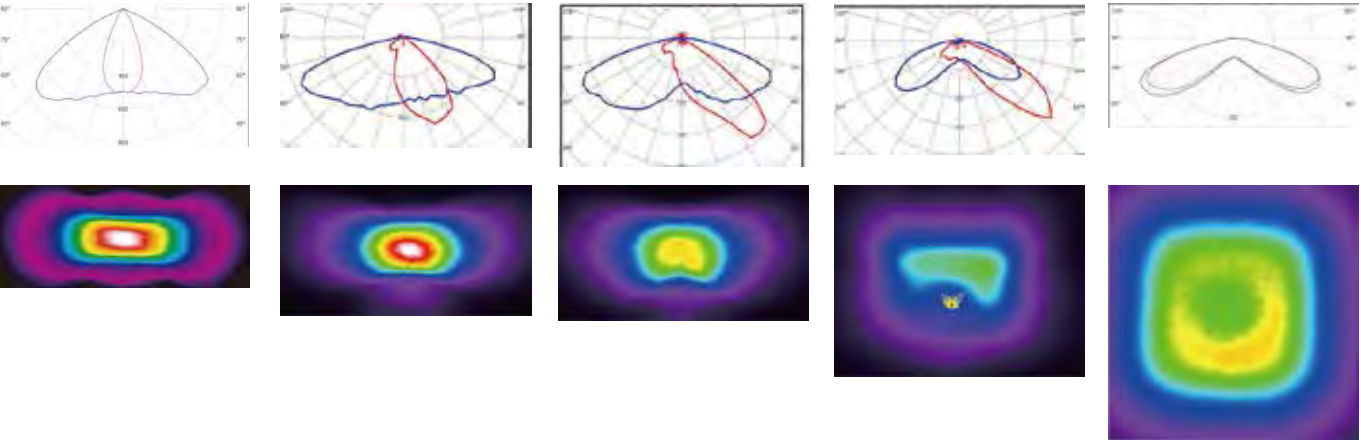


TYPE1 TYPE2 TYPE3 TYPE4 TYPE5

配光曲线 (全角) Distribution Curve Flux (SBC Case)

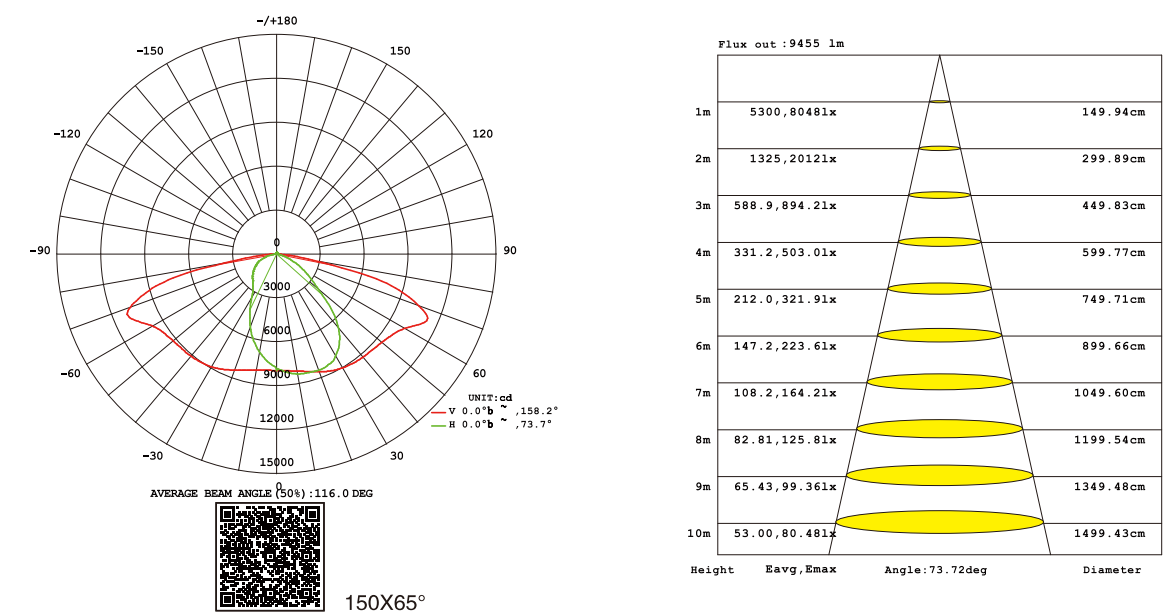


Road Light Series
SL7503

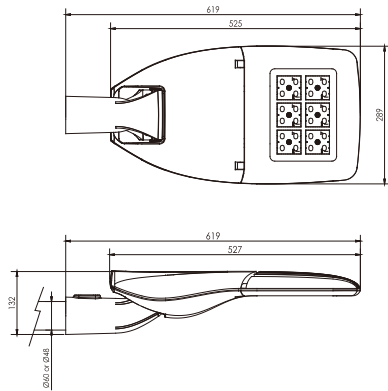

技术参数 Specification

产品型号/ Product Code	SL7503-M60	SL7503-C60	SL7503-M60HE
Led品牌/ Led Brand	LUMILEDS	CREE	LUMILEDS
Led数量/ Led Quantity	24pcs	24pcs	42pcs
额定功率/ Rated Power	60W/40W	60W	60W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	3000K / 4000K / 5000K / 6000K		
发光角度/ Beam Angle	120x50° 150x65° 150x60° 140x30° 148°		150x60° 90°
控制方式/ Control Mode	CC / PLC/ zigbee / Light-operated control		
使用寿命/ Life	80000H	80000H	80000H
功率因数/ Power Factor	>0.95	>0.95	>0.95
防浪涌电压/ Surge Voltage	>6KV	>6KV	>6KV
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%

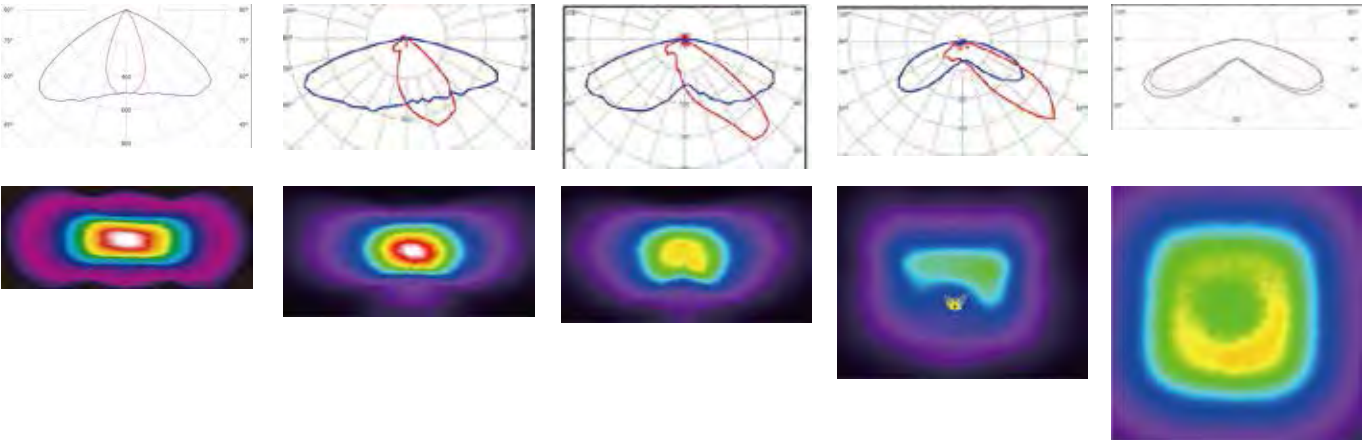

TYPE1


TYPE2

TYPE3

TYPE4

TYPE5

配光曲线 (全角) Distribution Curve Flux (SBC Case)

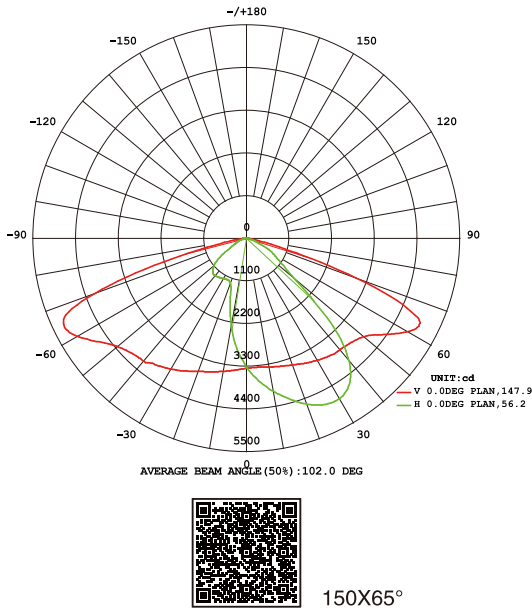

Flux out:5169 lm			
Height	Eavg, Emax	Angle:82.86deg	Diameter
1m	2030,38621x		176.50cm
2m	507.4,965.41x		353.01cm
3m	225.5,429.11x		529.51cm
4m	126.8,241.31x		706.01cm
5m	81.18,154.51x		882.52cm
6m	56.38,107.31x		1059.02cm
7m	41.42,78.811x		1235.52cm
8m	31.71,60.341x		1412.03cm
9m	25.06,47.671x		1588.53cm
10m	20.30,38.621x		1765.03cm

LED Highbay Light Series
SL0180U




产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命。
- 二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入。
- 四、可完美兼容0-10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能。

- 1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、Adopt American CREE LED light source, low light decay, long life-span, the light effect for complete luminarie is as high as 130 lm/W
- 3、Light body adopts high pressure die-casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet-proof.
- 4、Perfectly compatible with 0-10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti-glare function under the condition of without shade.

技术参数 Specification

产品型号/Product Code	SL0180U-200	SL0180U-150
LED品牌/LED Brand	CREE / LUMILEDS	CREE / LUMILEDS
LED数量/LED Quantity	64Pcs	48Pcs
额定功率/Rated Power	208W	155W
输入电压/Input Voltage	AC100-305V	AC100-305V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°	60° 120°
控制方式/Control Mode	CC/0-10V Dimming/DALI	CC/0-10V Dimming/DALI
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%

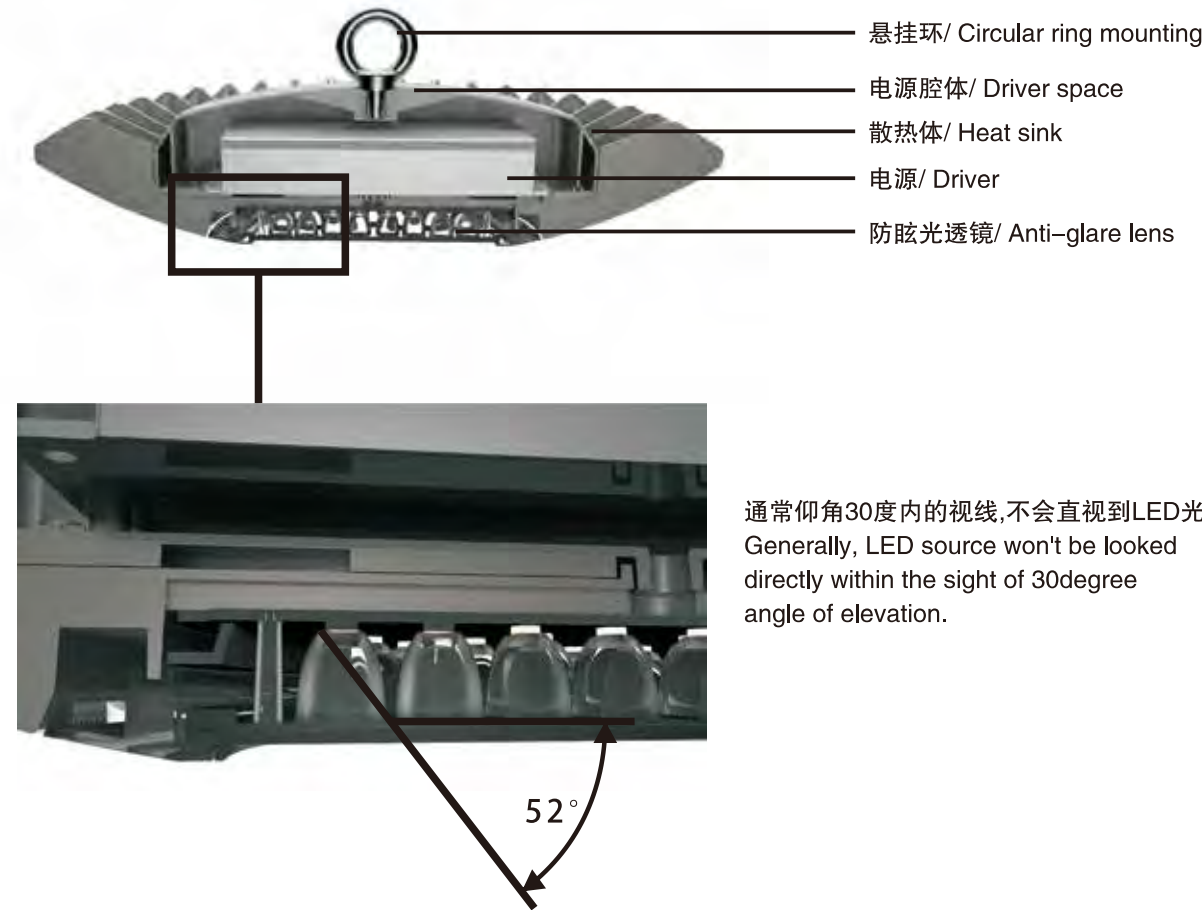

通常仰角30度内的视线,不会直视到LED光源。
Generally, LED source won't be looked directly within the sight of 30degree angle of elevation.

LED Highbay Light Series
SL0180C



产品简介 Product Introduction



- 一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命。
- 二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入。
- 四、可完美兼容0-10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能。

- 1、 Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、 Adopt American CREE LED light source, low light decay, long life–span, the light effect for complete luminarie is as high as 130 lm/W
- 3、 Light body adopts high pressure die–casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet–proof.
- 4、 Perfectly compatible with 0–10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、 Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti–glare function under the condition of without shade.


技术参数 Specification

产品型号/Product Code	SL0180C–200	SL0180C–150
LED品牌/LED Brand	CREE / LUMILEDS	CREE / LUMILEDS
LED数量/LED Quantity	64Pcs	48Pcs
额定功率/Rated Power	208W	155W
输入电压/Input Voltage	AC100–305V	AC100–305V
频率/Frequency Range	50/60Hz	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°	60° 120°
控制方式/Control Mode	CC/0–10V Dimming/DALI	CC/0–10V Dimming/DALI
使用寿命/Life	50000H	50000H
防护等级/Protection Grade	IP65	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

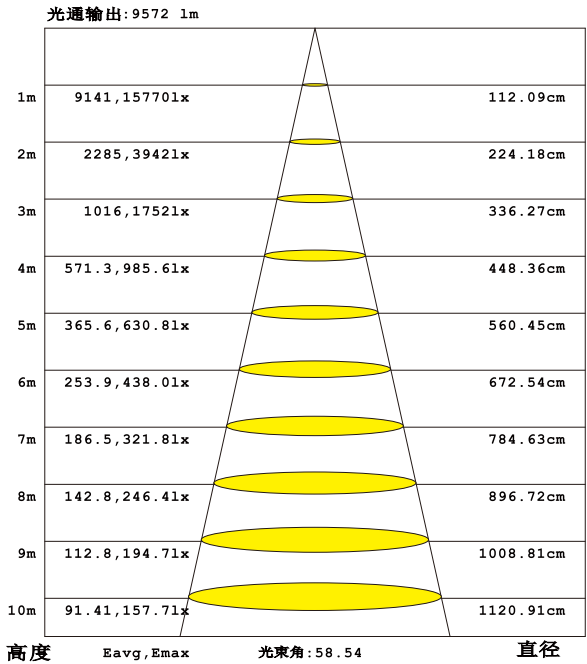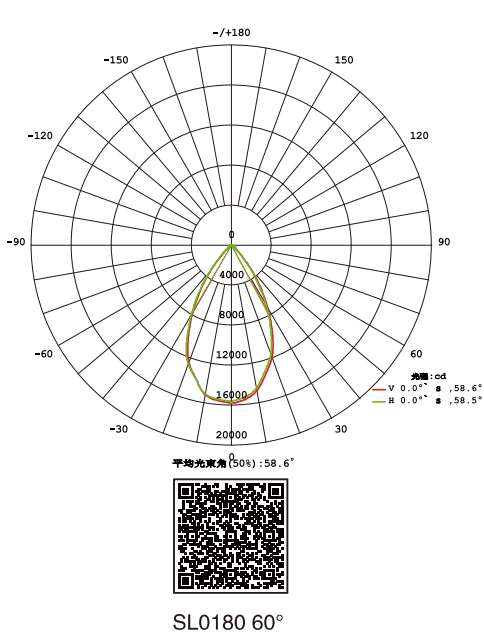

LED Highbay Light Series
SL0181U

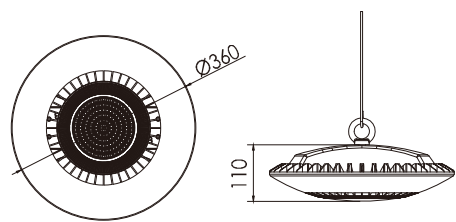

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命。
- 二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入。
- 四、可完美兼容0-10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能。

- 1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、Adopt American CREE LED light source, low light decay, long life–span, the light effect for complete luminarie is as high as 130 lm/W
- 3、Light body adopts high pressure die–casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet–proof.
- 4、Perfectly compatible with 0–10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti–glare function under the condition of without shade.

技术参数 Specification

产品型号/Product Code	SL0181U-110
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	33Pcs
额定功率/Rated Power	110W
输入电压/Input Voltage	AC100-305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0-10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	- 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

LED Highbay Light Series
SL0181C



产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命。
- 二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入。
- 四、可完美兼容0–10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能。

- 1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、Adopt American CREE LED light source, low light decay, long life–span, the light effect for complete luminarie is as high as 130 lm/W
- 3、Light body adopts high pressure die–casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet–proof.
- 4、Perfectly compatible with 0–10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti–glare function under the condition of without shade.


技术参数 Specification

产品型号/Product Code	SL0181C–110
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	33pcs
额定功率/Rated Power	110W
输入电压/Input Voltage	AC100–305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0–10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

配光曲线 (全角) Distribution Curve Flux (SBC Case)

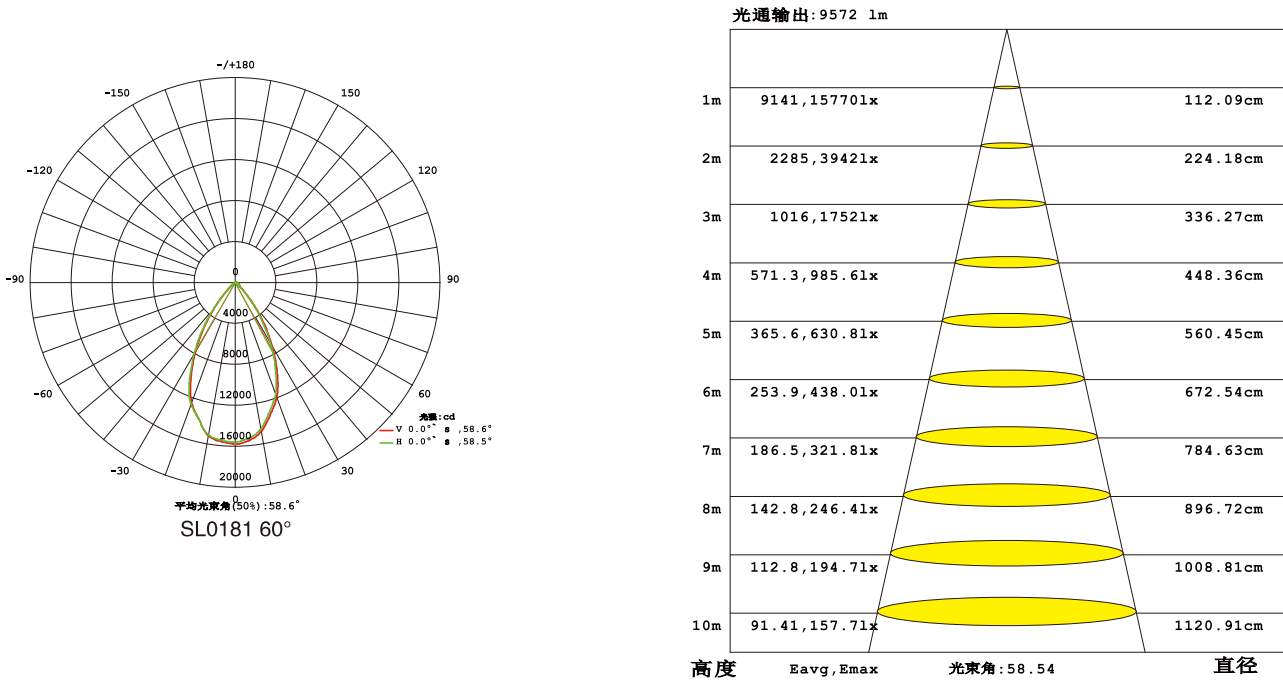

LED Highbay Light Series
SL0182U

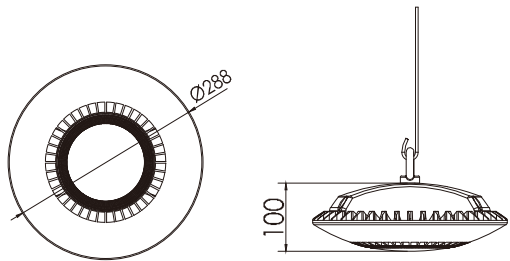

产品简介 Product Introduction


- 一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命。
- 二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入。
- 四、可完美兼容0–10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能。

- 1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、Adopt American CREE LED light source, low light decay, long life–span, the light effect for complete luminarie is as high as 130 lm/W
- 3、Light body adopts high pressure die–casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet–proof.
- 4、Perfectly compatible with 0–10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti–glare function under the condition of without shade.

技术参数 Specification

产品型号/Product Code	SL0182U–55
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	20Pcs
额定功率/Rated Power	55W
输入电压/Input Voltage	AC100–305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0–10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

LED Highbay Light Series
SL0182C

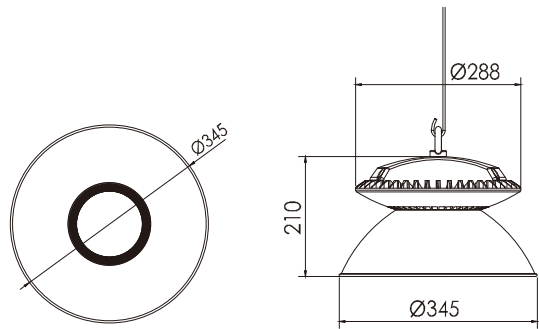


产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计,外型时尚美观; 采用隔离双腔体结构，独立通风散热，,充分保证LED的稳定性和长寿命。
- 二、采用美国CREE芯片，低光衰，长寿命. 整灯光效高达130lm/W
- 三、灯体采用高强度压铸铝成型，表面静电喷塑处理；灯罩采用高透光率聚碳酸酯. 抗冲击耐磨擦.IP65/IK10防护等级,可有效防止灰尘和水分侵入。
- 四、可完美兼容0–10V或可控硅调光模式,使群组灯具实现智能调光
- 五、创造性的采用60° 配光反射器,旋转对称, 适合中高天棚及公共区域的通用照明, 同时在不加灯罩的情况下具有防眩光功能。

- 1、Patent owned design, fashion and beautiful profile, adopting isolated double cavity design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、Adopt American CREE LED light source, low light decay, long life–span, the light effect for complete luminarie is as high as 130 lm/W
- 3、Light body adopts high pressure die–casting aluminum, surface with electrostatic plastic coating. Lampshade adopts high transmittance Poly carbonate , resist the impact and friction. IP65/IK10 protection grade prevents luminaries from dust penetration and jet–proof.
- 4、Perfectly compatible with 0–10V or silicon controlled dimmer mode, to realize intelligent dimmer group of lamps and lanterns.
- 5、Creatively adopt 60° light distribution reflector with rotational symmetry. Suitable for the lighting application in middle and high ceiling areas, public areas. Meanwhile own the anti–glare function under the condition of without shade.

技术参数 Specification

产品型号/Product Code	SL0182C–55
LED品牌/LED Brand	CREE / LUMILEDS
LED数量/LED Quantity	20Pcs
额定功率/Rated Power	55W
输入电压/Input Voltage	AC100–305V
频率/Frequency Range	50/60Hz
颜色/Color	3000K/4000K/5000K/6000K
发光角度/Beam Angle	60° 120°
控制方式/Control Mode	CC/0–10V Dimming/DALI
使用寿命/Life	50000H
防护等级/Protection Grade	IP65
环境温度/Ambient Temperature	– 25℃ ~ 50℃
环境湿度/Ambient Humidity	10% ~ 90%

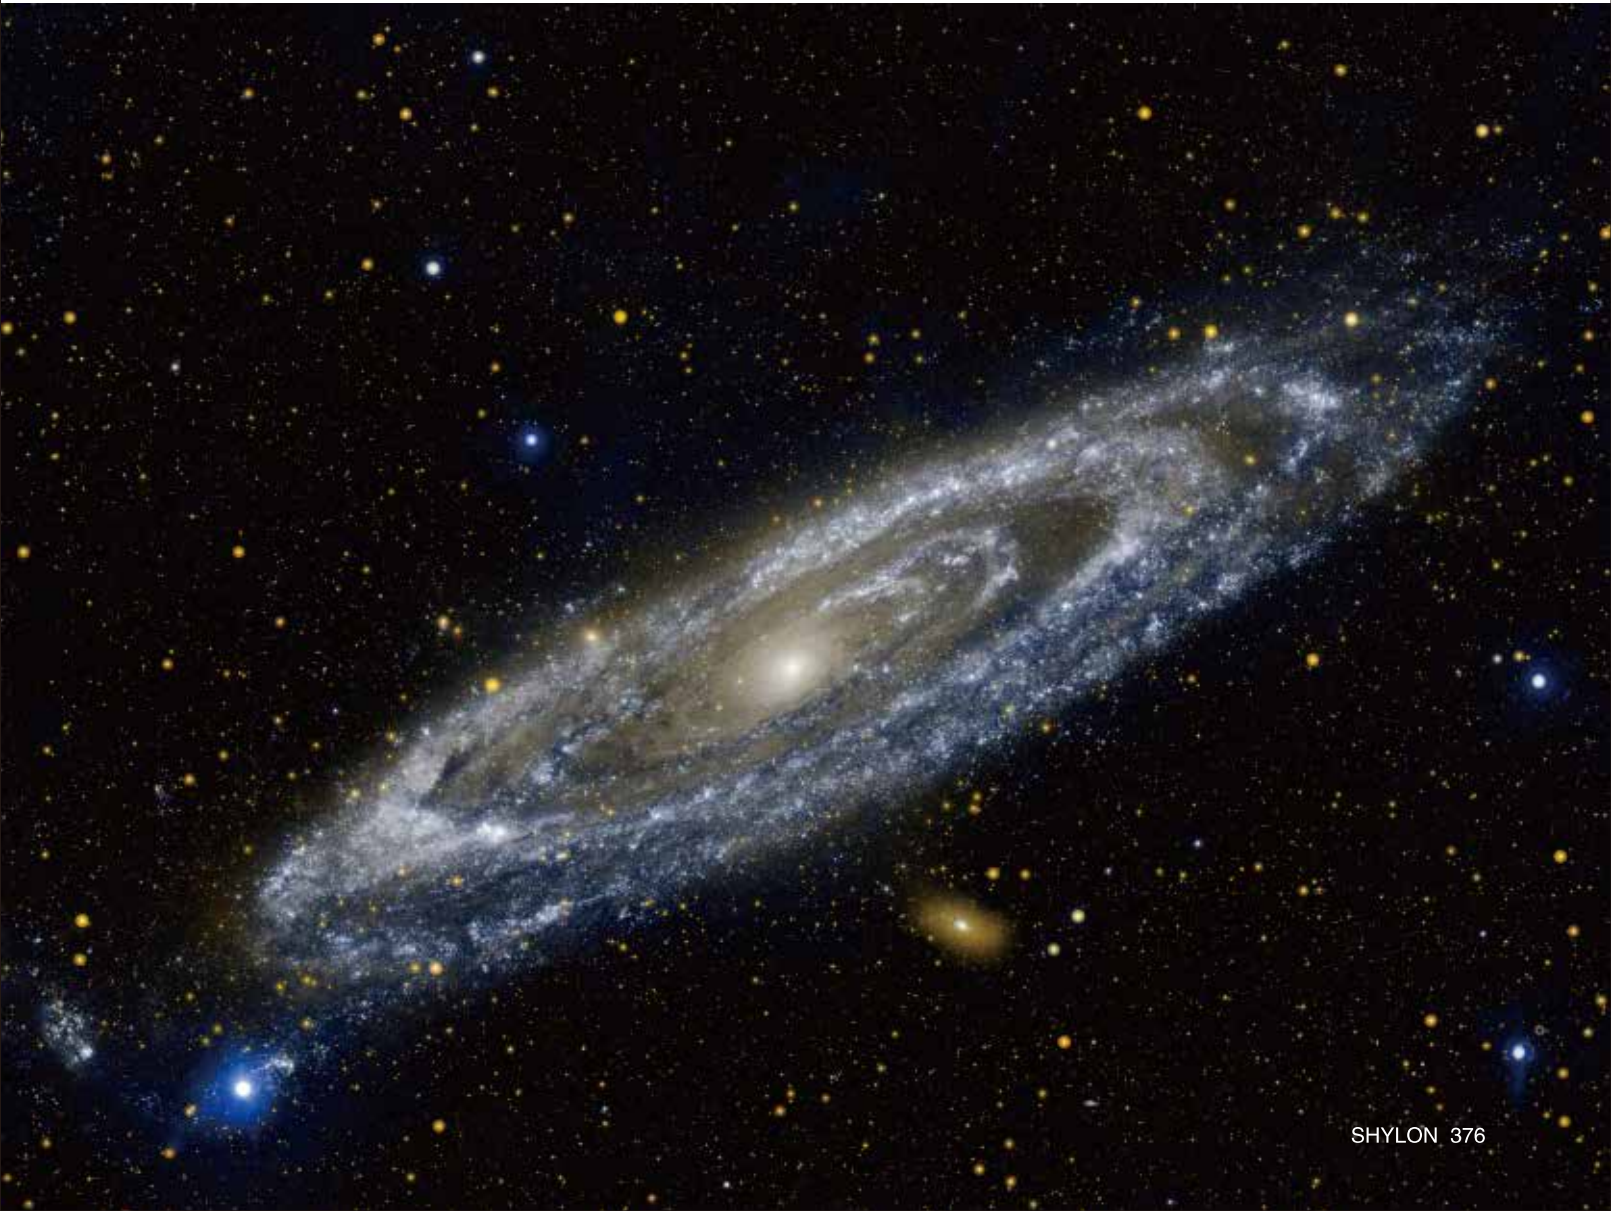

Control System

SL-E2120K 联机主控器

SL-E2120K Master Controller

产品简介 Product Introduction

SL-E2120K是一台大型联机主控制器，配合SL-E3200分控器使用；可承载15W个像素点，SD卡存储，外配遥控器，可实现节目片段选择、整体亮度调整、白平衡调整、播放速度调整、内置动画测试程序、RGBW四色灯具控制等功能；即可以控制DMX512通讯的灯具又可以控制SPI、单线、双线灯具（不可同时控制）极大满足了客户再应用及调试中的多种需求。

SL-E2120K is a large-scale online master controller, cooperates with slave controller-SL-E3200 in application. SL-D2120K is access to load 0.15 million pixels with SD card storage and remote controller, which can implement function, such as the play fragment selection, overall brightness adjustment, the white balance adjustment, play speed adjustment, built-in animation test program, RGBW four-color fixture lighting control and etc. SL-E2120K is the combination of DMX512 and SPI ,single wire, dual wire lamps serial control(can not be selected simultaneously) ,which immensely meets the various demand from customers during the application and debugging.

主要性能特点 Main performance

- 1、采用16GB的大容量U盘存储数据，花样更丰富多彩；
- 2、具有LCD中文或者英文显示界面，操作直观方便。
- 3、具有节目选择、速度调节及亮度设置等功能满足不同场所的需要
- 4、控制器及灯具排列方式任意，灵活性超强
- 5、具备同步控制（联机）和异步控制（脱机）双功能；既可以同步直播电脑的视频，也可以播放U盘里的视频；当同时连接电脑和插入U盘时，优先播放电脑的视频。
- 6、多种控制方式，具DMX512、SPI、单线、双线控制于一身；配合分控可承载15万像素点，适用于大型项目。
- 7、支持H264(MPEG-4)格式视频实时播放

- (1) Adopt the large volume of 16GB SD card to store data with various programs.
- (2) Own LCD Chinese and English display interface with features of easy operation intuitive.
- (3) Equip with function of program selection, speed adjustment and brightness set-up and etc. to satisfy demands on various occasions.
- (4) Allow the arbitrary layout with controllers and luminaires, achieving high flexibility.
- (5) Support working on-line, and cooperate with slave controller off-line; when on line, it achieves real-time synchronization work, the working performance of LED luminaire is matched with the display on a computer screen.
- (6) Offer various controller methods, such as DMX512 and SPI; SL-D8000 is access to load 0.12 million pixels when cooperated with slave controller, it is especially applied to large-scale projects.

规格参数表 Specification

序号/NO.		参数/Parameter
1	名 称 / Product name	LED智能主 控制器/ LED intelligent master controller
2	型 号 / Item No.	SL-E2120K
3	尺寸 / Dimension	288(L)x158 (W) x45 (H) mm
4	电 源 / Driver	AC100~220V 60/50Hz
5	额定功率 / Rated power	15W
6	控制点数 / Control pixel	15万像素点/0.15million pixels
7	控制效果 / Control effect	任意花样的文字动画 图案 视频影像/Present various words, animation, images, video
8	SD卡容量/SD card volume	16GB
9	通讯接口 / Communication interface	RJ45、 HDMI
10	节目数量/Program quantity	≤99个 / ≤99 units
11	速度等级 / Speed grade	100级 / 100 Grade
12	可调亮度等级 / Brightness adjustment grade	100级 / 100 Grade
13	防护等级 / Protection grade	IP20
14	工作温度 / Work temperature	-40℃ ~ 50℃
15	固定孔间距 / Fixed hole interval	268mm
16	适用场所 / Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project



Control System

SL-E3200K 分控器

SL-E3200 Slave Controller

产品简介 Product Introduction

SL-E3200是一套配合SL-E2120K使用的分控器，控制系统实现R G B各256级灰度，共可表现1677万种颜色，真正实现全彩色。8端口输出，每端口可承载170个全彩点并支持扩展。独有的在线自动寻址技术，以最方便简洁的线路排布实现复杂的控制功能，极大地提高了产品的可靠性和稳定性。既可以连接电脑同步工作，又可以连接脱机播放器同步工作。在联机联合同步控制时，可轻松将文字、动画、图像、视频等媒体信息完整再现于您的LED工程项目中。 配套主控为SL-E2120K。

SL-E3200 is a slave controller which cooperates with master controller -SL-M2120K in application. SL-E3200 enables it achieving the R G B each 256 gray level, totally presenting 16.77 million kinds of color, authentically realizing full color. There are 8 ports output with load of 170 pixels per port which supports extension. SL-E3200 is equipped with online automatic addressing technology, the complex control function is accomplished by this most concise and convenient approach, which tremendously improves reliability and stability of the products. SL-E3200 supports working on-line or connecting the off-line player to achieve synchronization work; In the system of connection with many controllers, it is simple to make words, animation, images, video and etc media information completely be represented in your LED project.



主要性能特点 Main performance

1. 每台可控制1360个全彩点并支持扩展，可无限级联；需配套主控或脱机播放器共同使用。
2. 控制器间通讯采用以太网接口和UDP网络协议，传输距离最大为100米。
3. 512级三基色独立亮度控制，使精确调整白平衡更加简单有效；
4. 控制器显示模块及时显示控制器参数、状态。
5. 双网络接口，可以实现控制器间级联；控制器自动检测，软件直观显示连接状态。
6. 支持多种播放模式：手动、节假日、每日、时段及自定义等。可以轻松实现任意日期、时间自动定时播放，周一至周日播放不同的节目。
7. 播放速度可调范围是1—100帧每秒，亮度可调范围是1—100。
8. 支持红，绿，蓝，白四色灯具控制；支持音乐频谱显示，外部视频调用；支持不中断显示画面播放即时消息；布线支持导入CAD，导入参考图片等特殊功能，满足客户多样化需求。
1. Support 1360 full color pixels, extension on each port, infinite cascade connection when cooperated with master controller or off-line player.
2. Adopt Ethernet interface and UDP internet protocol between controllers, the maximum transmission distance is 100 meters.
3. 512 Grade three primary colors control brightness independently, which makes the white balance adjustment more simple and effective.
4. The controller displays module presents its parameter and status timely.
5. Double internet interface can realize the cascade connection between controllers; the controller makes self-detected automatically, then the software indicates the connection status intuitively.
6. Support multiple display modes: manual, holidays, day, fragment, self-define and so on. It can easily realize arbitrary date, automatic timing play and different programs play within 7 days(one week), also can operate it manually.
7. The adjustable range for play speed is 1—100 frames per second, 1—100 grade for brightness.
8. Allow the control of luminaire with red, green, blue, white four colors; support music spectrum presentation, external video usage, play instant message without interrupting the display screen, wiring layout lead CAD, reference pictures and other special functions, immensely meet the diversified demands from customers.

规格参数表 Specification

序号/NO.		参数/Parameter
1	名 称 / Product name	LED智能分控制器/ LED intelligent slave controller
2	型 号 / Item No.	SL-E3200K
3	尺寸 / Dimension	288(L)x158 (W) x45 (H) mm
4	电 源 / Driver	AC100~220V 60/50Hz
5	额定功率 / Rated power	15W
6	控制点数 / Control pixel	15万像素点/0.15million pixels
7	控制效果 / Control effect	任意花样的文字动画 图案 视频影像/Present various words, animation, images, video
8	SD卡容量/SD card volume	16GB
9	通讯接口 / Communication interface	RJ45
10	节目数量/Program quantity	≤99个 / ≤99 units
11	速度等级 / Speed grade	100级 / 100 Grade
12	可调亮度等级 / Brightness adjustment grade	100级 / 100 Grade
13	防护等级 / Protection grade	IP20
14	工作温度 / Work temperature	-40℃ ~ 50℃
15	固定孔间距 / Fixed hole interval	268mm
16	适用场所 / Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL-M2220K 联机主控器

SL-M2220K On-line Master Controller

产品简介 Product Introduction

SL-M2220K是一台大型联机主控制器，配合SL-M3301分控器使用；可带载15万个像素点，SD卡存储，外配遥控器，可实现节目片段选择、整体亮度调整、白平衡调整、播放速度调整、内置动画测试程序、RGBW四色灯具控制等功能；即可以控制DMX512通讯的灯具又可以控制SPI、单线、双线灯具（不可同时控制）极大满足了客户再应用及调试中的多种需求。

SL-M2220K is a large-scale online master controller, cooperates with slave controller SL - M3301 in application. SL-M2220K is access to load 0.15 million pixels with SD card storage and the remote control, which can implement function, such as the off-line timing play, play fragment selection, overall brightness adjustment, the white balance adjustment, play speed adjustment, built-in animation test program, RGBW four-color fixture lighting control and etc. SL - M2220K is the combination of DMX512 and SPI serial control(can not be selected simultaneous-ly) ,which immensely meets the various demand from customers during the application and debugging.

主要性能特点 Main performance

- 1、采用8GB的大容量SD存储卡存储数据，花样更丰富多彩。
- 2、具有LCD中文或者英文显示界面，操作直观方便。
- 3、具有节目选择、速度调节及亮度设置等功能满足不同场所的需要。
- 4、控制器及灯具排列方式任意，灵活性超强。
- 5、既可以与电脑联机同步工作，又可以配合分控脱机工作。与电脑联机实时同步工作，LED灯具显示效果与电脑屏幕一致。
- 6、多种控制方式，具DMX512、SPI、单线、双线控制于一身；配合分控可带载15万个像素点，适用于大型项目。

- 1、Adopt the large volume of 8GB SD card to store data with various programs.
- 2、Own LCD English display interface with features of easy operation intuitive.
- 3、Equip with function of program selection, speed adjustment set-up and etc. to satisfy demand on various occasion.
- 4、Allow the arbitrary layout with controllers and luminaires, achieve high flexibility.
- 5、Support working on-line, and cooperate with slave controller off-line; when on line, it achieves real-time synchronization work, the working performance of LED luminaire is matched with the display on a computer screen.
- 6、Offer various controller methods, such as DMX512 and SPI; SL-M2102K is access to load 0.15 million pixels when cooperated with slave controller, it is especially applied to large-scale projects.

规格参数表 Specification

序号/NO.	名称/Product name	参数/Parameter
1	名称/Product name	LED智能主控制器/ LED intelligent master controller
2	型号/Item No.	SL-M2220K
3	外形尺寸/Dimension	283 (L) × 134 (W) × 45 (H) mm
4	电源/Driver	AC 100~240V 60/50Hz
5	额定功率/Rated power	15W
6	控制点数/Control pixel	15万像素点/0.15million pixels
7	控制效果/Control effect	文字 动画 图案 视频 / words,animation,images,video
8	SD卡容量/SD card volume	8GB
9	通讯接口/Communication interface	RJ-45
10	节目数量/Program quantity	≤99个/≤99units
11	速度等级/Speed grade	100级 / 100 Grade
12	可调亮度等级/Brightness adjustment grade	100级 / 100 Grade
13	防护等级/Protection grade	IP20
14	工作温度/Work temperature	-40℃ ~ 50℃
15	固定孔间距/Fixed hole interval	68mm;268mm
16	适用场所/Application	户外、室内LED亮化工程/Outdoor and indoor led lighting project



Control System

SL-M3301R 分控器

SL-M3301R Slave Controller

产品简介 Product Introduction

SL-M3301是一套配合SL-M2220K使用的分控器，控制系统实现R G B各256级灰度，共可表现1677万种颜色，真正实现全彩色。8端口输出，每端口可带载170个全彩点并支持扩展。独有的在线自动寻址技术，以最方便简洁的线路排布实现复杂的控制功能，极大地提高了产品的可靠性和稳定性。既可以连接电脑同步工作，又可以连接脱机播放器同步工作。在多机联合同步控制时，可轻松将文字、动画、图像、视频等媒体信息完整再现于您的LED工程项目中。

SL - M3301R is a slave controller which cooperates with master controller SL -M2220K in application. SL-M3301R enables it achieving the R G B each 256 gray level, totally presenting 16.77 million kinds of color, authentically realizing full color. There are 8 ports output with load of 170 pixels per port which supports extension. SL-M3301R is equipped with online automatic addressing technology, the complex control function is accomplished by this most concise and convenient approach, which tremendously improves reliability and stability of the products. SL-M3301R supports working on-line or connecting the off-line player to achieve synchronization work; In the system of connection with many controllers, it is simple to make words, animation, images, video and etc media information completely be represented in your LED project.

主要性能特点 Main performance

- 1、每台可控制1360个全彩点并支持扩展，可无限级联；需配套主控或脱机播放器共同使用。
- 2、控制器间通讯采用以太网接口和UDP网络协议，传输距离最大为100米。
- 3、512级三基色独立亮度控制，使精确调整白平衡更加简单有效。
- 4、控制器显示模块及时显示控制器参数、状态。
- 5、双网络接口，可以实现控制器间级联；控制器自动检测，软件直观显示连接状态。
- 6、支持多种播放模式：手动、节假日、每日、时段及自定义等。可以轻松实现任意日期、时间自动定时播放，周一至周日播放不同的节目。
- 7、播放速度可调范围是1—100帧每秒，亮度可调范围是1—100。
- 8、支持红，绿，蓝，白四色灯具控制；支持音乐频谱显示，外部视频调用；支持不中断显示画面播放即时消息；布线支持导入CAD，导入参考图片等特殊功能，满足客户多样化需求。

- 1、Support 1360 full color pixels, extension on each port, infinite cascade connection when cooperated with master controller or off-line player.
- 2、Adopt Ethernet interface and UDP internet protocol between controllers, the maximum transmission distance is 100 meters.
- 3、512 Grade three primary colors control brightness independently, which makes the white balance adjustment more simple and effective.
- 4、The controller display module presents its parameter and status timely.
- 5、Double internet interface can realize the cascade connection between controllers; the controller makes self-detected automatically, then the software indicates the connection status intuitively.
- 6、Support multiple display modes: holidays, day, fragment, self-define and so on. It easily realize arbitrary date, automatic timing play and different programs play within 7 days(one week), also can operate it manually.
- 7、The adjustable range for play speed is 1-100 frames per second, 1-100 grade for brightness.
- 8、Allow the control of luminaire with red, green, blue, white four color; support music spectrum presentation, external video usage, play instant message without interrupting the display screen, wiring layout lead CAD, reference pictures and other special function, immensely meet the diversified demand from customers.



规格参数表 Specification

序号/NO.		参数/Parameter
1	名称/Product Name	LED智能分控制器 / LED intelligent slave controller
2	型号/Item NO.	SL-M3301R
3	外形尺寸/Dimension	283 （ L ） x134 （ W ） x45 （ H ） mm
4	电源/Driver	AC220V 50Hz
5	额定功率/Rated power	15W
6	输出路数/Output ways	8路 （ DMX512 ） / 8 ports for DMX512
7	控制点数/Control points	1360像素可支持扩展 / 1360 pixels for DMX, support extension
8	驱动效果/Control effect	文字 动画 图案 视频 / words,animation,images,video
9	通讯接口/Communication interface	RJ45
10	时钟类型/Communication interface	年、月、日、时、分、秒、星期 / Year, month,day,hour,minute,second,week
11	播放模式/Clock type	手动、节假日、每日、时段、自定义 / Manual, holiday,day,fragment,self-definite
12	速度等级/Speed grade	100级 / 100 grade.
13	可调亮度等级/Brightness adjustment grade	100级 / 100 grade.
14	防护等级/Protection grade	IP20
15	寻址方式/Addressing method	自动寻址，所有灯具地址可以任意编辑 Automatic addressing (each luminaire can be addressed and located in sequence)
16	工作温度/Work temperature	－40℃ ~ 50℃
17	固定孔间距/Fixed hole interval	68mm ; 268mm
18	适用场所/Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL-M3200R 分控器
SL-M3200R Slave Controller

产品简介 Product Introduction

SL-M3200R控制器支持标准RDM技术标准协议，基于DMX512-A标准协议，组建LED控制应用的RDM系统，其控制系统具备与标准DMX512相关控制应用的全部功能，并集成RDM控制命令的发送、RDM反馈信息的接收、及RDM信息的显示等功能，能够通过控制系统实时检测LED灯具的工作状态，如灯具的电流、电压、温度、运行时间等信息，是一套配合SL-M2120K、SL-B2120K使用的RDM分控器。



SL-M3200R Controller supports standard RDM Technical Standard Protocol, based on DMX512-A Standard Protocol, builds RDM system for LED control application, SL-M3200R control system has all the functions related to the standard DMX512 control application,and also integrates the functions of sending and receiving feedback information of RDM control command and displaying RDM information, etc. SL-M3200R can real-time detect the working state of LED lamps by control system, such as current, voltage, temperature, operating time and so on, it is a set of RDM slave controller used with SL-M2120K, SL-B2120K.

主要性能特点 Main performance

- 1、控制器输出基于标准DMX512-A协议，全面支持标准RDM技术标准协议。
- 2、配合标准RDM协议的LED灯具，支持灯具工作状态的检测，如灯具的电流、电压、功率、温度、运行时间等灯具工作状态参数。
- 3、每台可控制1360个全彩点并支持扩展，可无限级联；需配套主控或脱机播放器共同使用。
- 4、控制器间通讯采用以太网接口和UDP网络协议，传输距离最大为100米。
- 5、512级三基色独立亮度控制，使精确调整白平衡更加简单有效。
- 6、控制器显示模块及时显示控制器参数、状态。

- 7、双网络接口，可以实现控制器间级联；控制器自动检测，软件直观显示连接状态。
- 8、支持多种播放模式：手动、节假日、每日、时段及自定义等；可以轻松实现任意日期、时间自动定时播放，周一至周日播放不同的节目。
- 9、播放速度可调范围是1—100帧每秒，亮度可调范围是1—100。
- 10、支持红，绿，蓝，白四色灯具控制；支持音乐频谱显示，外部视频调用；支持不中断显示画面播放即时消息；布线支持导入CAD，导入参考图片等特殊功能，满足客户多样化需求。

- 1、Controller output based on DMX512-A Standard Protocol, overall support RDM Technical Standard Protocol.
- 2、LED lamps in accordance with RDM Standard Protocol to support the detection of the working state of lamps, such ascurrent, voltage, power, temperature, operating time and other working state parameters
- 3、Support 1360 full color pixels, extension on each port, infinite cascade connection when cooperated with master controller or off-line player.
- 4、Adopt Ethernet interface and UDP internet protocol between controllers, the maximum transmission distance is 100meters.
- 5、512 Grade three primary colors control brightness independently, which makes the white balance adjustment more simple and effective.
- 6、The controller display module presents its parameter and status timely.
- 7、Double internet interface can realize the cascade connection between controllers; the controller makes self-detected automatically, then the software indicates the connection status intuitively.
- 8、Support multiple display modes: holidays, day, fragment, self-define and so on. It easily realize arbitrary date, automatic timing play and different programs play within 7 days(one week), also can operate it manually.
- 9、The adjustable range for play speed is 1-100 frames per second, 1-100 grade for brightness.
- 10、Allow the control of luminaire with red, green, blue, white four color; support music spectrum presentation, external video usage, play instant message without interrupting the display screen, wiring layout lead CAD, reference pictures and other special function, immensely meet the diversified demand from customers.

规格参数表 Specification

序号/NO.		参数/Parameter
1	名 称 / Product name	LED智能分控制器 / LED intelligent slave controller
2	型 号 / Item No.	SL-M3200R
3	尺寸 / Dimension	283 （ L ） x134 （ W ） x45 （ H ） mm
4	电 源 / Driver	AC220V 50Hz
5	额定功率 / Rated power	15W
6	输出路数 / Output port	8路 （ DMX512、RDM ） / 8 ports for DMX512、RDM
7	控制点数 / Control pixel	1360像素可支持扩展 / 1360 pixels for DMX, support extension
8	控制效果 / Control effect	文字 动画 图案 视频 / words,animation,images,video
9	通讯接口 / Communication interface	RJ45
10	时钟类型 / Communication interface	年、月、日、时、分、秒、星期 / Year, month,day,hour,minute,second,week
11	播放模式 / Clock type	手动、节假日、每日、时段、自定义 / Manual, holiday,day,fragment,self-definite
12	速度等级 / Speed grade	100级 / 100 grade.
13	可调亮度等级 / Brightness adjustment grade	100级 / 100 grade.
14	防护等级 / Protection grade	IP20
15	寻址方式 / Addressing method	自动寻址，所有灯具地址可以任意编辑 Automatic addressing (each luminaire can be addressed and located in sequence)
16	工作温度 / Work temperature	－40℃ ~ 50℃
17	固定孔间距 / Fixed hole interval	68mm ; 268mm
18	适用场所 / Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL-B2120K BTS基站同步SIM程控主控器

SL-B2120K BTS Base Station Synchronous SIM Program Control Master Controleler

产品简介 Product Introduction

SL-B2120K主控器是基于Android平台与SIM通讯平台开发的远程控制BTS基站同步脱机主控器。

SL-B2120K依托于SIM通讯，通讯采用800MHz~900MHz频段，具备强大的穿透能力，无盲区的覆盖率，保证了远程遥控指令的高稳定性与高有效性。利用Android平台与SIM通讯的稳定性及普及率，用户可采用Android移动终端的APP软件，通过移动终端SIM通讯发送短信息，来控制卫星同步主控器中的节目片断、播放速度及亮度调整等功能。

SL-B2120K主控器采用BTS基站通讯模块，通过连接设备所在地周边通讯基站，取得基站中高精度的授时信号以实现同步联动控制。

SL-B2120K 主控器实现稳定、简便的远程遥控功能，主要应用于多栋楼宇联动的脱机项目，针对于项目甲方越加严格的工程要求，SL-B2120K主控器这种远程遥控技术极大的满足了客户的需求。



SL-B2120K master controller is one remote control BTS base offline master controller which is based on the Android platform and the SIM communication platform.

SL-B2120K relies on SIM communication, and the communication adopts 800MHz~900MHz frequency band, has a strong penetrating ability, no blind area coverage, to ensure the high stability and high efficiency of remote command.

With the Android platform and the SIM communication stability and penetration, the users can send messages to control the satellite synchronization master controller’ s program clips, playback speed, and brightness adjustments via mobile terminal APP of android.

SL-B2120K adopts BTS base station communication module, through connecting the equipment around the communication base stations to obtain high accuracy signal and reach the synchronized linkage control

SL-B2120K master controller realized stable and simple remote control function,mainly used in the offline project of multiple buildings.Re-garding the strict engineering requirements of project party A,SL-B2120K master controller with the remote control technology is greatly satisfying the requirements of customers.

规格参数表 Specification

序号/NO.	名称/Product name	参数/Parameter
1	名称/Product name	BTS基站同步SIM程控主控器/ BTS base station synchronous SIM program control master controleler
2	型号/Item No.	SL-B2120K
3	外形尺寸/Dimension	283（L）×134（W）×45（H）mm
4	电源/Driver	AC 100~240V 60/50Hz
5	额定功率/Rated power	15W
6	控制点数/Control pixel	15万像素点/0.15million pixels
7	控制效果/Control effect	文字 动画 图案 视频 / words,animation,images,video
8	SD卡容量/SD card volume	8GB
9	通讯接口/Communication interface	RJ-45
10	节目数量/Program quantity	≤99个/≤99units
11	速度等级/Speed grade	100级 / 100 Grade
12	可调亮度等级/Brightness adjustment grade	100级 / 100 Grade
13	防护等级/Protection grade	IP20
14	工作温度/Work temperature	—40℃ ~ 50℃
15	固定孔间距/Fixed hole interval	68mm;268mm
16	适用场所/Application	户外、室内LED亮化工程/Outdoor and indoor led lighting project

Control System

SL-Y2100 主控制器

SL-Y2100 Master Controller

产品简介 Product Introduction

SL-Y2100主控制器是DL-Y2000主控器的升级产品；是一套用于建筑室内外亮化控制的LED全彩控制系统，控制系统实现R G B各256级灰度，共可表现1677万种色彩，真正实现全彩色。集DMX512与SPI串行控制于一身的控制器；SL-Y2100控制器采用触摸屏控制，配备一块4.3英寸电容屏，完美的人机交互界面，轻松上手，操作简单，功能完善。



SL-Y2100 master controller is an upgraded product of the SL-Y2000 which is applied to lighting for the indoor and outdoor building, achieving the R G B each 256 gray level, totally presenting 16.77 million kinds of color, authentically realizing full color. SL-Y2100 controller combines DMX512 with SPI serial control; applies touch screen control with 4.3 inch capacitor screen. Perfect human-machine interface, easy to use, simplify to operate and with perfect function.

主要性能特点 Main performance

- 1、采用4G TF卡（标配）存储数据，花样更丰富多彩。
- 2、系统支持自动，定时，节日预设效果播放。
- 3、控制器的触摸屏采用下沉设计，有效地保护触摸屏，防误接触。
- 4、可实现节目片段选择、整体亮度调整、白平衡调整、播放速度调整等。
- 5、具有DMX512信号，兼容同步串行移位数据信号（不可同时输出），方便灵活的满足客户的多种需求。
- 6、不可联机；可选择GPRS同步、交流同步、同步线同步或者无同步。

- 1、Adopt 4GB TF card to store data with various programs.
- 2、The system supports playing programs automatically, timing, and festival preset effects.
- 3、The touch screen of the controller with sinking design, which can protect touch screen effectively, prevented mistaking touch.
- 4、SL-Y2100 can realize program segment selection, overall brightness adjustment, white balance adjustment, play speed adjustment, etc.
- 5、Combine DMX512 signal with synchronous serial shift data signal (can not output simultaneously), flexible to meet types of requirements from customers.
- 6、Not supported online control; can select GPRS synchronization, AC synchronization, synchronous line synchronization or no synchronization.

规格参数表 Specification

序号/NO.	名称/Product Name	参数/Parameter
1	名称/Product Name	LED智能控制器/LED intelligent master controller
2	型号/Item NO.	SL-Y2100
3	外形尺寸/Dimension	153（L）x 90（W）x 31（H）mm
4	电源/Driver	AC 9V/DC 7.5V-24V/ DC 5V
5	额定功率/Rated power	15W
6	输出路数/Output ways	2路DMX512或2路SPI（不可同时使用）/2 ports for DMX512,2 ports for SPI (can not be selected simultaneously)
7	控制点数/Control points	DMX 340像素（SPI为1024像素）并支持扩展 / 340 pixels for DMX(1024 pixels for SPI)support extension
8	驱动效果/Control effect	文字 动画 图案 视频 / words,animation,images,video
9	TF卡容量/ TF card volume	4GB
10	通讯接口/Communication interface	无通讯接口/Without cascade and communication interface
11	节目数量/Program quantity	≤80个 / ≤80 units
12	速度等级/Speed grade	100级 / 100 Grade
13	可调亮度等级/Brightness adjustment grade	100级 / 100 Grade
14	防护等级/Protection grade	IP20
15	寻址方式/Addressing method	自动寻址，所有灯具地址可任意编辑 Automatic addressing(each luminaire can be addressed and located in sequence)
16	工作温度/Work temperature	—40℃ ~ 50℃
17	固定孔间距/Fixed hole interval	无
18	适用场所/Application	户外、室内LED亮化工程 / Outdoor and indoor led lighting project

Control System

SL-D100 信号放大器
SL-D100 Signal Amplifier

产品简介 Product Introduction

SL-D100是一款具有信号隔离功能的DMX信号中继器。
外壳采用ABS材质,高强度,耐腐蚀; 产品功耗小、屏蔽性能好、抗干扰强、稳定性强。防护等级IP65。

SL-D100 is a DMX signal amplifier with the function of signal isolation.
The housing adopts ABS material with high intensity and profound corrosion resistance; Own small power consumption, excellent shielding effectiveness, powerful anti-jamming capability, strong stability; Degree of protection IP65



规格参数表 Specification

序号/NO.	名称/Product Name	参数/Parameter
1	名称/Product Name	DMX信号 隔离中继器 / DMX signal isolated amplifier
2	型号/Item NO.	SL-D100
3	外形尺寸/Dimension	122 (L) x55 (W) x38 (H) mm
4	电源/Driver	DC6 ~ 36V/AC100-240V
5	消耗功率/Power consumption	≤2W
6	隔离电压/Isolate voltage	1000V
7	通讯接口/Communication interface	DMX512
8	传输速率/Transmission speed	≤1Mbps
9	寻址方式/Addressing mode	支持自动寻址 / Support automatic addressing
10	防护等级/Protection grade	IP65
11	环境温度/Work temperature	-40℃ ~ 50℃
12	主控配置/Master control	SL-D8000、SL-D2000、SL-D3200或者DMX512控制台 SL-D8000、SL-D2000、SL-D3200 or DMX512Console
13	固定孔间距/Fixed hole interval	110mm
14	适用场所/Application	户外、室内LED亮化工程或者舞台灯光工程 Outdoor and indoor led lighting project or stage lighting project

Control System

SL-BT100 智能控制器
SL-BT100 intelligent controller

产品简介 Product Introduction

SL-BT100是一台集控制与写码功能一体的小型控制器，
主要针对于CE3401/3402芯片的写码与控制， 内置多种变化效果，可手动或自动变化。

SL-BT100 is a compact controller that
integrates control and code writing functions. It is
mainly aimed at the code writing and control of the
CE3401/3402 chip. It has a variety of built-in effects
and can be changed manually or automatically.



规格参数表 Specification

序号/NO.	名称/Product Name	参数/Parameter
1	名称/Product Name	LED智能控制器 / LED intellgent DMX controller
2	型号/Item NO.	SL-BT100
3	外形尺寸/Dimension	60(L)x25(W)x25(H)mm
4	电源/Driver	DC24V
5	消耗功率/Power consumption	5W
6	输出路数/Output ports	1路DMX512/1 port for DMX512
7	控制点数/Control pie	DMX 170像素/DMX 170pixels
8	控制效果/Control effect	内置/Internal
9	SD卡/SD Card	支持自动寻址 / Support automatic addressing
10	防护等级/Protective grade	IP20
11	环境温度/Work temperature	-40℃ ~ 50℃
12	固定孔距/Fixed hole	/
13	适用场所/Application	SHYLON色彩管理系统灯具/SHYLON colorful control management system

Shanghai SHYLON Optoelectronics Technology Co., Ltd.

Shanghai: Room 120, No. 1, Lane 2, Suide Rd, Putuo District,Shanghai CHINA 200331
Kunshan: (SHYLON Industrial Park)No.1186-1, Pengqing Rd, Huaqiao, Kunshan, Jiangsu, CHINA 215332
Tel: +86-512-50339960 50339961 50339962 50339963 50339969
FAX: +86-512-50339972
Web: www.shylon.com
Mail: info@shylon.com

上海芯龙光电科技股份有限公司

上海: 上海市普陀区绥德路2弄1号 120室
昆山: 江苏省昆山市花桥镇蓬青路1186-1号(芯龙光电产业园)
电话: +86-512-50339960 50339961 50339962 50339963 50339969
传真: +86-512-50339972
官网: www.shylon.com
邮箱: info@shylon.com

